

HALLIBURTON

MICROLOG

COMPANY	OXY USA INC.		
WELL	WIGGAINS 12-11		
FIELD/BLOCK	GOOCH		
COUNTY	STEVENS		
STATE	KANSAS		
COMPANY	OXY USA INC.	WELL	WIGGAINS 12-11
FIELD/BLOCK	GOOCH	COUNTY	STEVENS
COUNTY	STEVENS	STATE	KANSAS
API No.	15189227880000	Location	(SHL) 330' FSL & 330' FEL
Other Services:	DSN / SDL MICROLOG BSAT ACRT		
Sect.	12	Twp.	35S
Rge.	36W		
Permament Datum	GL	Elev.	3012.0 ft
Log measured from	KB	D.F.	3026.0 ft
Drilling measured from	KB	G.L.	3012.0 ft

Date	17-Feb-13		
Run No.	ONE		
Depth - Driller	6850.00 ft		
Depth - Logger	6824.0 ft		
Bottom - Logged Interval	6780		
Top - Logged Interval	4200		
Casing - Driller	8.625 in @ 1819.0 ft		
Casing - Logger	1816.0 ft @		
Bit Size	7.875 in @		
Type Fluid in Hole	WATER BASED		
Density	9.2 ppg	48.00 s/qt	
PH	9.00 pH	7.6 cpHm	
Source of Sample	MUD PIT		
Rm @ Meas. Temperature	1.670 ohmm	@ 60.00 degF	@
Rmf @ Meas. Temperature	1.40 ohmm	@ 60.00 degF	@
Rmc @ Meas. Temperature	1.900 ohmm	@ 60.00 degF	@
Source Rmf	Rmc	MEASURED	MEASURED
Rm @ BHT	0.68 ohmm	@ 157.0 degF	@
Time Since Circulation	24.5 hr		
Time on Bottom	17-Feb-13 07:09		
Max. Rec. Temperature	157.0 degF	@ 6824.0 ft	@
Equipment	Location	10782954	LIBERAL
Recorded By	S. INGERSOLL		
Witnessed By	C. WYLLIE		
	AUSTIN GARNIER		

Fold here

Service Ticket No.: 900213985 API Serial No.: 15189227880000 PGM Version: WL INSITE R3.8.4 (Build 5)

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE					RESISTIVITY SCALE CHANGES				
Date	Sample No.				Type Log	Depth	Scale Up Hole	Scale Down Hole	
Depth-Driller									
Type Fluid in Hole									
Density	Viscosity								
Ph	Fluid Loss								
Source of Sample					RESISTIVITY EQUIPMENT DATA				
Rm @ Meas. Temp		@		@	Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
Rmf @ Meas. Temp.		@		@	ONE	ACRT	N/A	CENT.	
Rmc @ Meas. Temp.		@		@		10929775			
Source Rmf	Rmc								
Rm @ BHT		@		@					
Rmf @ BHT		@		@					
Rmc @ BHT		@		@					

EQUIPMENT DATA

GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.	ONE	Run No.	ONE	Run No.	ONE
Serial No.	102811258	Serial No.	10747684	Serial No.	10685803	Serial No.	10755066
Model No.	GTET	Model No.	BSAT	Model No.	SDLT	Model No.	DSNT
Diameter	3.625"	No. of Cent.	2	Diameter	5.3"	Diameter	3.625"
Detector Model No.	GTET	Spacing	.5'	Log Type	GAM-GAM	Log Type	NEU-NEU
Type	SCINT			Source Type	CS-137	Source Type	AM-241BE
Length	8"	LSA [Y/N]		Serial No.	5073GW	Serial No.	DSN-436
Distance to Source	N/A	FWDA [Y/N]		Strength	1.5 CI	Strength	15 CI

LOGGING DATA

GENERAL			GAMMA		ACOUSTIC		DENSITY			NEUTRON				
Run No.	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	6824	1816	REC	0	150	30	-10	47.6 us/ft	30	-10	2.71 gm/cc	30	-10	LIME

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING.


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON



Plot Time: 17-Feb-13 09:20:52
 Plot Range: 4195 ft to 6829.33 ft
 Data: WIGGAINS_12-11\Well Based\WIGGAINS_12-11_DETAIL_PASS
 Plot File: \\LOCAL-WIGGAINS_12-11\Well Based\MICROLOG\Microlog_IQ_5_main.lib


5 INCH MAIN LOG

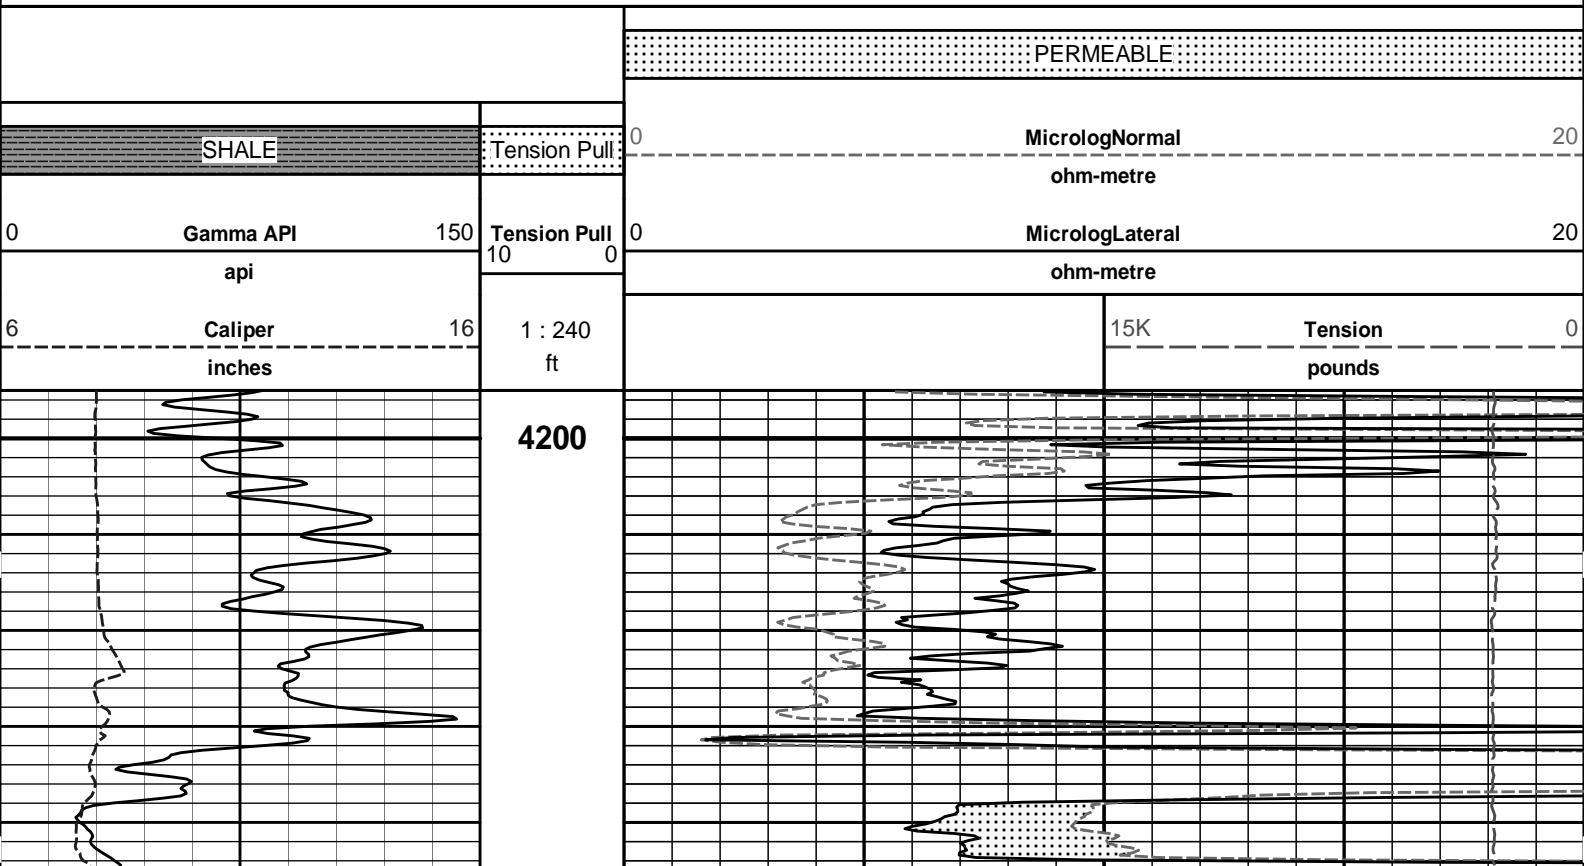


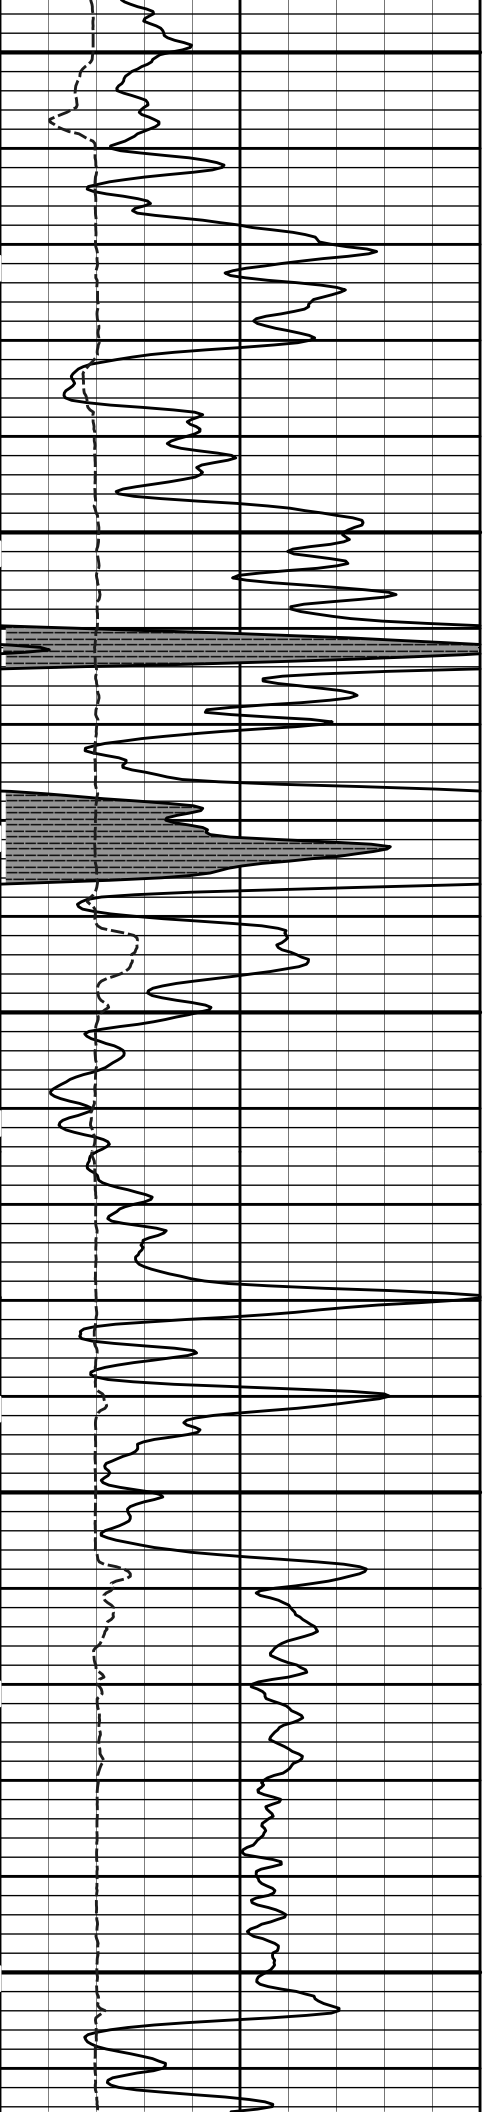

4300


4400

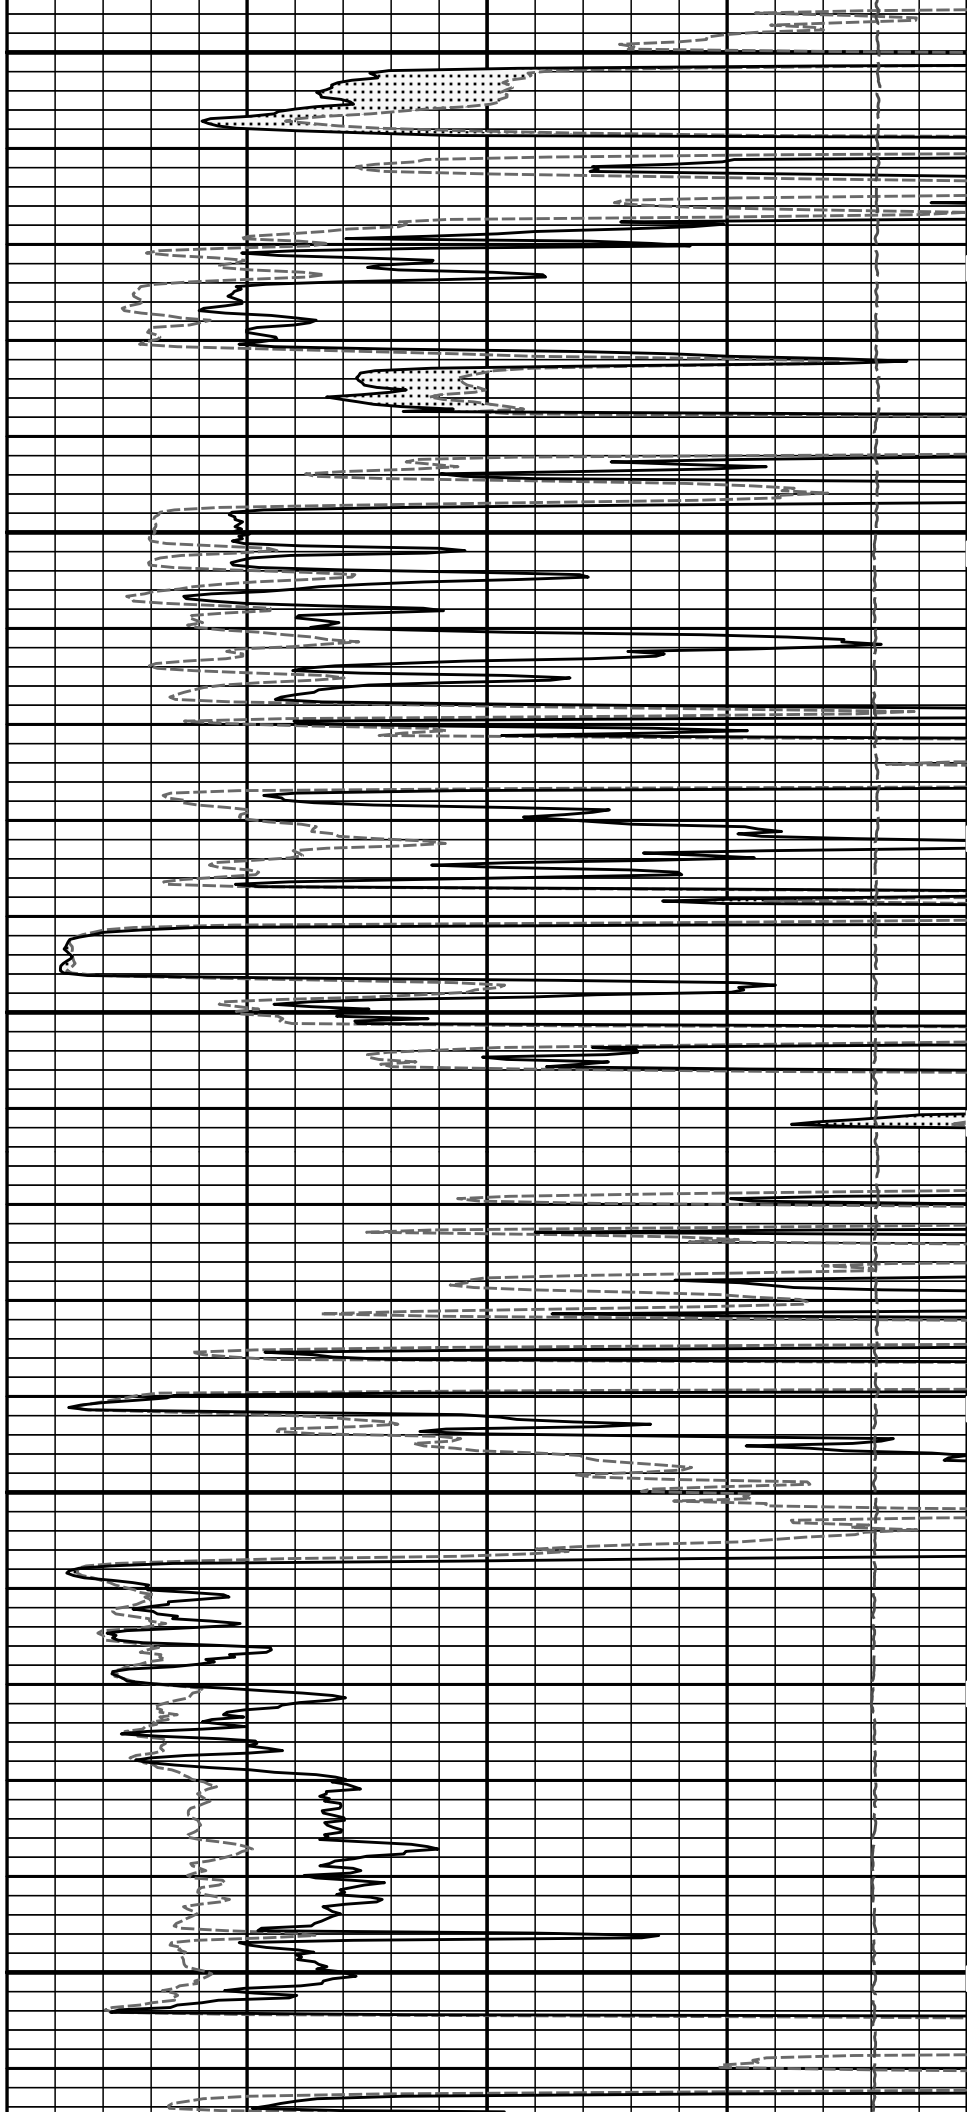

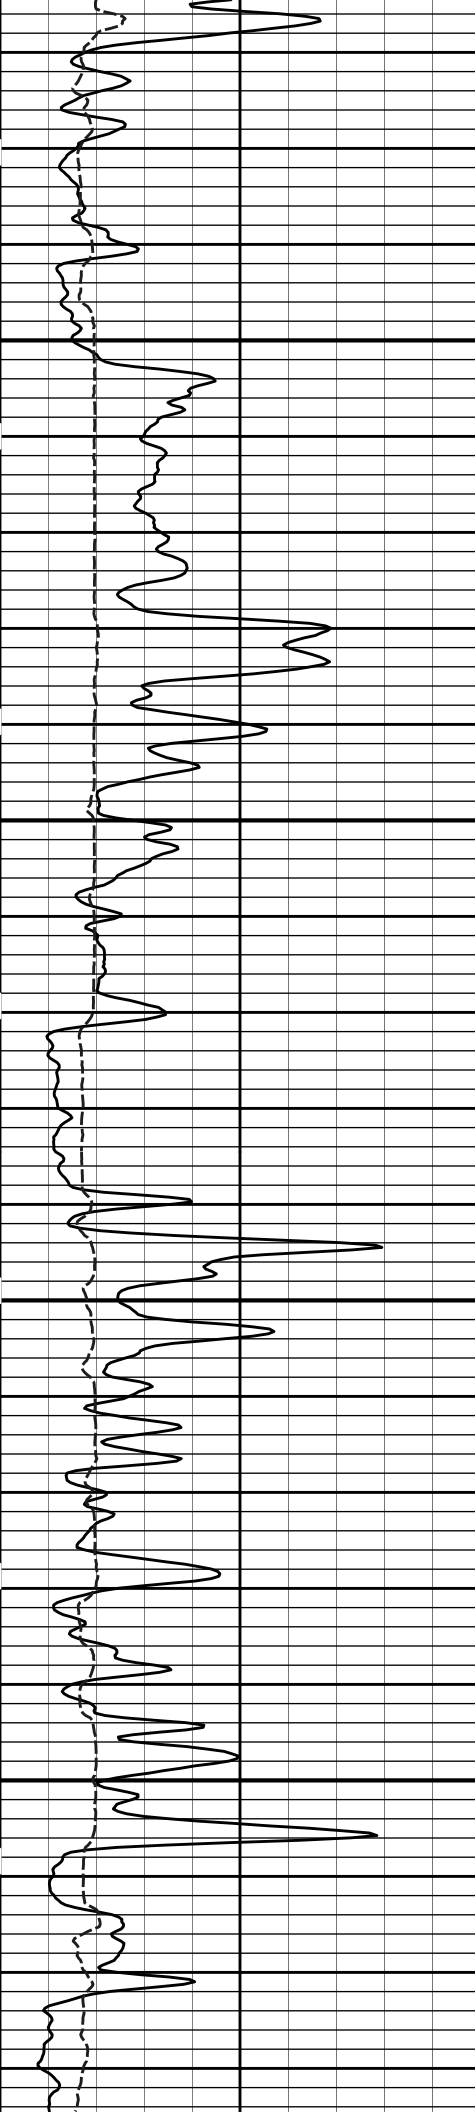

4500

4600

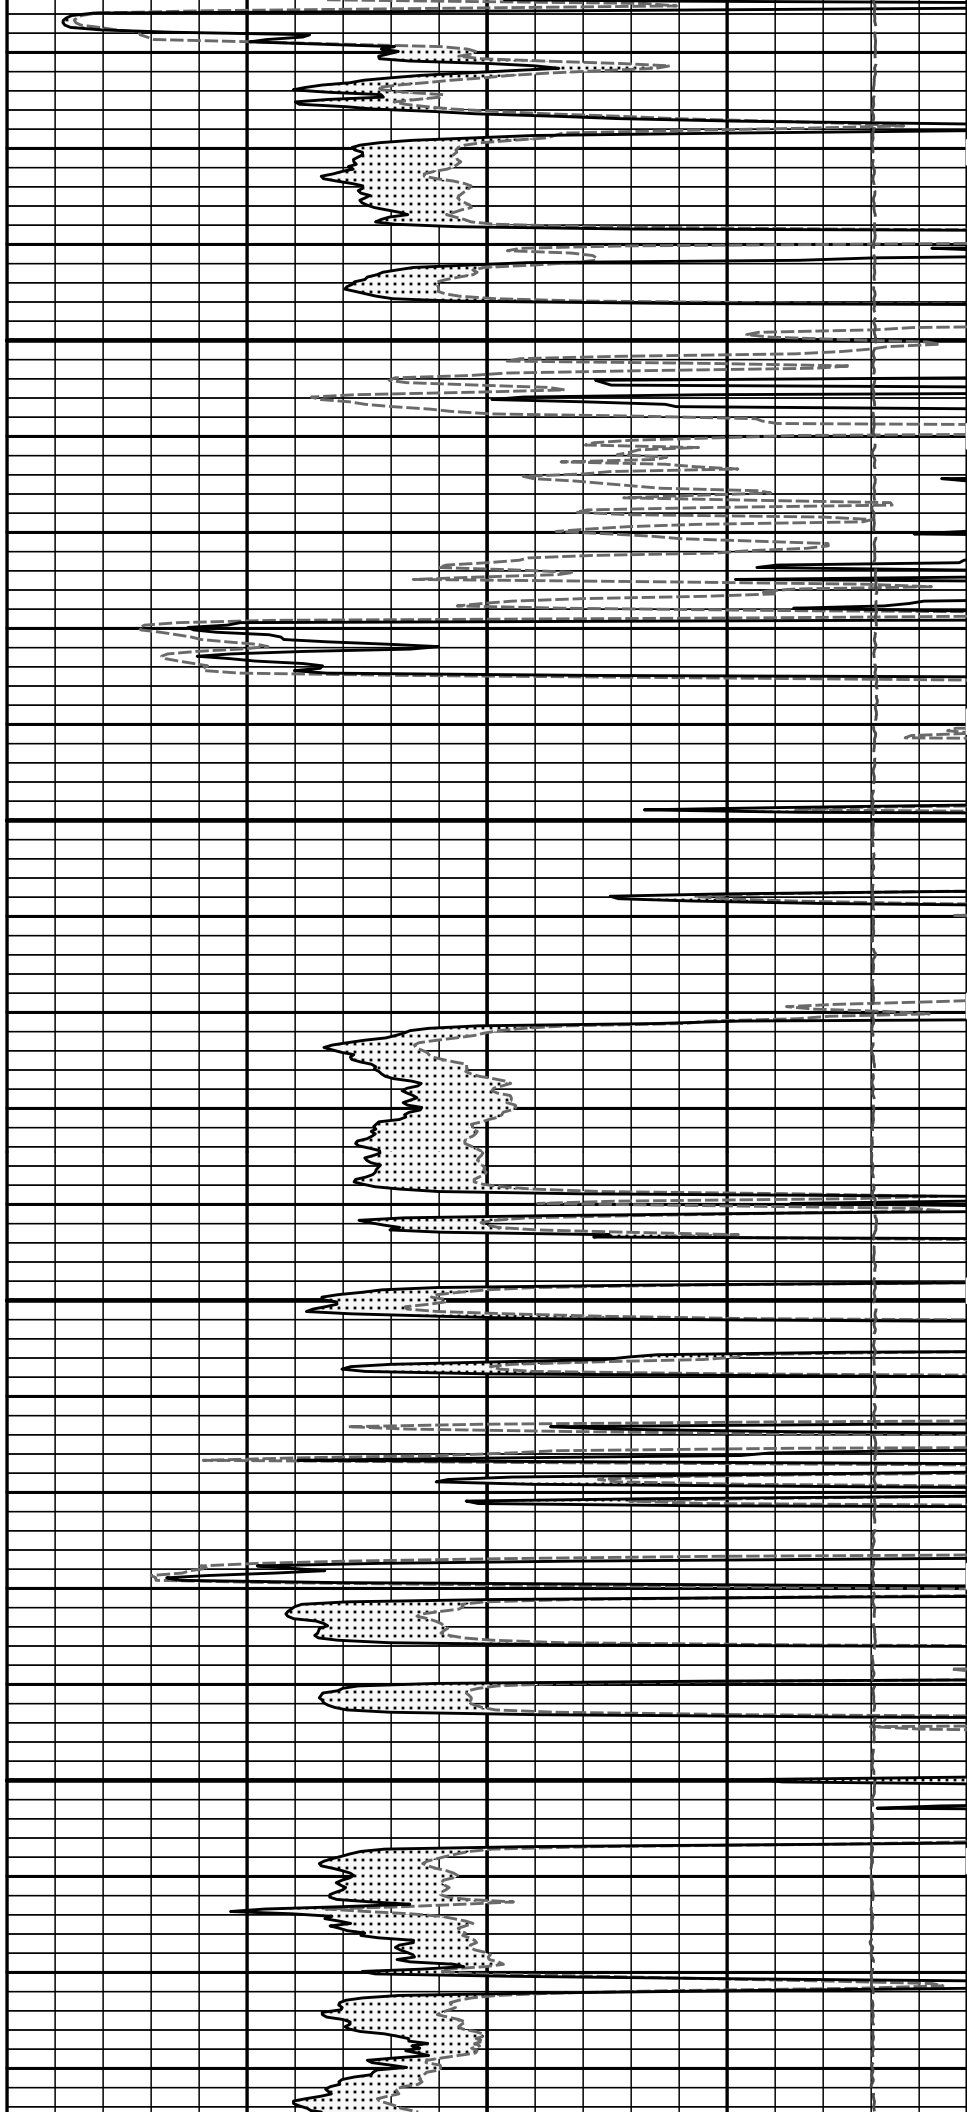




4700

4800


4900

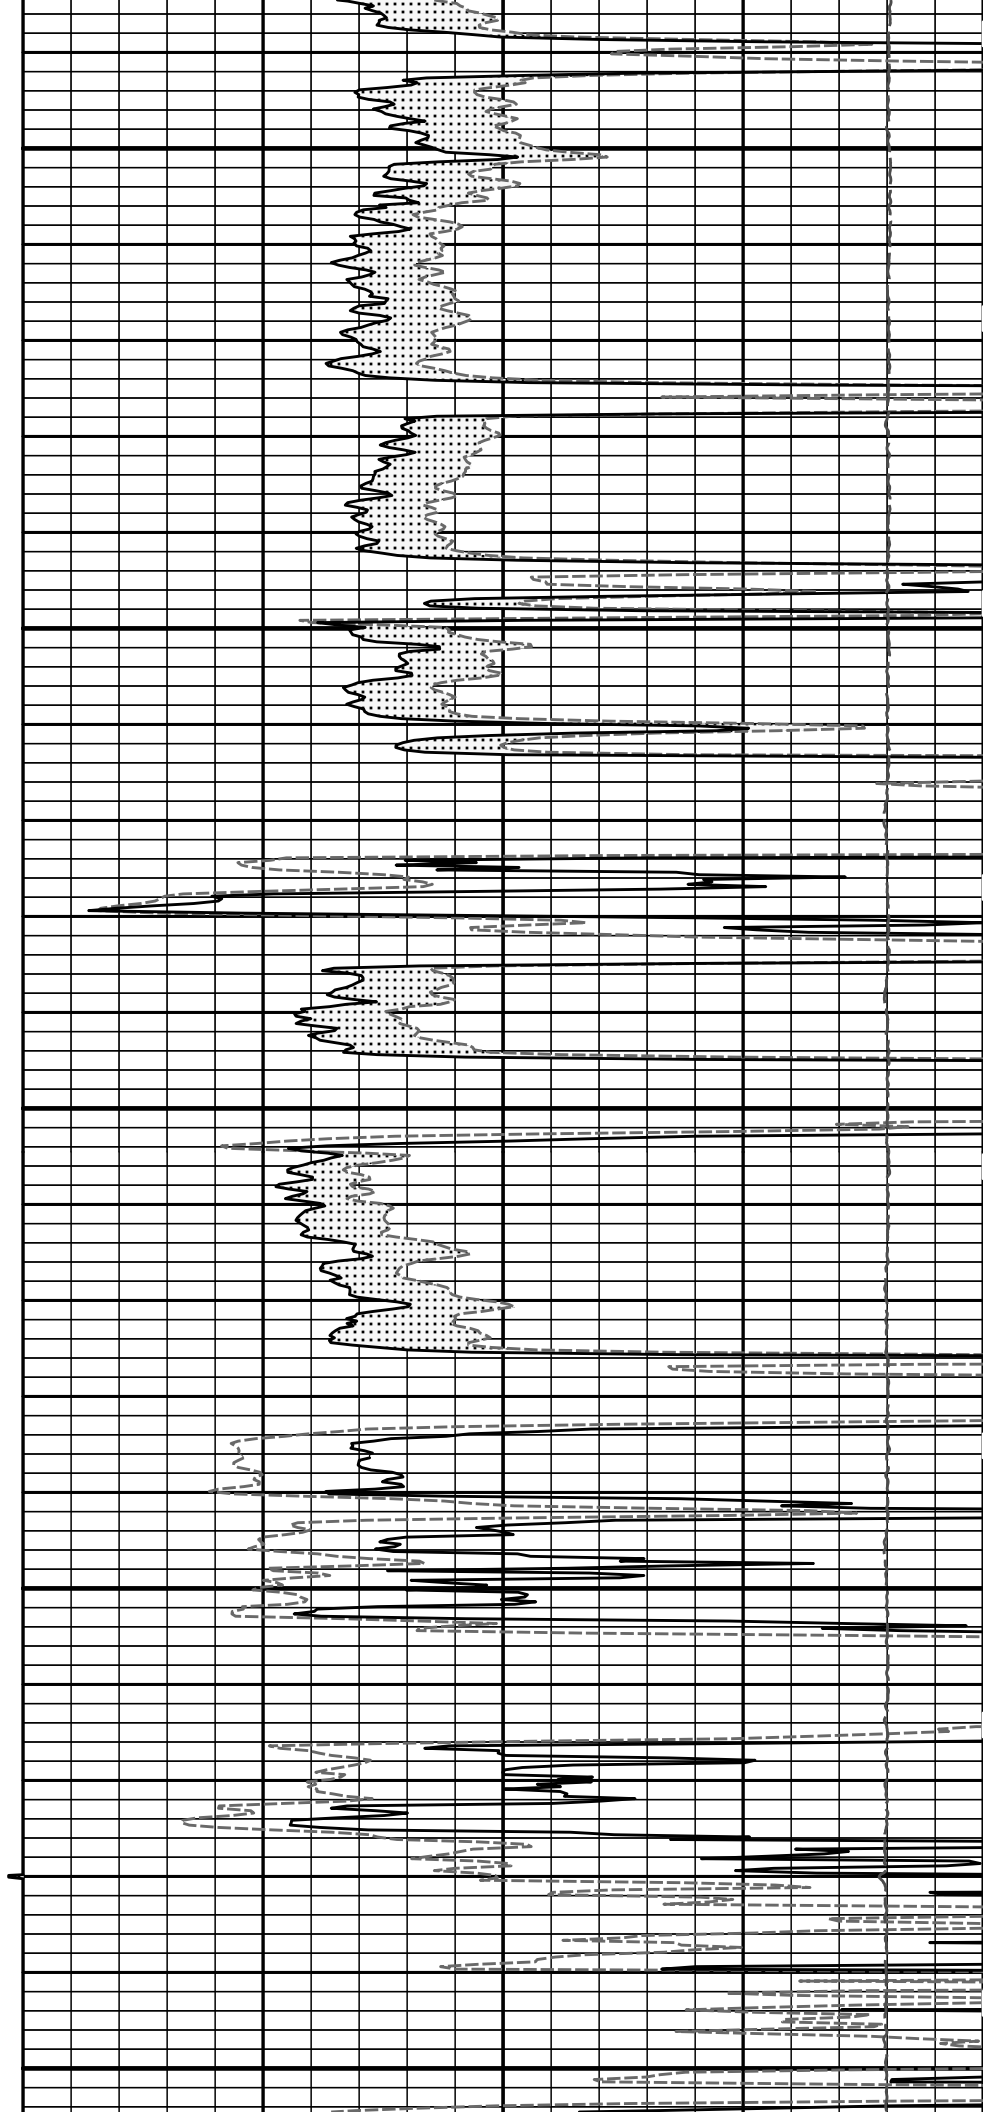




5000


5100

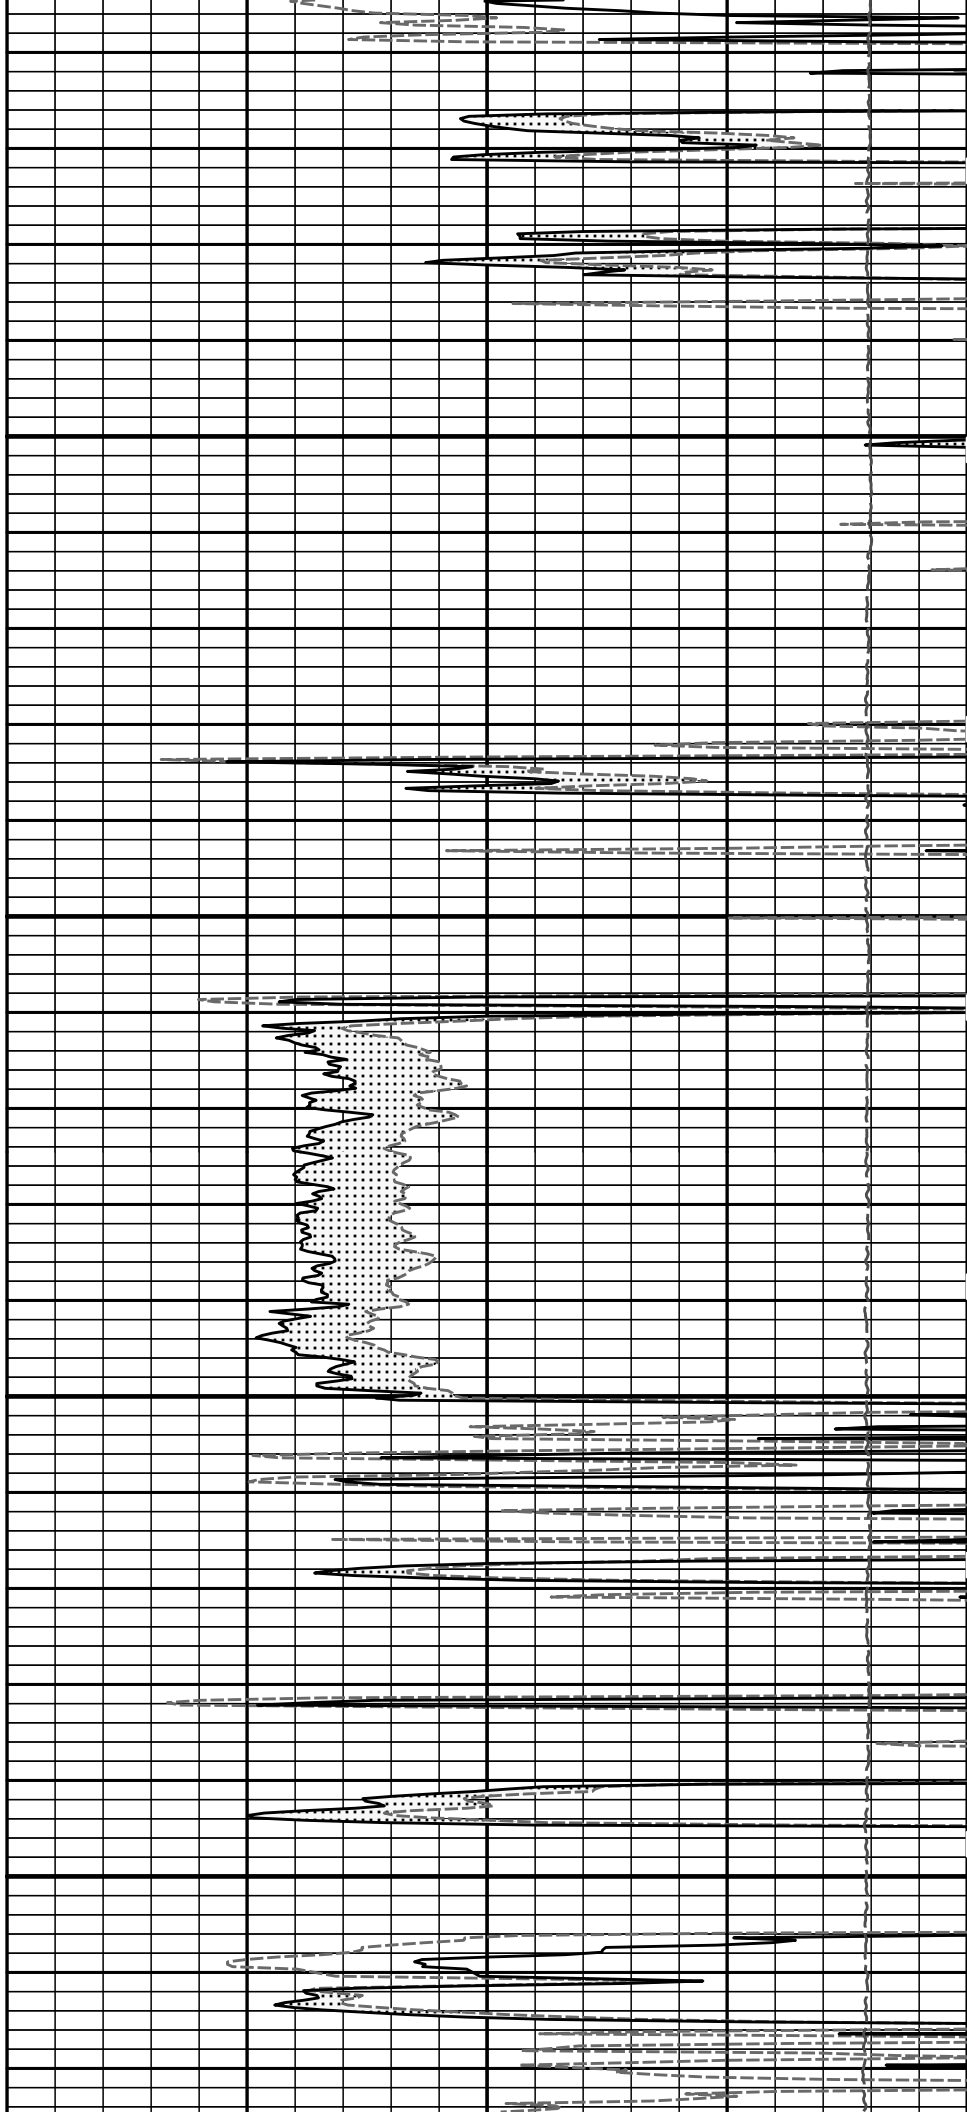


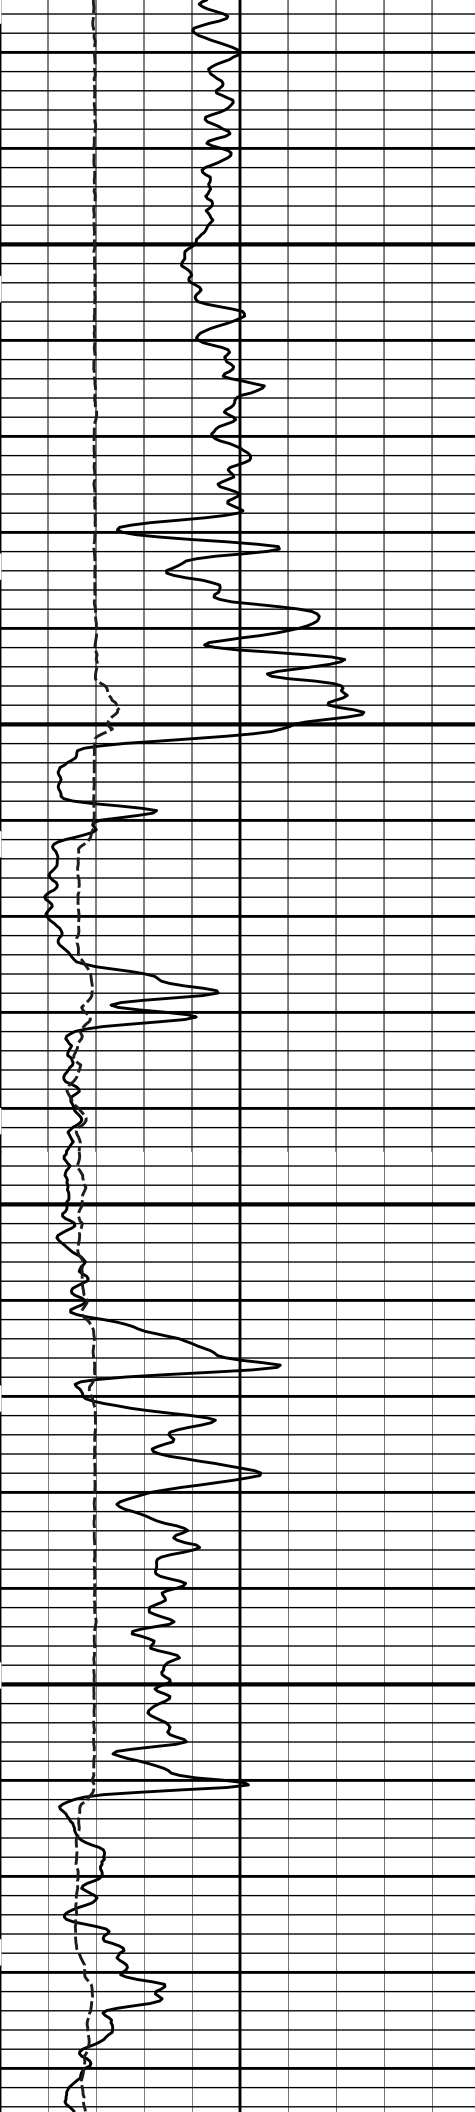

5200


5300

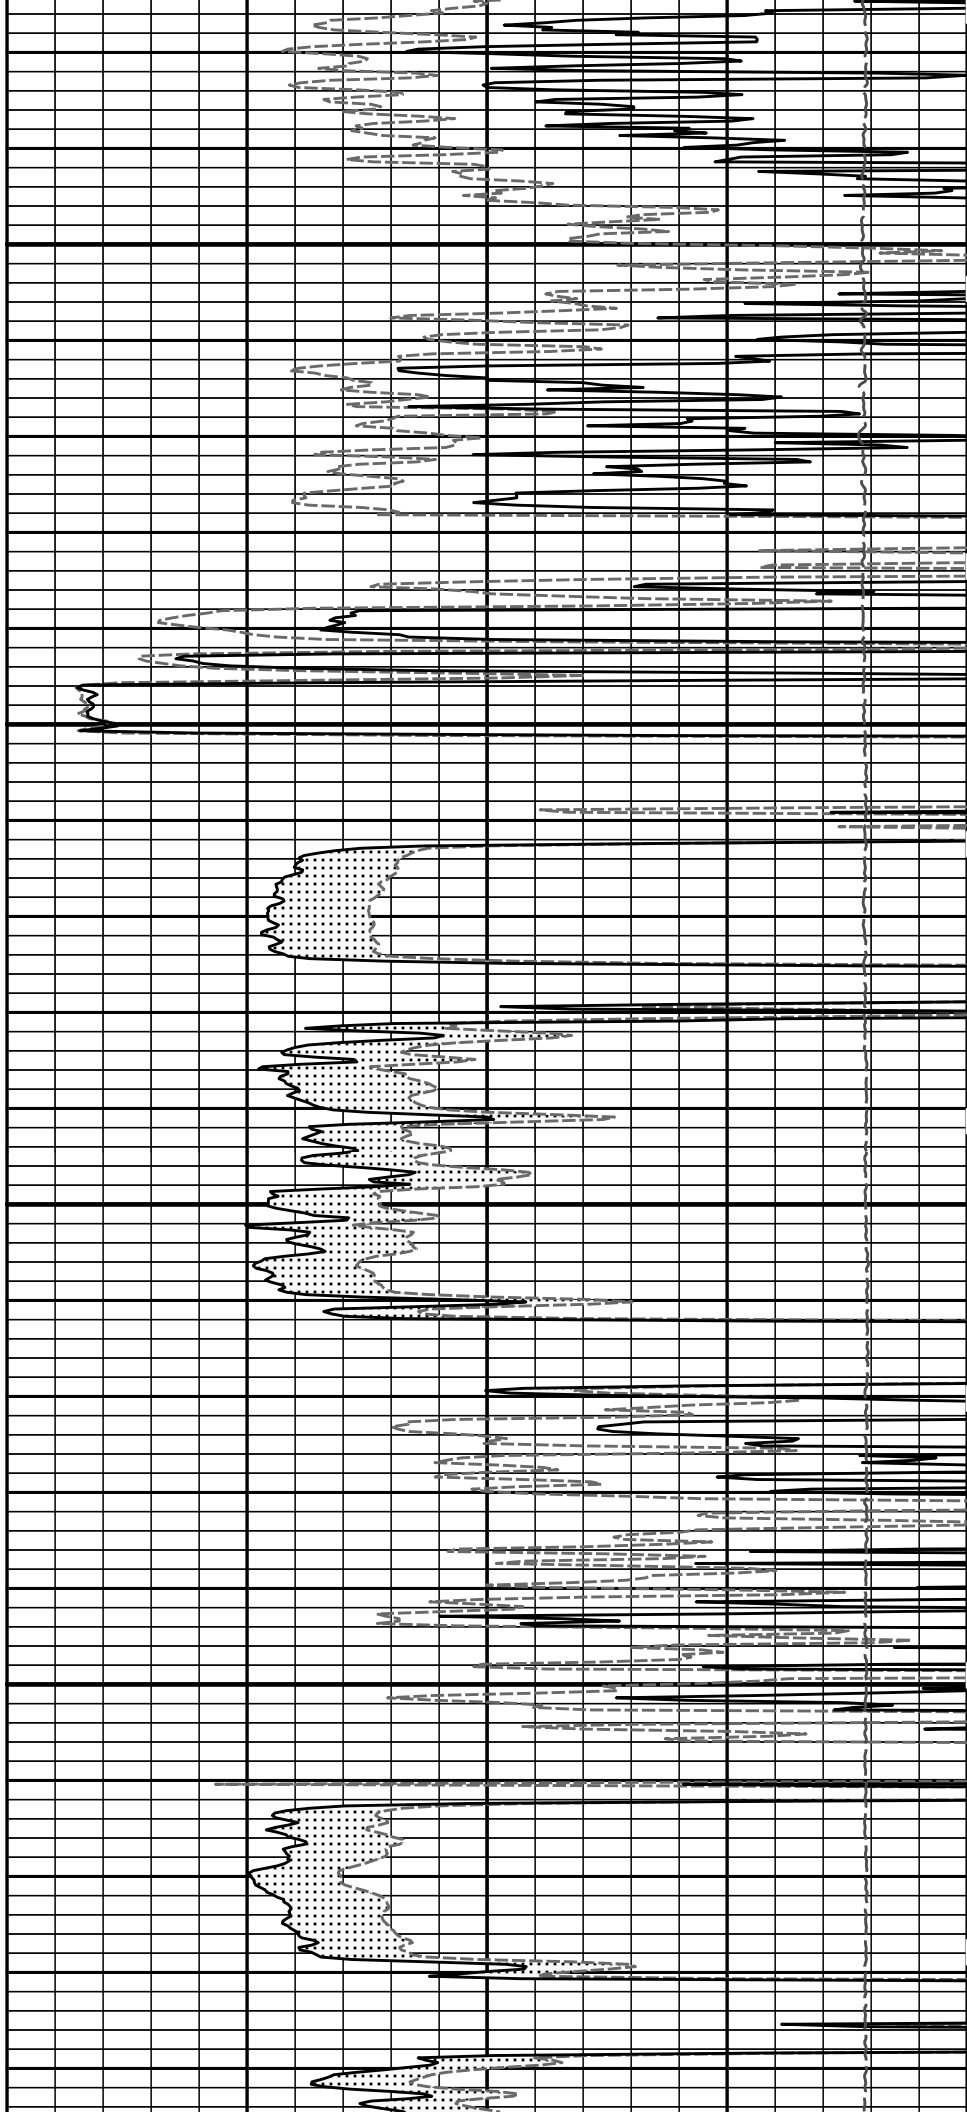


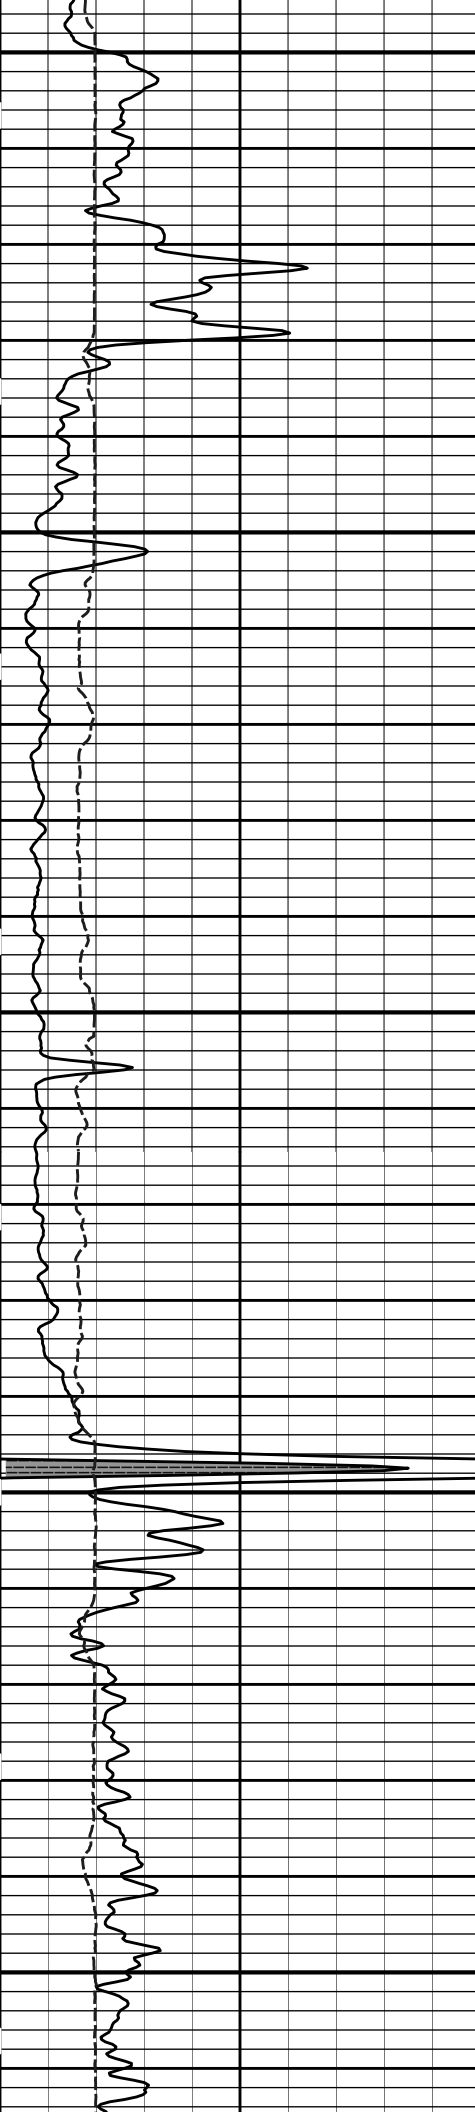

5400


5500

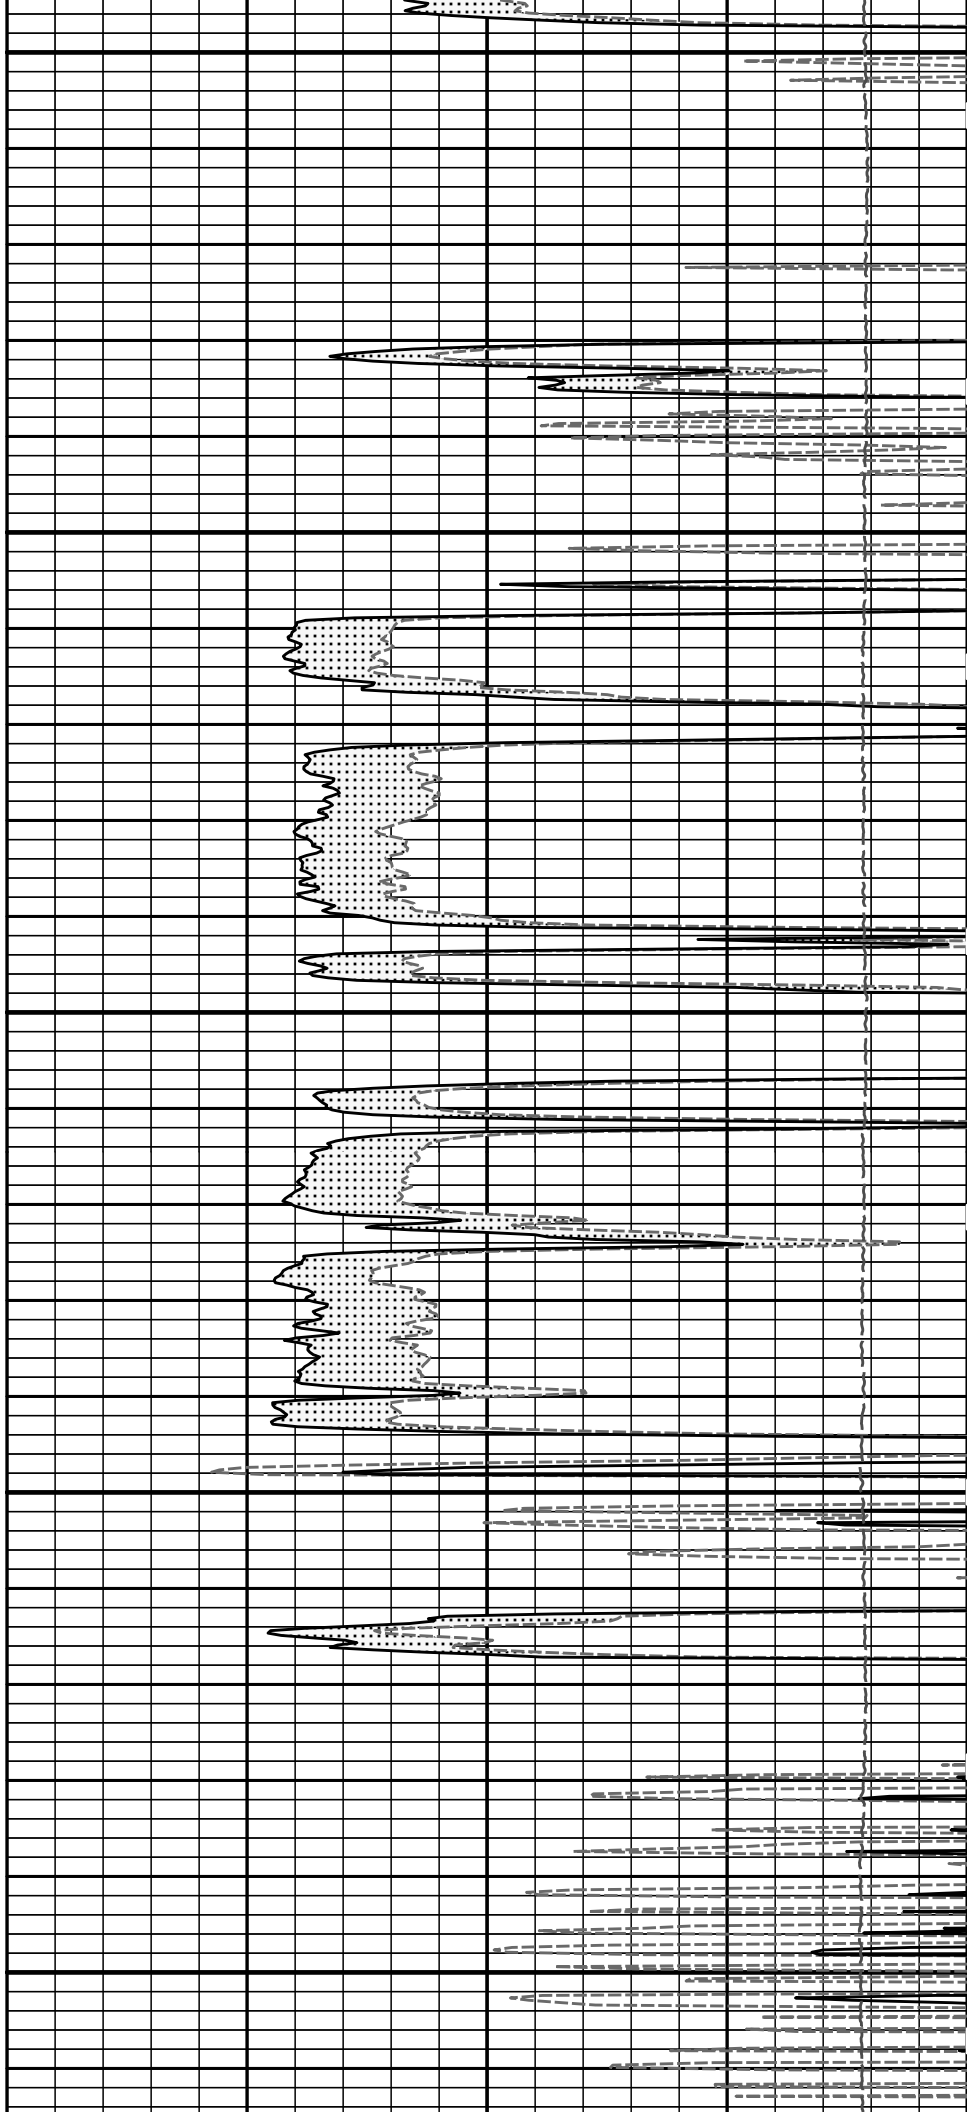


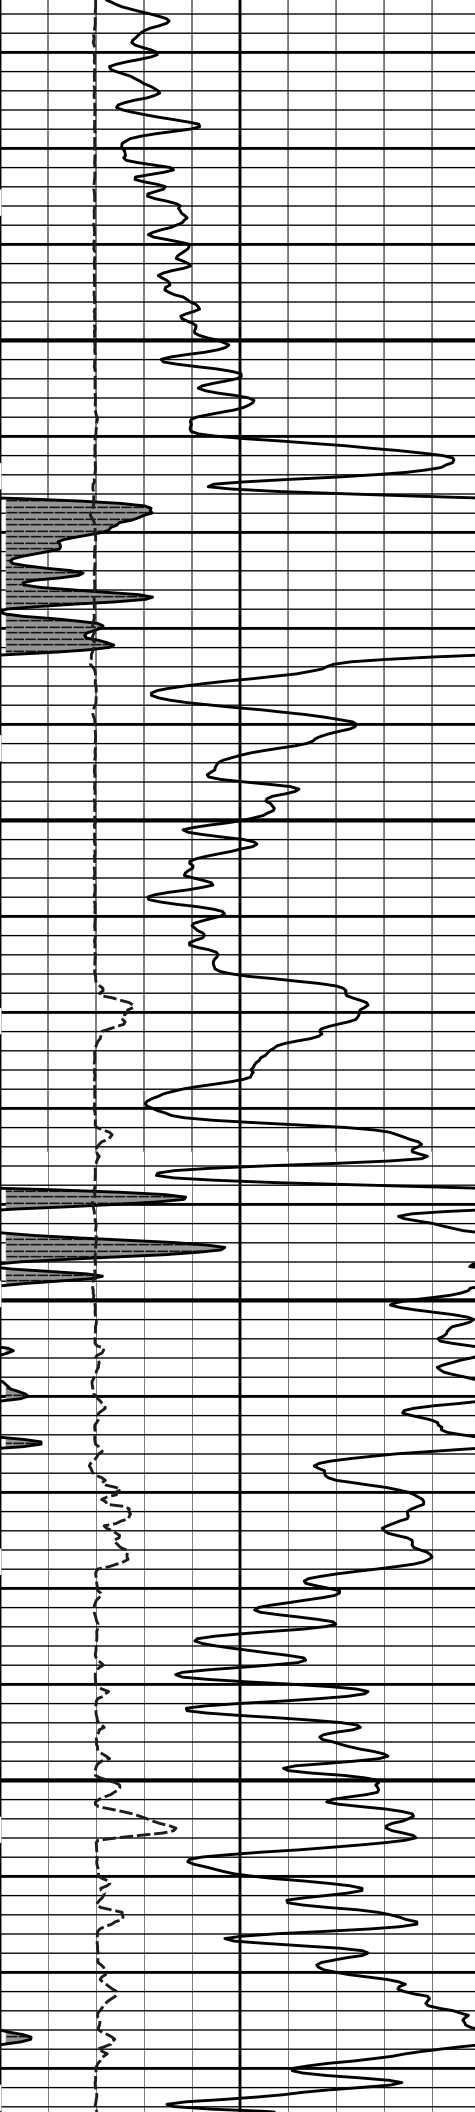

5600

5700

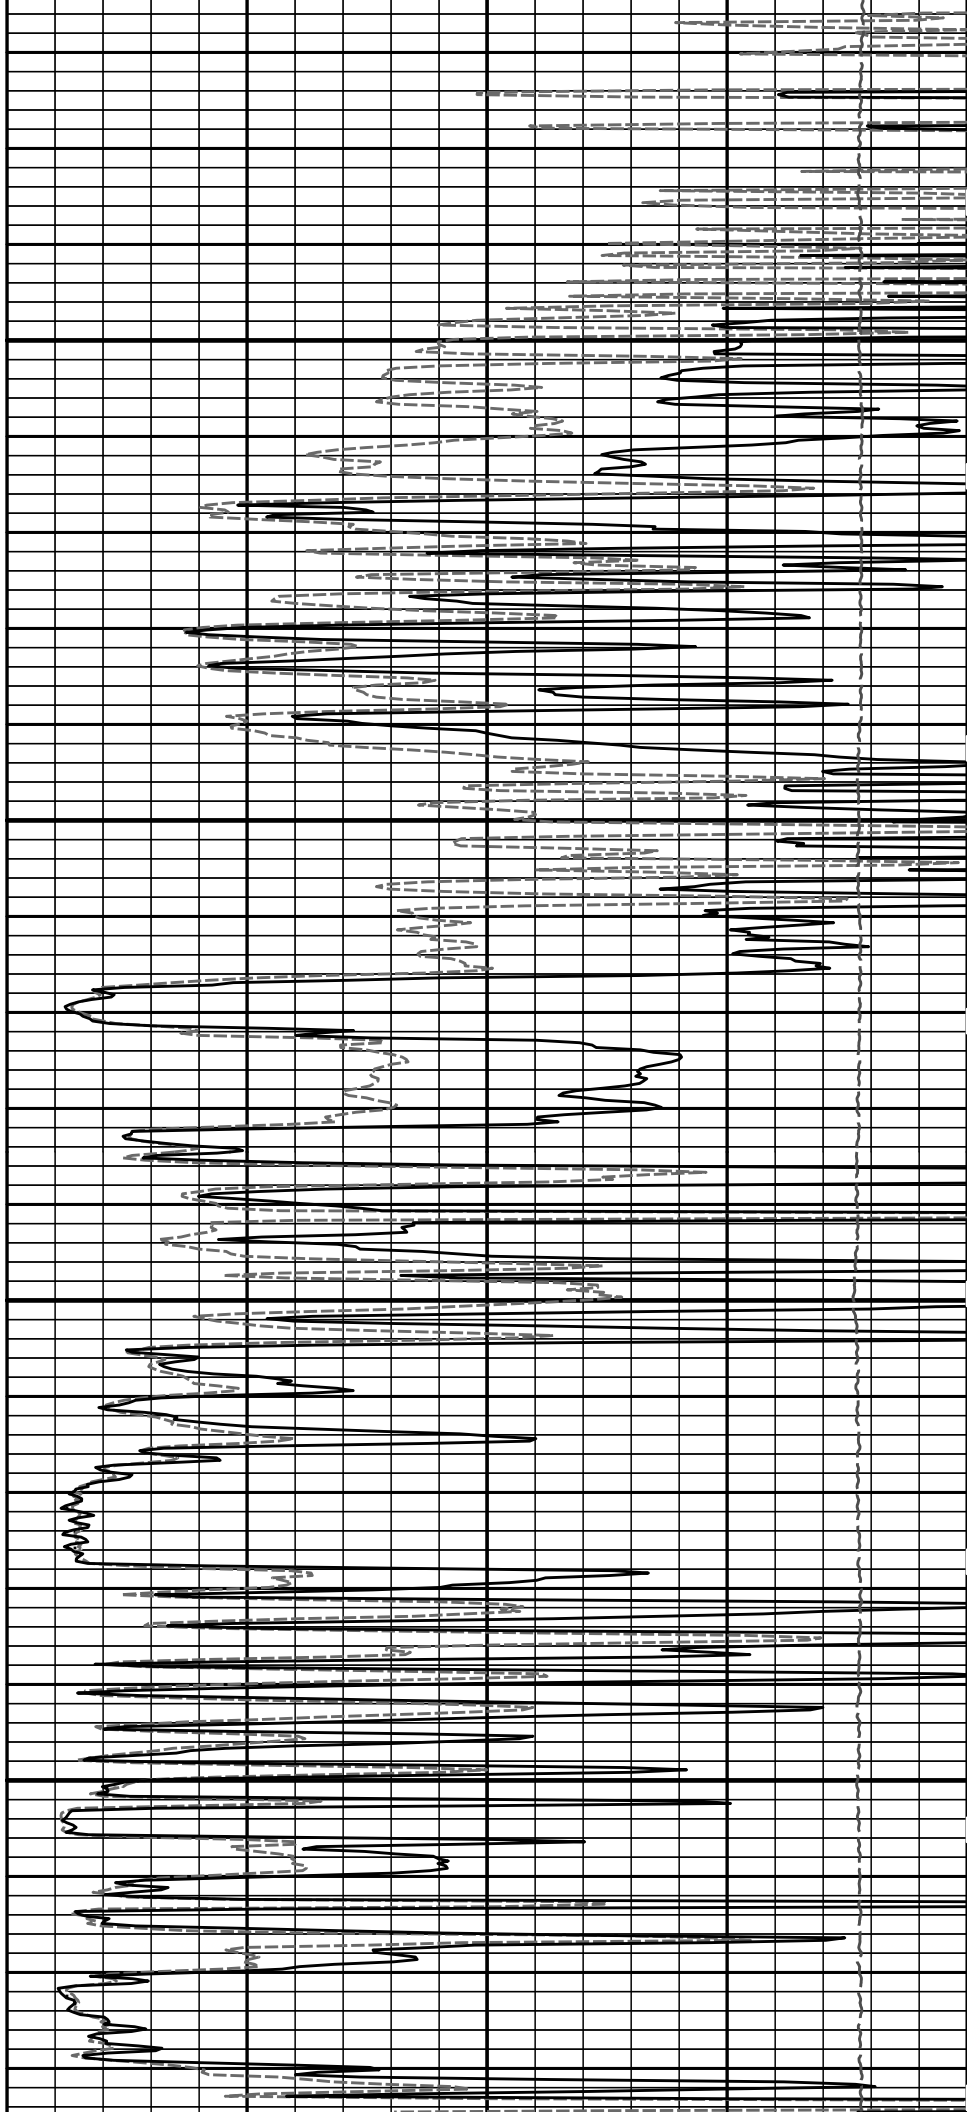


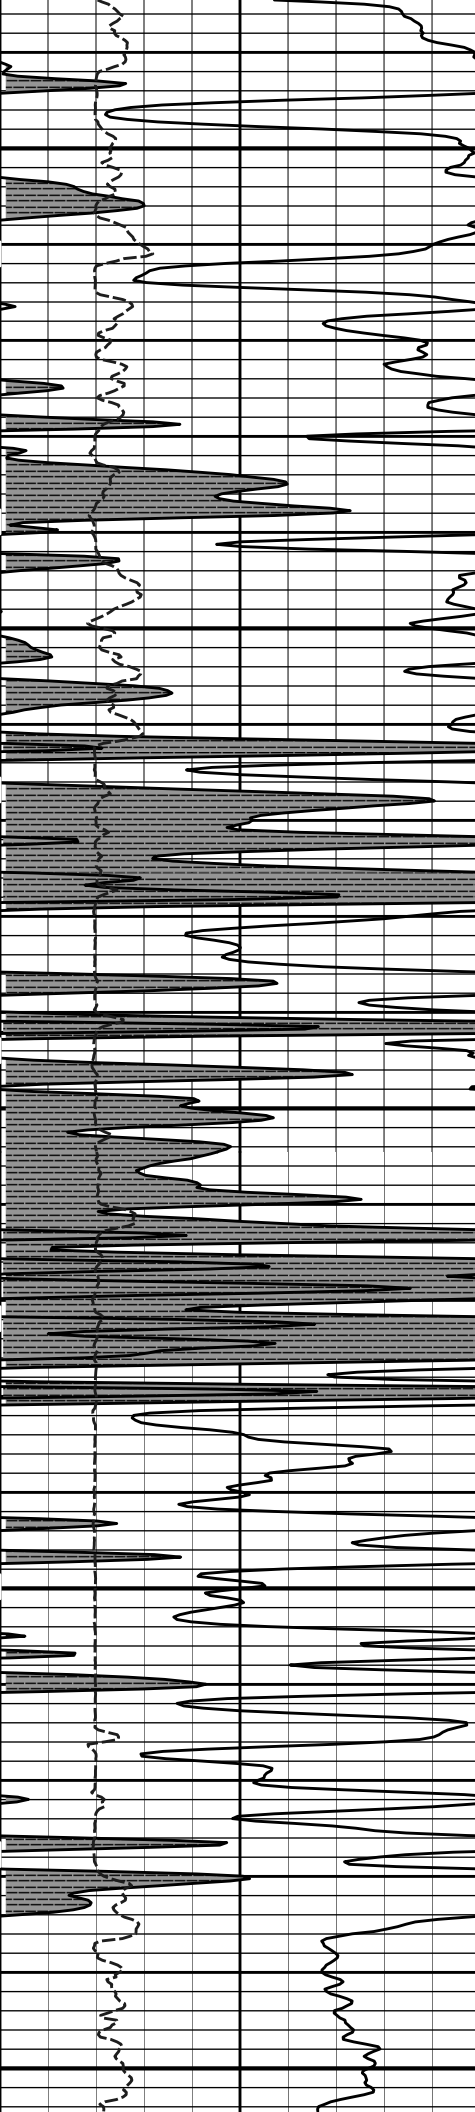


5800

5900


6000

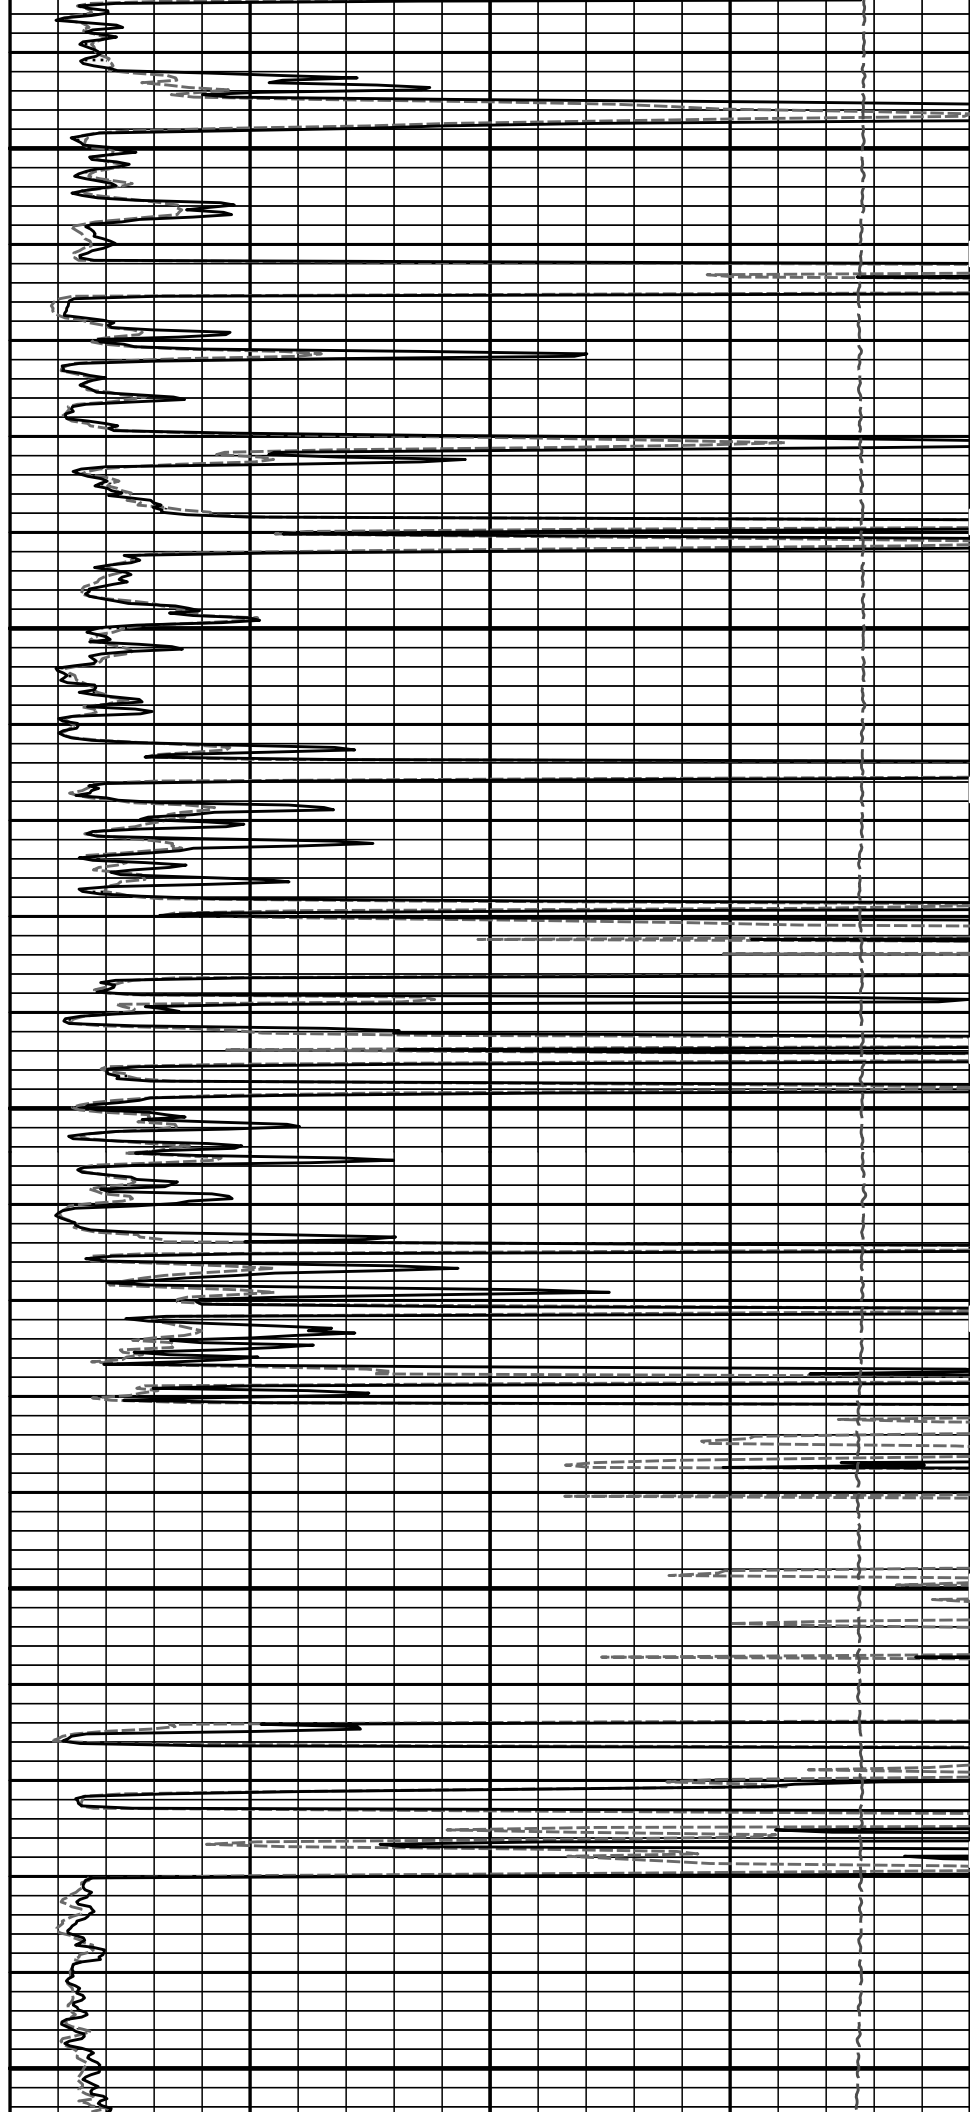


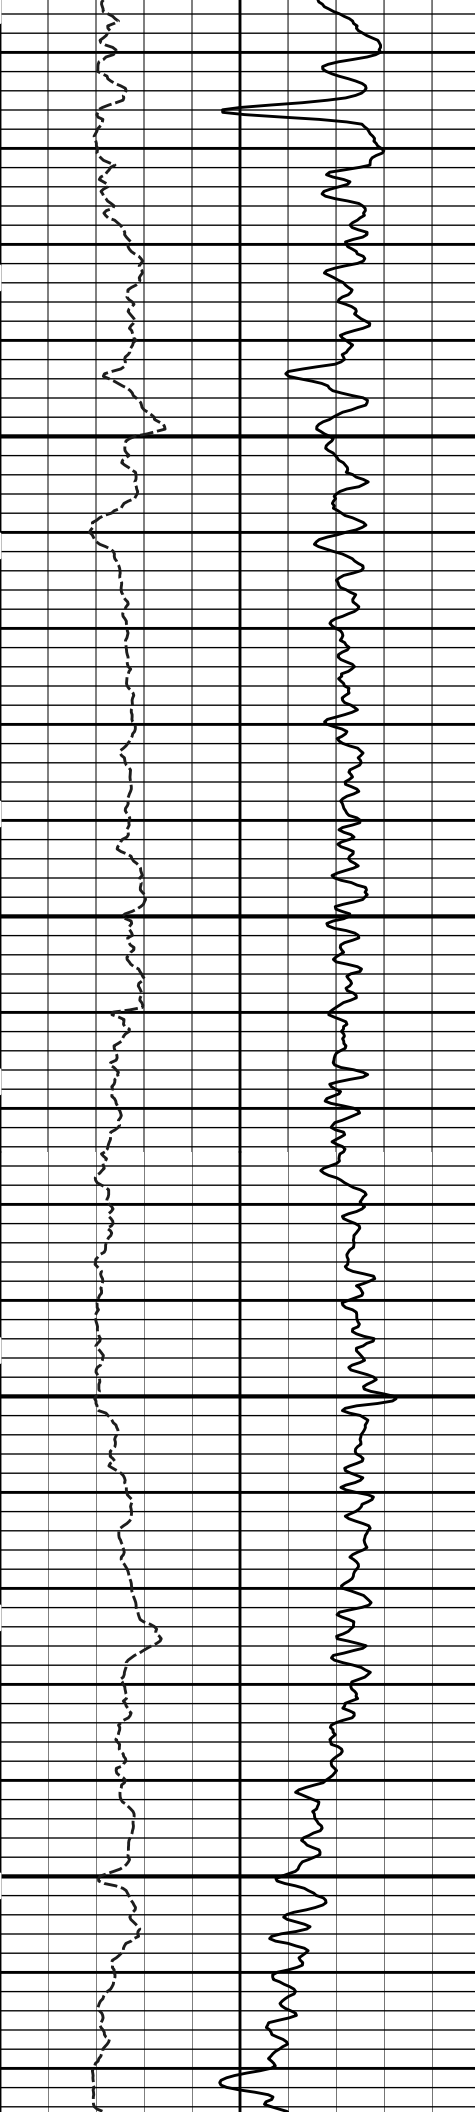

6100


6200

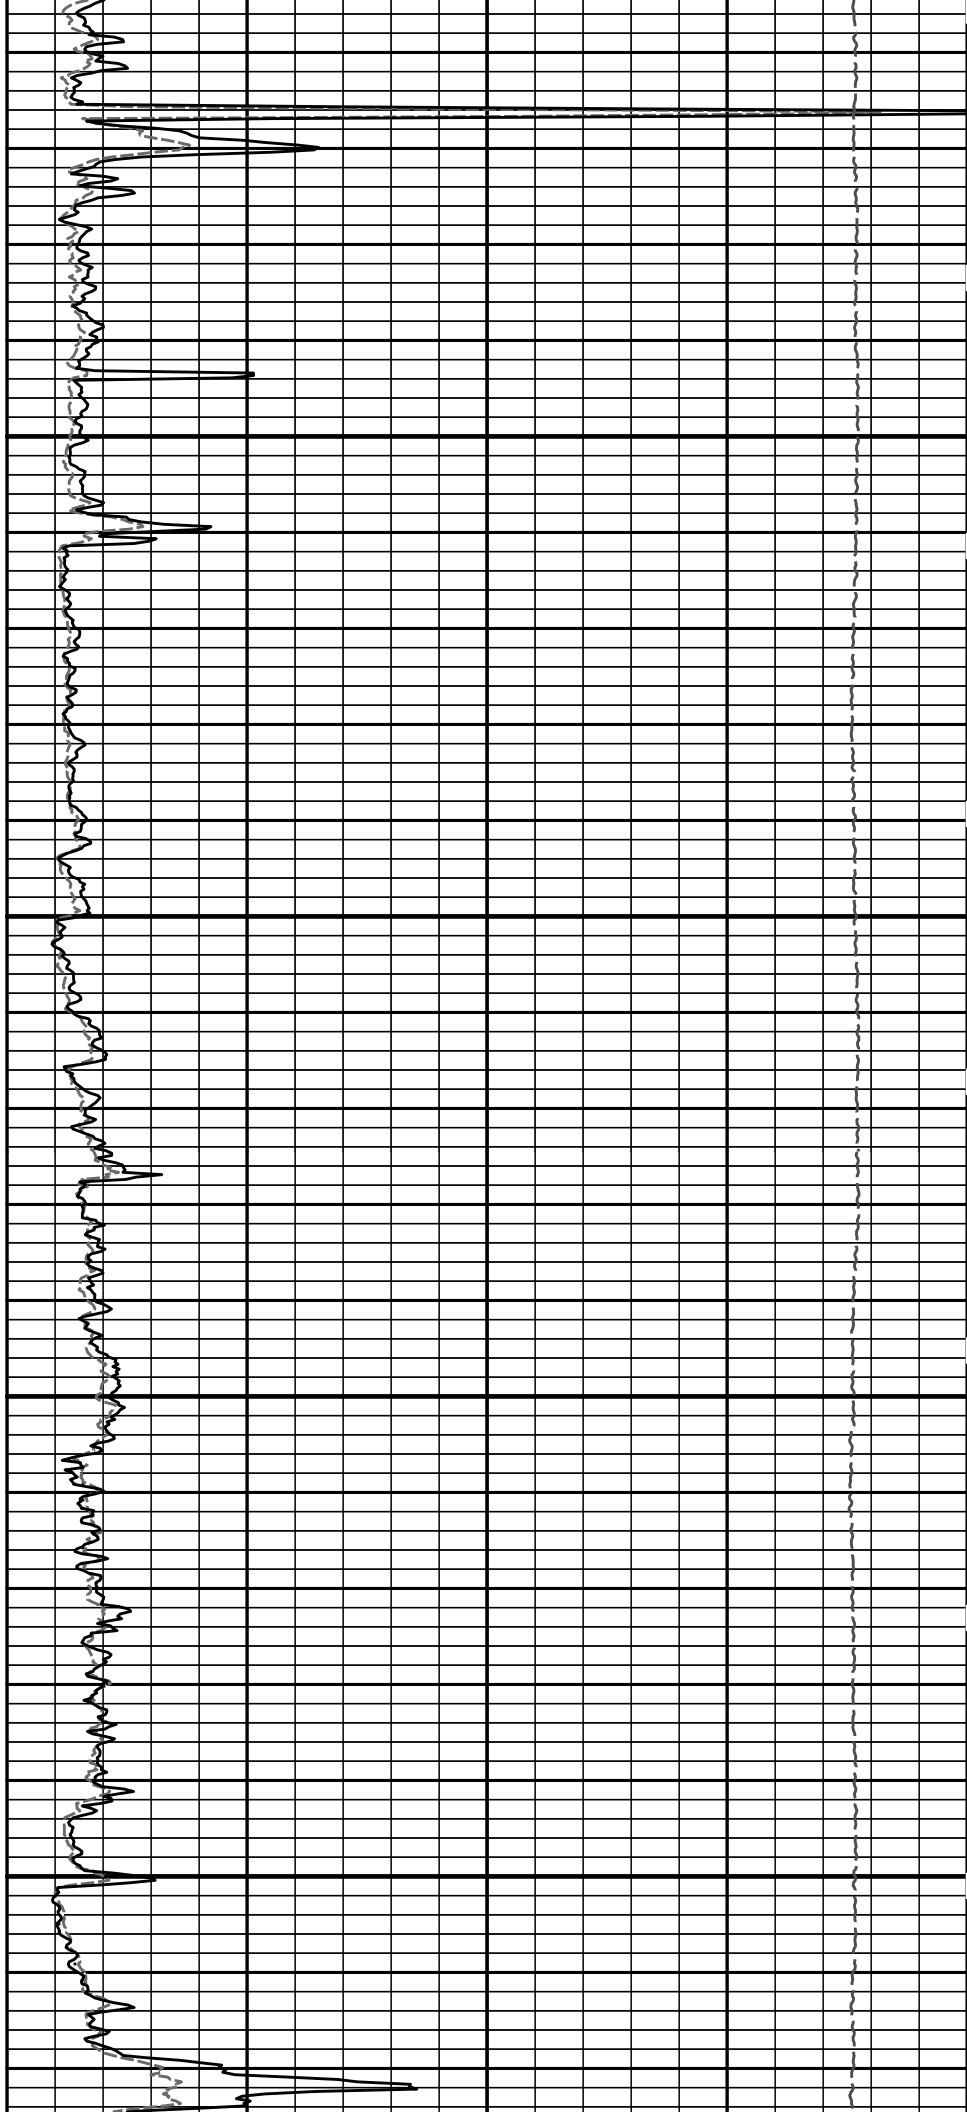


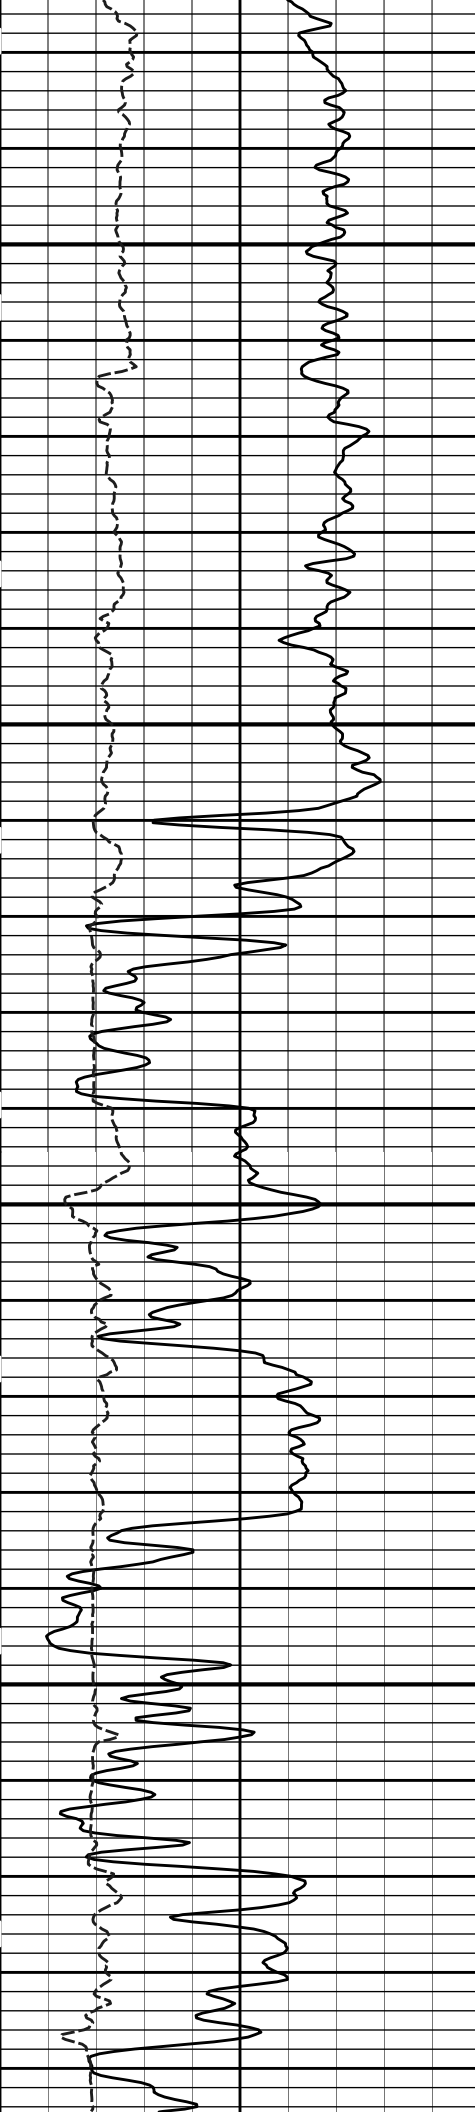

6300


6400

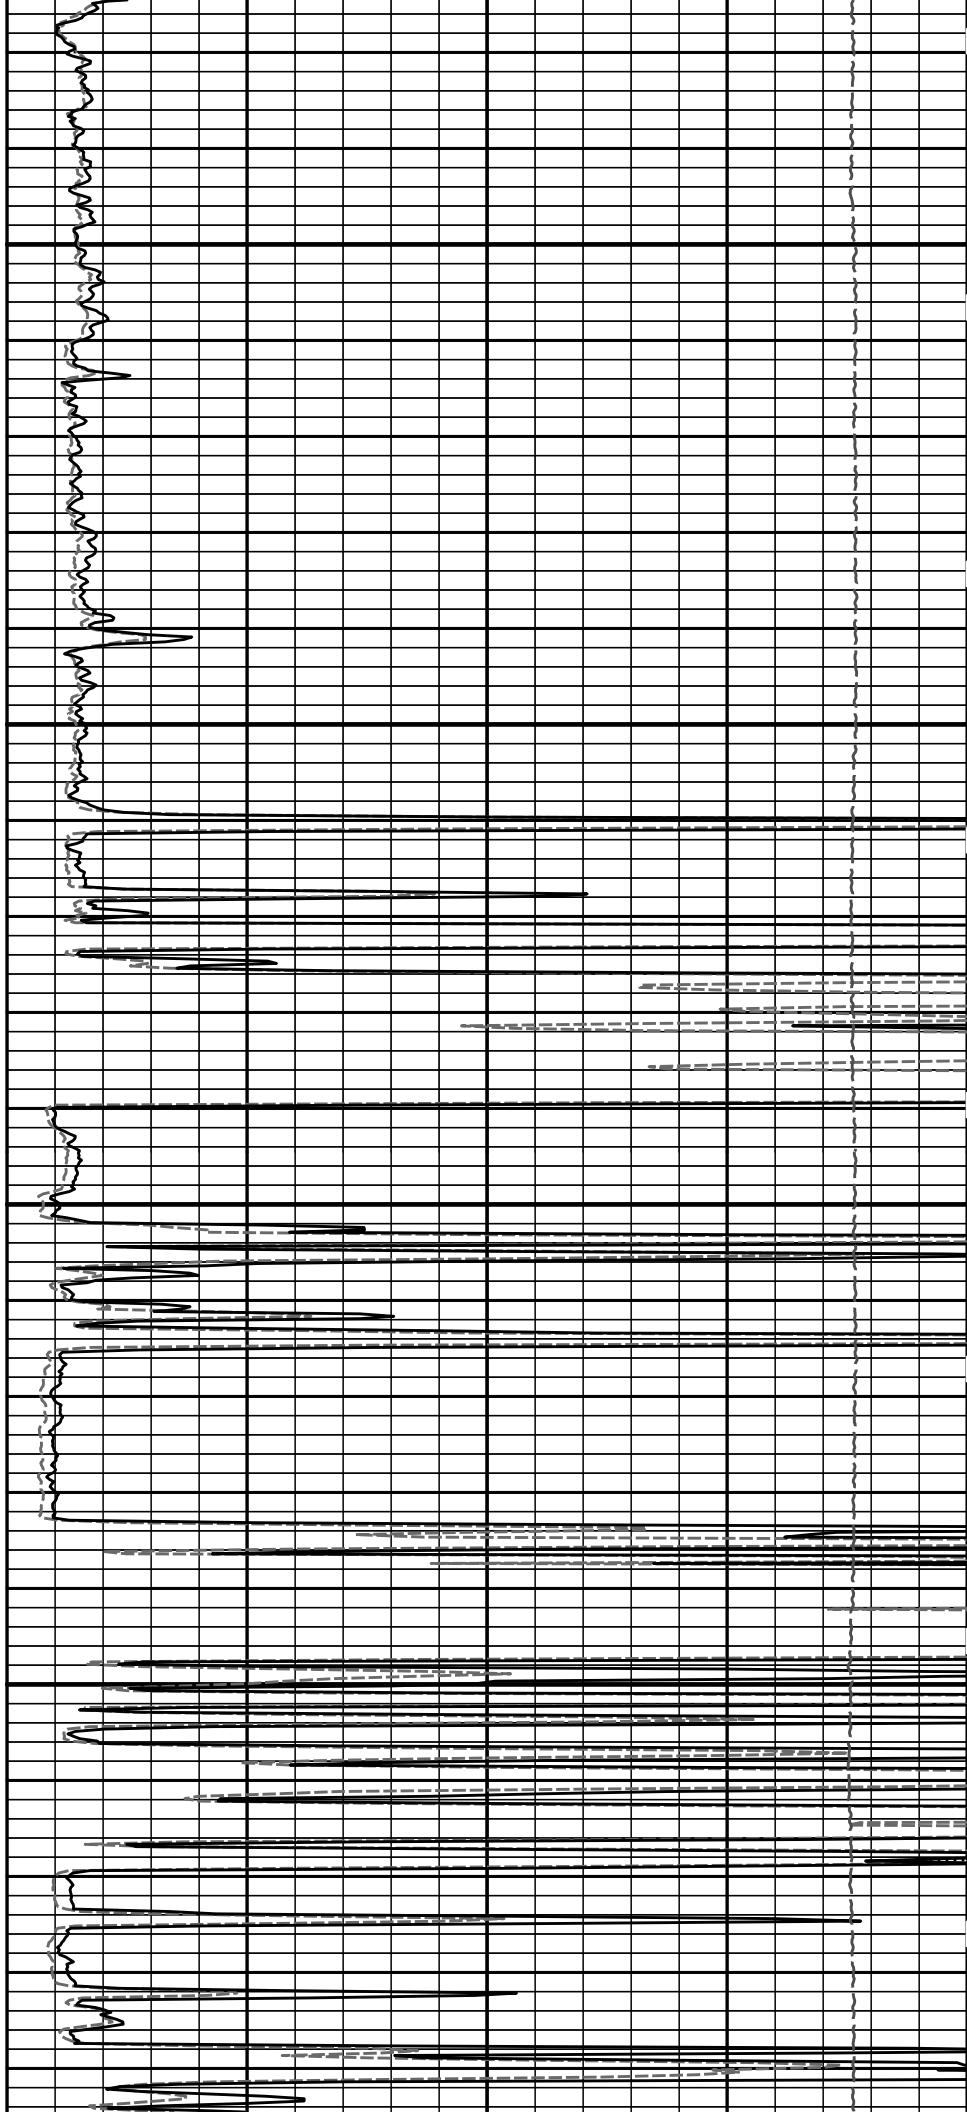


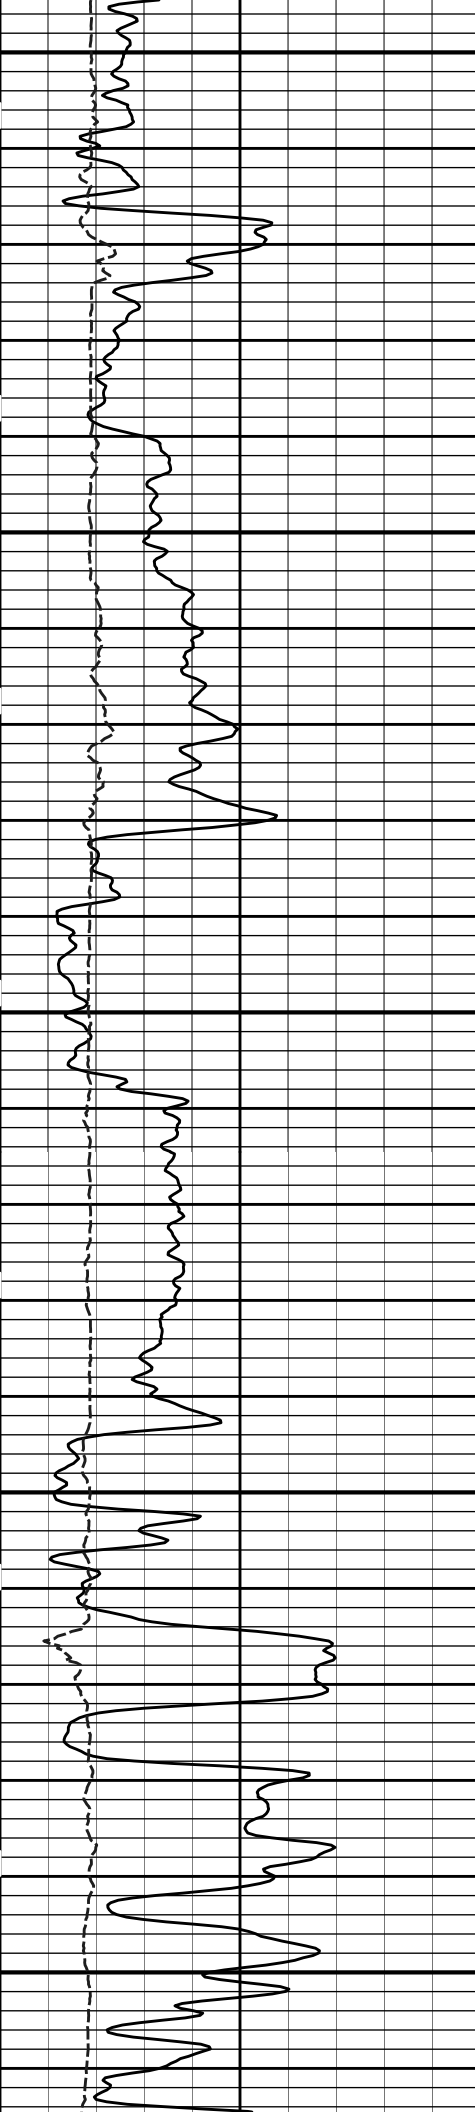

6500

6600

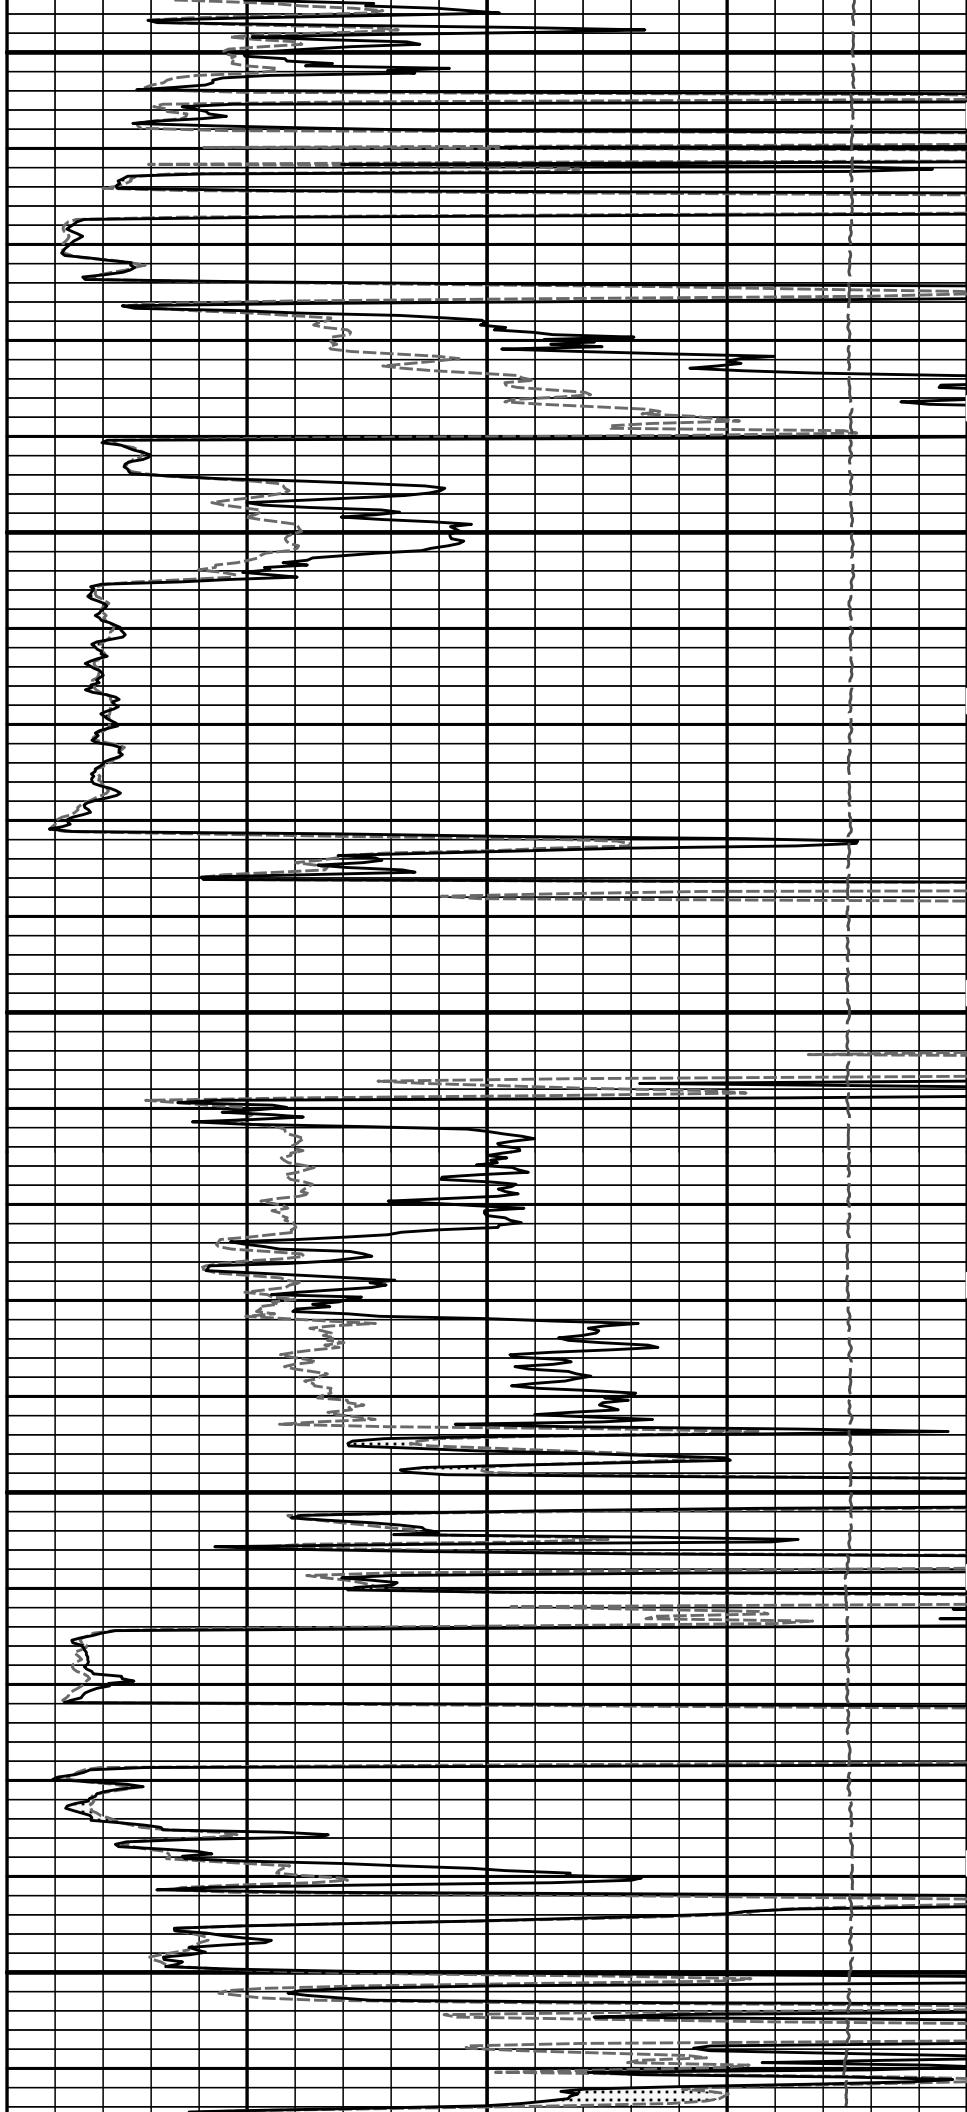

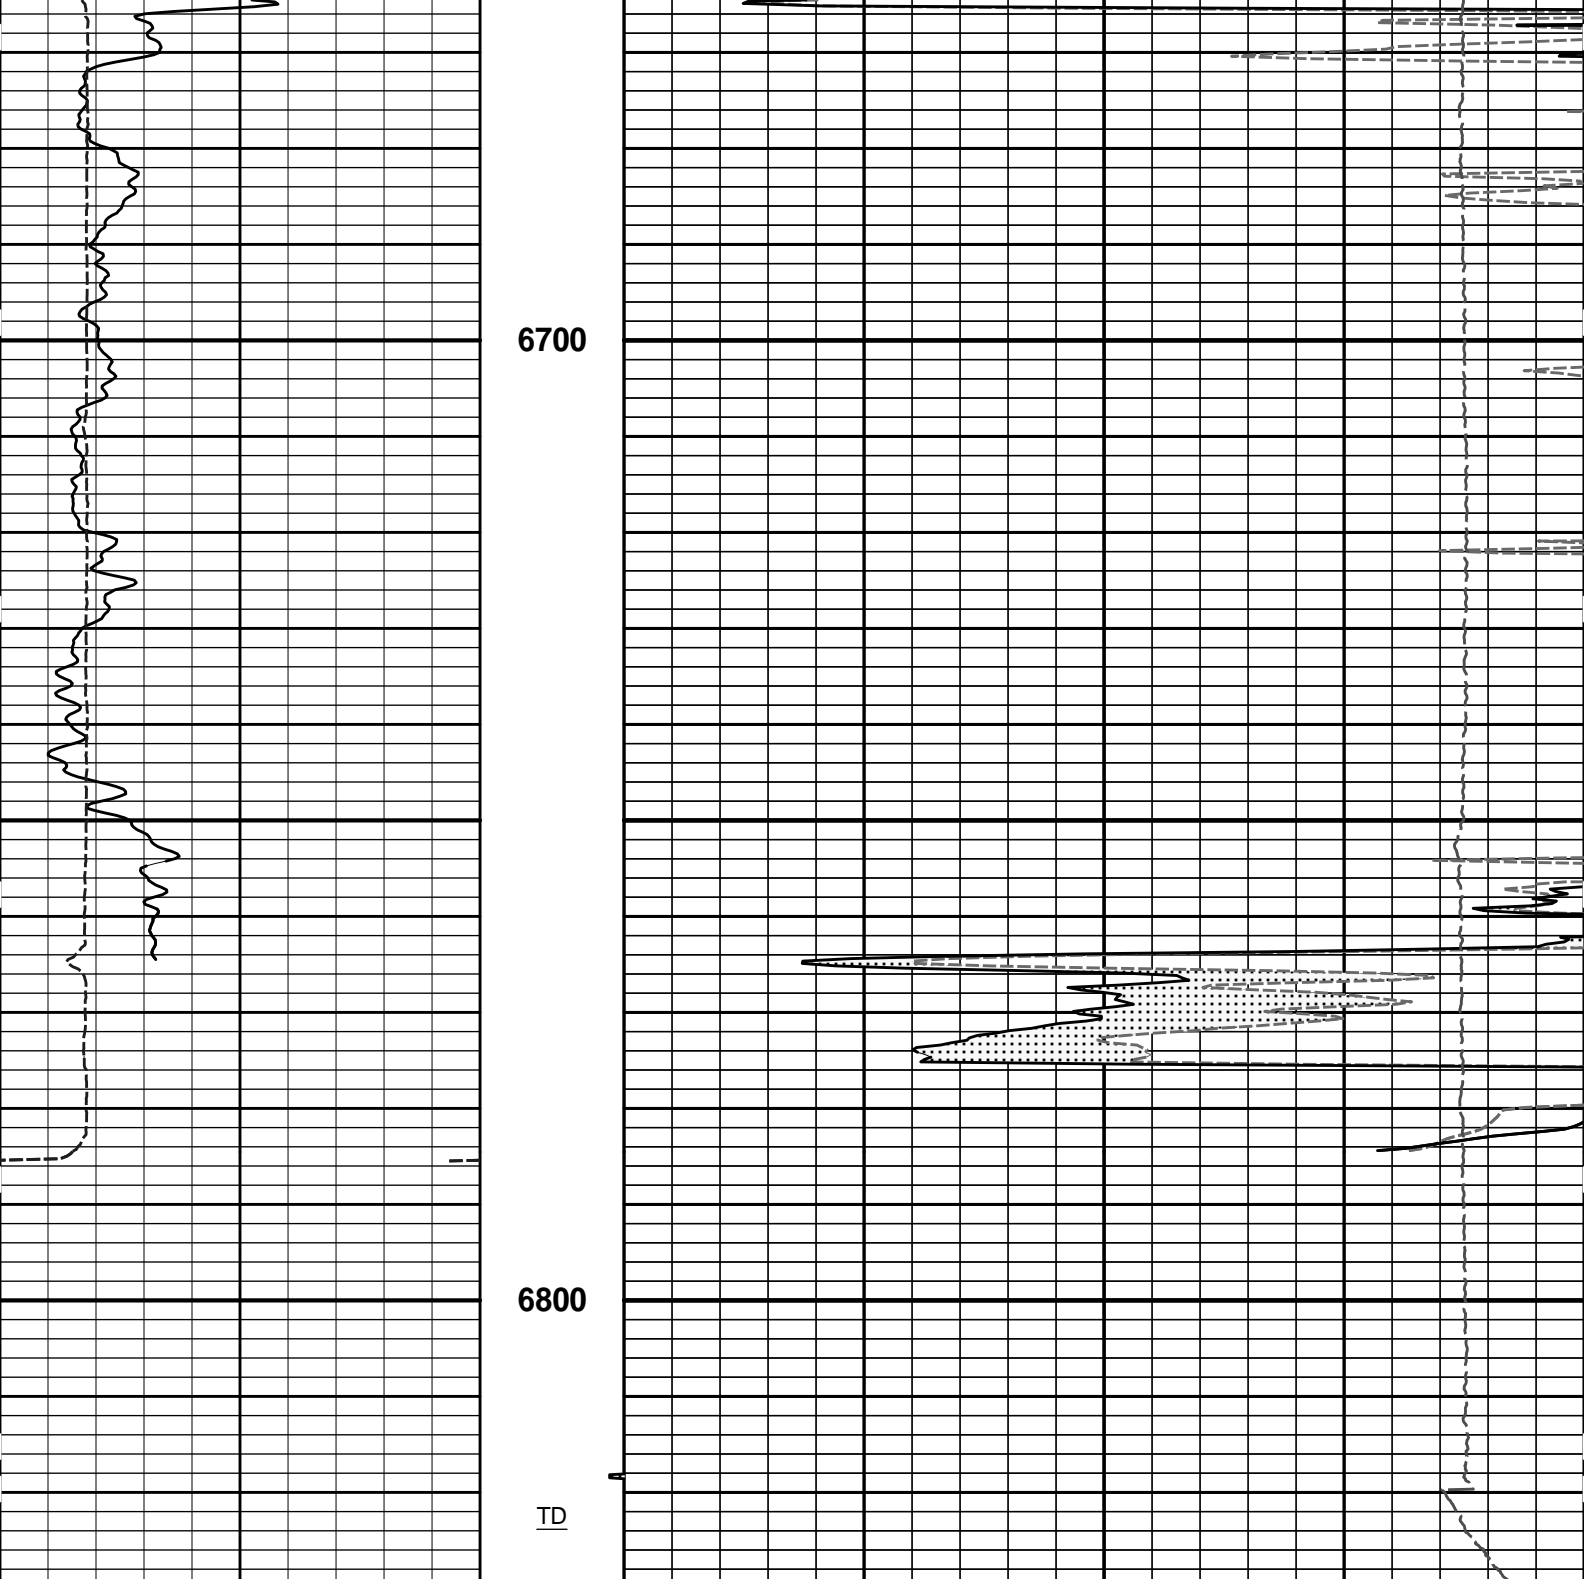

6700

6800

TD

6	Caliper	16	1 : 240	15K	Tension	0
	inches		ft		pounds	
0	Gamma API	150	Tension Pull	0	MicrologLateral	20
	api		10	0	ohm-metre	
	SHALE		Tension Pull	0	MicrologNormal	20
					ohm-metre	
					PERMEABLE	

HALLIBURTON

Plot Time: 17-Feb-13 09:21:07

Plot Range: 4195 ft to 6829.33 ft

Data: WIGGAINS_12-11\Well Based\WIGGAINS_12-11_DETAIL_PASS\


Plot File: \\-LOCAL-WIGGAINS_12-11\Well Based\MICROLOG\Microlog_IQ_5_main.lib


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 17-Feb-13 09:21:07
 Plot Range: 6295 ft to 6831.58 ft
 Data: WIGGAINS_12-11\Well Based\WIGGAINS_REPEAT\
 Plot File: \\-LOCAL-WIGGAINS_12-11\Well Based\MICROLOG\Microlog_IQ_5_rep_lib


REPEAT SECTION

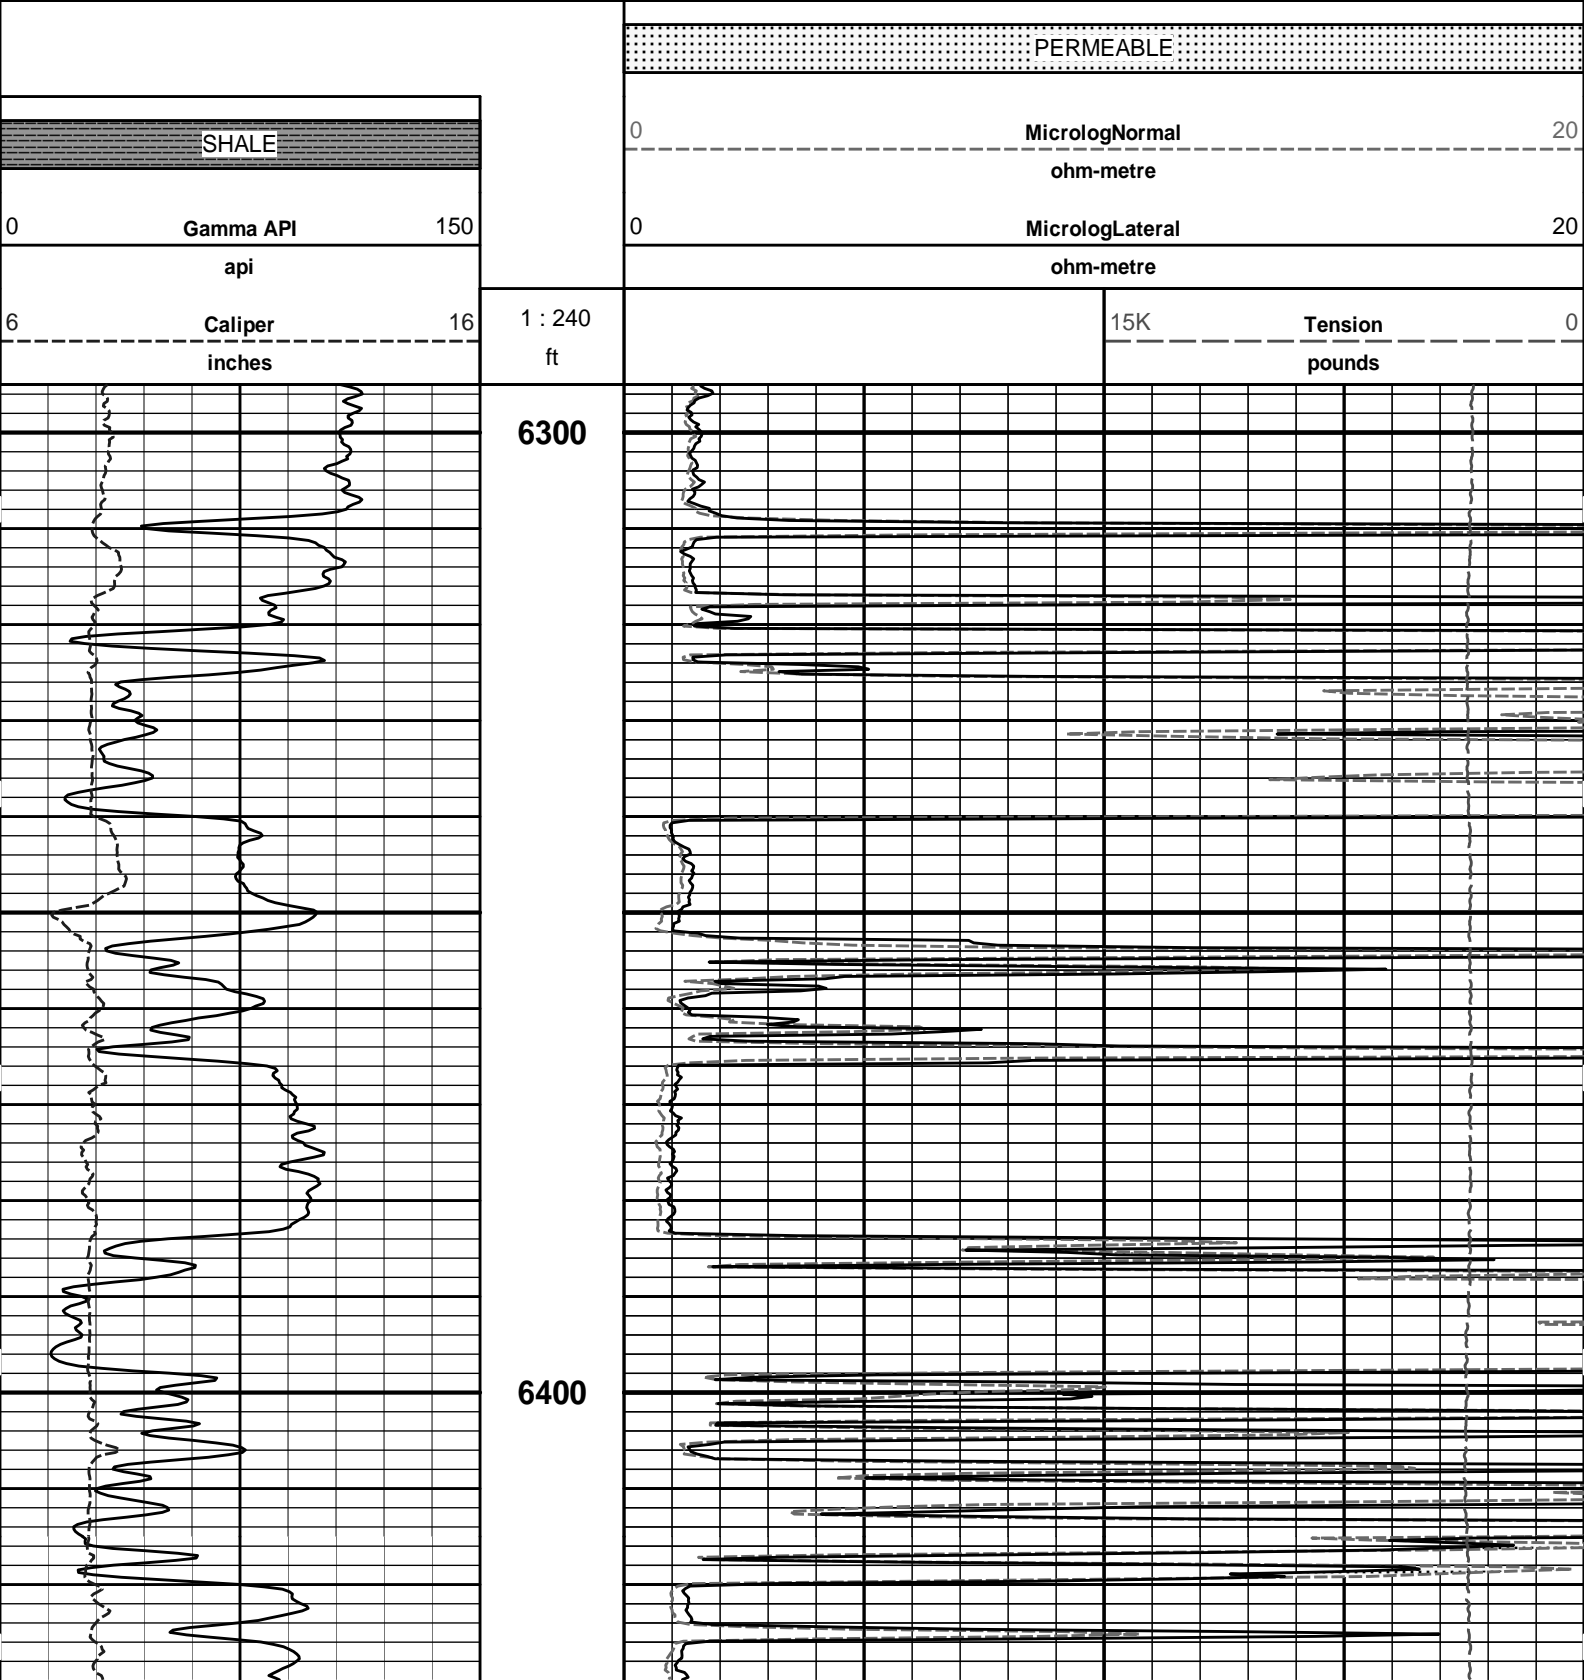


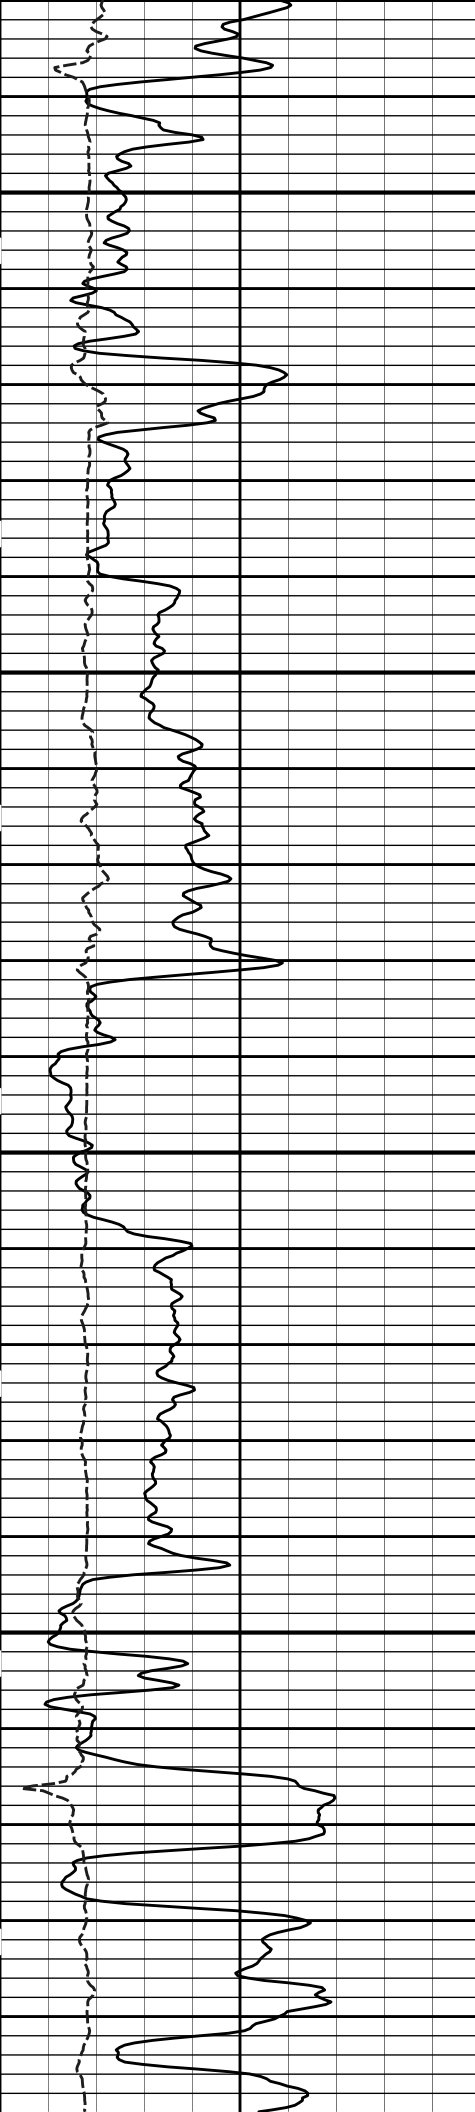

6500


6600

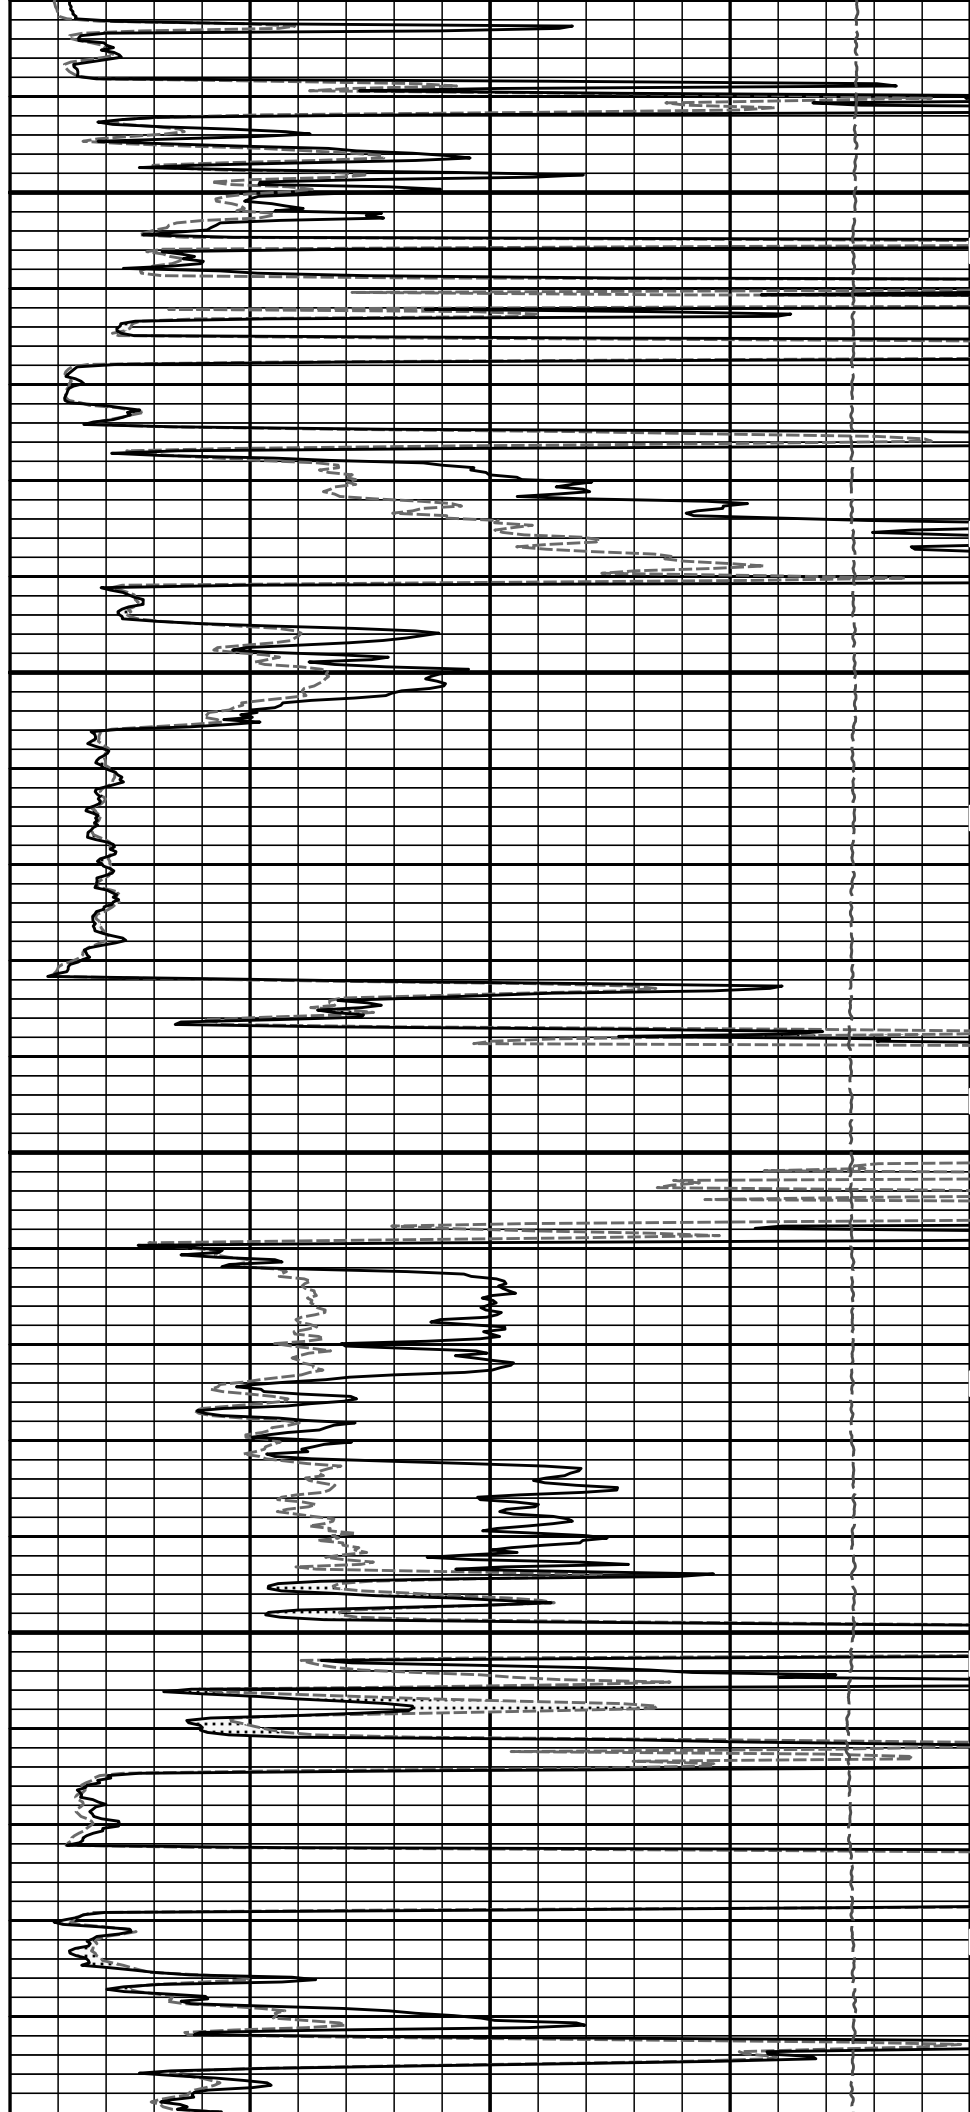

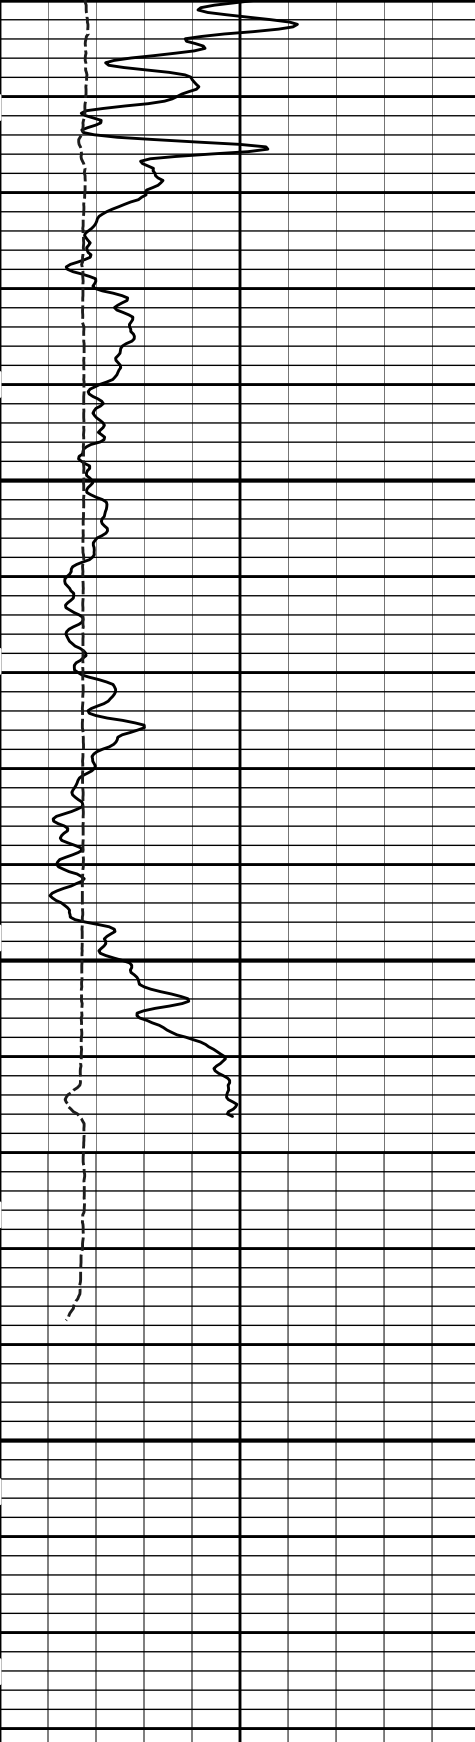

6700

6800

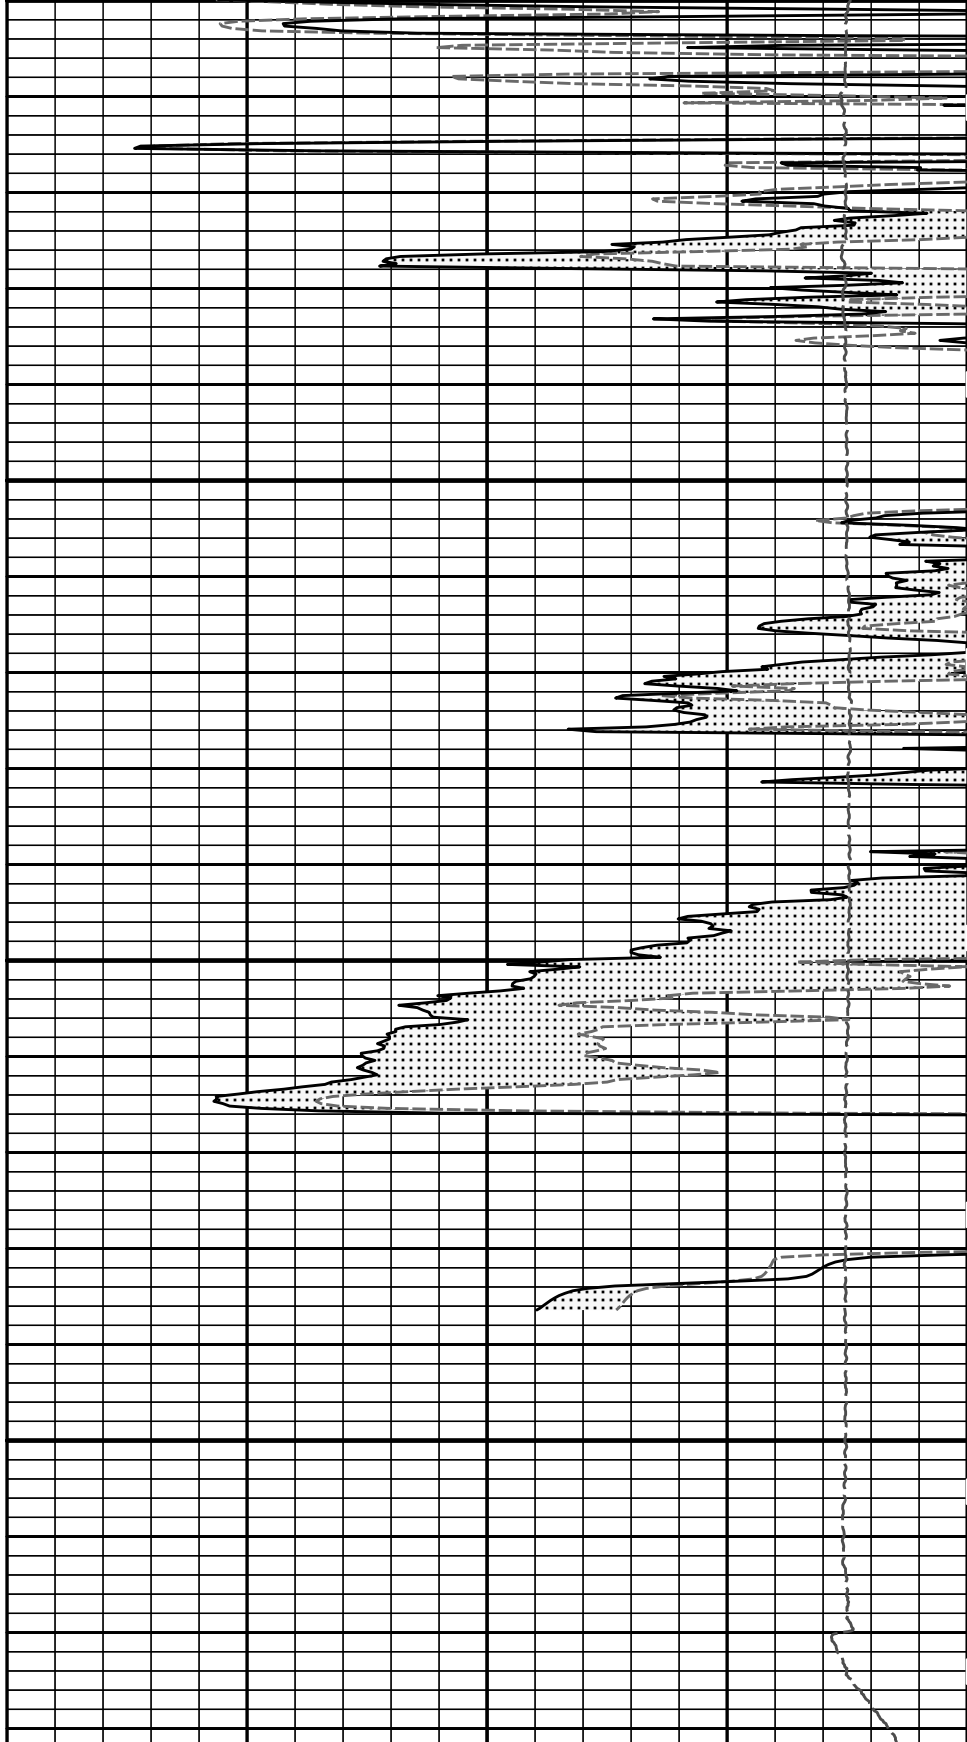

6	Caliper	16
	inches	
0	Gamma API	150
	api	
SHALE		

1 : 240
ft


15K Tension 0
pounds

0	MicrologLateral	20
	ohm-metre	
0	MicrologNormal	20
	ohm-metre	
PERMEABLE		

REPEAT SECTION

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
Cable Head- PROT01 30.00 lbs		Ø 3.625 in →			1.92 ft	75.71 ft
SP Sub-11441709 60.00 lbs		Ø 3.625 in →		← SP @ 72.01 ft	3.74 ft	73.79 ft
GTET-10811258 165.00 lbs		Ø 3.625 in →		← GammaRay @ 63.99 ft	8.52 ft	70.05 ft
DSN Decentralizer- 10735145 6.60 lbs		Ø 5.000 in* →				61.53 ft
DSNT-10755066 174.00 lbs		Ø 3.625 in →		← DSN Far @ 54.59 ft ← DSN Near @ 53.84 ft	9.69 ft	51.84 ft
SDLT-10685803 360.00 lbs	SDLT Pad-10714945 65.00 lbs Microlog Pad-10685803 8.00 lbs	Ø 4.500 in → Ø 4.750 in* → Ø 4.750 in* →		Microlog @ 44.03 ft SDL Caliper @ 43.84 ft SDL @ 43.83 ft	10.81 ft	41.03 ft
Flex Joint-10989947 140.00 lbs		Ø 3.625 in →			5.67 ft	

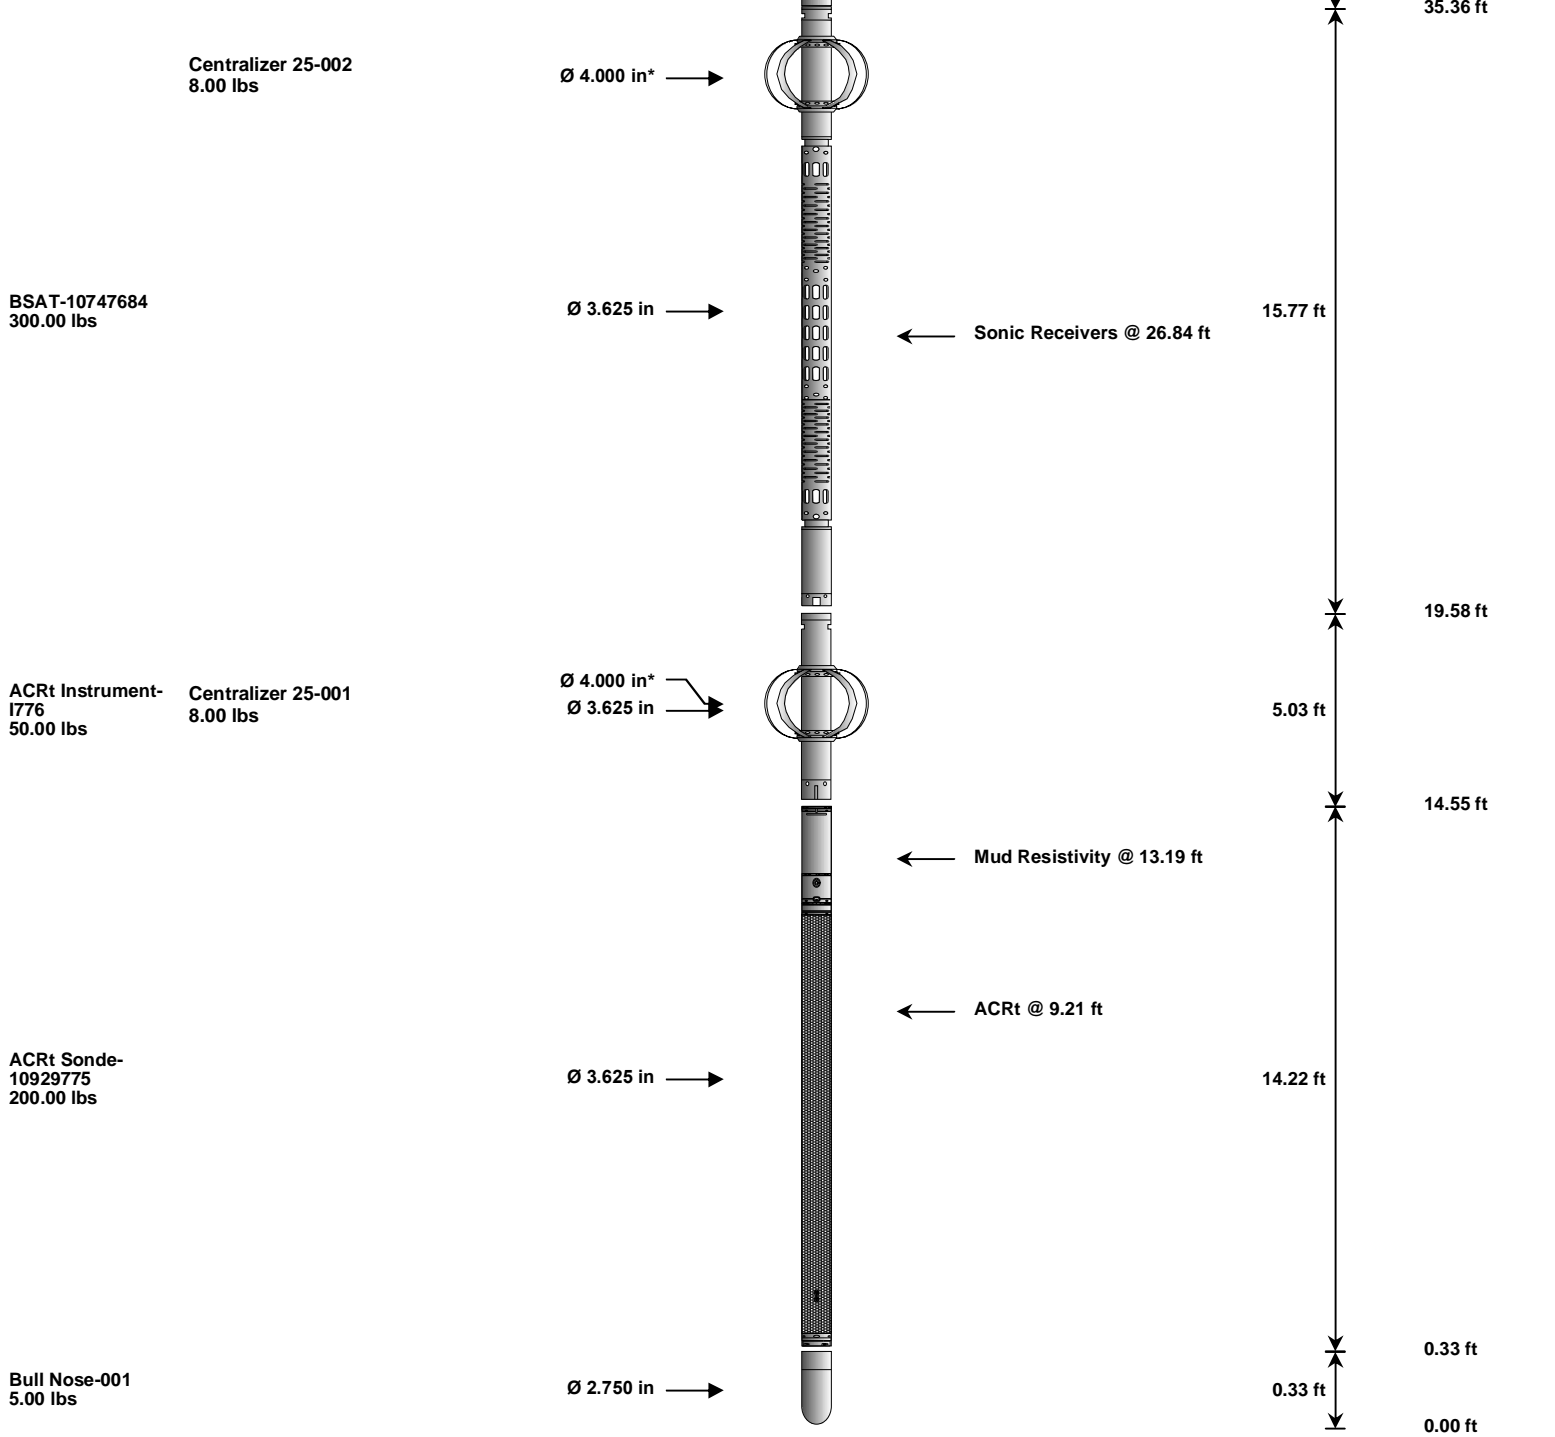

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH	Standard OH Cable Head	PROT01	30.00	1.92	73.79	300.00
SP	SP Sub	11441709	60.00	3.74	70.05	300.00
GTET	Gamma Telemetry Tool	10811258	165.00	8.52	61.53	60.00
DSNT	Dual Spaced Neutron	10755066	174.00	9.69	51.84	60.00
DCNT	DSN Decentralizer	10735145	6.60	5.13	* 55.17	300.00
SDLT	Spectral Density Tool	10685803	360.00	10.81	41.03	60.00
MICP	Microlog Pad	10685803	8.00	1.00	* 43.53	60.00
SDLP	Density Insite Pad	10714945	65.00	2.55	* 43.24	60.00
FLEX	Flex Joint	10989947	140.00	5.67	35.36	300.00
BSAT	Borehole Sonic Array Tool	10747684	300.00	15.77	19.58	60.00
OBCEN	Centralizer - 25 in. Overbody	002	8.00	2.08	* 32.52	300.00
ACRt	Array Compensated True Resistivity Instrument Section	1776	50.00	5.03	14.55	300.00
OBCEN	Centralizer - 25 in. Overbody	001	8.00	2.08	* 16.10	300.00
ACRt	Array Compensated True Resistivity Sonde Section	10929775	200.00	14.22	0.33	300.00
BLNS	Bull Nose	001	5.00	0.33	0.00	300.00
Total			1,579.60	75.71		

* Not included in Total Length and Length Accumulation.

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	1.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	6850.00	ft
	SHARED	BHT	Bottom Hole Temperature	140.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTP	Temperature Correction Type	None	
	DSNT	DPRS	DSN Pressure Correction Type	None	
	DSNT	SHCO	View More Correction Options	No	
	DSNT	UTVD	Use TVD for Gradient Corrections?	No	
	DSNT	LHWT	Logging Horizontal Water Tank?	No	
	SDLT	CLOK	Process Caliper Outputs?	Yes	

SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm

BOTTOM

Data: WIGGAINS_12-11\0001 SP-GTET-DSNT-SDLT-FLEX-BSAT-ACRT-BN005 17-Feb-13 07:09 Up @6829.8f

Date: 17-Feb-13 08:00:12

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 10811258	Reference Calibration Date: 31-Dec-12 23:10:29
Engineer: T. HYDE	Calibration Date: 03-Feb-13 11:19:35
Software Version: WL INSITE R3.8.4 (Build 5)	Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Measurement	Measured	Calibrated	Units
Background	49.5	50.6	api
Background + Calibrator	276.4	282.6	api
Calibrator	226.9	232.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 10811258	Reference Calibration Date: 03-Feb-13 11:19:35
Engineer: S. INGERSOLL	Calibration Date: 17-Feb-13 04:12:27
Software Version: WL INSITE R3.8.4 (Build 5)	Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Field Verification	Shop	Field	Units
--------------------	------	-------	-------

Background	50.6	23.7	api
Background + Calibrator	282.6	254.2	api
Calibrator	232.0	230.4	api

Shop	Field	Difference	Tolerance
232.0	230.4	1.6	+/- 9.00

DENSITY CALIPER SHOP CALIBRATION

Tool Name: SDLT - 10685803 **Reference Calibration Date:** 18-Jan-13 09:58:36
Engineer: T. HYDE **Calibration Date:** 18-Jan-13 10:03:41
Software Version: WL INSITE R3.6.0 (Build 3) **Calibration Version:** 1
Host Tool Name: DSNT - 10755066

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-4650.98	-4634.87	-7000.00 - -1000.00
Pad Gain	0.0003964	0.0003949	0.000200 - 0.000600
Arm Offset	-2226.61	-2519.31	-5000.00 - 3000.00
Arm Gain	0.0005361	0.0005659	0.000300 - 0.000700
Arm Power	-0.000006657	-0.000008059	-0.000010000 - 0.000010000

The ring diameter is computed from: $\text{DIAMETER} = \text{PAD EXTENSION} + \text{ARM EXTENSION} + \text{TOOL DIAMETER}$

Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.76	3.75	-0.01	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.54	6.50	-0.04	+/- 0.20
Medium Ring (in)	8.22	8.25	0.03	+/- 0.20
Large Ring (in)	14.94	15.00	0.06	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed
 Ring-Measurement Check: Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check: Passed

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 10685803 **Reference Calibration Date:** 18-Jan-13 10:03:41
Engineer: S. INGERSOLL **Calibration Date:** 17-Feb-13 04:19:24
Software Version: WL INSITE R3.8.4 (Build 5) **Calibration Version:** 1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.66	-0.09	+/- 0.10
Ring Diameter	8.25	8.23	-0.02	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check: Passed
 Diameter Check: Passed

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - 10685803	Reference Calibration Date: 18-Dec-12 11:10:27
Engineer: T. HYDE	Calibration Date: 18-Jan-13 10:08:15
Software Version: WL INSITE R3.6.0 (Build 3)	Calibration Version: 1
Host Tool Name: DSNT - 10755066	

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.06	-0.05	-0.00	0.01	ohmm
Calibration Point #1	-0.02	0.00	-0.01	0.00	ohmm
Calibration Point #2	20.02	20.00	20.01	20.00	ohmm
Internal Reference	20.08	20.06	20.16	20.14	ohmm

Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value		Units
	Tool Zero		2.22		
Calibration Point #1		14.47		0.24	V
Calibration Point #2		5262.91		6820.77	V
Internal Reference		5278.27		6869.97	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10685803	Reference Calibration Date: 18-Jan-13 10:08:15
Engineer: S. INGERSOLL	Calibration Date: 17-Feb-13 04:15:57
Software Version: WL INSITE R3.8.4 (Build 5)	Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.05	-0.06	0.01	0.00	ohmm
Internal Reference	20.06	19.95	20.14	20.03	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	20.06	19.95	0.11	+/- 0.80
Microlog Lateral	20.14	20.03	0.11	+/- 0.80

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-10811258						
Gamma Ray Calibrator	232.0	230.4	-----	1.6	+/- 9.00	api
SDLT-10685803						
Pad Extension	3.75	3.66	-----	0.09	+/-0.10	in
Ring Diameter	8.25	8.23	-----	0.02	+/-0.15	in
Microlog Pad-10685803						
MicroLog Normal	20.06	19.95	-----	0.11	+/-0.80	ohmm
MicroLog Lateral	20.14	20.03	-----	0.11	+/-0.80	ohmm

Data: WIGGAINS_12-11\0001 SP-GTET-DSNT-SDLT-FLEX-BSAT-ACRT-BN005 17-Feb-13 07:09 Up @6829.8f

Date: 17-Feb-13 08:01:12

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
SP Sub				
PLTC	Plot Control Mask	72.01	NO	
SP	Spontaneous Potential	72.01	BLK	1.250
SPR	Raw Spontaneous Potential	72.01	NO	
SPO	Spontaneous Potential Offset	72.01	NO	
GTET				
TPUL	Tension Pull	63.99	NO	
GR	Natural Gamma Ray API	63.99	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	63.99	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	63.99	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	53.74	NO	
RNDS	Near Detector Telemetry Counts	53.84	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.59	TRI	0.583
DNTT	DSN Tool Temperature	53.84	NO	
DSNS	DSN Tool Status	53.74	NO	
ERND	Near Detector Telemetry Counts EVR	53.84	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.59	BLK	0.000
ENTM	DSN Tool Temperature EVR	53.84	NO	
SDLT				
TPUL	Tension Pull	43.84	NO	
PCAL	Pad Caliper	43.84	TRI	0.250
ACAL	Arm Caliper	43.84	TRI	0.250
BSAT				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000

F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Current Raw 12K X Receiver	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
SDLT Pad				
TPUL	Tension Pull	43.83	NO	
NAB	Near Above	43.66	BLK	0.920
NHI	Near Cesium High	43.66	BLK	0.920
NLO	Near Cesium Low	43.66	BLK	0.920
NVA	Near Valley	43.66	BLK	0.920
NBA	Near Barite	43.66	BLK	0.920
NDE	Near Density	43.66	BLK	0.920
NPK	Near Peak	43.66	BLK	0.920
NLI	Near Lithology	43.66	BLK	0.920
NBAU	Near Barite Unfiltered	43.66	BLK	0.250
NLIU	Near Lithology Unfiltered	43.66	BLK	0.250
FAB	Far Above	44.01	BLK	0.250
FHI	Far Cesium High	44.01	BLK	0.250
FLO	Far Cesium Low	44.01	BLK	0.250

