

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-00678-00-00
Spot: SENW Sec/Twnshp/Rge: 21-18S-24W
1980 feet from N Section Line, 1980 feet from W Section Line
Lease Name: PETERS Well #: 4
County: NESS Total Vertical Depth: 4390 feet

Operator License No.: 8902
Op Name: MAYS, SAM W., JR.
Address: PHILTOWER BUILDING 427 S BOSTO
TULSA, OK 74103

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|----------------------|
| MSCC | | 1544 | | WITH 235 SX CMT |
| PROD | 4.5 | 4389 | 0 | WITH 110 SX CMT #142 |
| SURF | 8.625 | 283 | | WITH 225 SX CMT |

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/04/2005 1:50 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: SAM MAYS Company: SAM W. MAYS, JR. Phone: (918) 382-9170

Proposed Plugging Method: PUMP 400# HULLS & 25 SX CMT. PUMP 15 SX GEL & 110 SX CMT. PRESSURE CHECK. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/04/2005 3:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 400# HULLS & 25 SX CMT. PUMP 15 SX GEL & 110 SX CMT. MAXIMUM PRESSURE 1700#. SHUT IN PRESSURE 500#. TIED ONTO BACKSIDE & PUMP 20 SX CMT. PRESSURED TO 500# & HELD.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4309 | 4311 | | |

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED
DATE 8-19-05
NO. 2006060339

District: 01

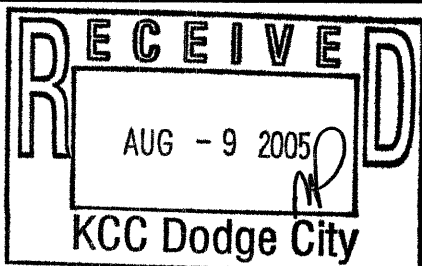

Signed Michael Maier
(TECHNICIAN)

RECEIVED
AUG 19 2005
KCC WICHITA

Form CP-26