

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-067-20810-00-00
 Spot: NWNWSESE Sec/Twnshp/Rge: 7-30S-36W
1250 feet from S Section Line, 1250 feet from E Section Line
 Lease Name: KITTLAUS Well #: 3-7
 County: GRANT Total Vertical Depth: 2940 feet

Operator License No.: 4824
 Op Name: PIONEER NATURAL RESOURCES USA.
 Address: 5205 N. O'CONNOR BLVD.
IRVING, TX 75039

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| CIBP | | 2350 | | WITH 2 SX CMT |
| PROD | 5.5 | 2870 | 690 | WITH 220 SX CMT |
| SURF | 8.625 | 685 | | WITH 200 SX CMT |

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/04/2005 9:30 AM
 Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
 Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 2350' & 2 SX CMT. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. PLUG AT 40' WITH 10 SX CMT

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
 Date/Time Plugging Completed: 08/04/2005 1:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

ANHYDRITE @ 1700' +/-, TOP OF PERMIAN @ 600' +/-, CIBP SET AT 2350' WITH 2 SX CMT. TOP OF FLUID AT 700'. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. GOOD CIRCULATION. PULL OUT OF HOLE TO 40'. CIRCULATE HOLE & PUMP 10 SX CMT TO SURFACE.


Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 2426 | 2746 | | |

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 01

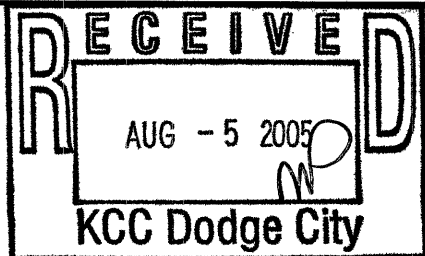

Signed

Jim Holland PART II
 RECEIVED (TECHNICIAN)

AUG 10 2005
 KCC WICHITA

INVOICED
 DATE 8-10-05

FILE NO 2006060297

Form CP-283