



**COMPLETION  
& PRODUCTION  
SERVICES CO.**

**DUAL INDUCTION  
LOG**

Company PIONEER RESOURCES  
Well HARMS #2  
Field MAURICE NORTHEAST  
County LOGAN  
State KANSAS

Company PIONEER RESOURCES  
Well HARMS #2  
Field MAURICE NORTHEAST  
County LOGAN State KANSAS

Location: API # : 15-109-21215-0000  
990' FNL & 330' FEL  
SE - NE - NE  
SEC 1 TWP 14S RGE 32W  
Permanent Datum GROUND LEVEL Elevation 2918  
Log Measured From KELLY BUSHING 8' A.G.L.  
Drilling Measured From KELLY BUSHING  
Other Services  
CDL/CNL  
Elevation  
K.B. 2926  
D.F. 2924  
G.L. 2918

Date	12/17/13
Run Number	ONE
Depth Driller	4733
Depth Logger	4735
Bottom Logged Interval	4733
Top Log Interval	00
Casing Driller	8 5/8"@211'
Casing Logger	211
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.2/53
pH / Fluid Loss	8.5/15.2
Source of Sample	FLOWLINE
Rim @ Meas. Temp	.660@70F
Rmf @ Meas. Temp	.495@70F
Rmc @ Meas. Temp	.792@70F
Source of Rmf / Rmc	MEASUREMENT
Rim @ BHT	.376@123F
Time Circulation Stopped	2.5 HOURS
Time Logger on Bottom	7:15 P.M.
Maximum Recorded Temperature	123F
Equipment Number	4854
Location	HAYS, KANSAS
Recorded By	JEFF LUEBBERS
Witnessed By	CLIFF OTTAWAY

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

**Comments**


THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395  
DIRECTIONS  
OAKLEY, KS. 16S. ON HWY 83 TO "NAVAJO RD.", 2E., 1 1/4S., W. INTO @TANK BATTERY




**MAIN SECTION**

Database File: 22225pe.db  
 Dataset Pathname: pass3.8  
 Presentation Format: dil2  
 Dataset Creation: Tue Dec 17 21:03:25 2013  
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			-----		
			1000	CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

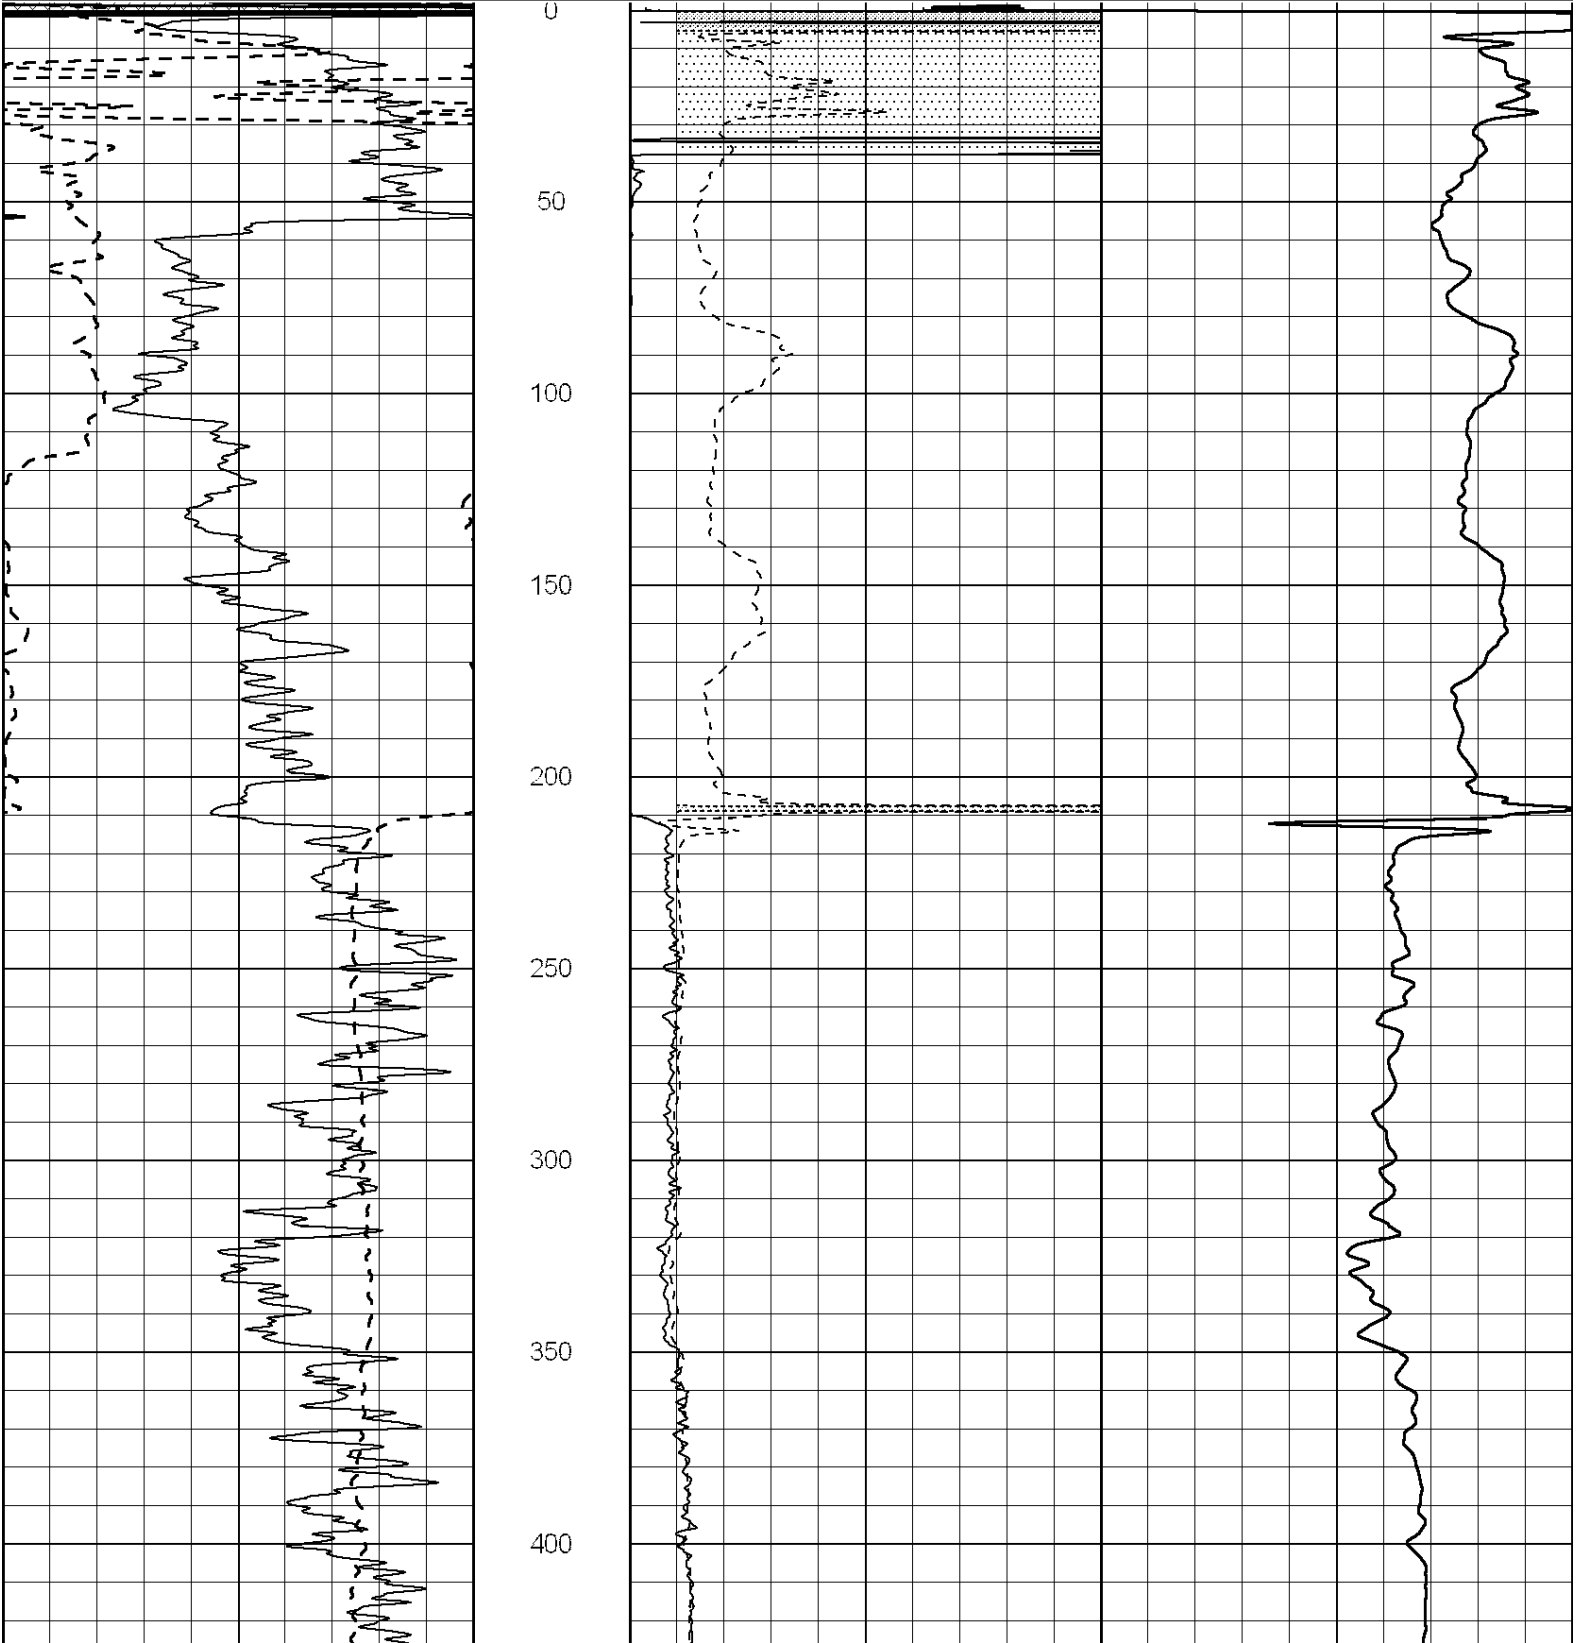

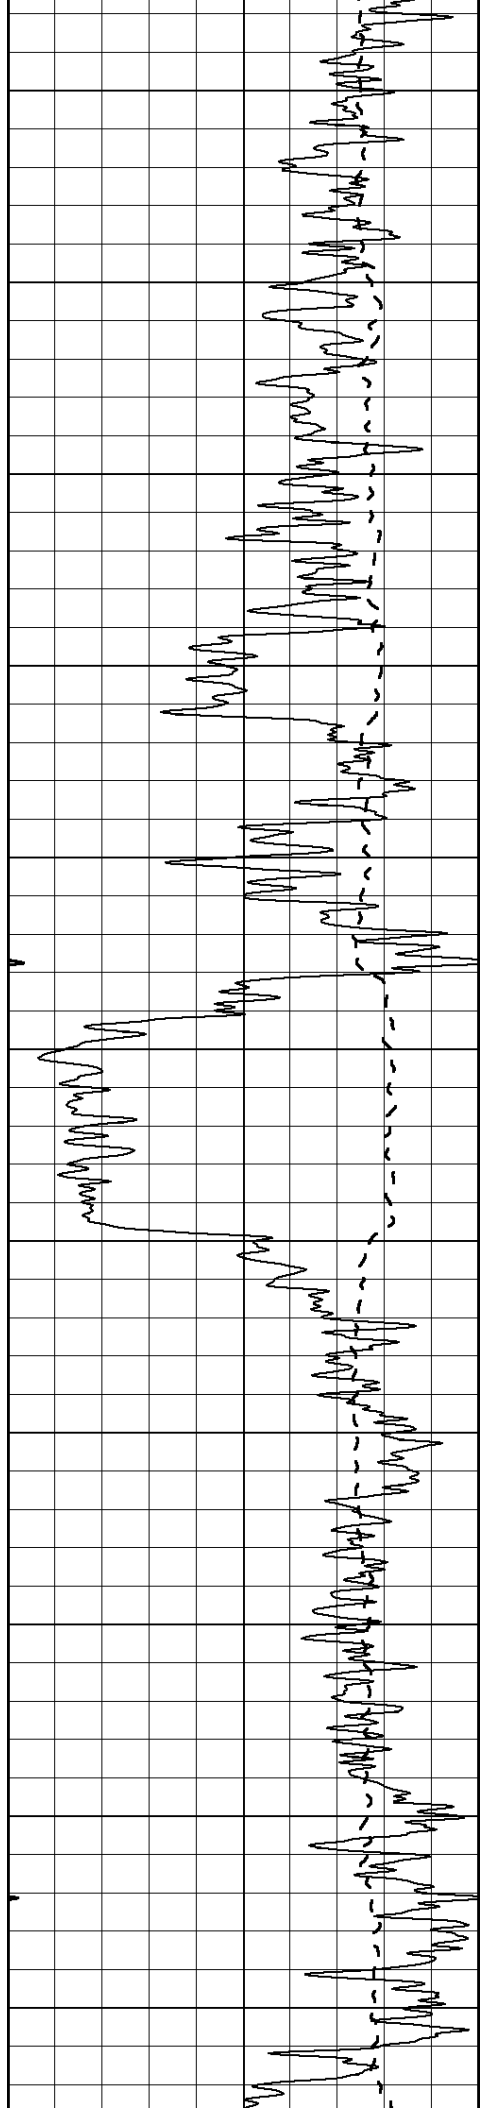

450

500

550

600

650

700


750


800

850

900

950

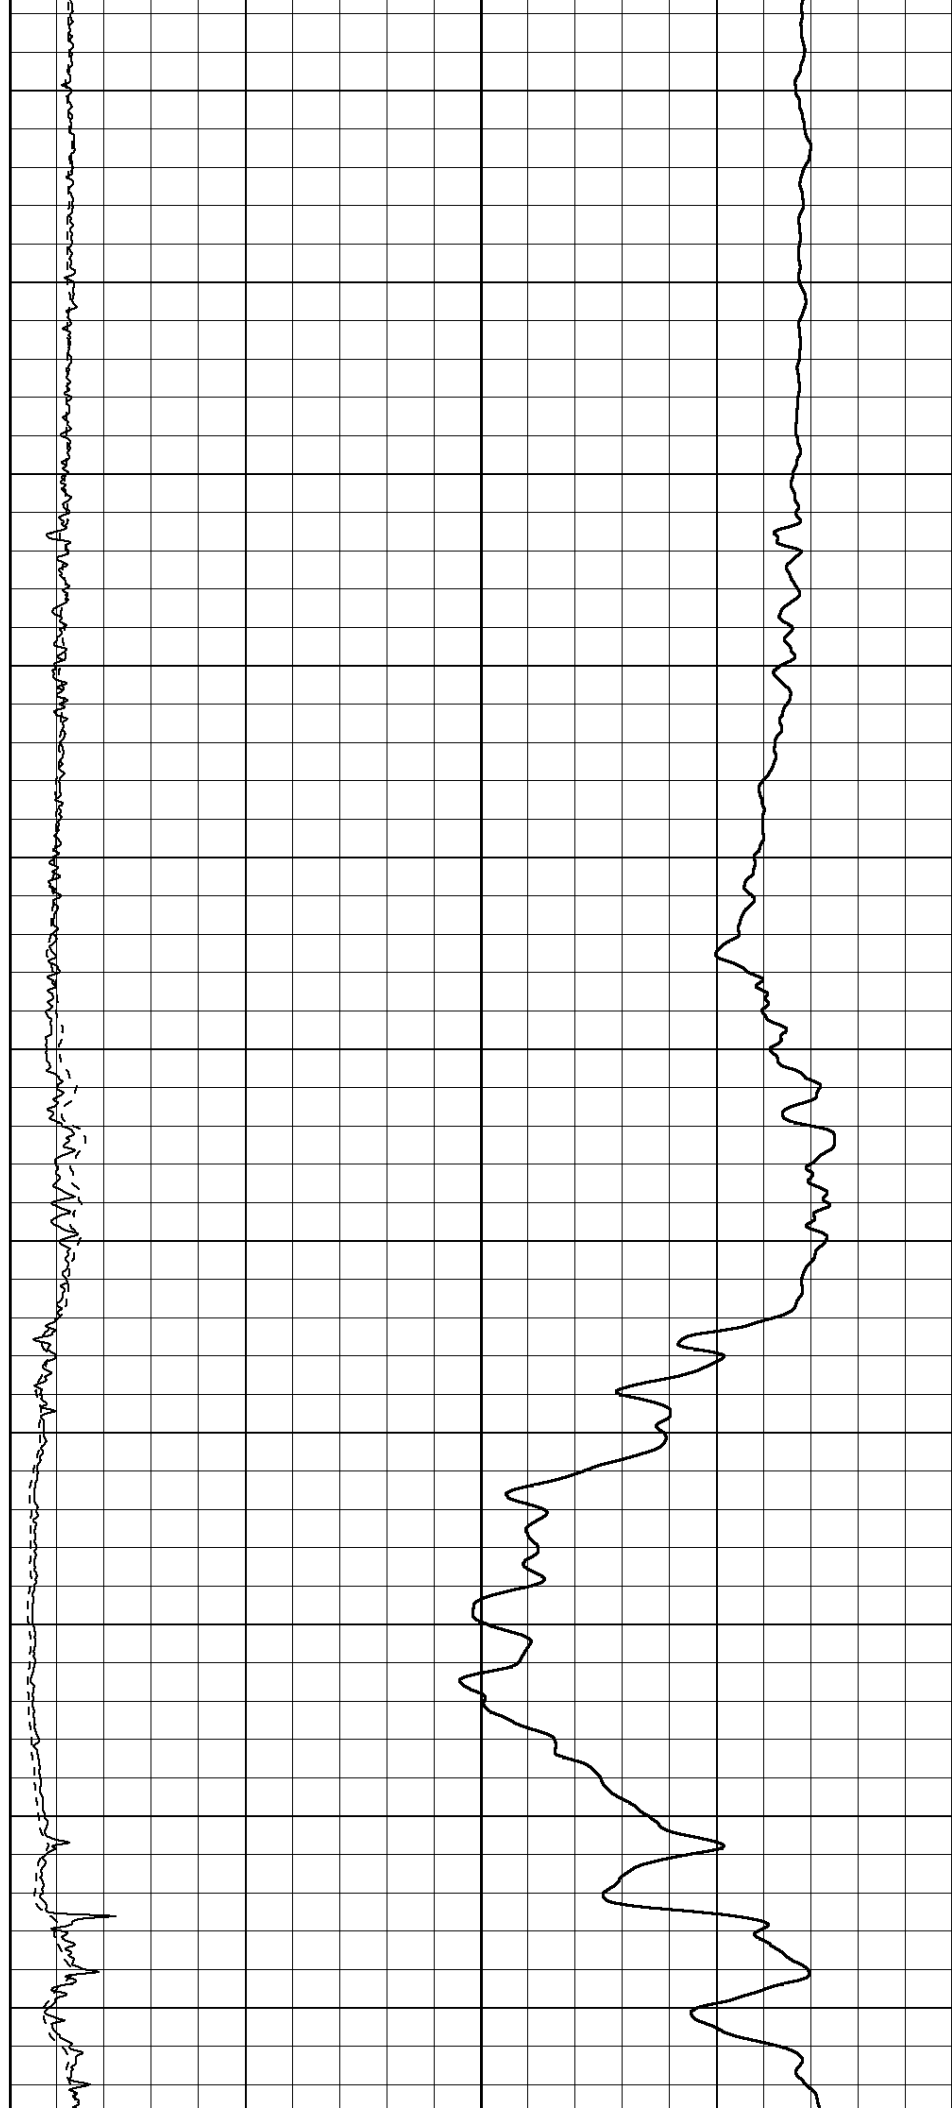

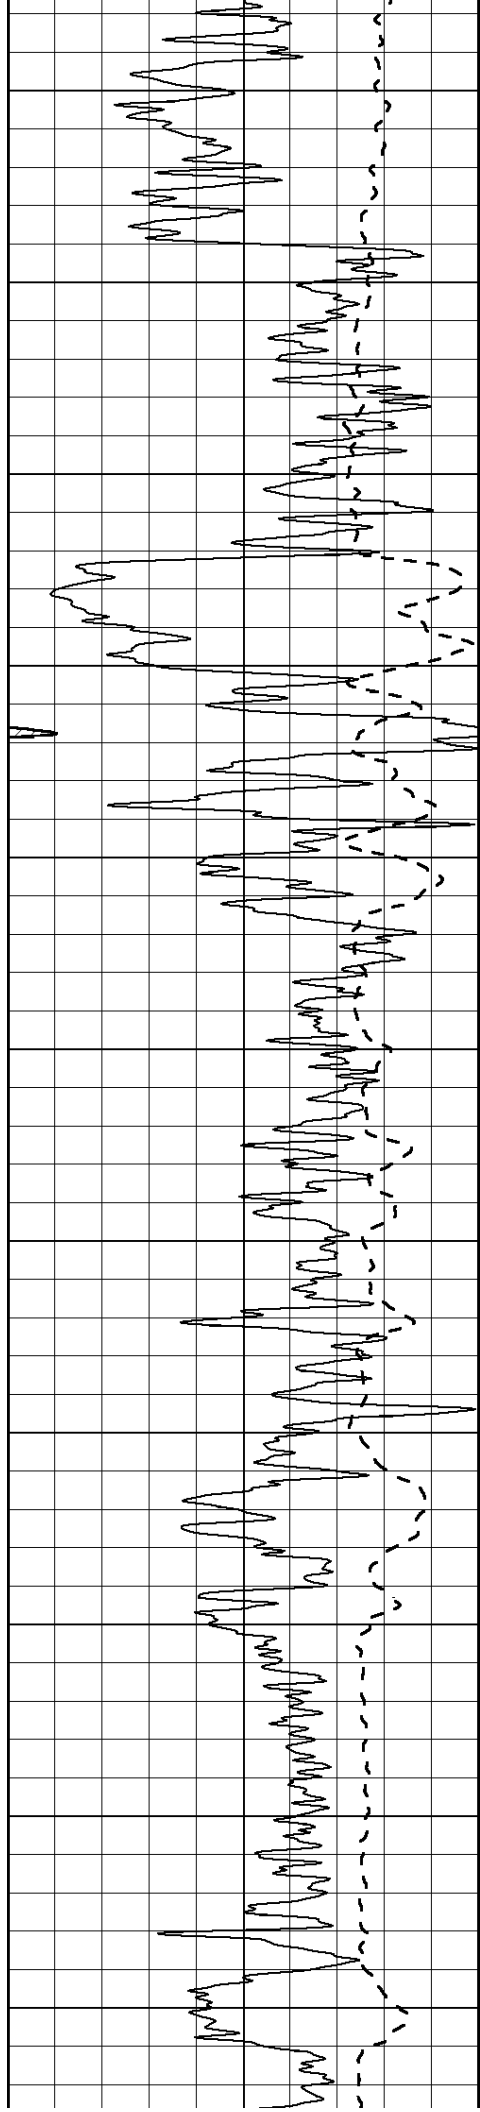

1000

1050

1100

1150

1200

1250



1300


1350

1400

1450

1500

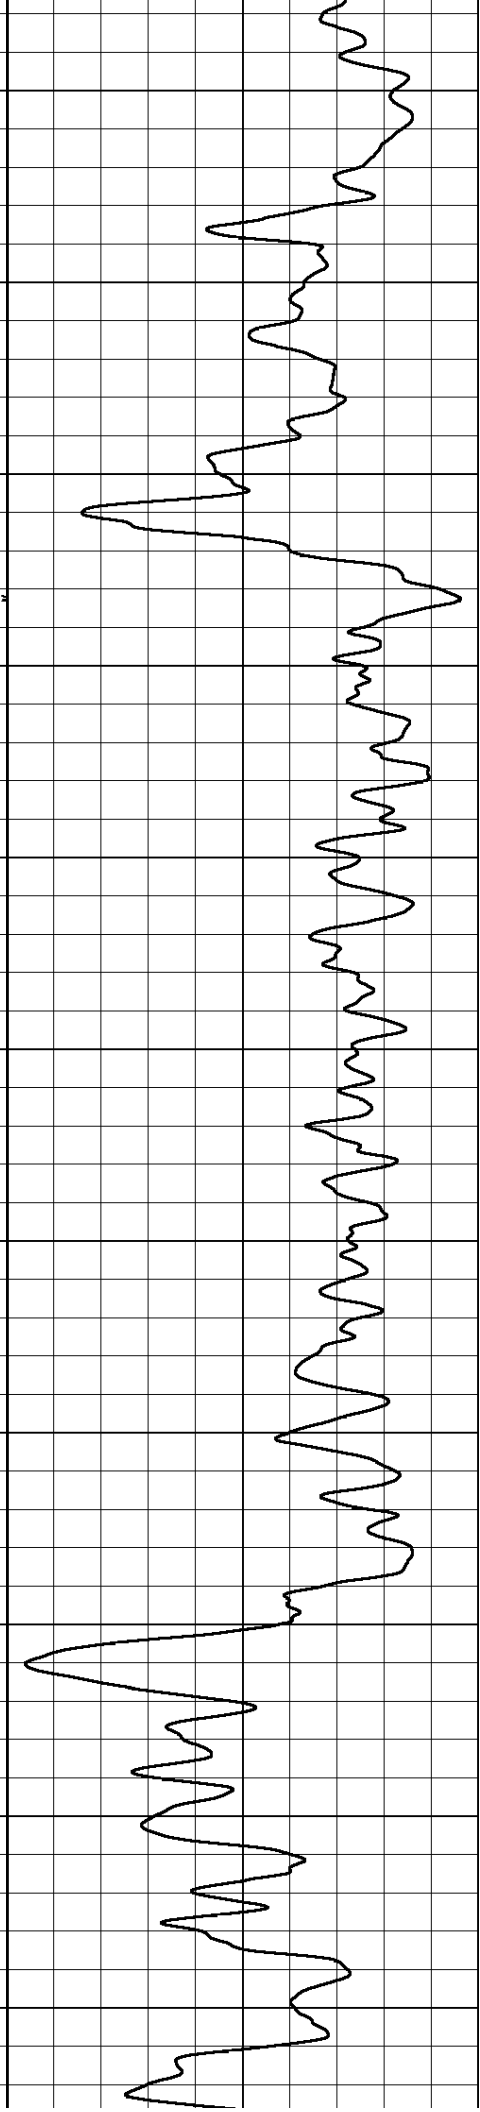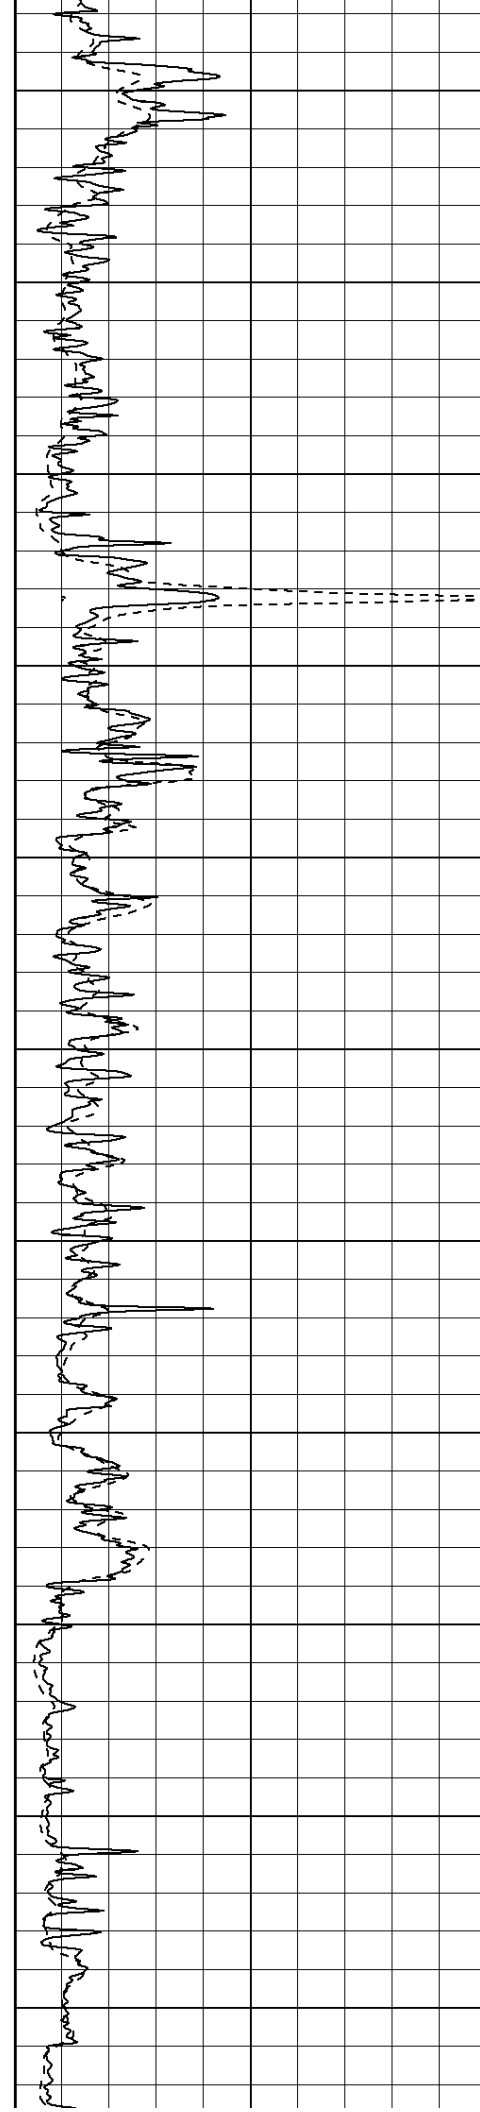

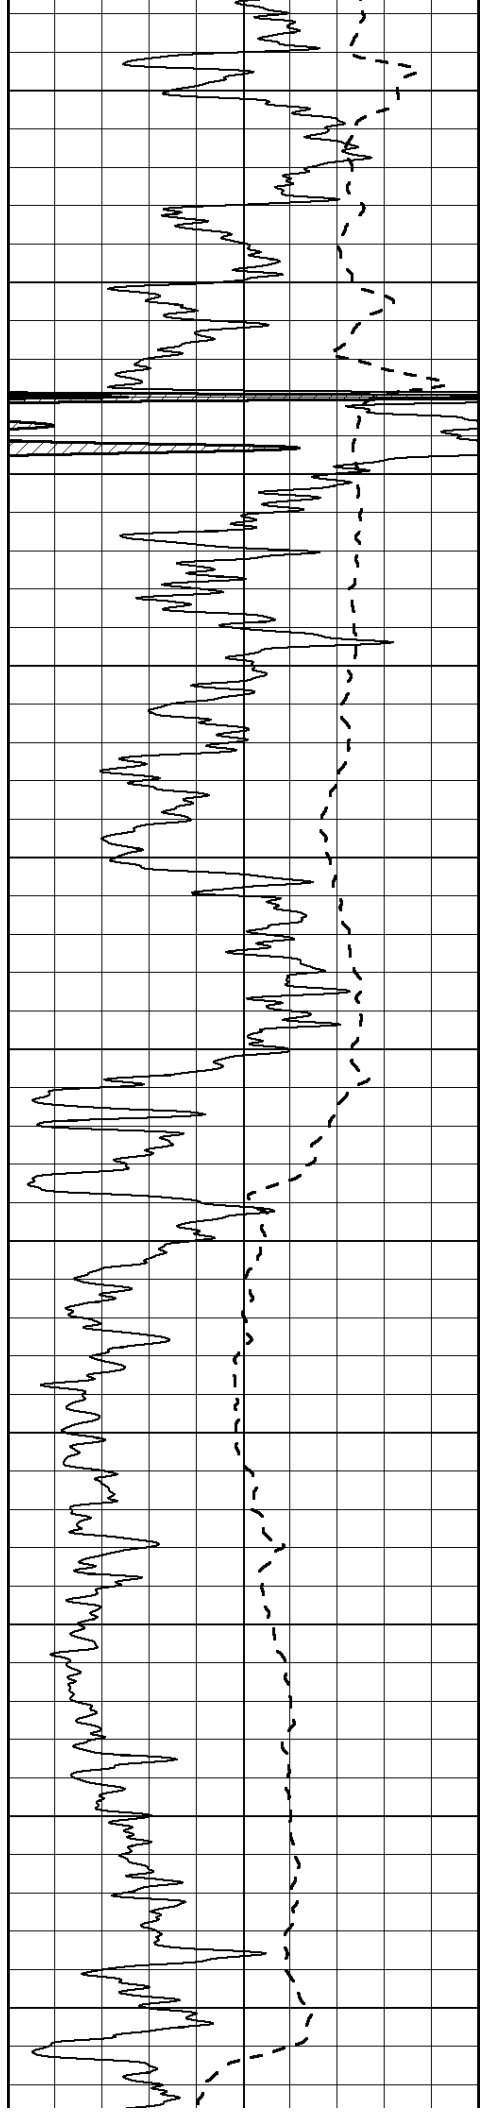

1550

1600

1650

1700

1750

1800


1850



1900


1950

2000

2050

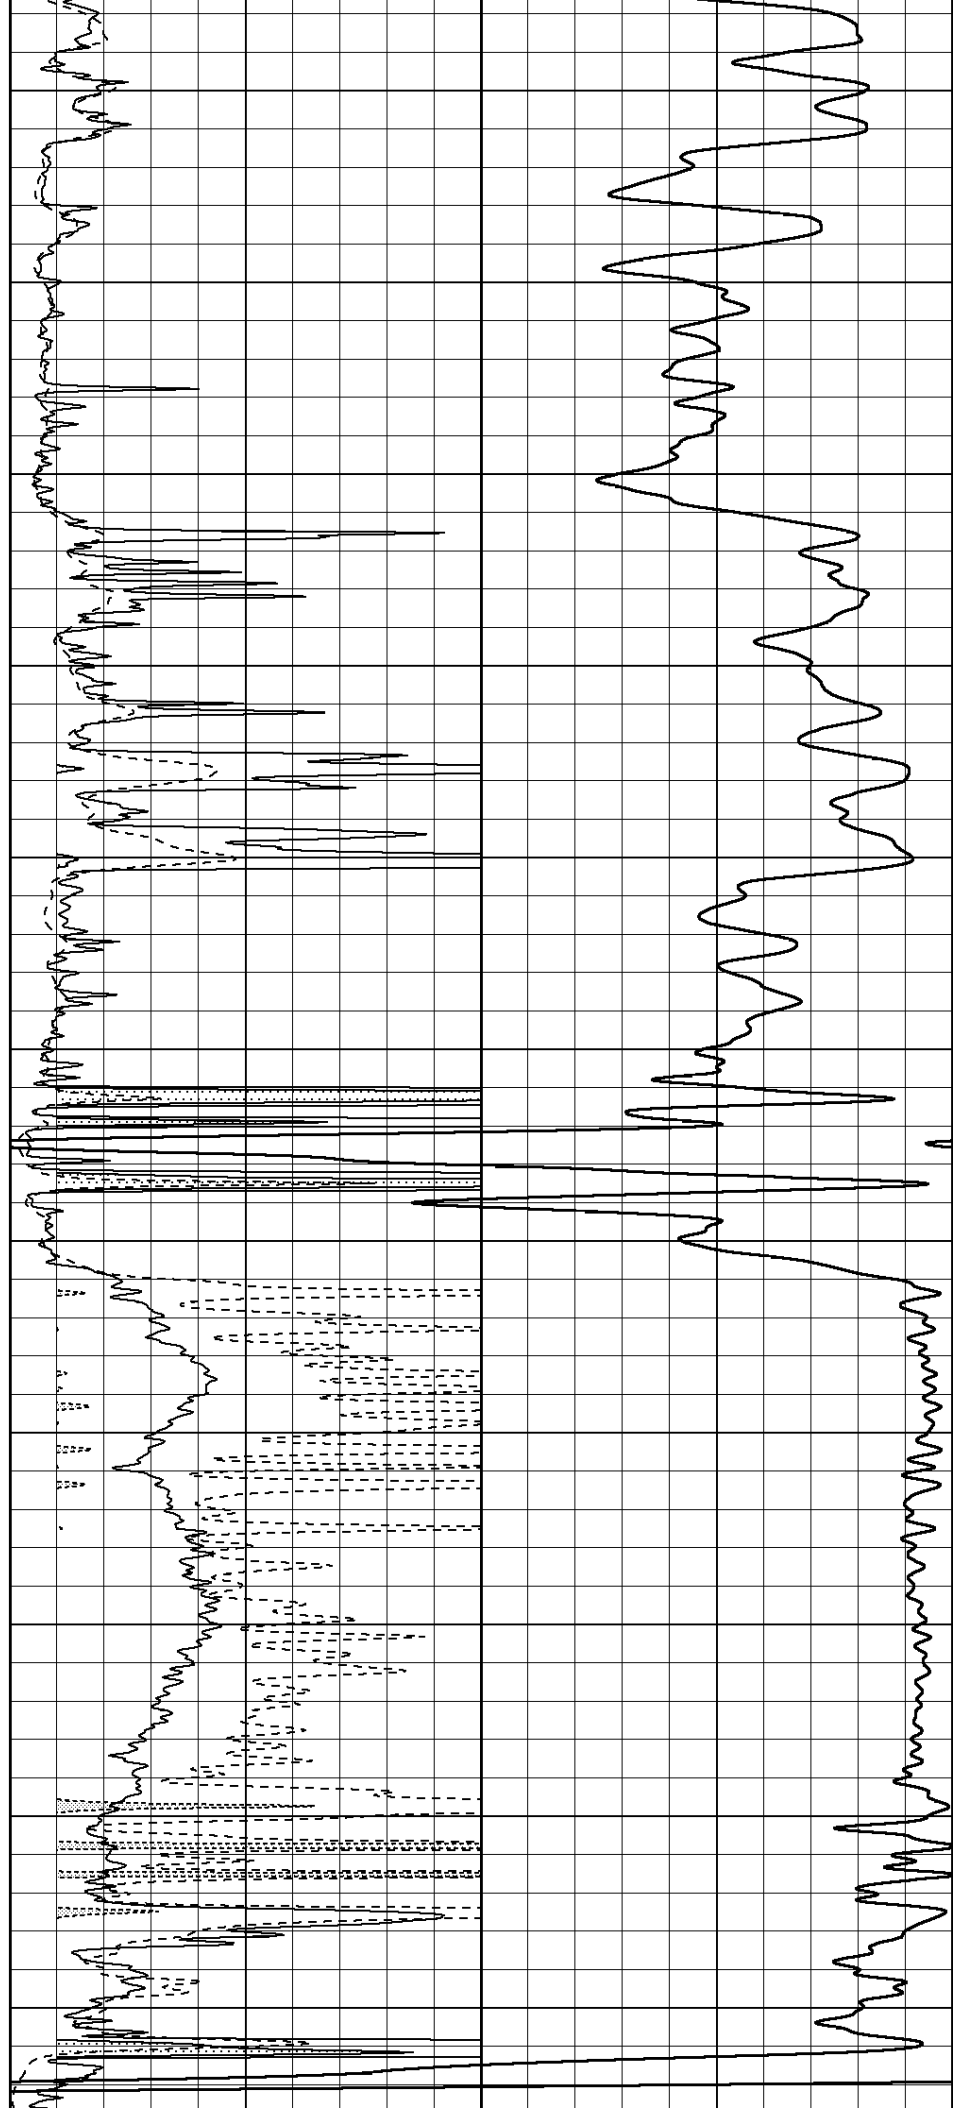

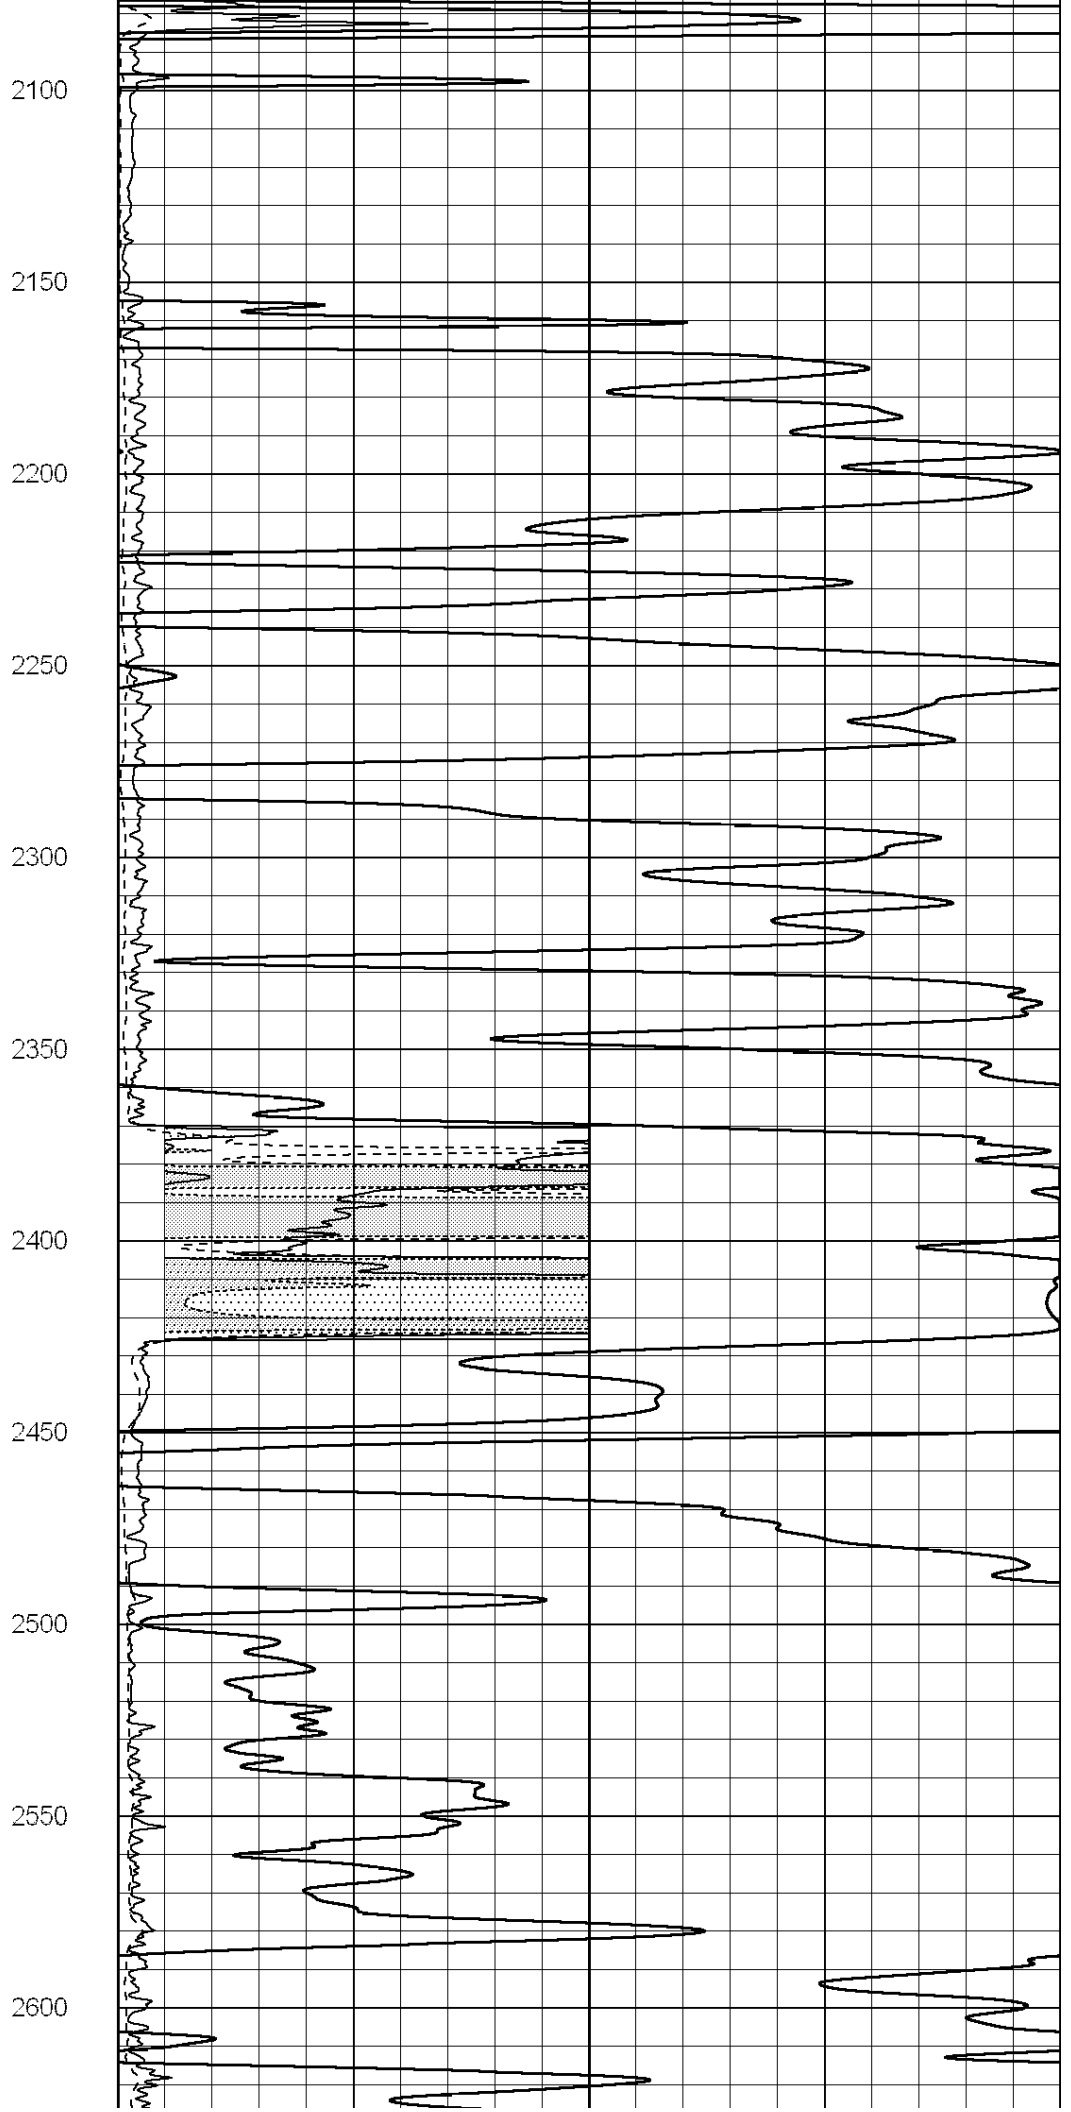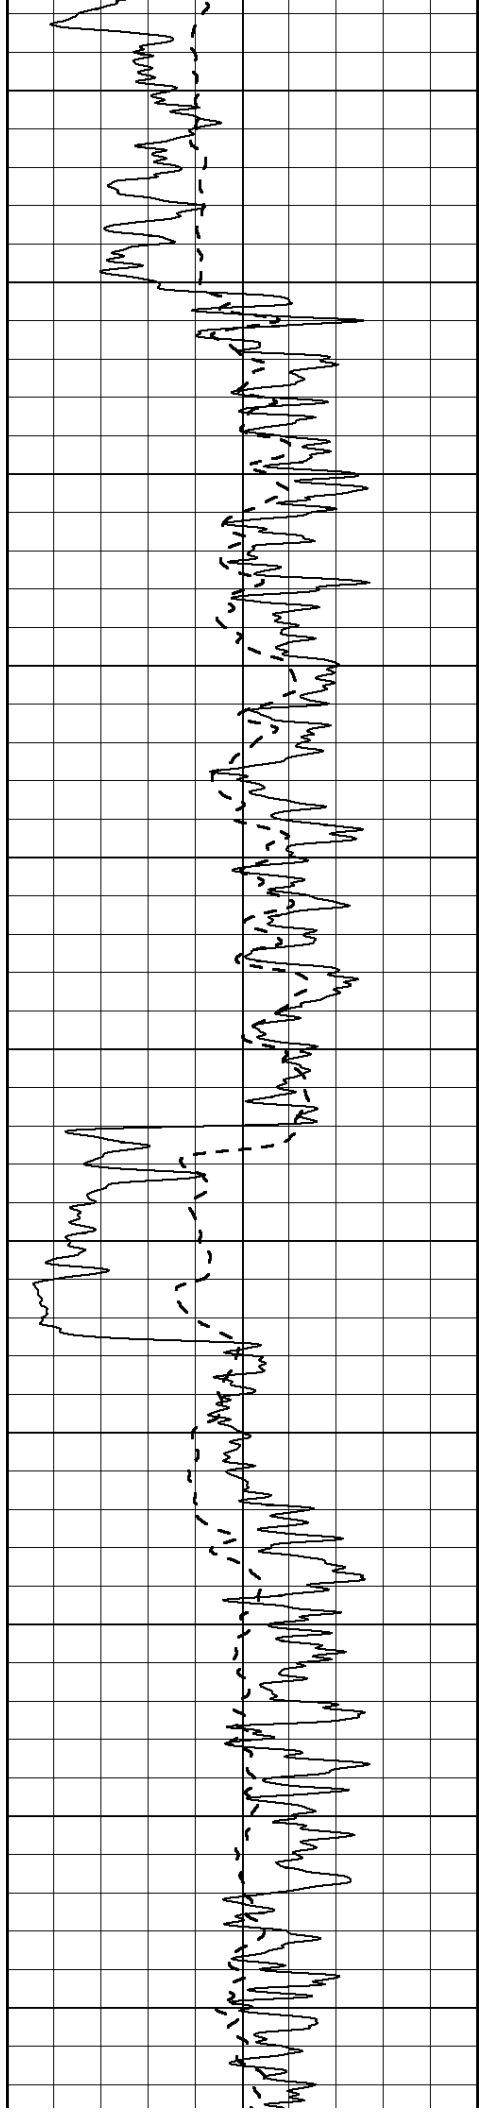

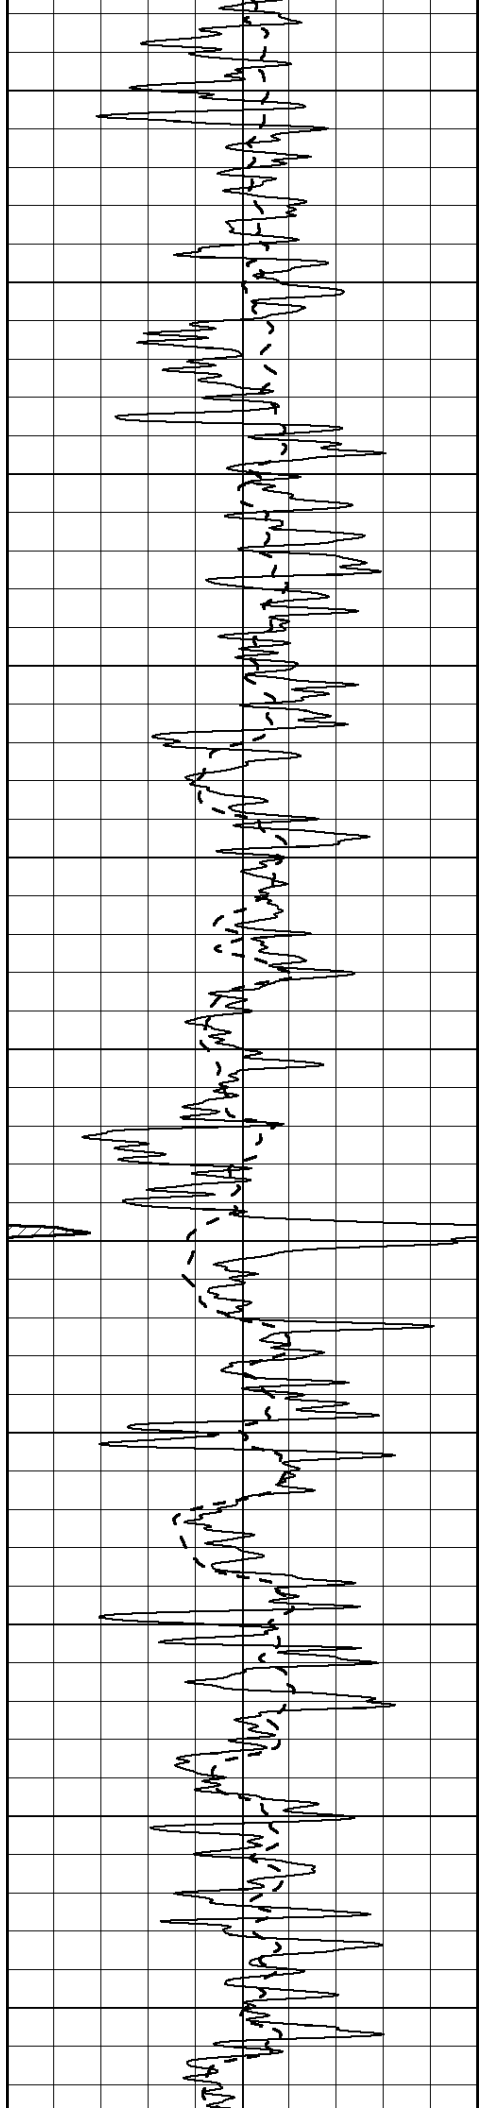

2650

2700

2750

2800

2850

2900


2950



3000


3050

3100

3150

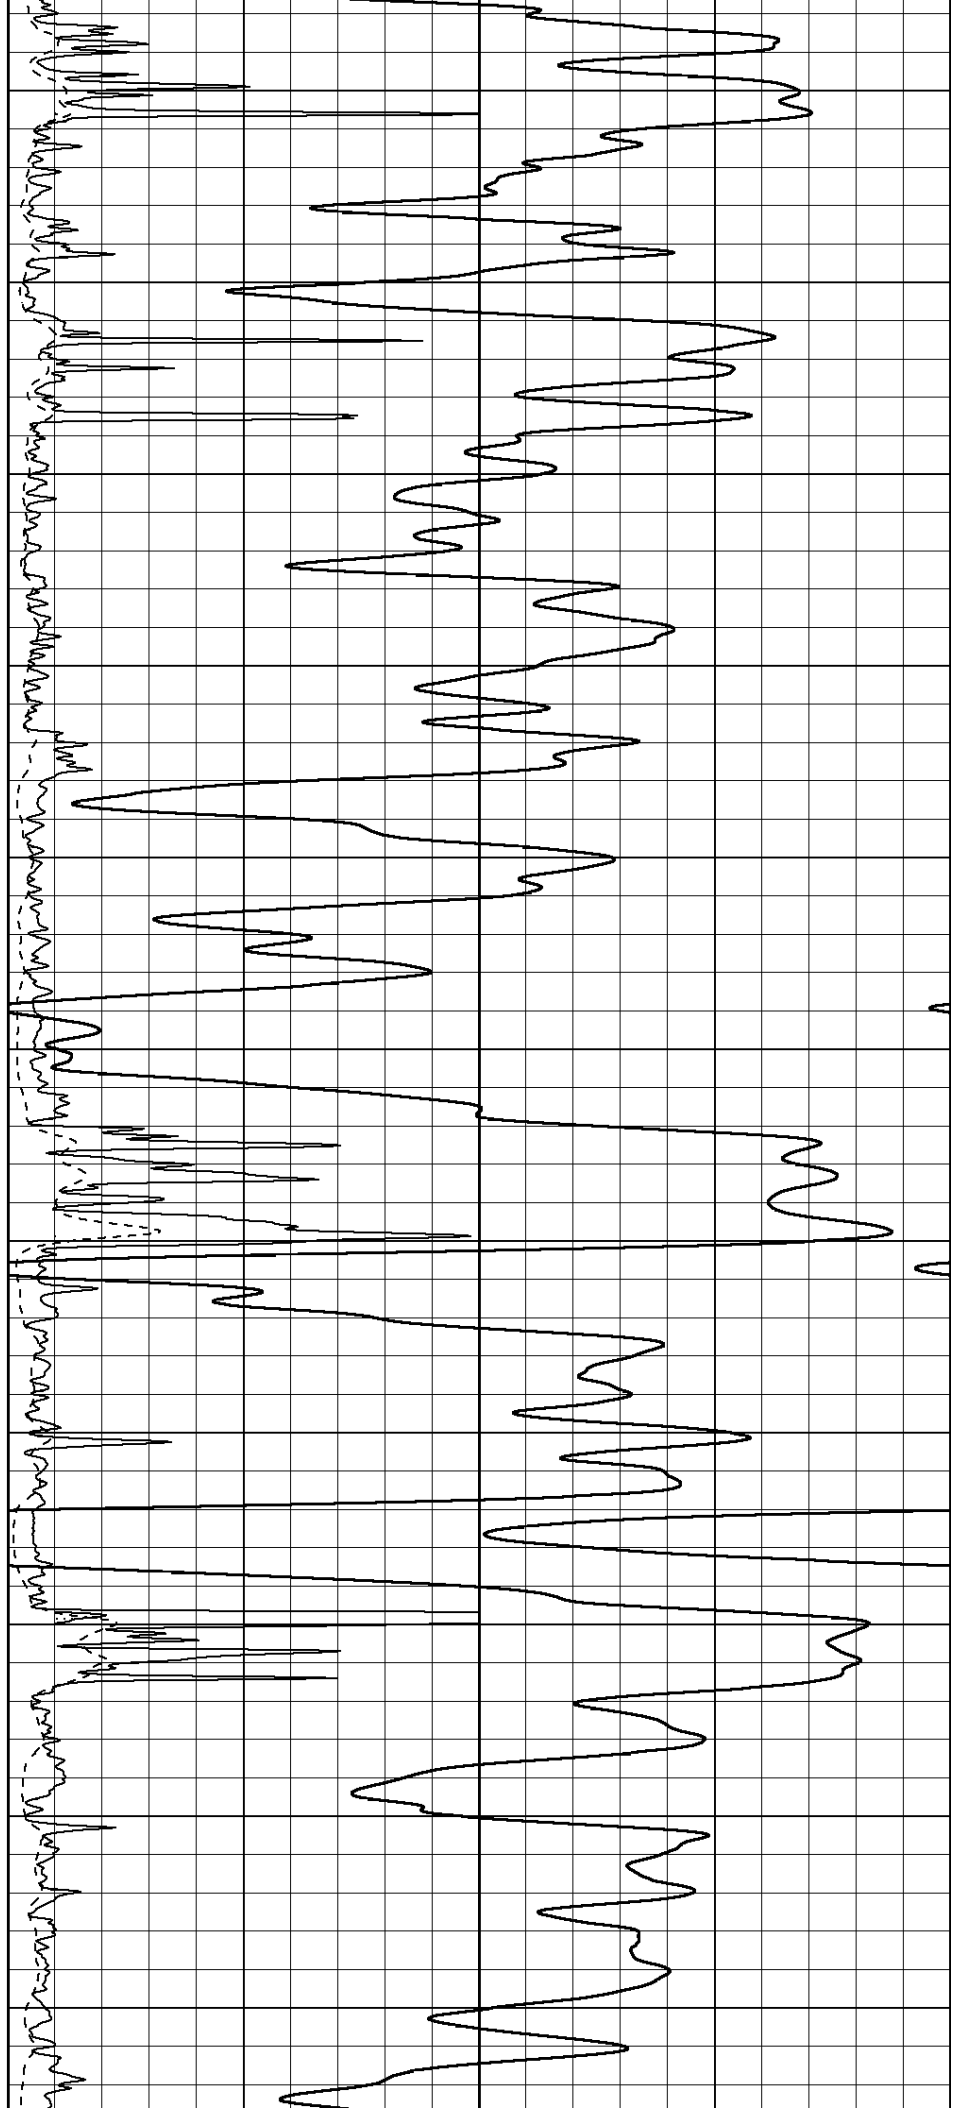

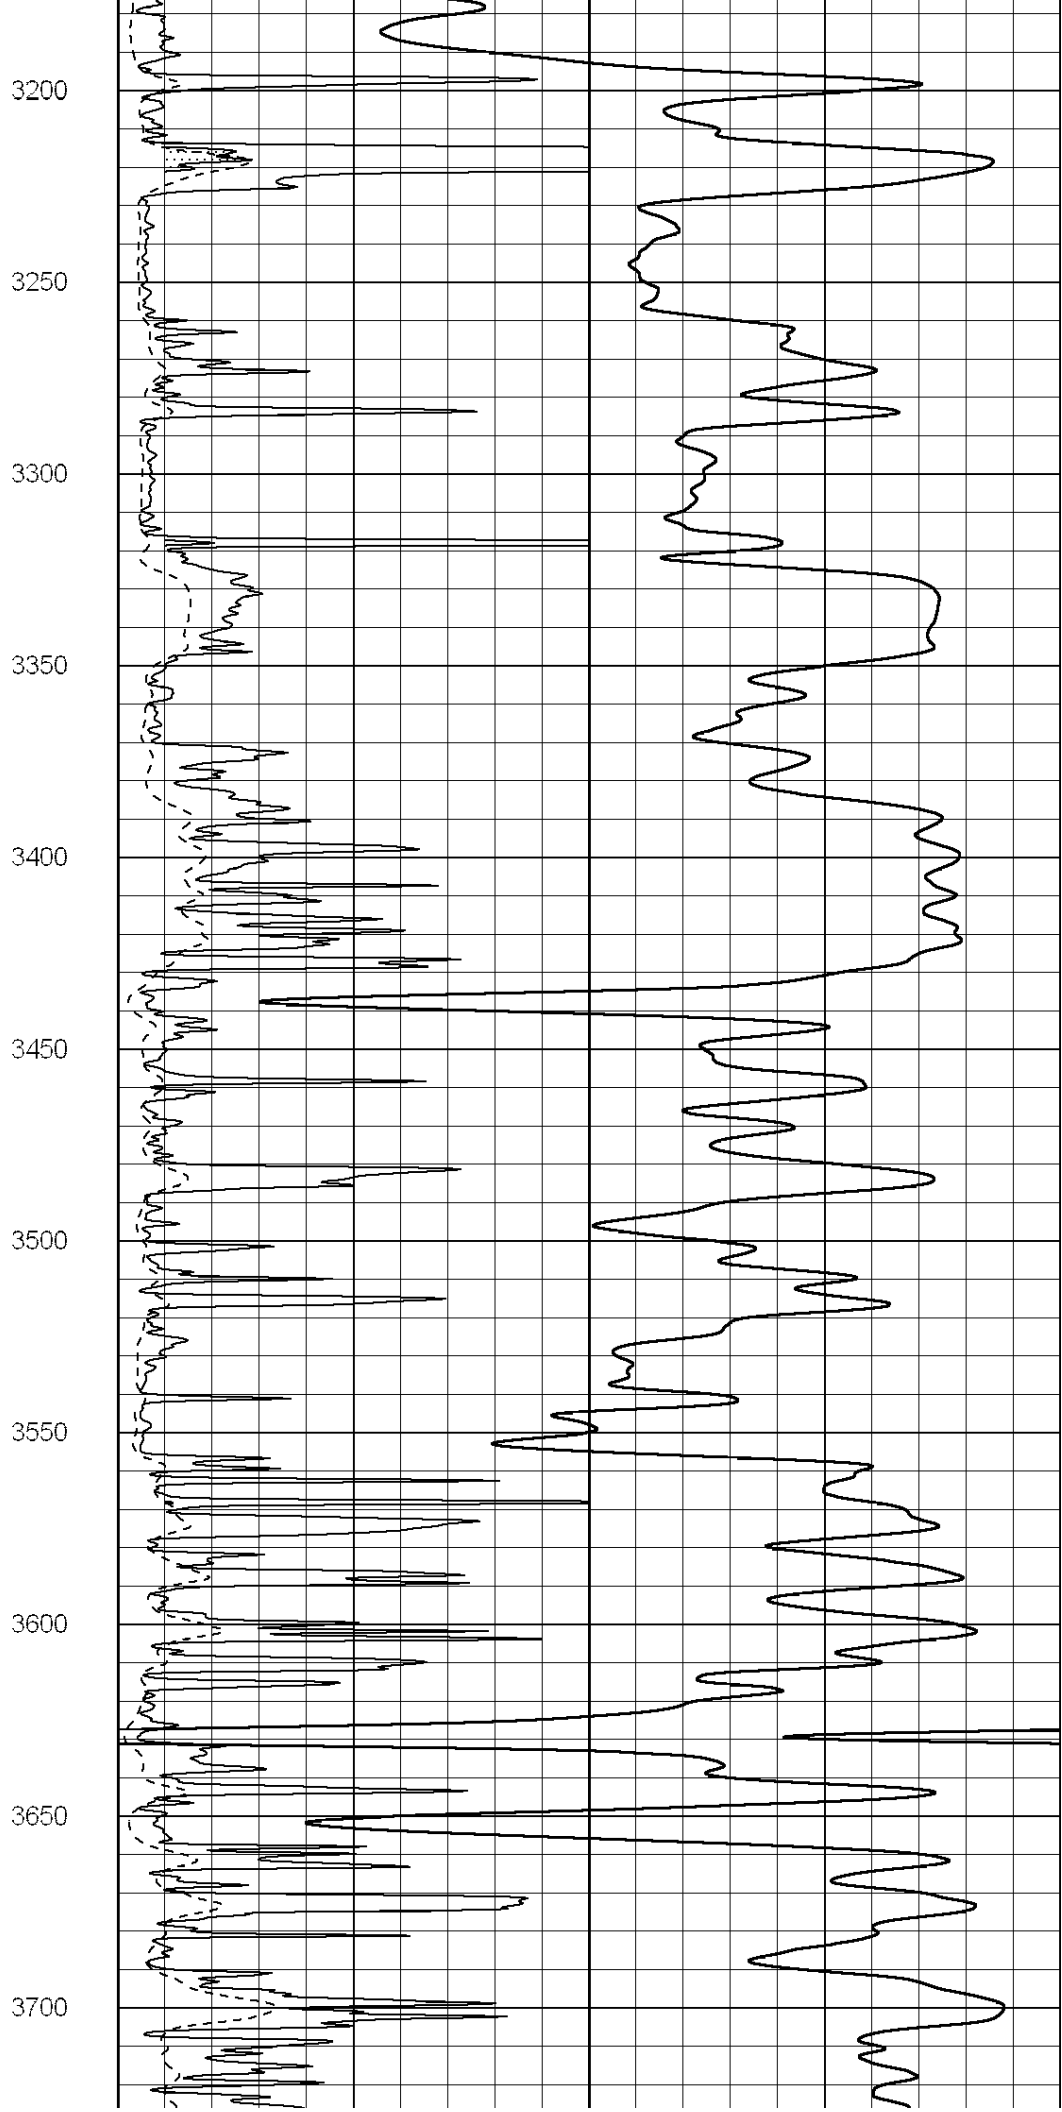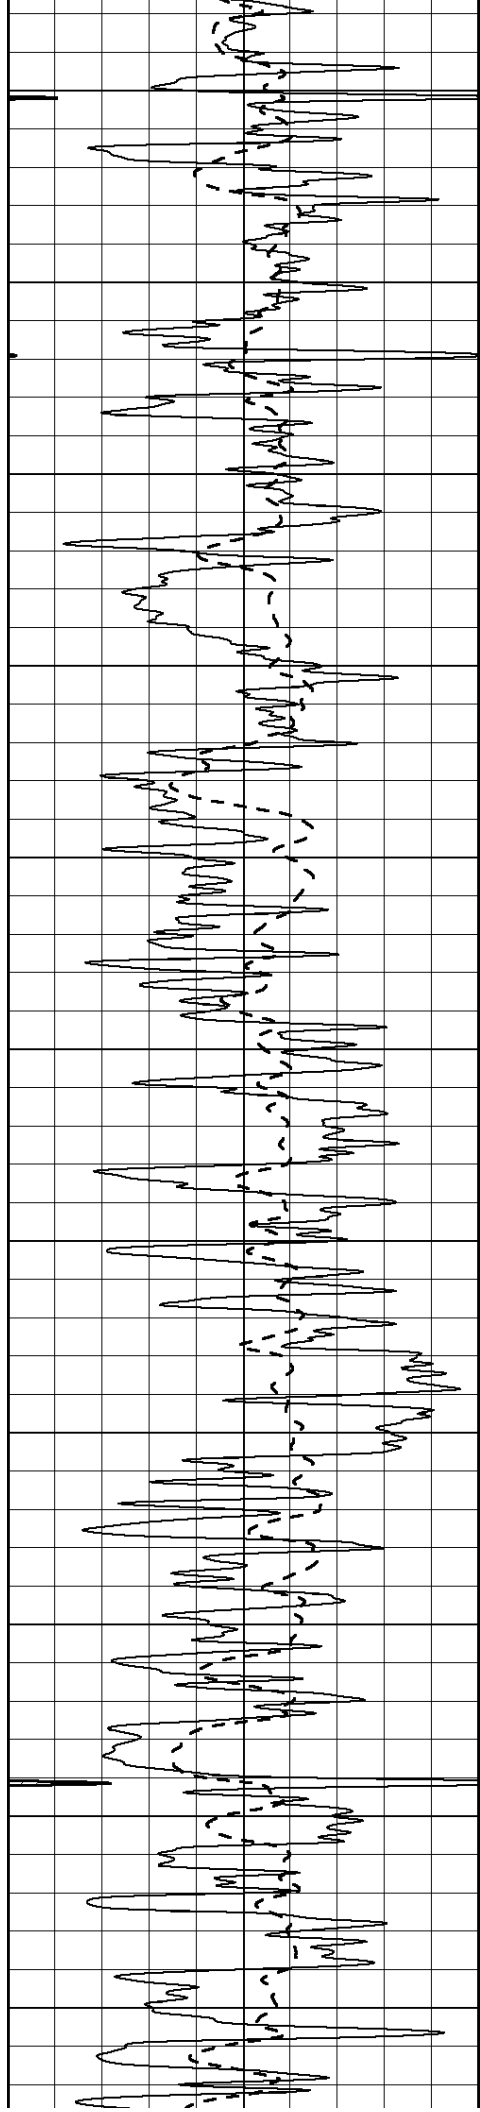

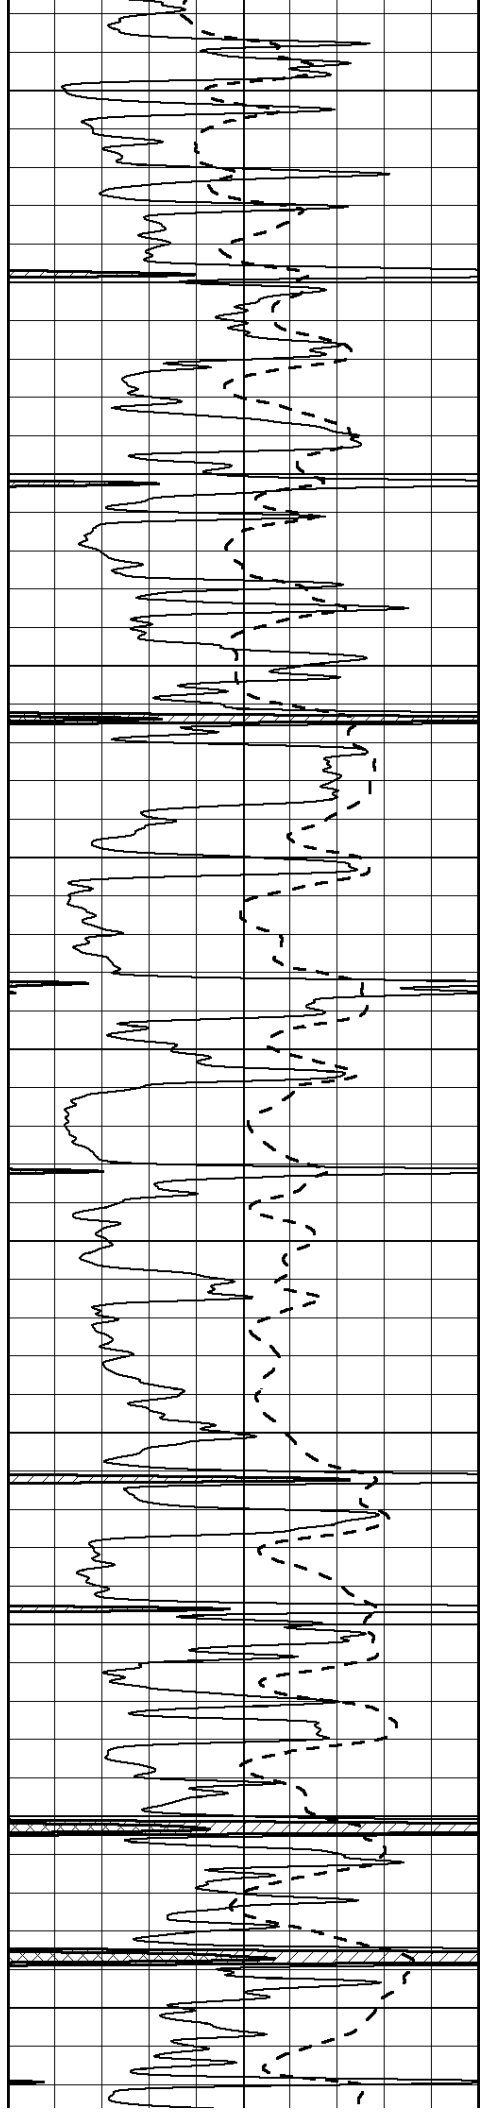

3750

3800

3850

3900

3950

4000



4050


4100

4150


4200

4250

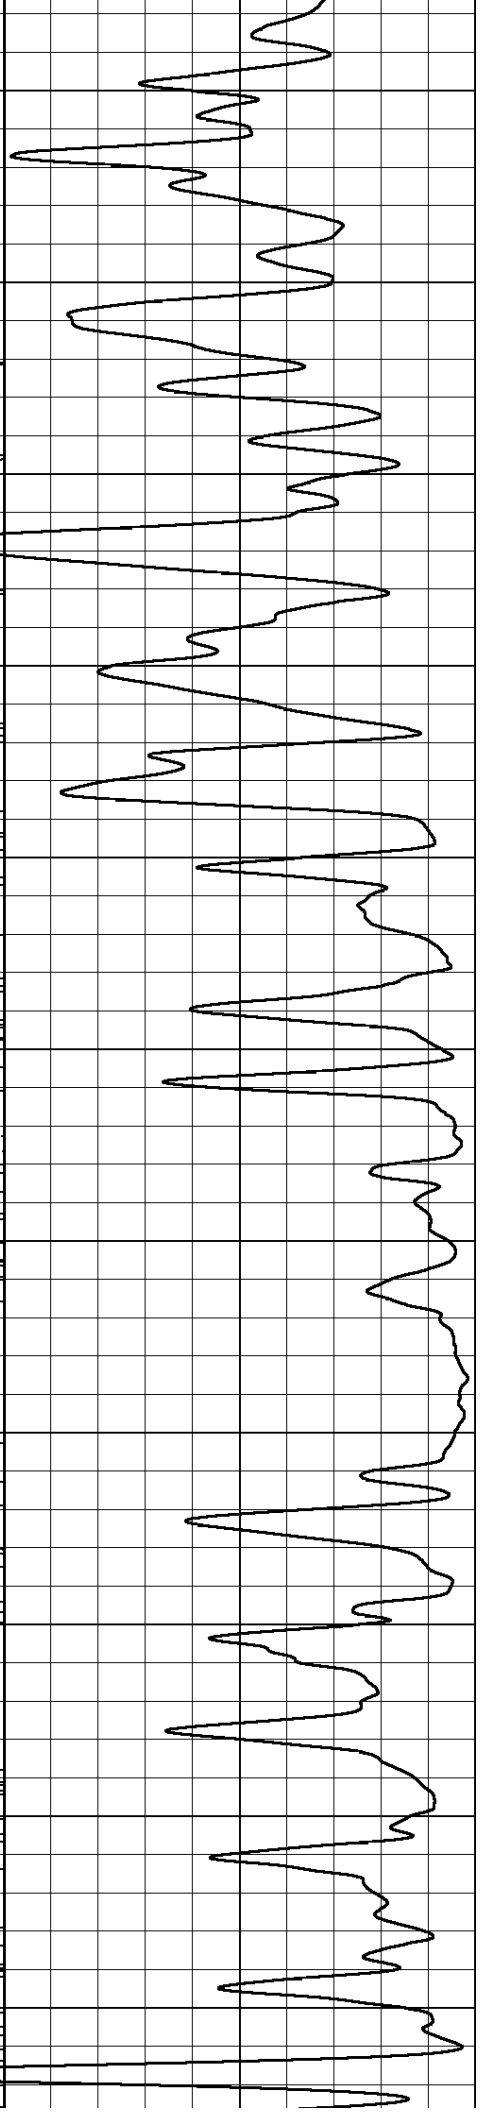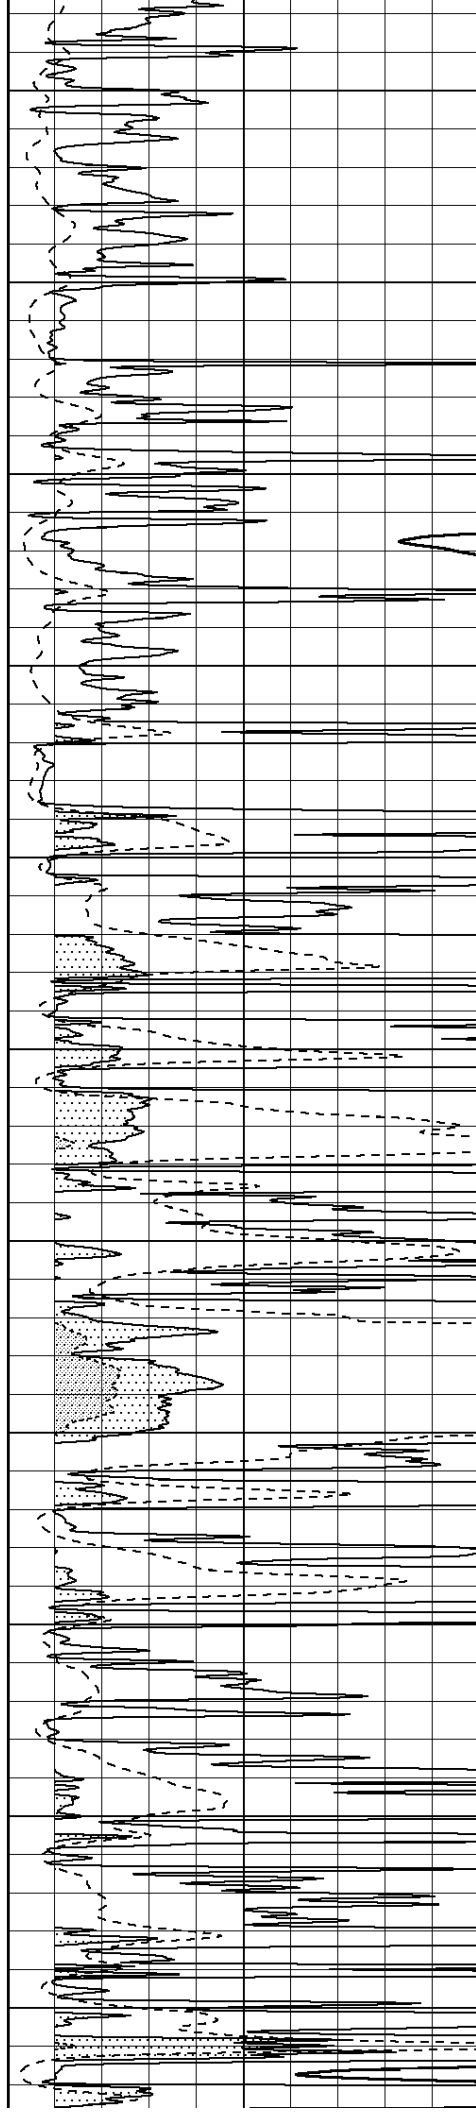

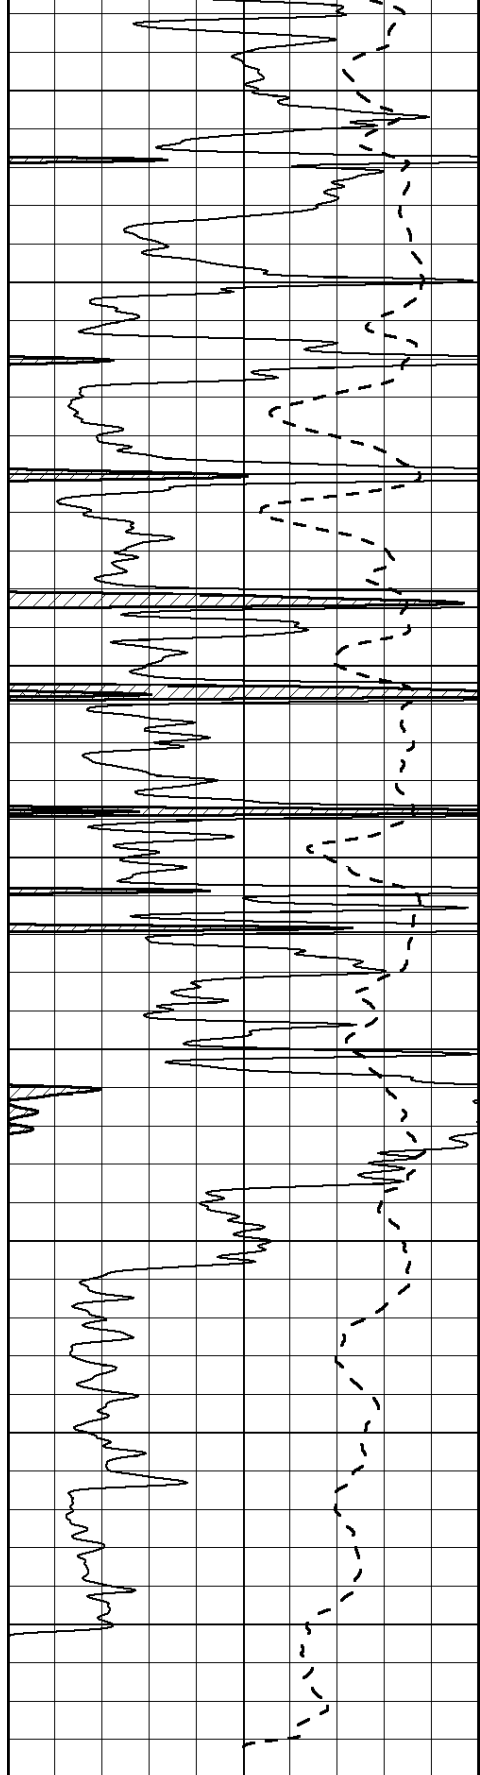


0 Gamma Ray (GAPI) 150  
 -100 SP (mV) 100

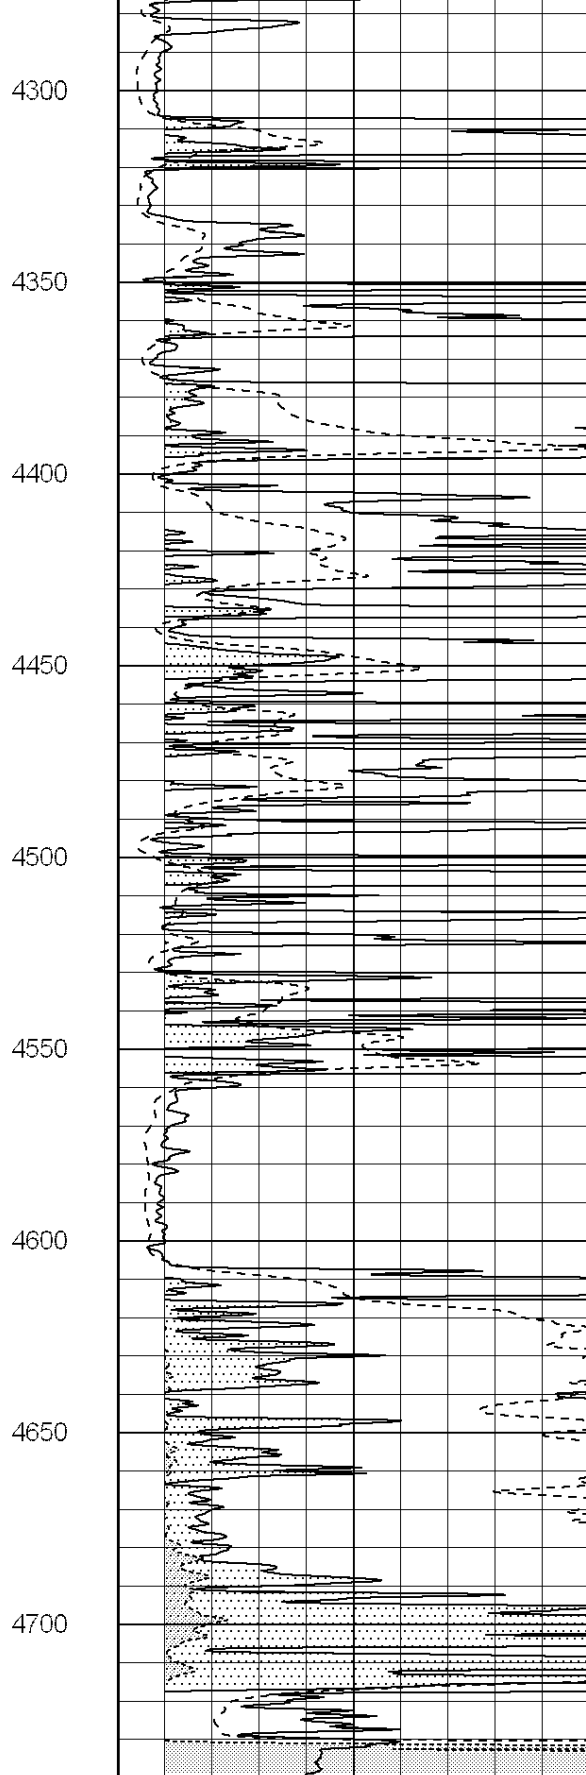

0 RLL3 (Ohm-m) 50  
 0 RILD (Ohm-m) 50  
 1000 CILD (mmho/m) 0

50 RILD X10 (Ohm-m) 500  
 50 RLL3 X10 (Ohm-m) 500

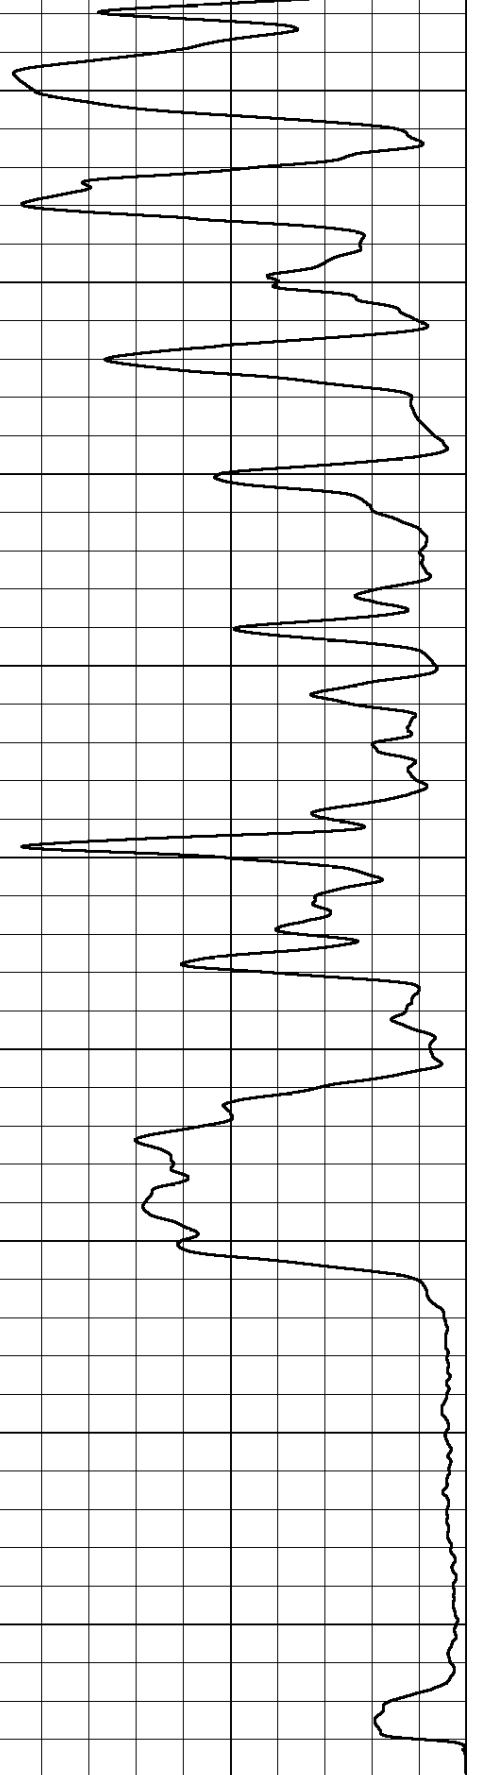


# ANHYDRITE

Database File: 22225pe.db  
 Dataset Pathname: pass3.9  
 Presentation Format: \_dil  
 Dataset Creation: Tue Dec 17 21:04:17 2013  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

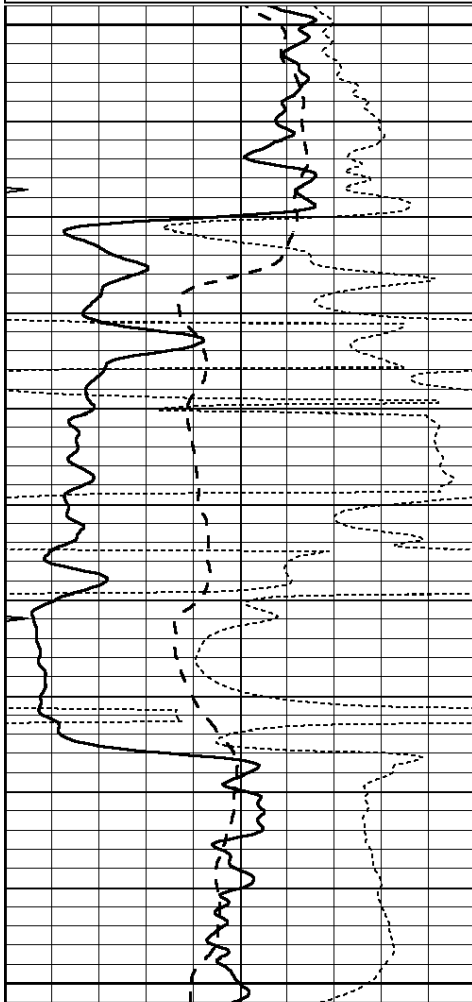

2350

2400

2450

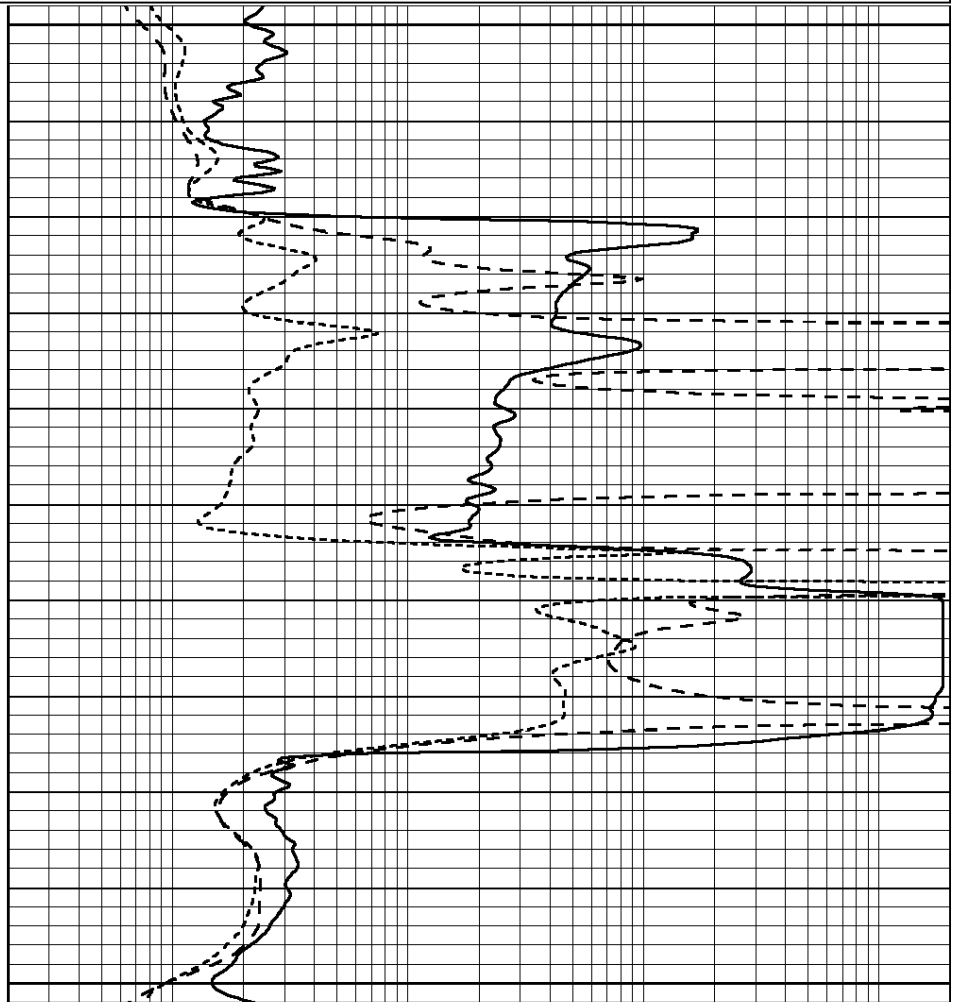

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

# MAIN SECTION

Dataset Pathname: pass3.8  
 Presentation Format: dil  
 Dataset Creation: Tue Dec 17 21:03:25 2013  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

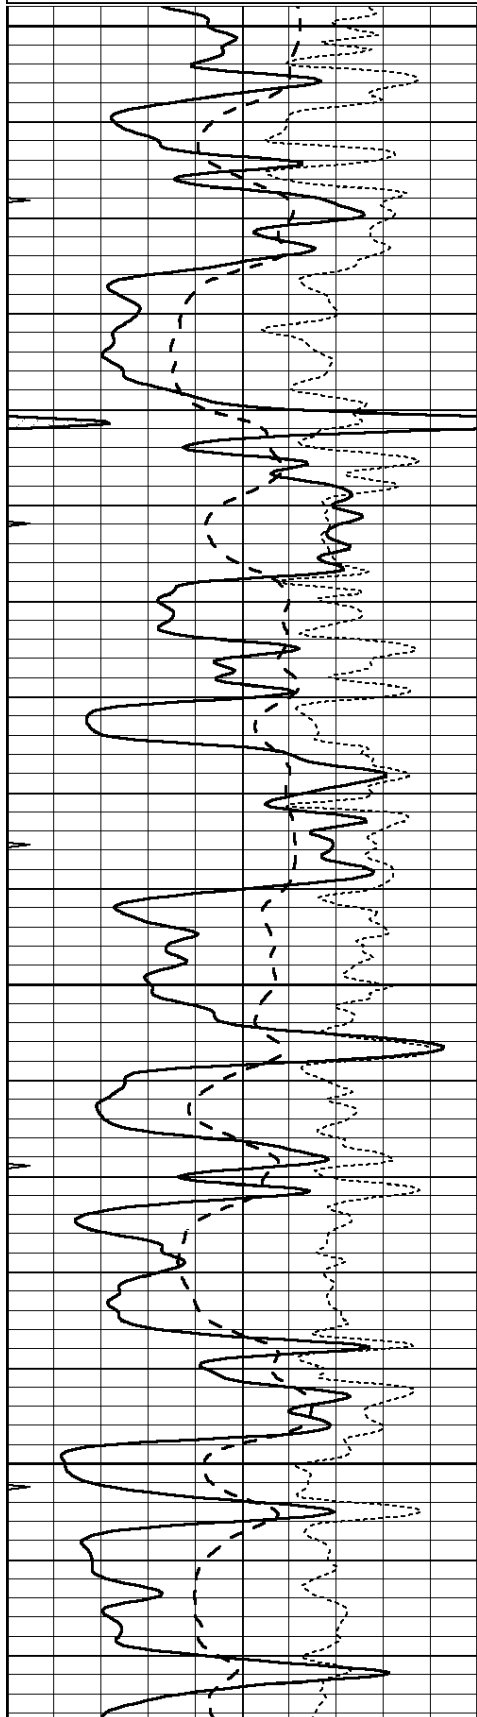



3600

3650

3700

3750

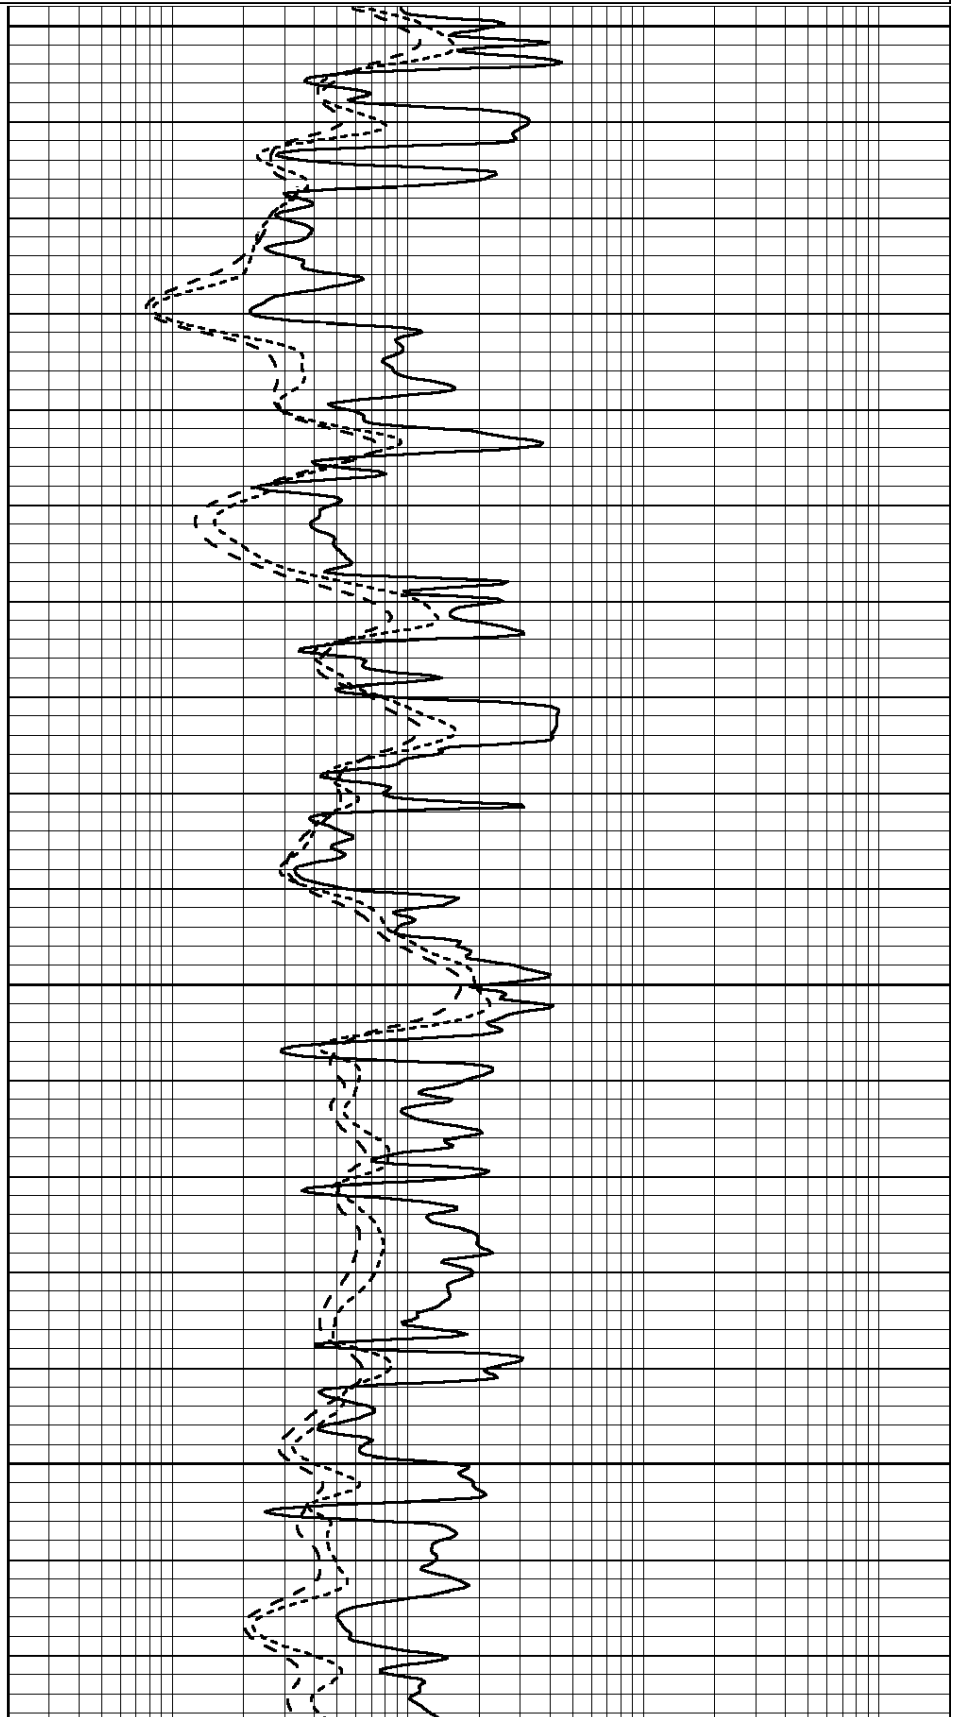

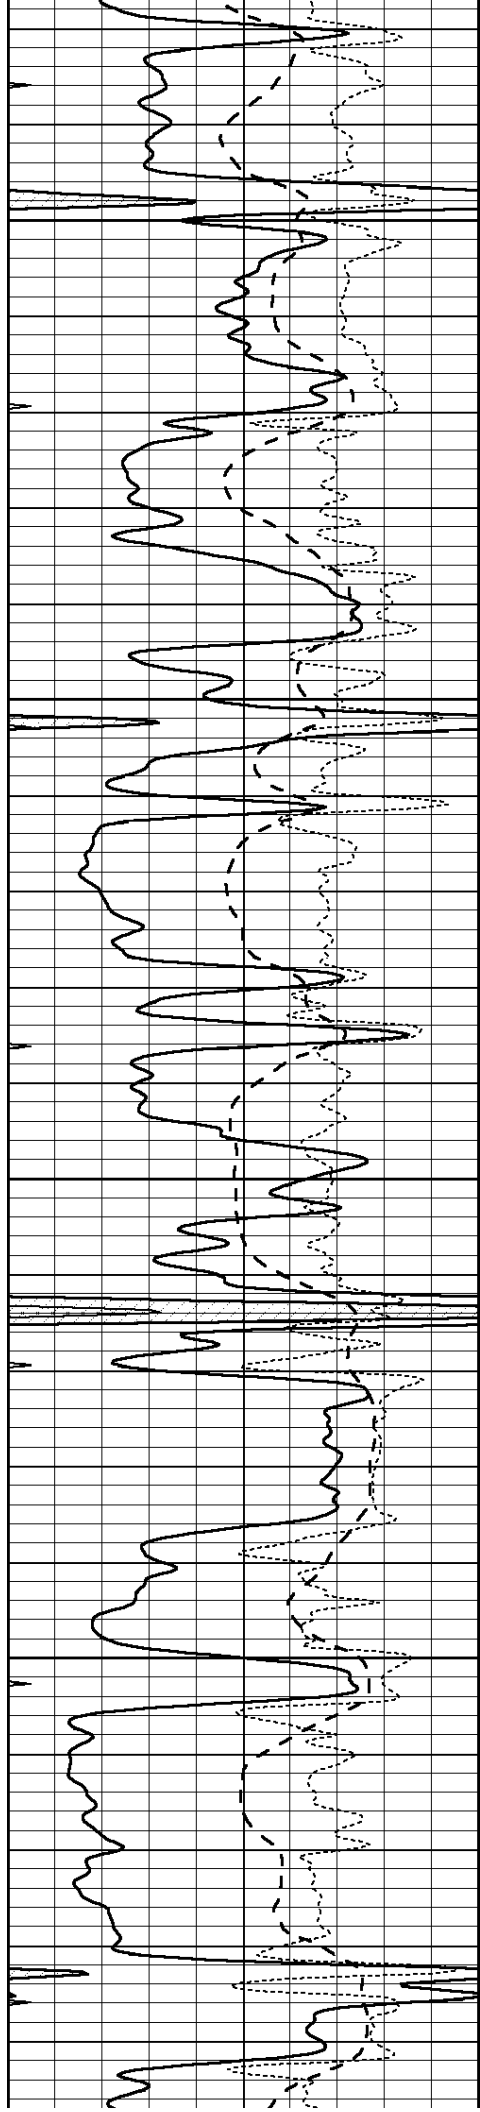



3800

3850

3900

3950

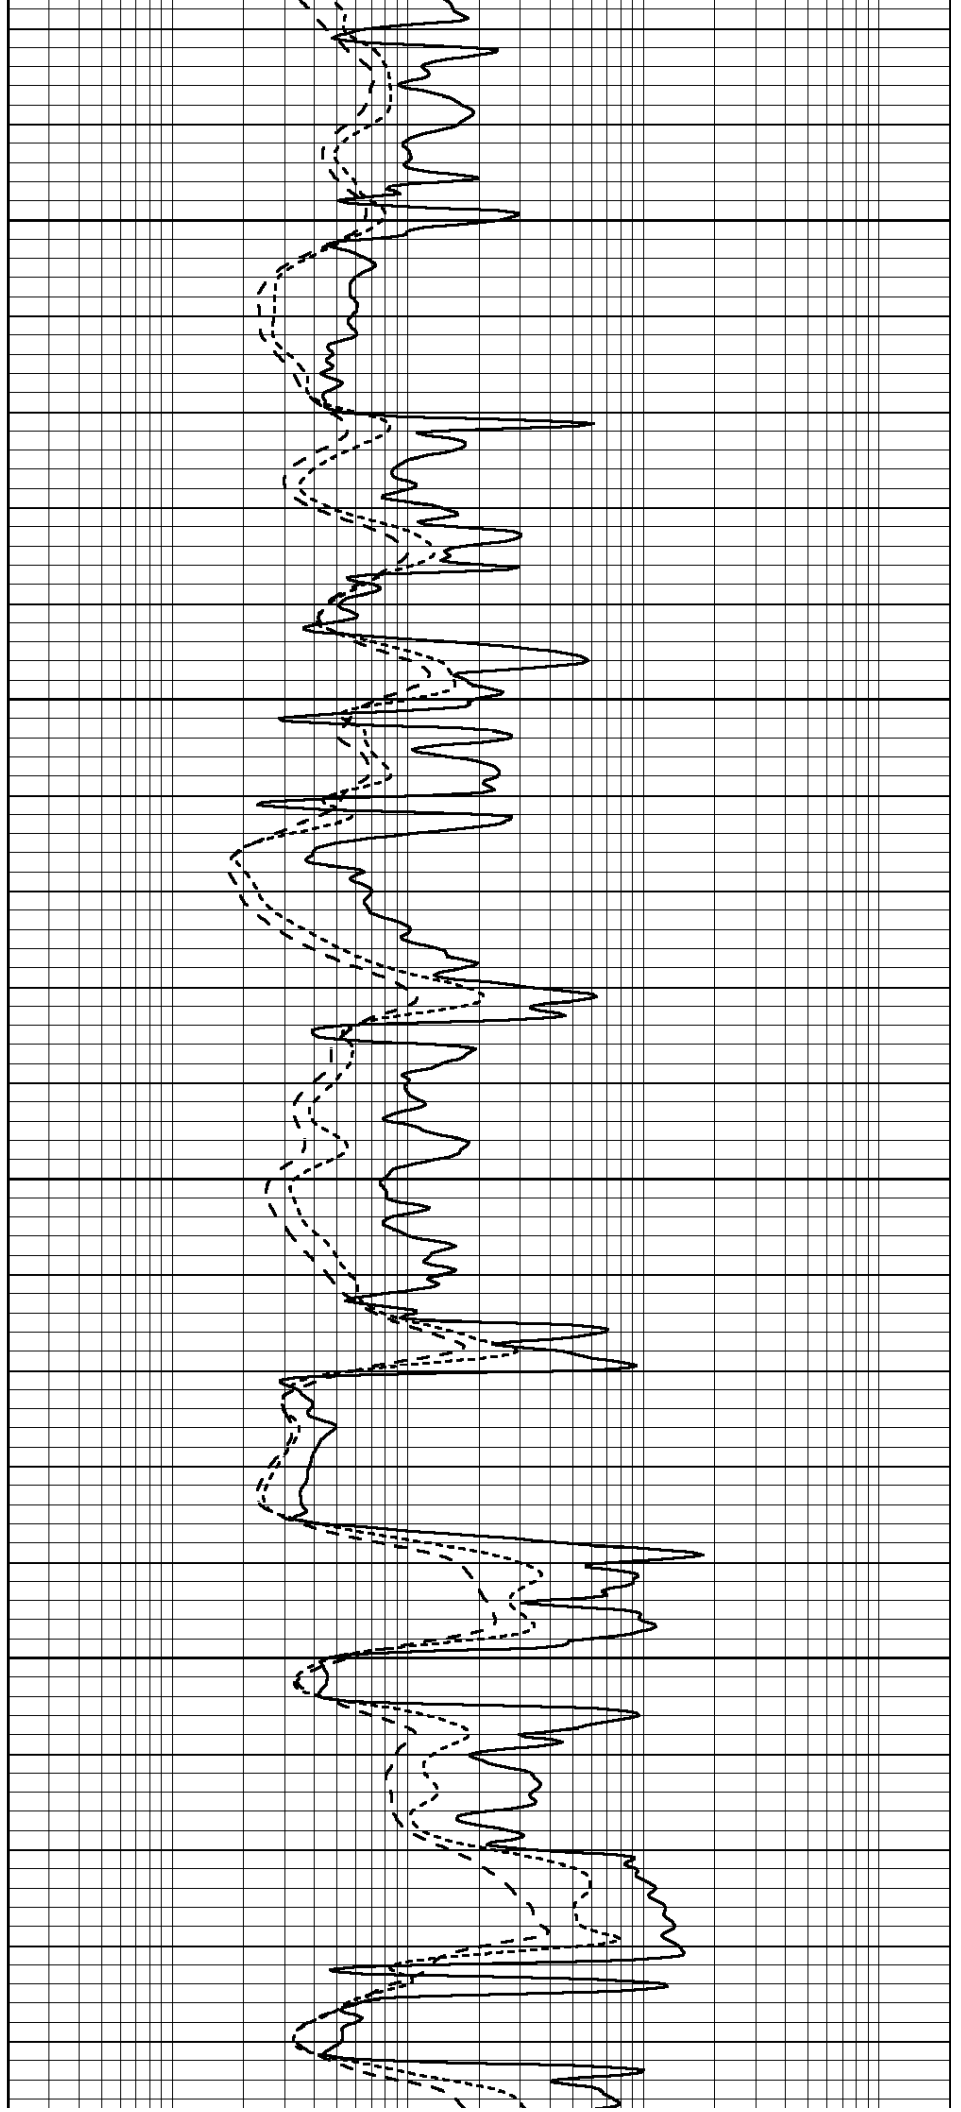

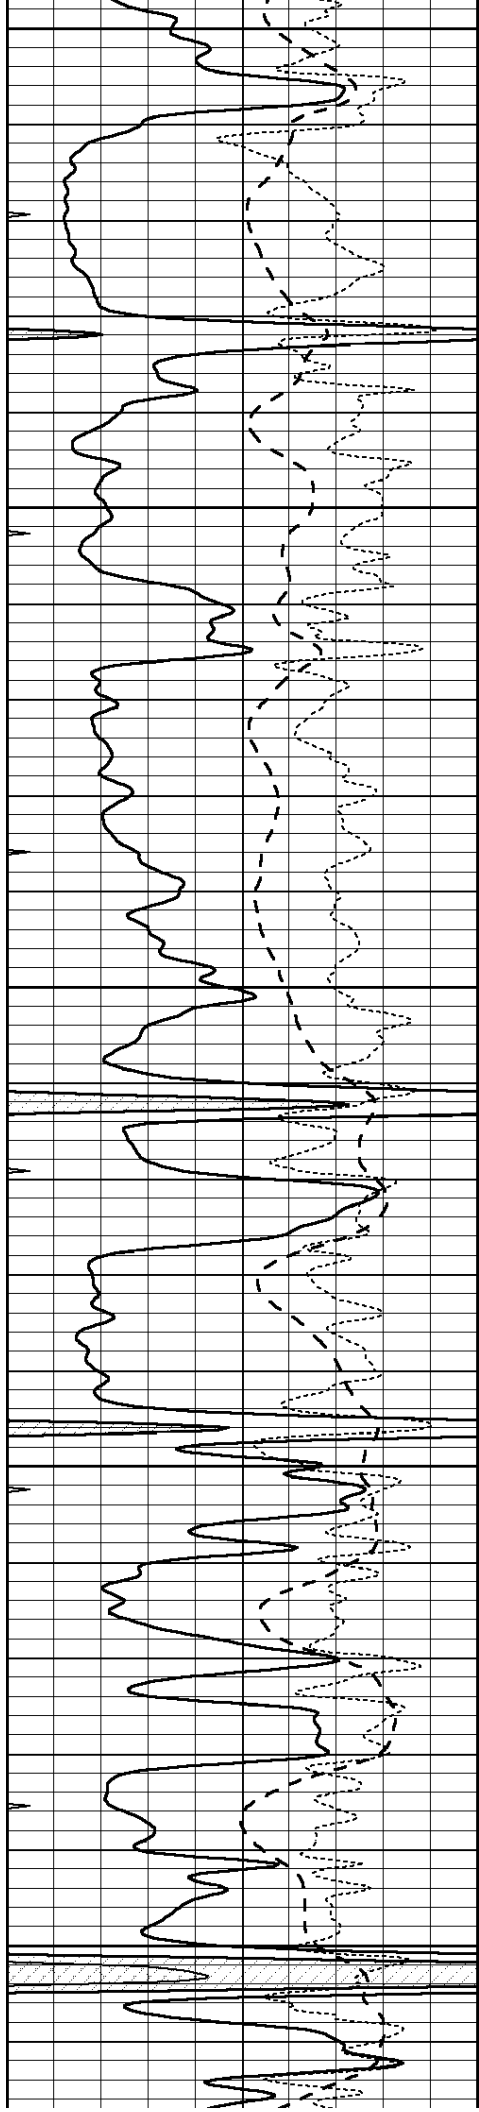


4000


4050

4100

4150

4200

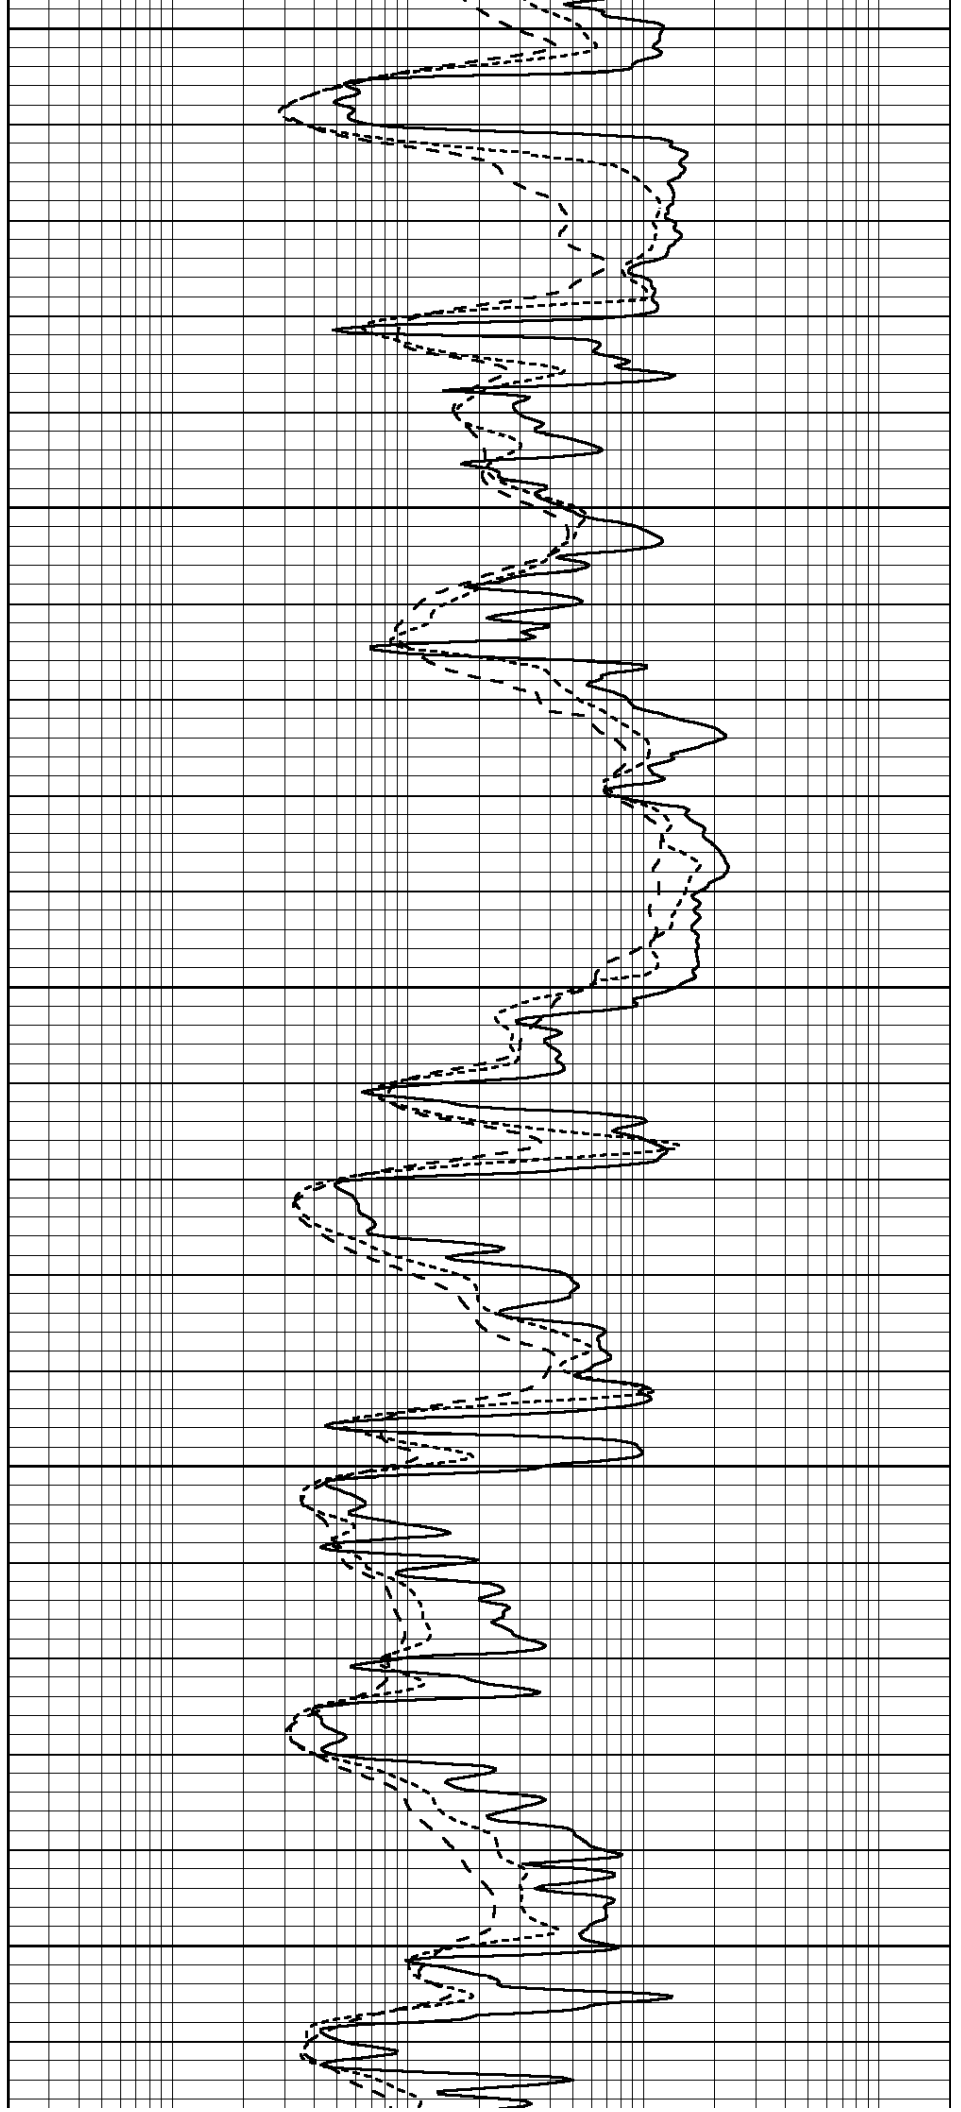

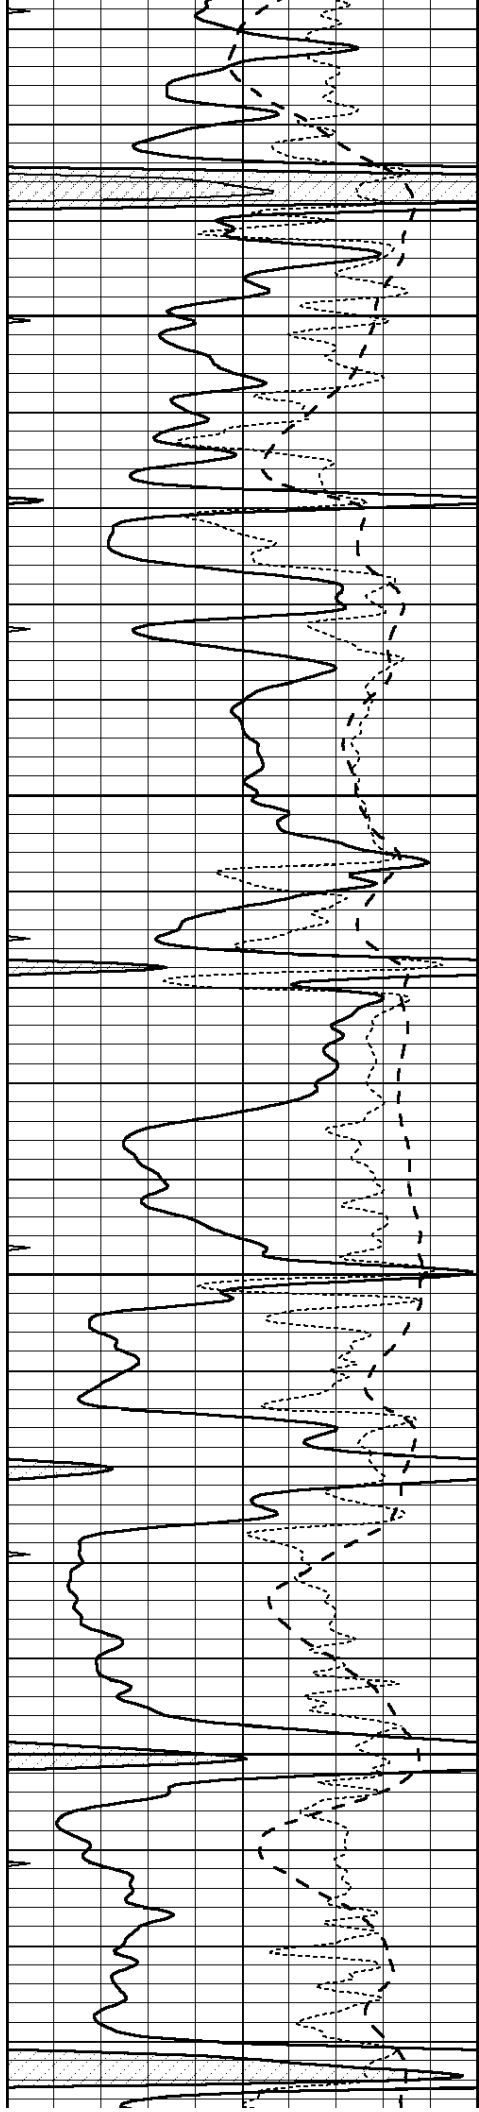



4250

4300

4350

4400

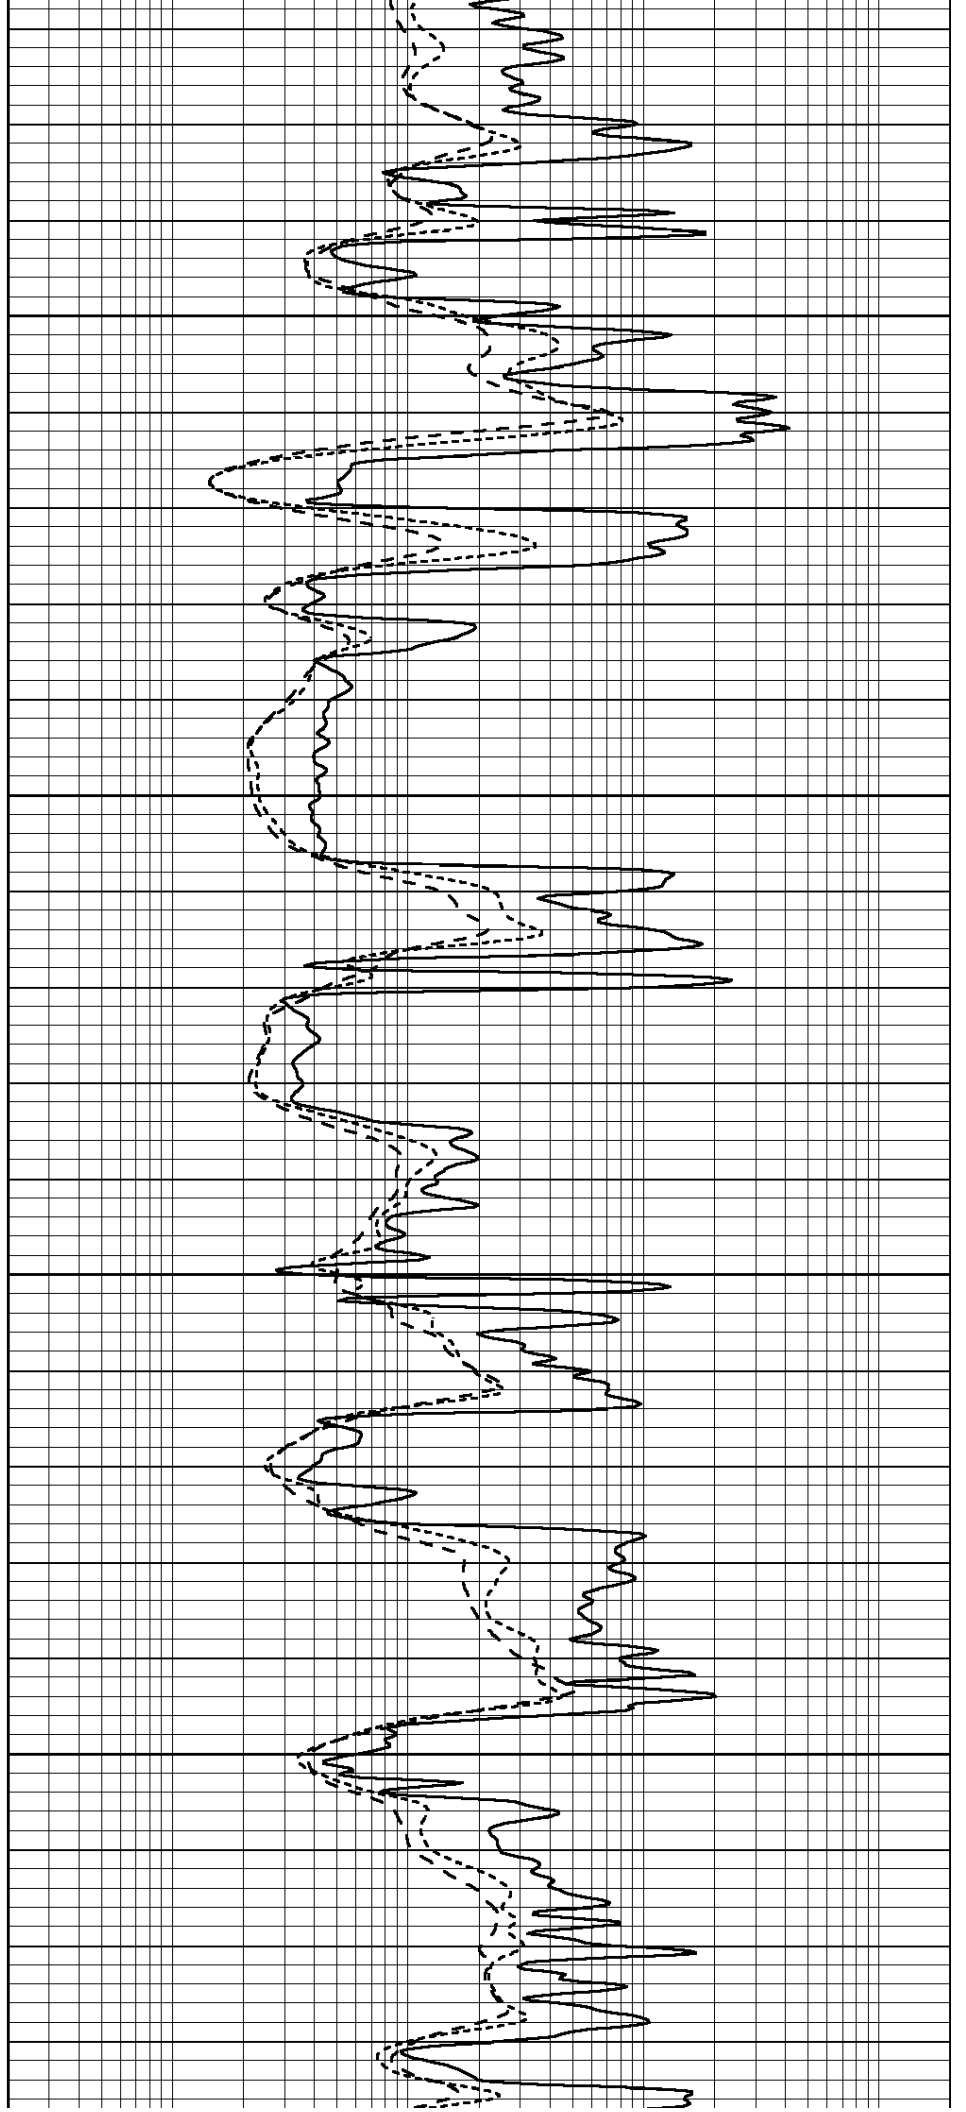

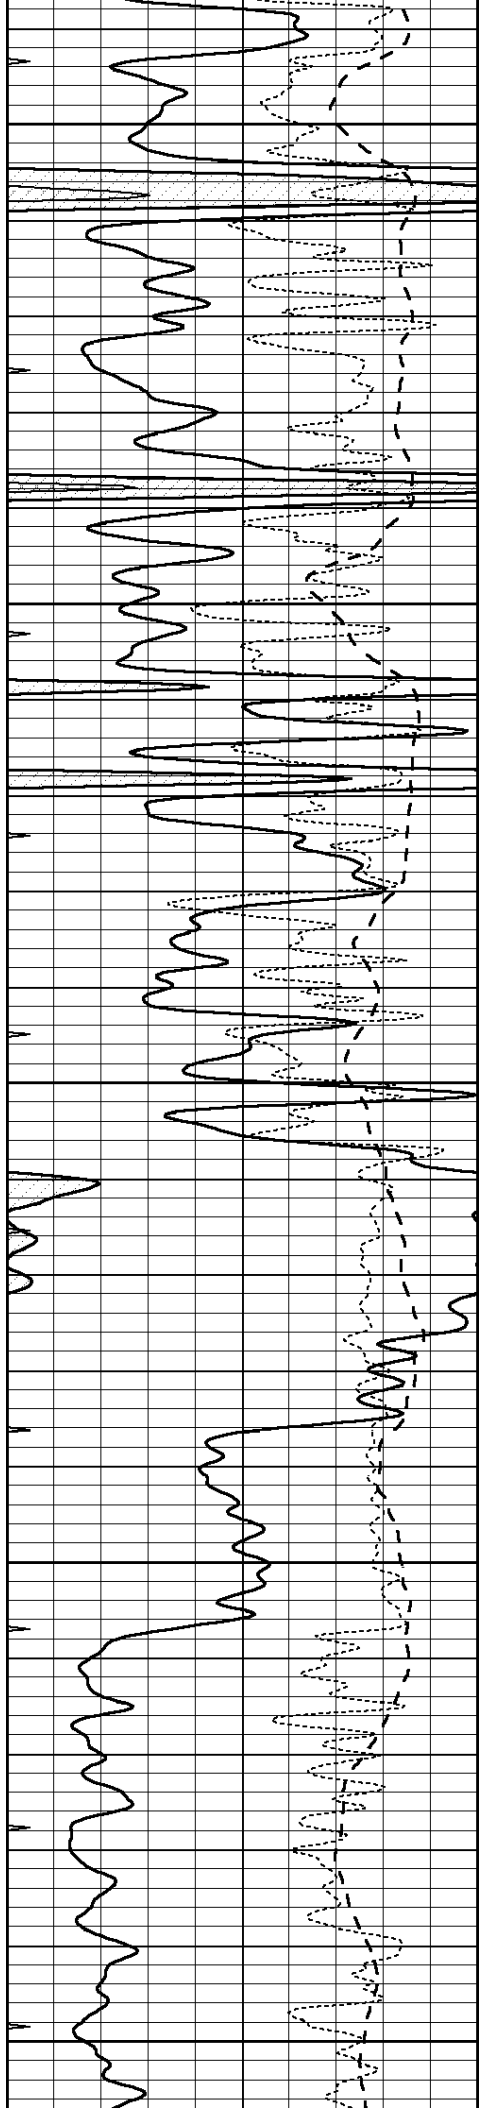


4450


4500

4550

4600


4650

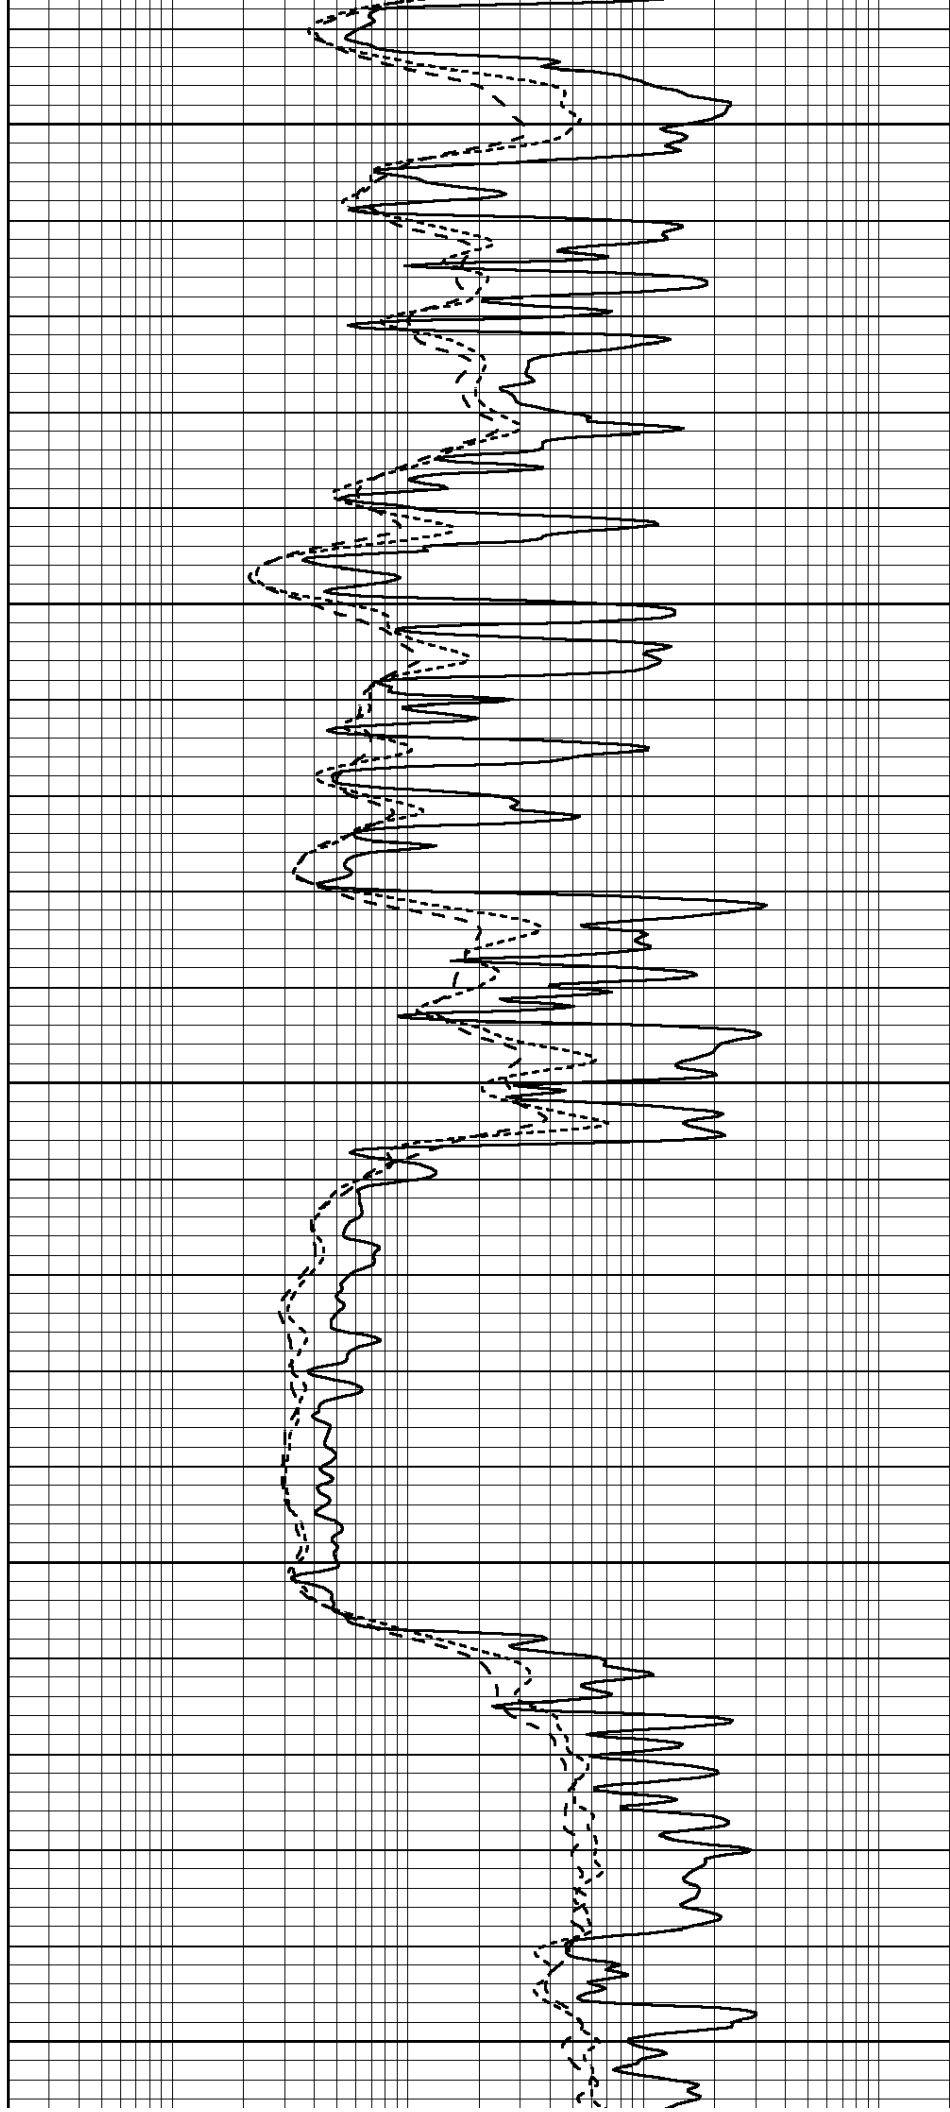

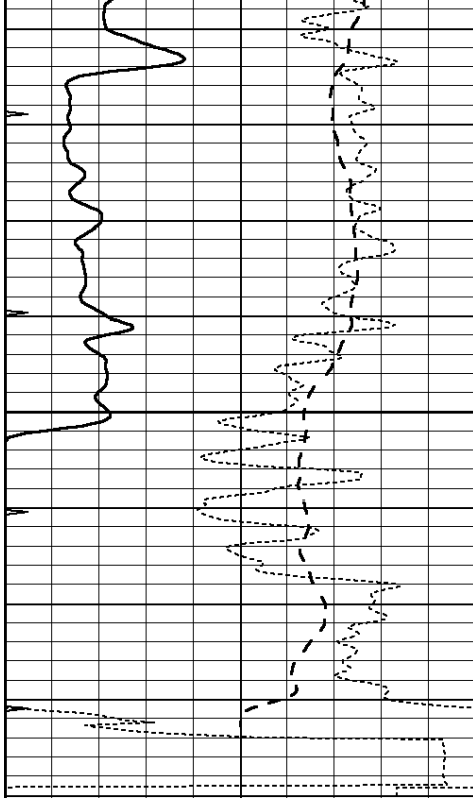

4700

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

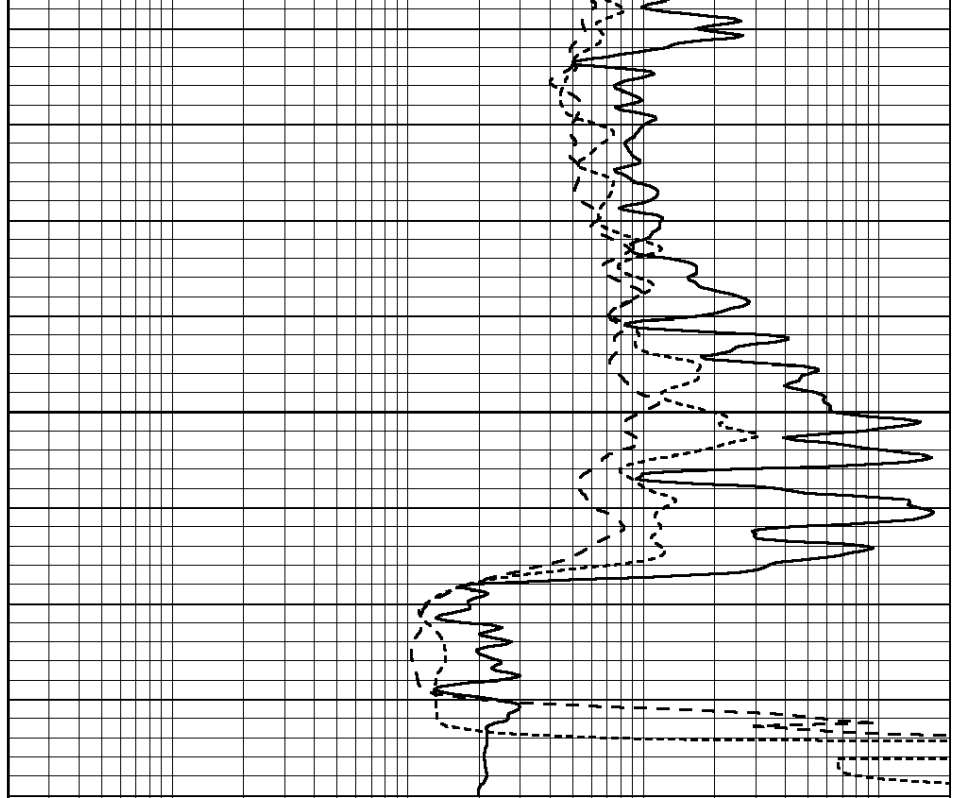

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




# REPEAT SECTION


Database File: 22225pe.db  
 Dataset Pathname: pass2.3  
 Presentation Format: \_dil  
 Dataset Creation: Tue Dec 17 20:04:33 2013 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

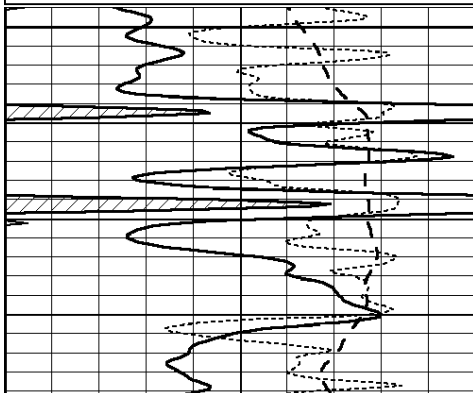


4500

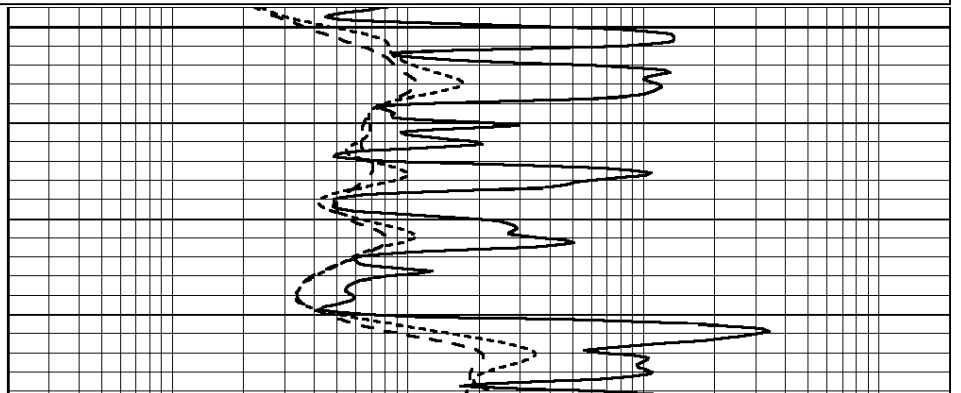

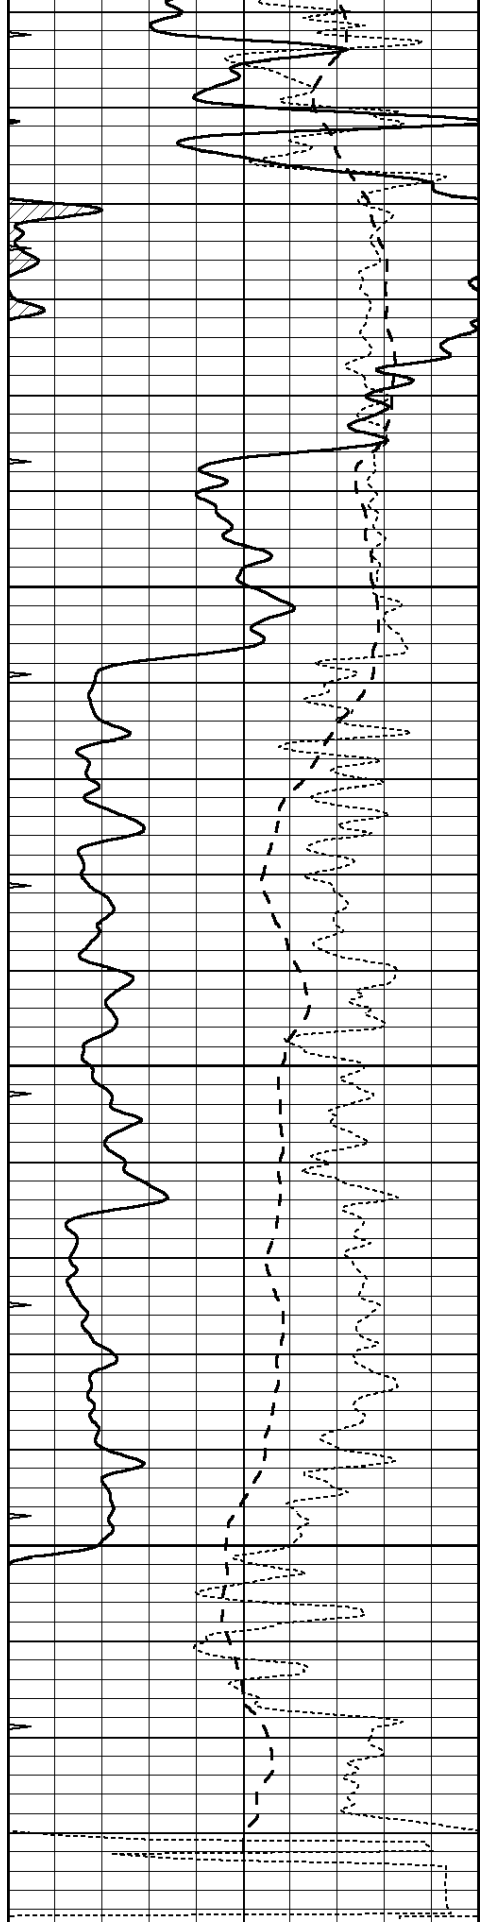

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

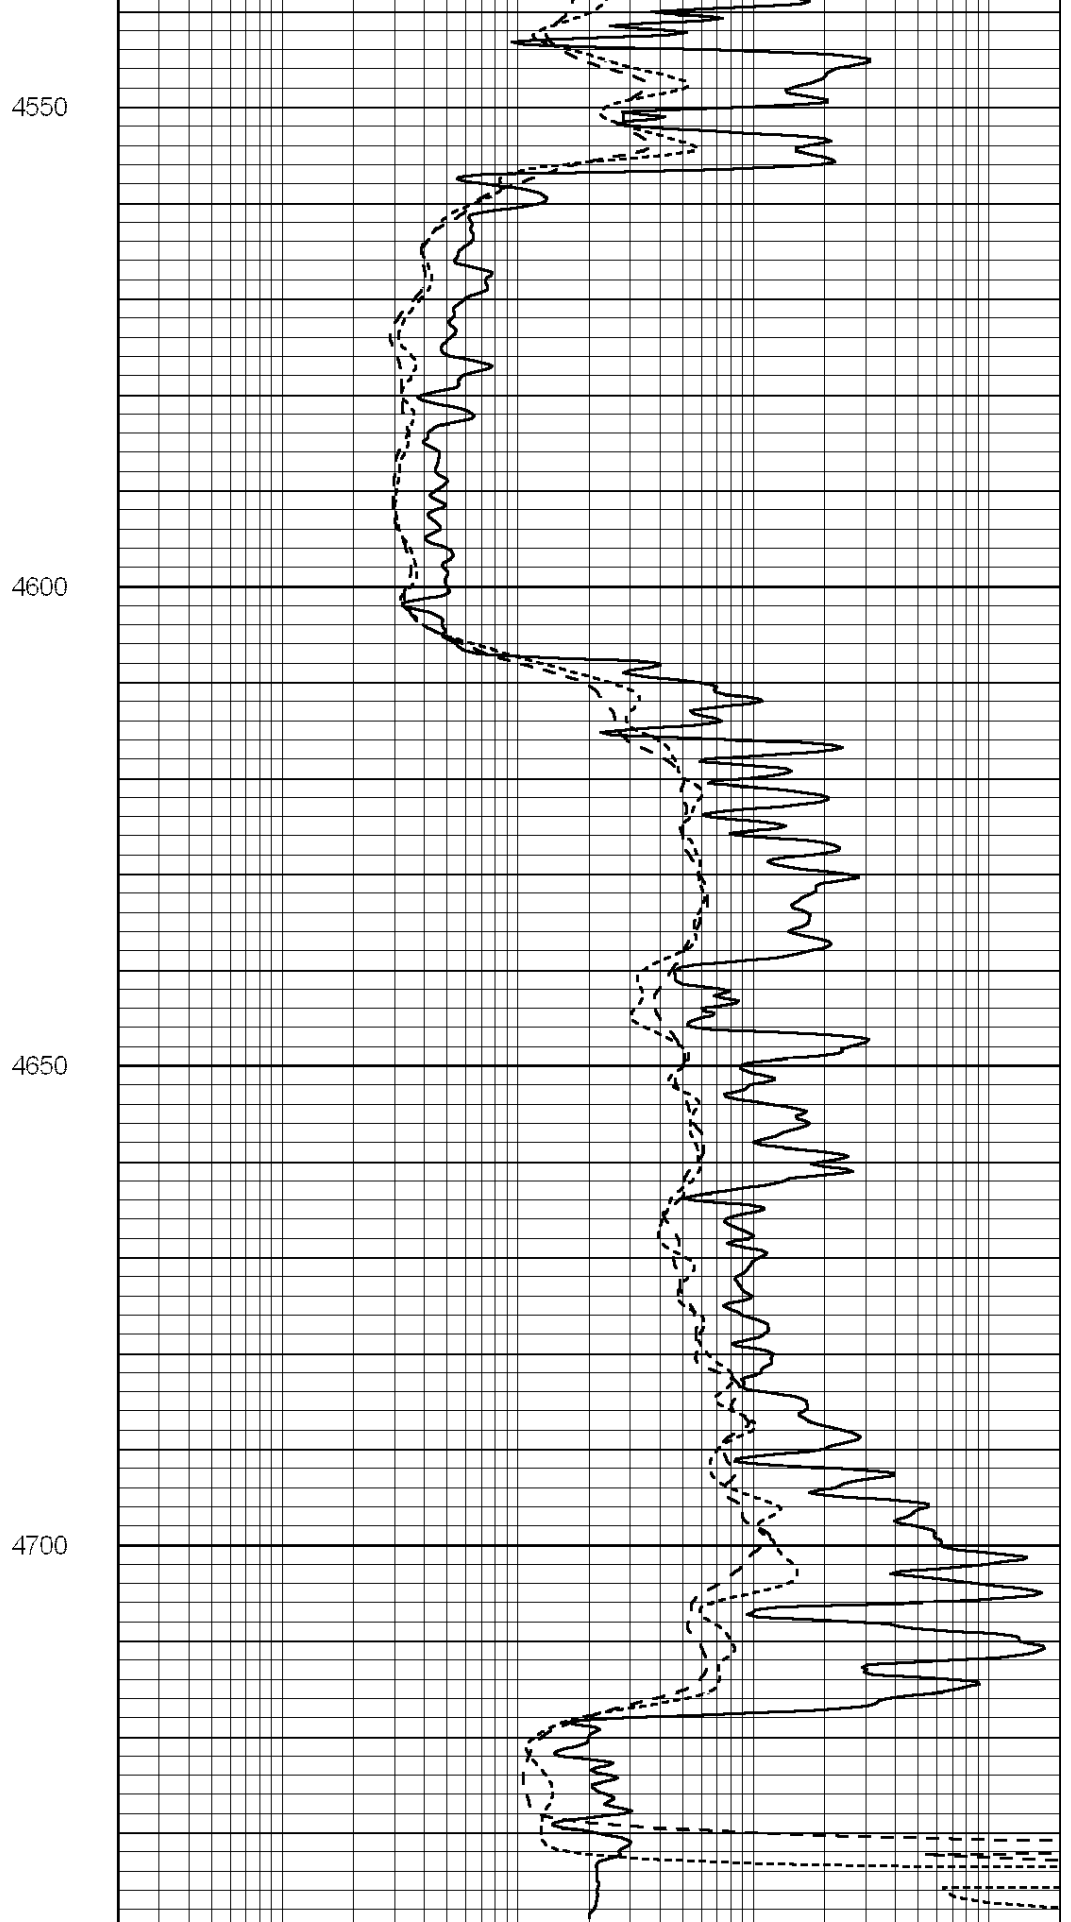

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 22225pe.db  
 Dataset Pathname: pass3.8  
 Dataset Creation: Tue Dec 17 21:03:25 2013

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG  
 Surface Cal Performed: Fri Dec 13 20:06:32 2013  
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008  
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	650.000	-4.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-9.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 004N Model: PRB

Master Calibration

Performed Mon Jun 03 09:36:56 2013

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1417.6	10391.4	3464.6	11537.5	cps
Window 2	1295.0	8959.7	3050.1	9816.4	cps
Window 3	1105.1	5464.2	2051.0	5838.8	cps
Window 4	315.0	317.7	312.9	319.8	cps
Long Space	0.0	7664.6	1755.0	8521.3	cps
Short Space	1.8	1582.4	1040.8	1699.4	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle : 44.1 Rib Slope : 0.970 Density/Spine Ratio : 0.574  
 Spine Angle : 74.1 Spine Slope : 3.519 Spine Intercept : -17.0

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808  
 Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070559  
 Tool Model: OPEN\_GR  
 Performed: Mon Dec 09 00:21:31 2013

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps  
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps