



Microresistivity Log

Pioneer Energy Services

API No.

15-053-21,289-00-00

Company Jason Oil Company, LLC

Well Beagley No. 1

Field Stollenberg

County Ellsworth State

Kansas

Location

E2-NE-NW-NE
330' FNL & 1350' FEL

Other Services
CNL/CDL
DIL/BHCS

Sec: 8

Twp: 16S

Rge: 10W

Elevation

Permanent Datum Ground Level Elevation 1816
Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1823
D.F. 1816
G.L. 1816

Date 10/27/13

Run Number Two

Depth Driller 3350

Depth Logger 3350

Bottom Logged Interval 3349

Top Log Interval 2000

Casing Driller 8.625 @ 347

Casing Logger 347

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity,ppm CL 4,000

Density / Viscosity 9.2 63

pH / Fluid Loss 9.5 8.0

Source of Sample Flowline

Rm @ Meas. Temp .50 @ 70

Rmf @ Meas. Temp .38 @ 70

Rmc @ Meas. Temp .68 @ 70

Source of Rmf / Rmc Charts

Rm @ BHT .32 @ 110

Operating Rig Time 4 1/2 Hours

Max Rec. Temp. F 110

Equipment Number 108

Location Hays

Recorded By J. Henrickson

Witnessed By Steve Reed

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Wilson Kansas
South on 105 Rd to Avenue N, 1 3/4 East, South Into

Database File: jasonoil_beagley_1hd.db
Dataset Pathname: DIL/jasstk
Presentation Format: micro
Dataset Creation: Sun Oct 27 10:58:49 2013
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
-200	SP (mV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0
		LSPD (ft/min)

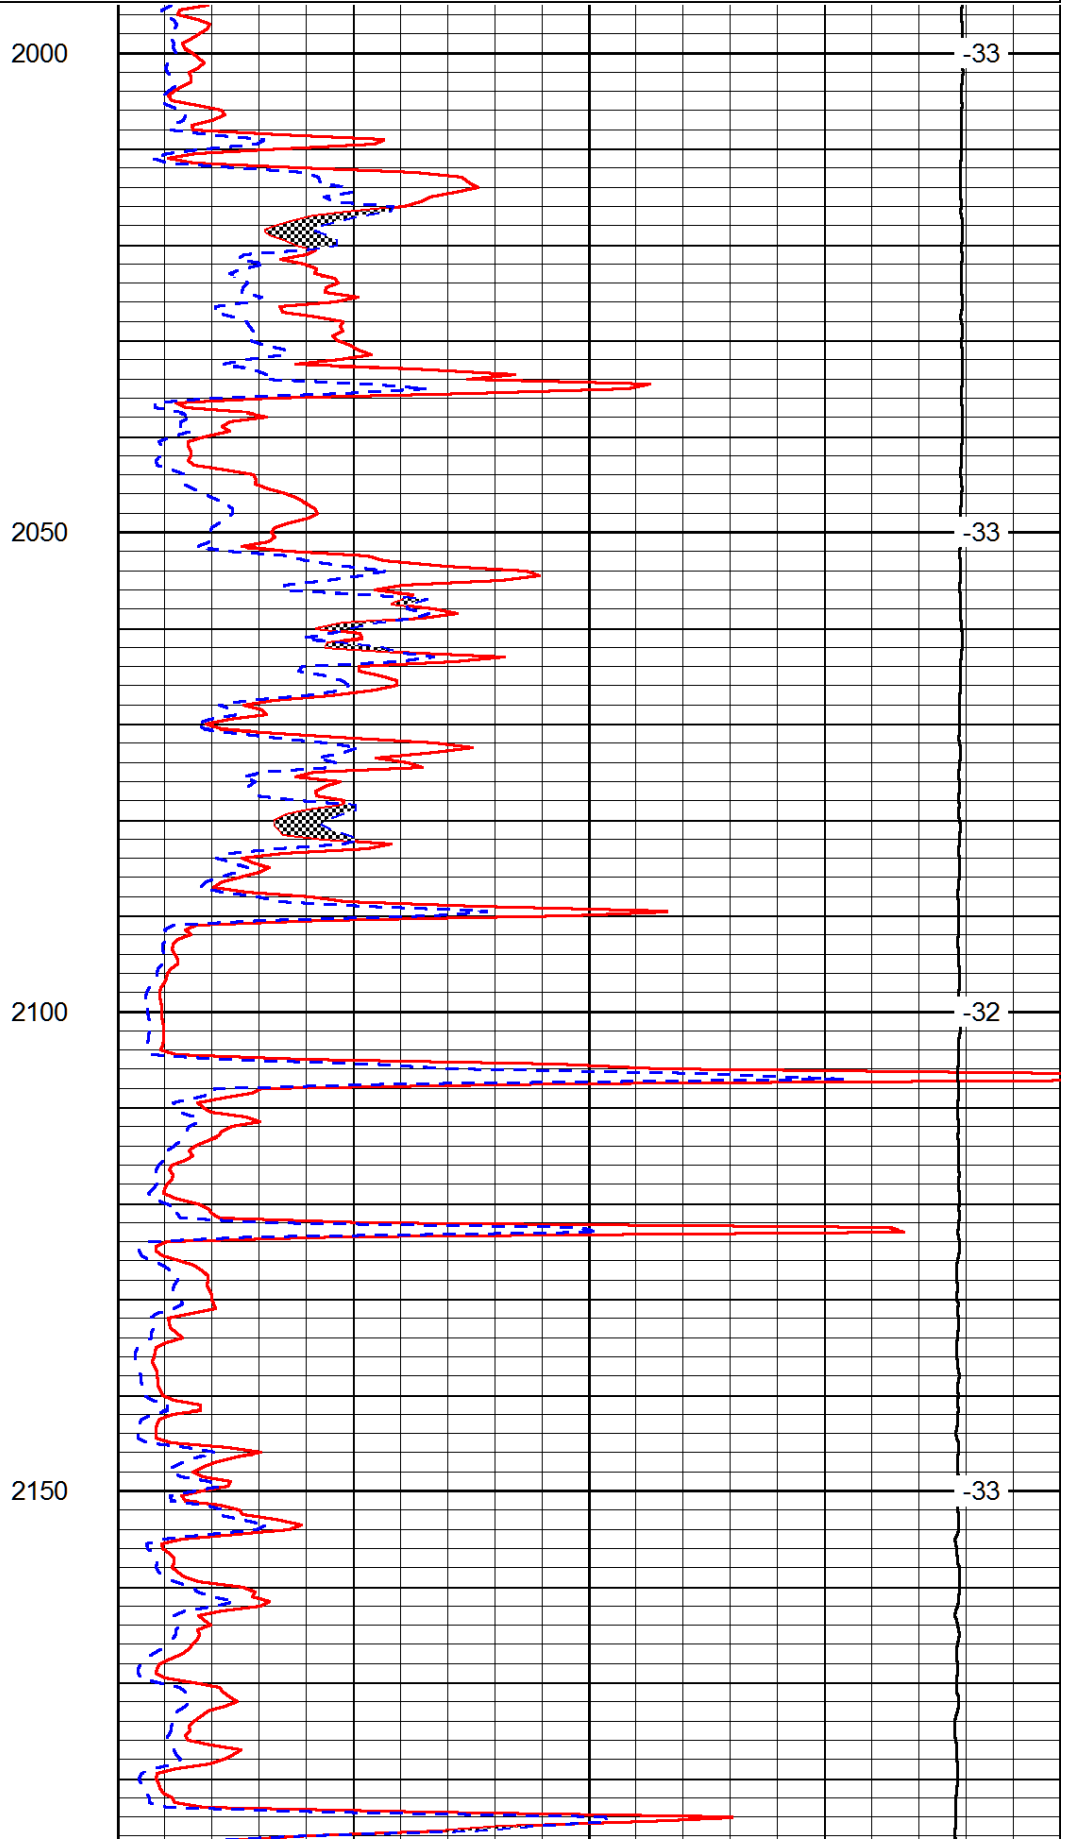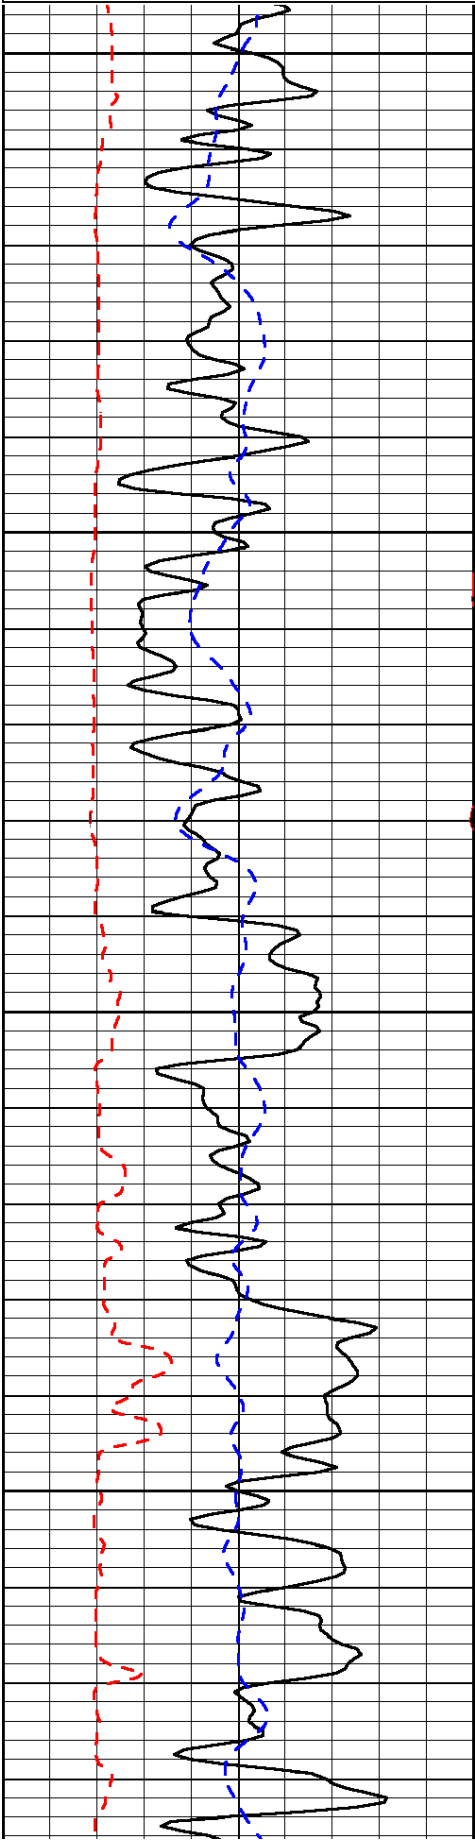

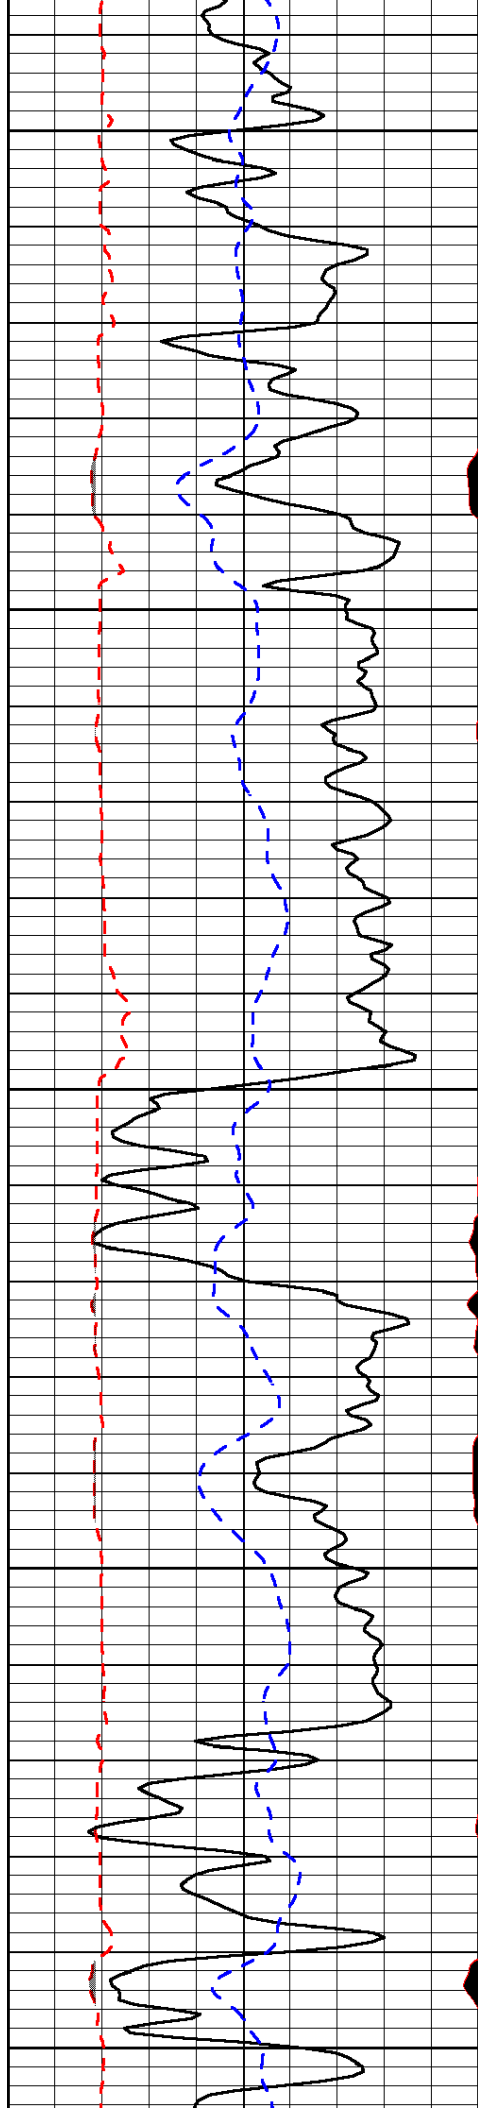


2200

2250

2300

2350

2400

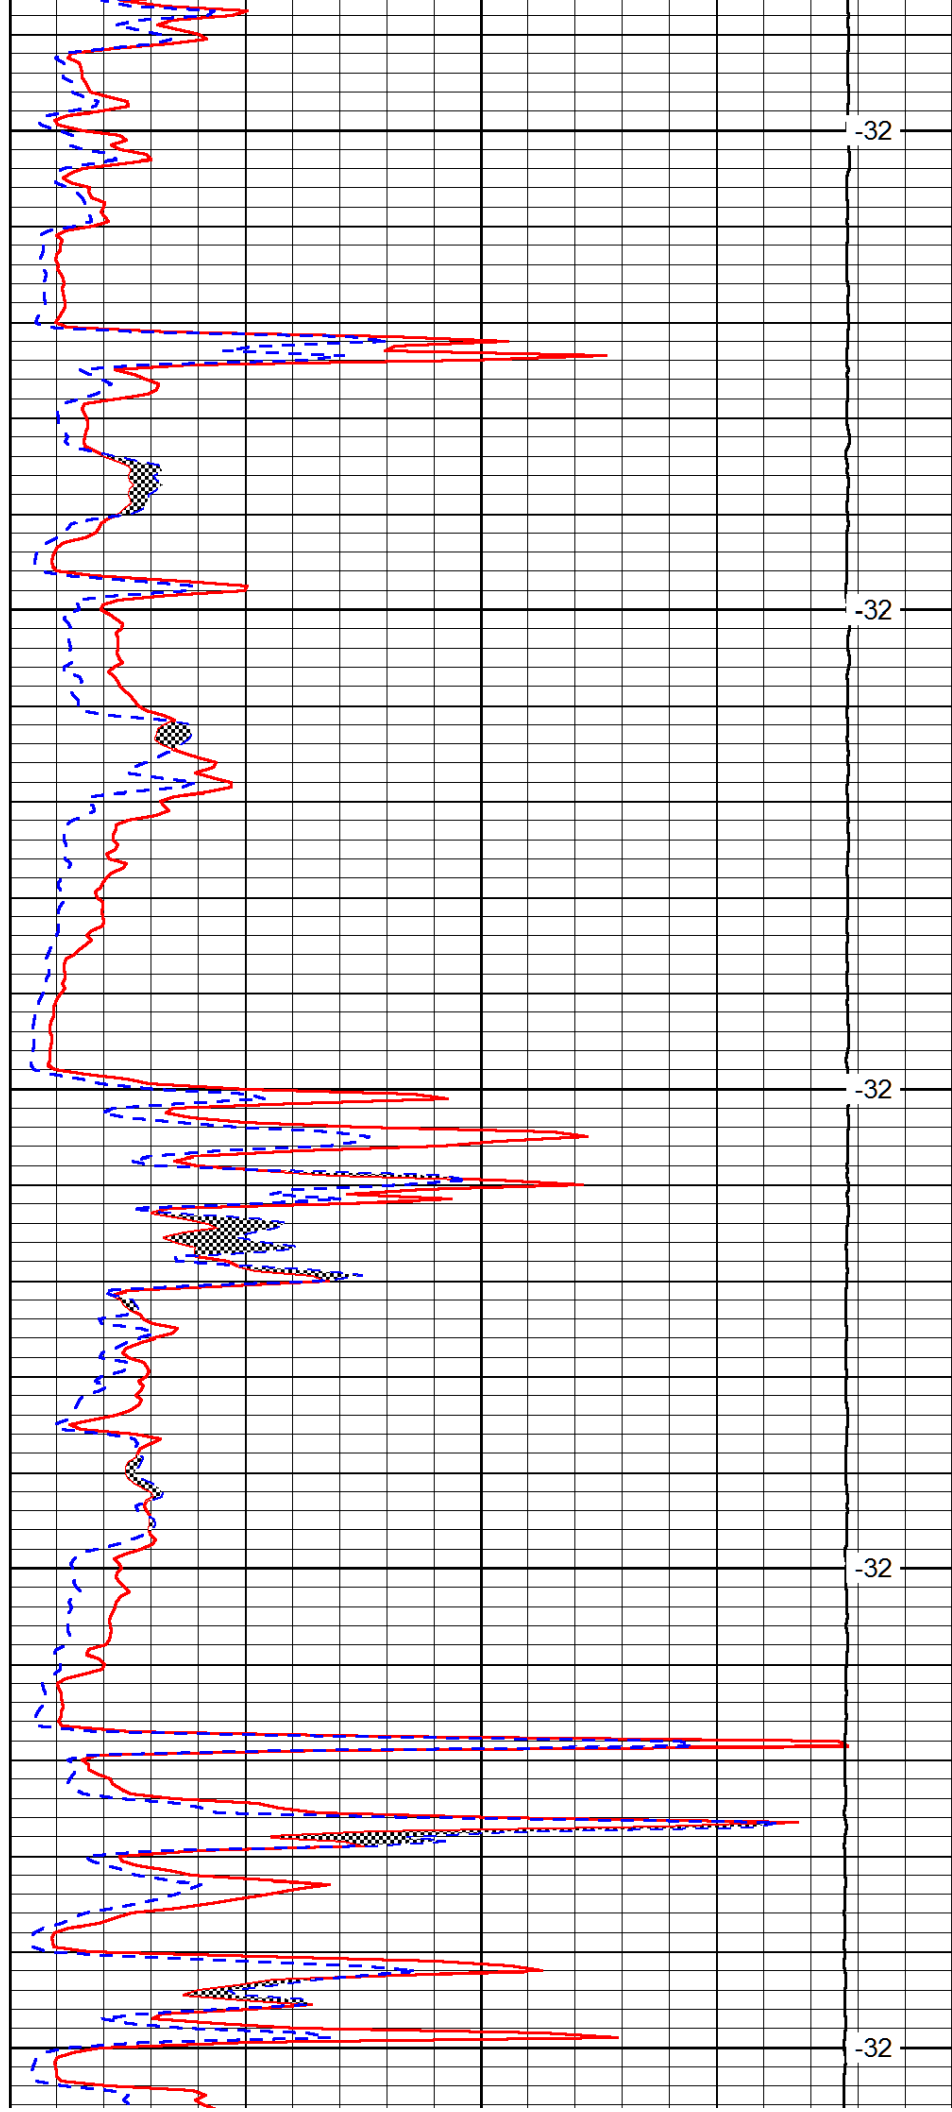



-32


-32

-32

-32

-32

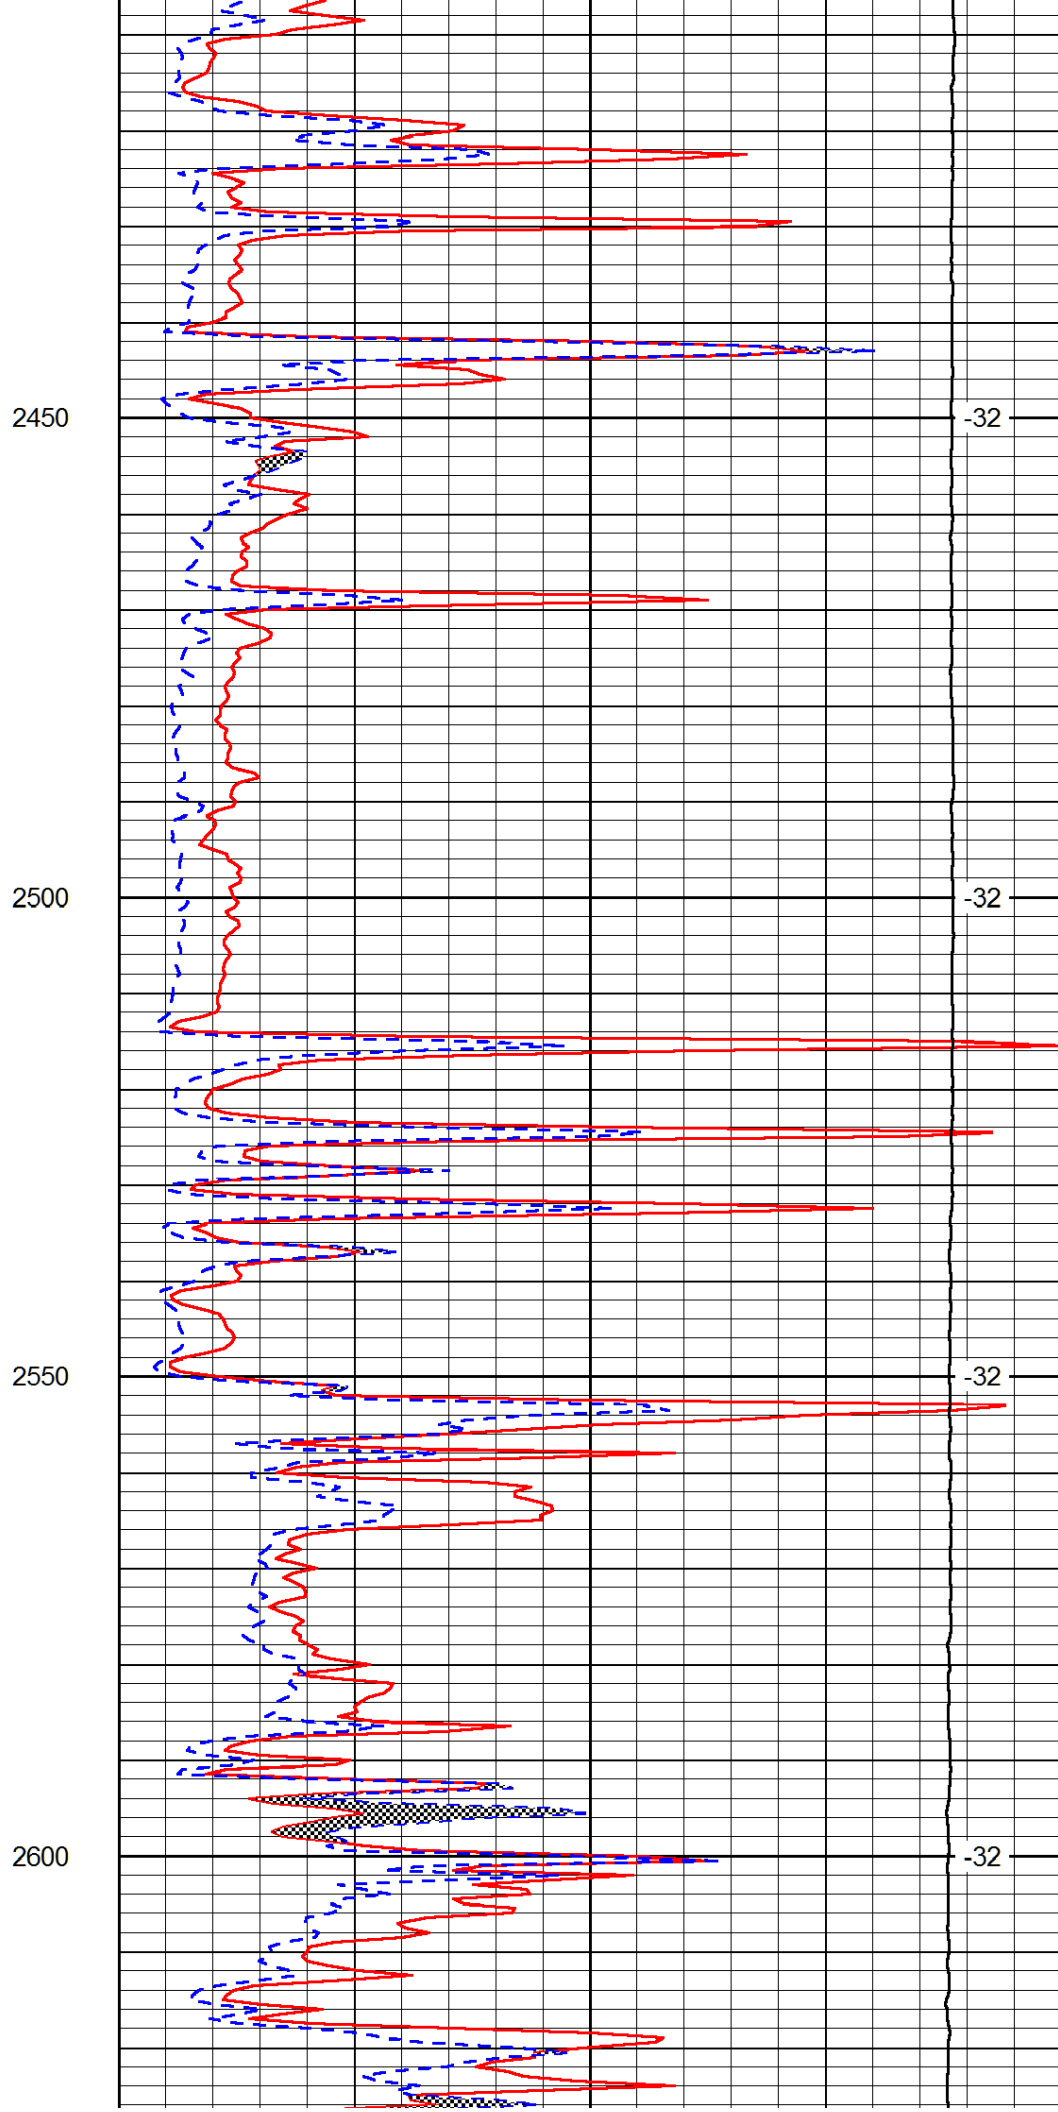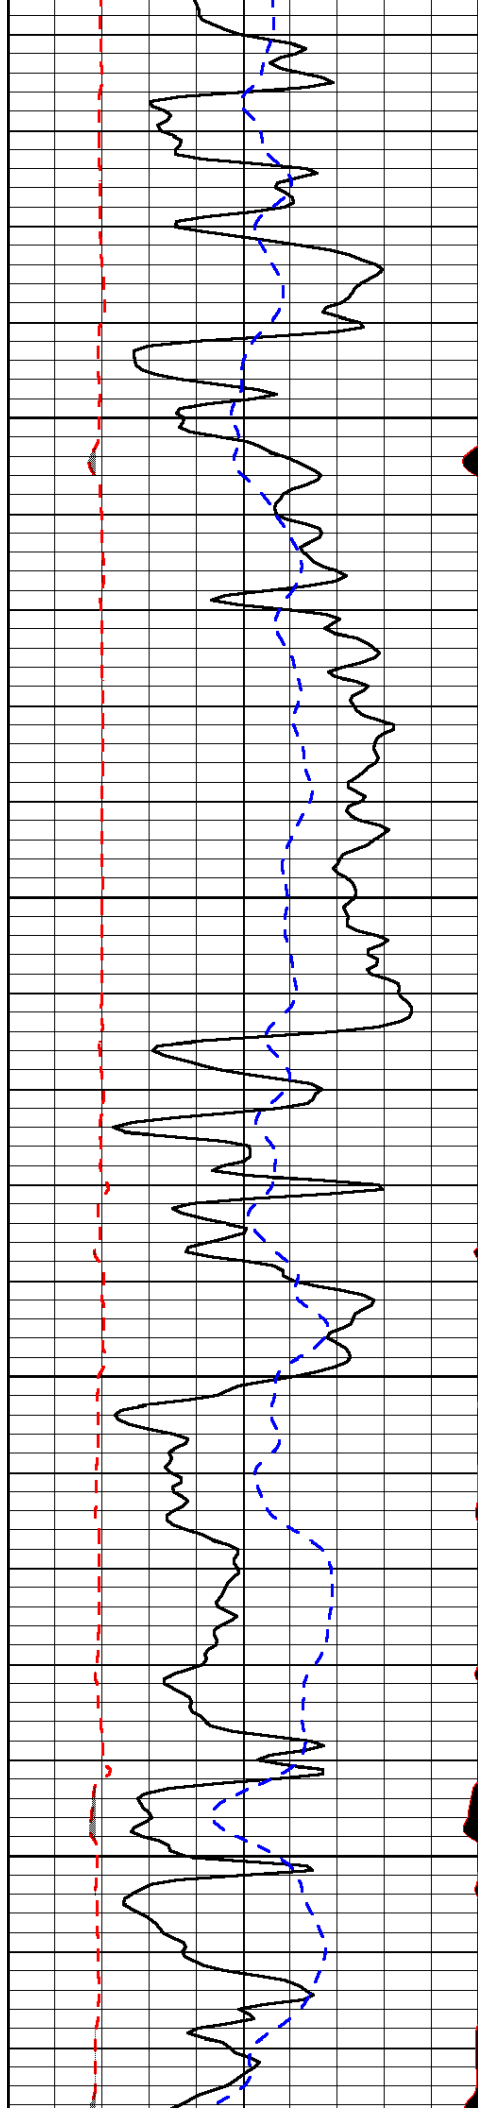

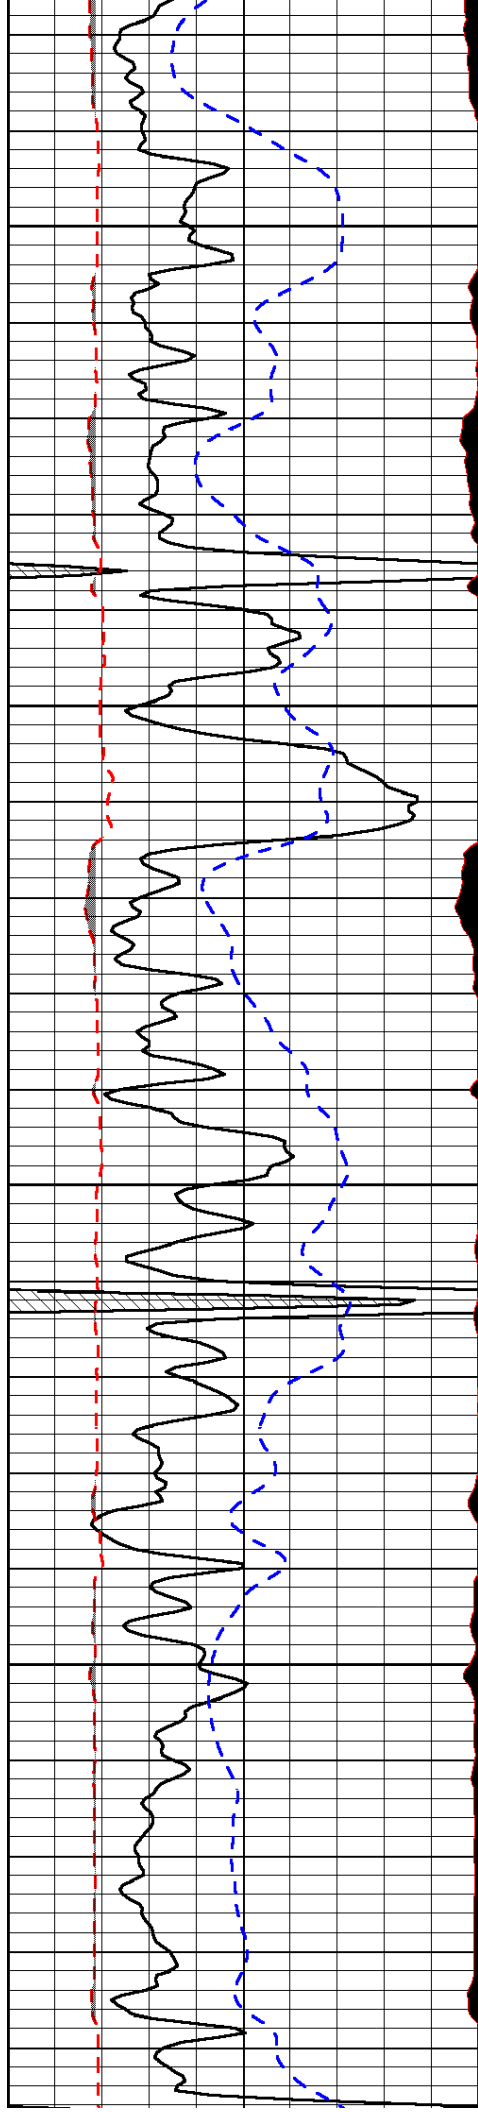




2650


2700

2750

2800

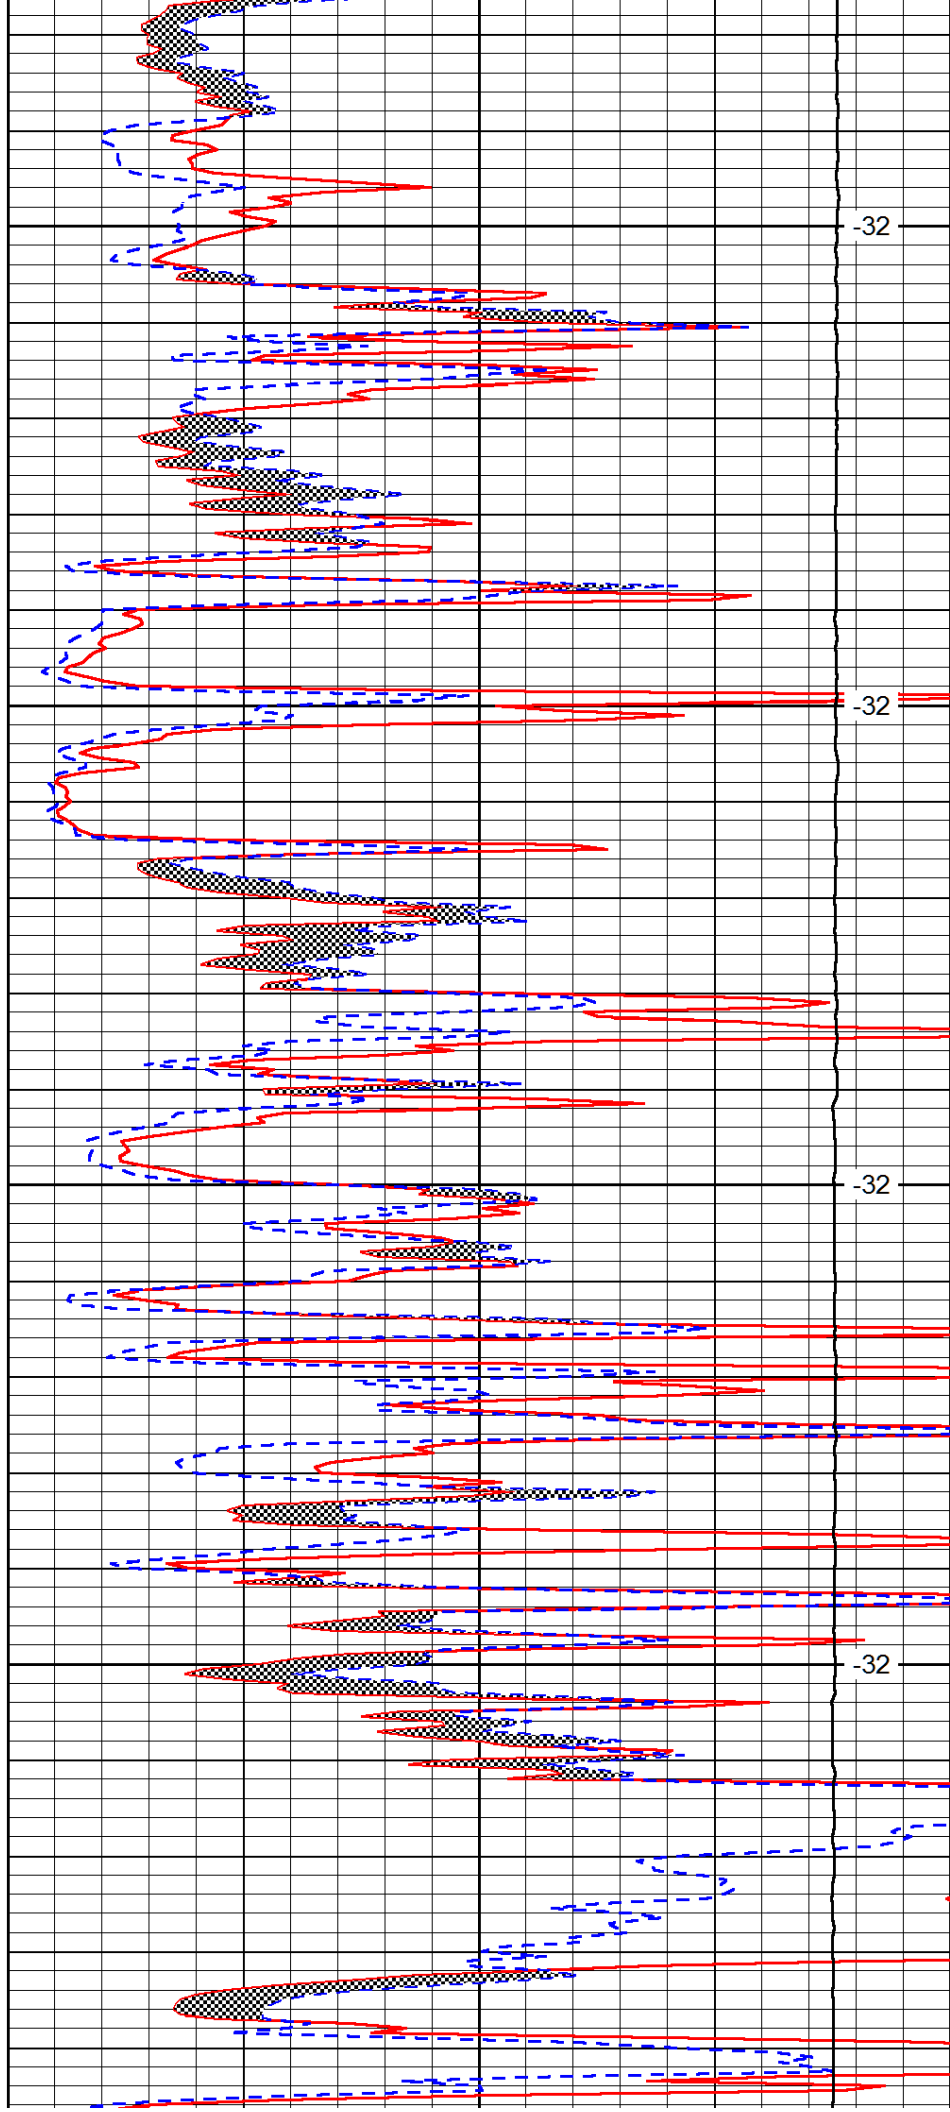

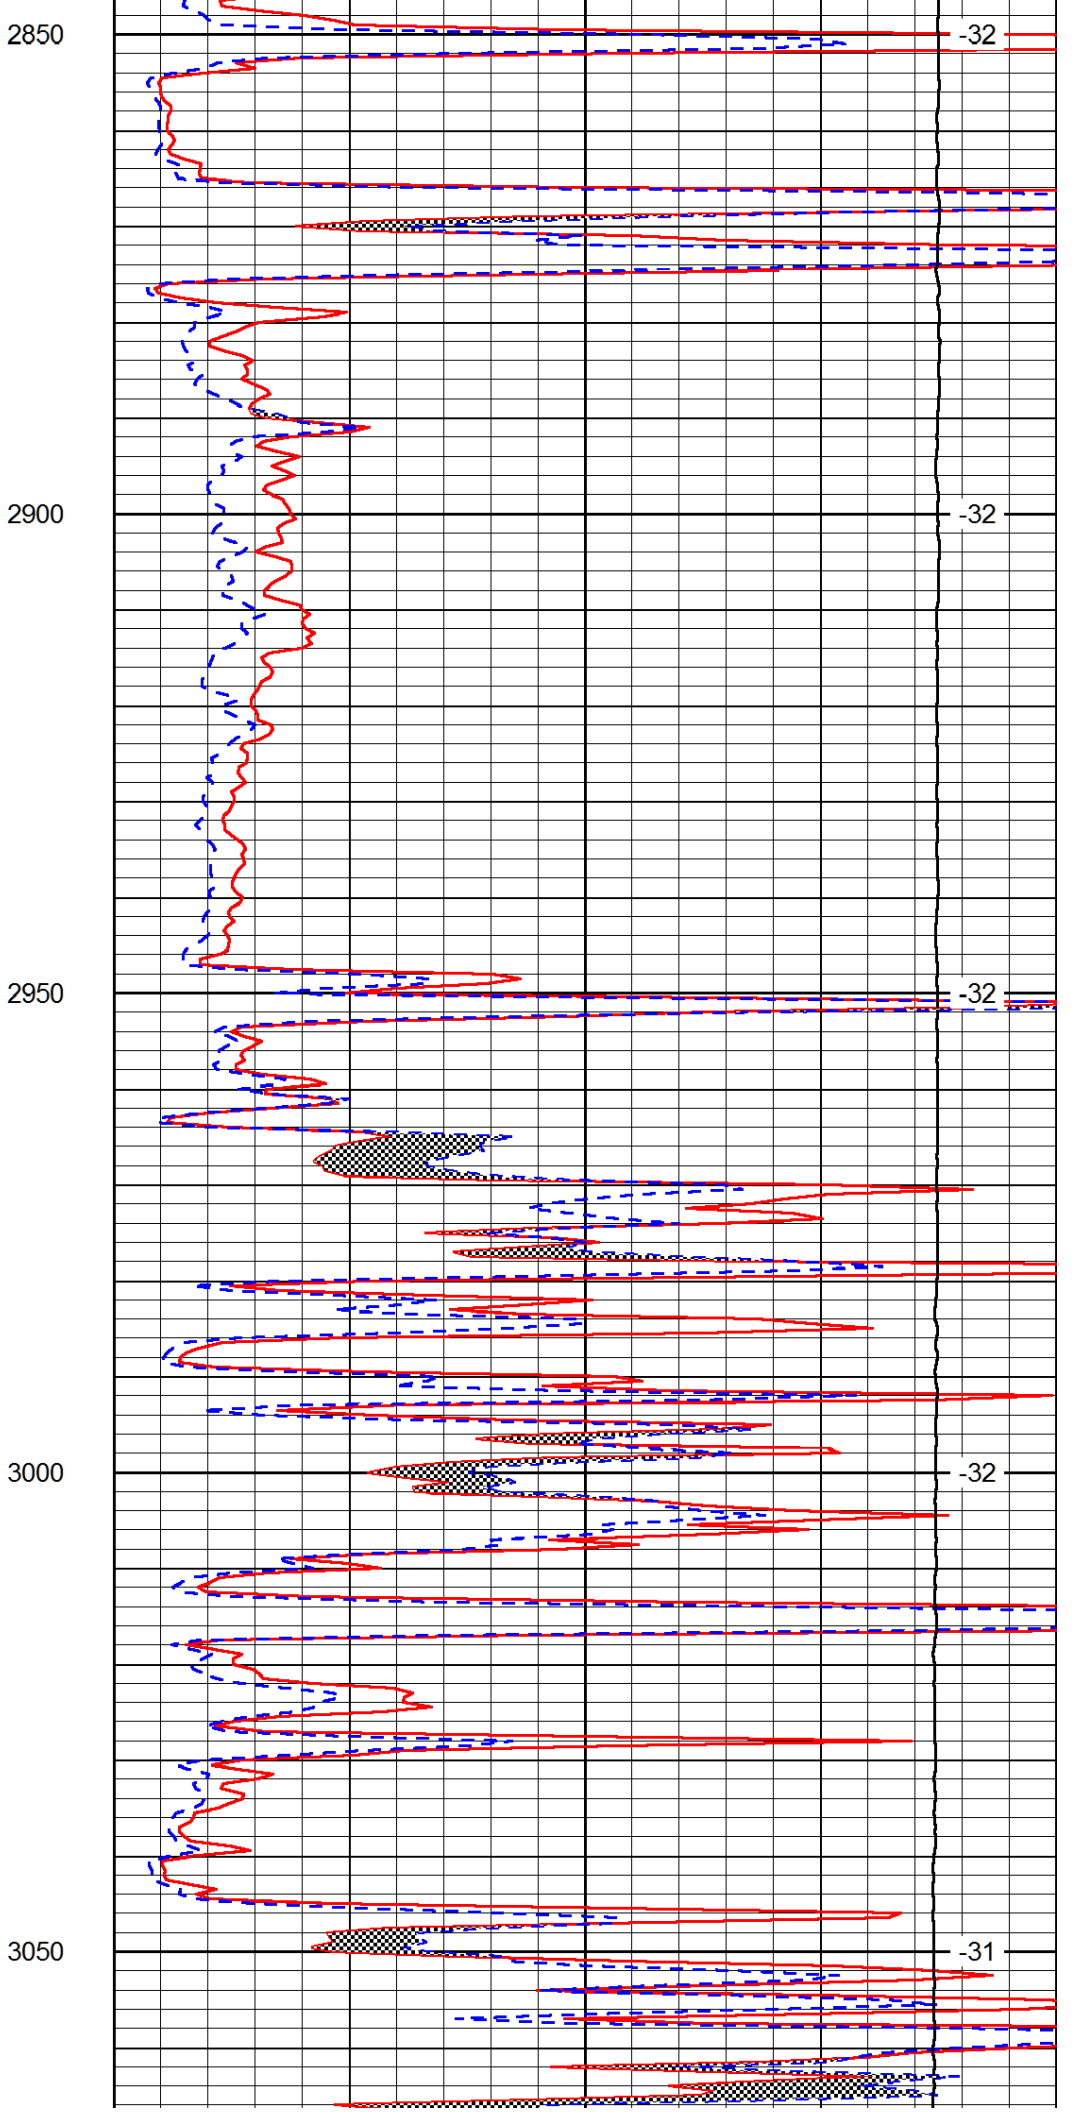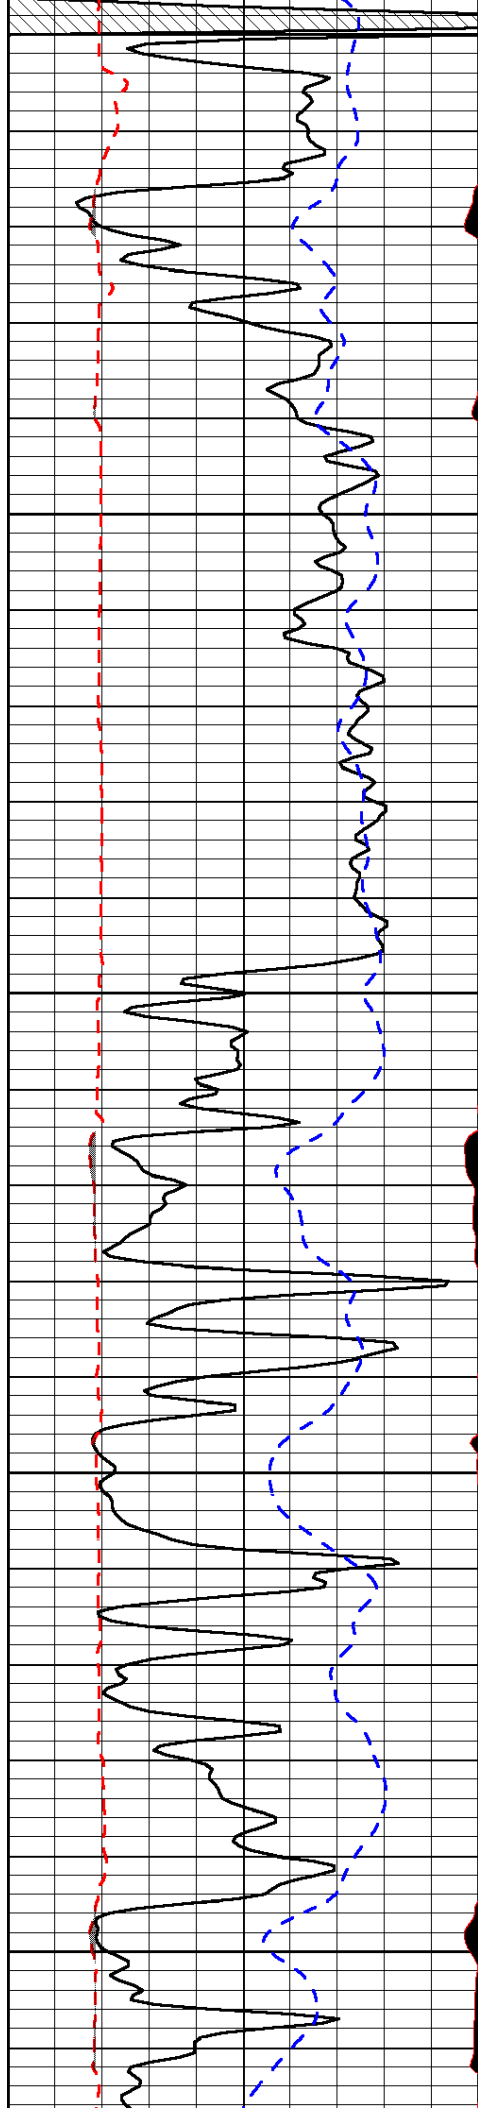

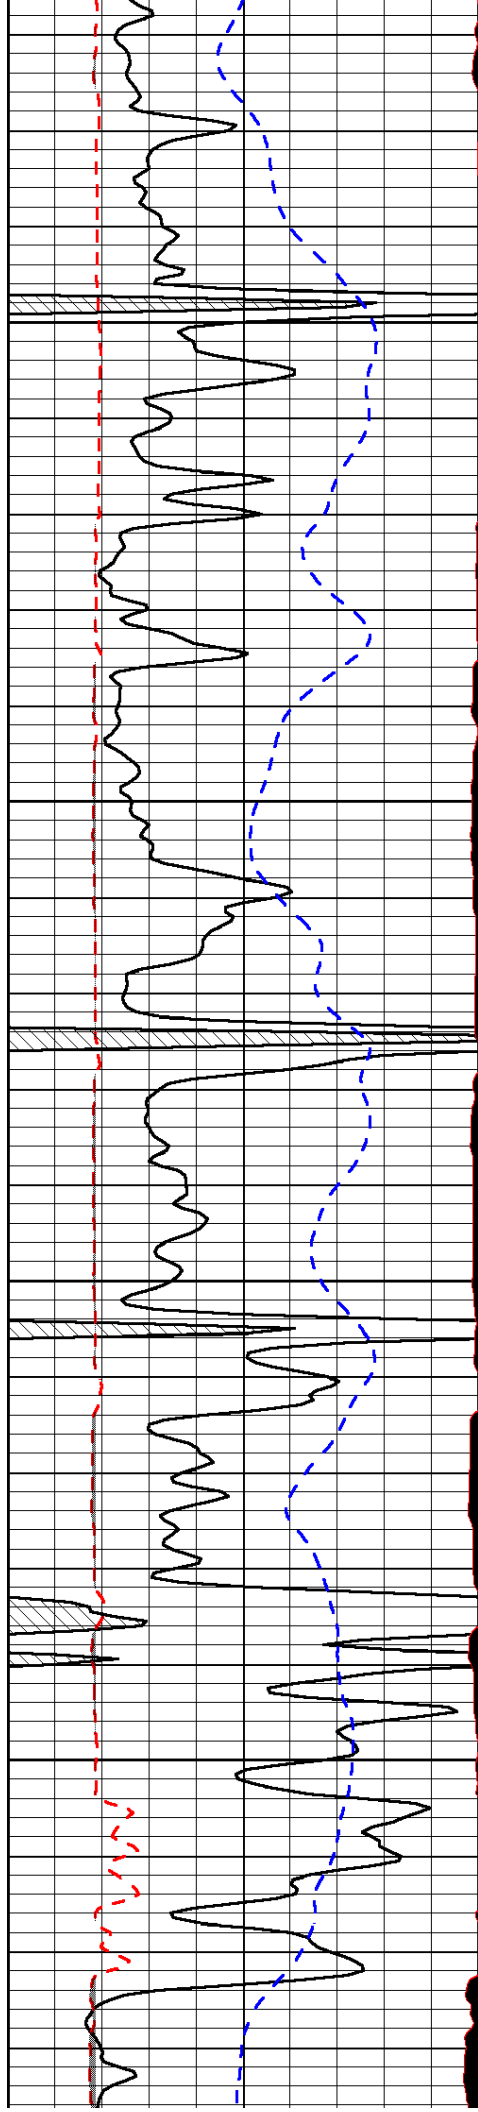



3100

3150

3200

3250

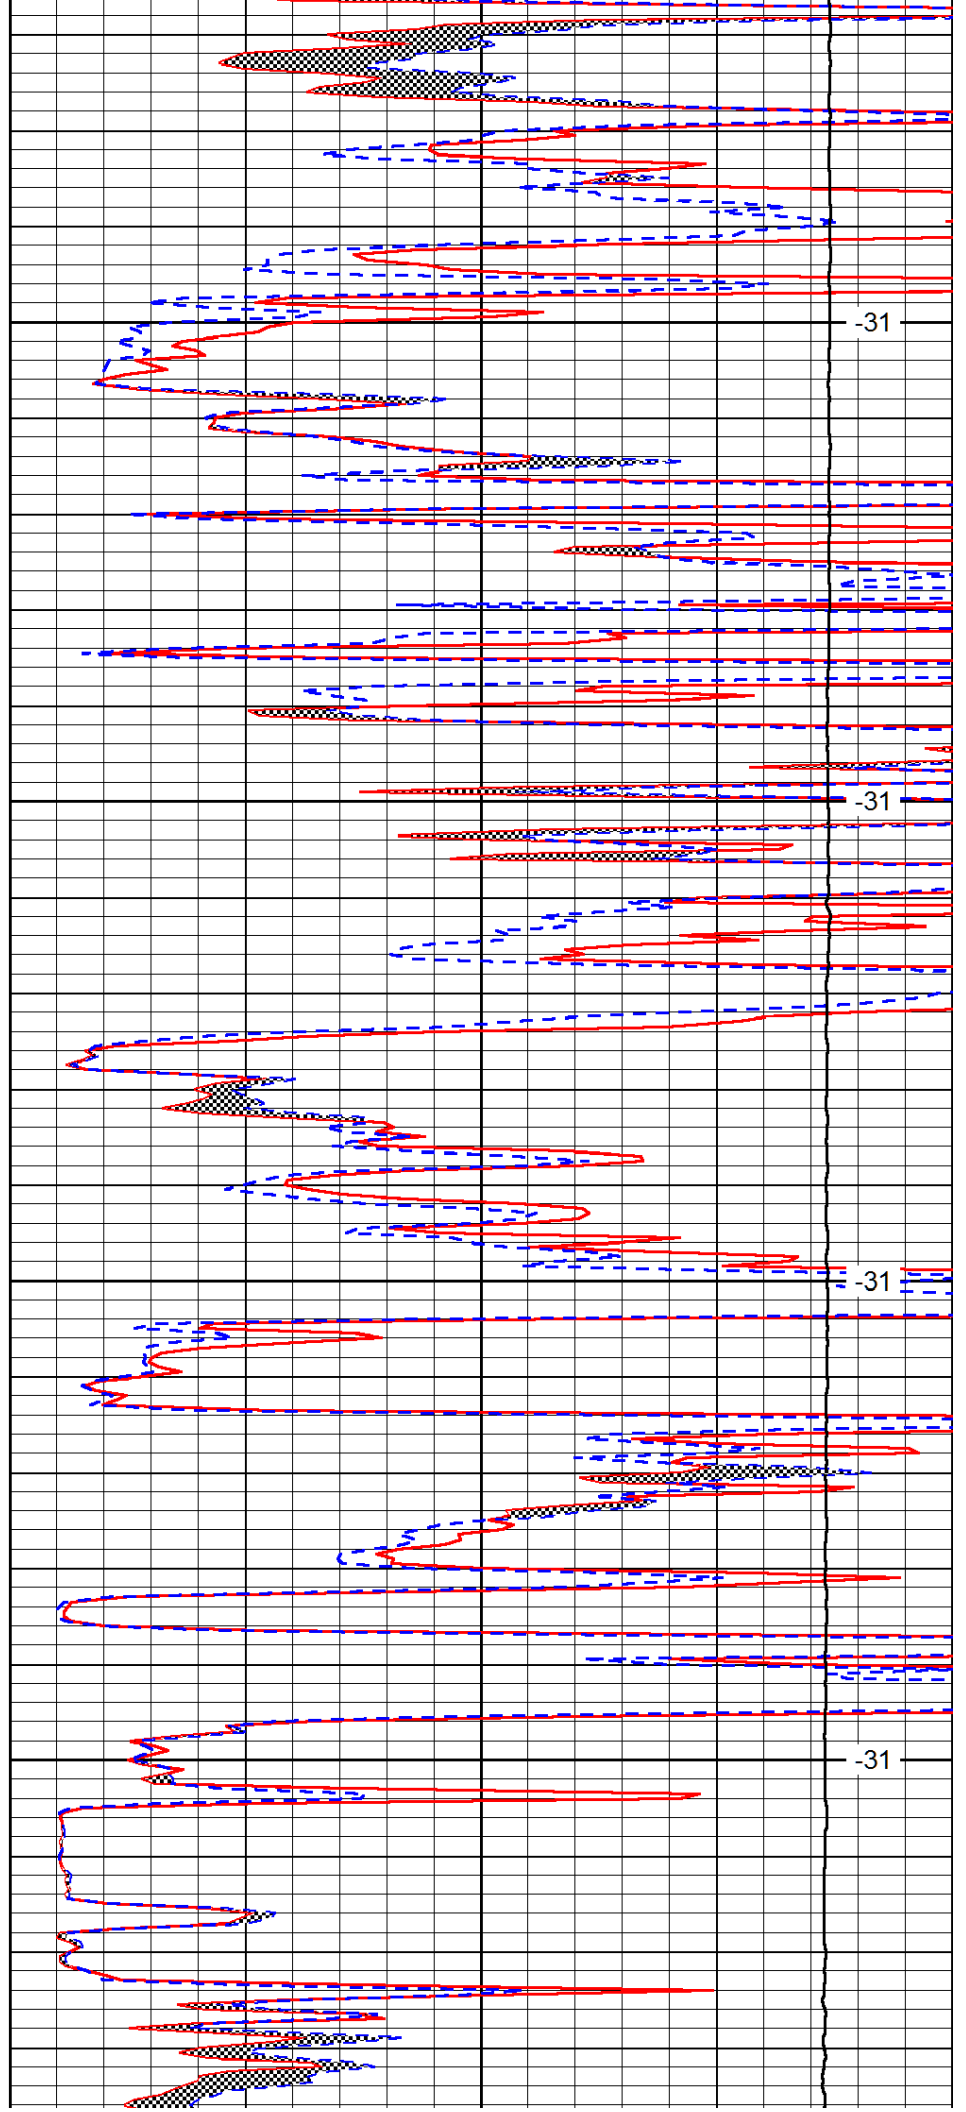


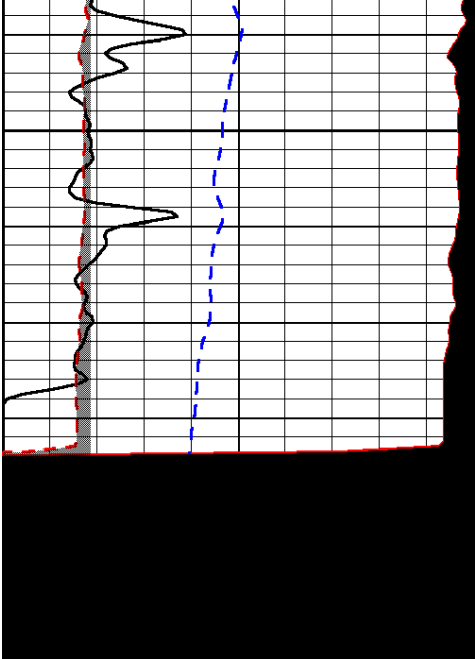

0	Gamma Ray (GAPI)	150
6	MCAL (in)	16
2.875	Mud Cake (in)	7.875
-200	SP (mV)	0

3300

3350

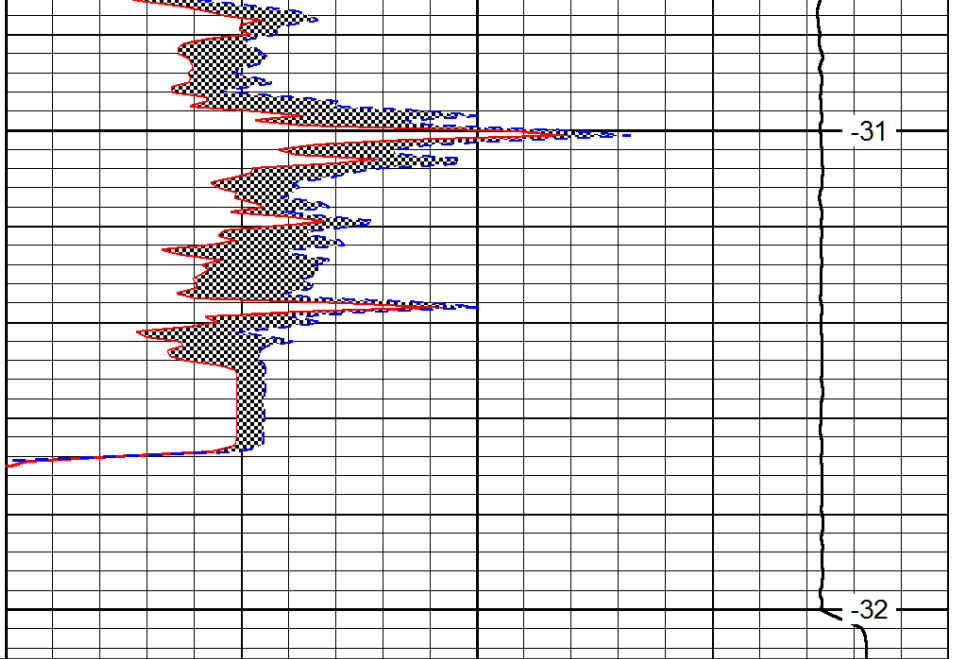

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
10000	Line Weight (lb)	0

LSPD
(ft/min)