

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-23003-00-02  
Spot: NWNWSE Sec/Twnshp/Rge: 7-21S-11W  
2310 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: SCHLOCHTERMEIER P Well #: 1-7  
County: STAFFORD Total Vertical Depth: 3600 feet

Operator License No.: 5056  
Op Name: HOLL, F.G., COMPANY L.L.C.  
Address: 9431 E CENTRAL, SUITE 100  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3404		
PROD	5.5	3600	2430	
SURF	8.625	200		

#117<sup>00</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/24/2005 1:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3190' & 5 SX CMT. PLUG AT 630' WITH 10 SX GEL & 50 SX CMT. PLUG AT 230' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 08/25/2005 3:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3190' & 5 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING. 1ST PLUG AT 630' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 230' WITH 50 SX CMT. NO CIRCULATION. SDON. 8/25/05: TAGGED CMT AT 220'. PUMPED 30 SX GEL WITH 500# HULLS & 50 SX 60/40 POZMIX 6% GEL AT 210'. PULLED CASING TO 40' PUMPED 35 SX 60/40 POZMIX 6% GEL. LOST CIRCULATION. WAITED 4 1/2 HOURS. TAGGED CMT AT 220'. PUMPED 20 SX GEL WITH 500# HULLS & 50 SX COMMON CMT WITH 3% CC. PUMP 10 SX CMT AT 40' WITH COMMON CMT WITH 3% CC. WELL STANDING FULL.


Perfs:

Top	Bot	Thru	Comments
3356	3365		
3327	3332		
3266	3270		
3253	3256		
3243	3246		

Remarks: USED 60/40 POZMIX 6% GEL & COMMON CMT WITH 3% CC BY ACID SERVICE.

Plugged through: CSG

District: 01

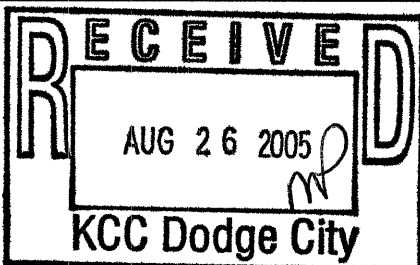

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED

DATE 9-01-05

INV. NO. 2006060424

Form C-273