

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
500 INSURANCE BUILDING
212 NORTH MARKET
WICHITA 2, KANSAS

15-179-05238-00-01

WELL PLUGGING APPLICATION FORM
File One Copy

Lease Owner Morgenstern & Specter Address Box 661, Russell, Kansas
(Applicant)
Lease (Farm Name) Emigh Well No. 1
Well Location SE NE NE Sec. 28 Twp. 6 Rge. 29 (~~E~~) (W)
County Sheridan Field Name (if any) _____
Total Depth 4210 Oil Gas EOR Dry Hole _____
Was well log filed with application? Yes If not, explain: _____

Date and hour plugging is desired to begin Soon as possible

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of person on the lease in charge of well for owner _____
Address _____

Plugging Contractor E & L Casing Pulling Co.

Plugging Contractor's License No. 249

Address Great Bend, Kansas

Invoice covering assessment for plugging this well should be sent to _____

Morgenstern & Specter Address Box 661, Russell, Kansas

and payment will be guaranteed by applicant.

Paul Morgenstern
Applicant or Acting Agent

Date July 1, 1958

RECEIVED
STATE CORPORATION COMMISSION

JUL 1 - 1958
07-01-58
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 28 T 6 R 29W
BOOK PAGE 112 LINE 1

15-179-05238-00-01

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- HENDERSON, et al.
Farm- Emigh No. 1

SEC. 28 T. 6 R. 29W
SE NE NE

Total Depth. 4210
Comm. 4-14-53 Comp. 5-5-53
Shot or Treated.
Contractor. Tom Allan
Issued. 7-4-53

County Sheridan
KANSAS



CASING:

8 5/8 set at 299' w/ 150 sx cement
5 1/2 set at 4210' w/ 100 sx cement

Elevation. 2827 RB

Production. Swab 3 BOPH

Figures indicate Bottom of Formations.

All depths from RB

surface soil	45
sand & clay	205
shale	1420
sand	1505
shale & sand	1870
sand	1920
shale	1940
sand	2010
shale	2100
shale & sand	2170
shale (inc. red)	2240
sand	2280
shale & sand	2340
red bed	2550
anhydrite	2590
red bed	2690
shale (inc. red) w/ anhydrite stringers	2900
red silty shale	2970
anhydrite & shale	3000
lime	3025
red shale	3075
lime	3090
shale & sand	3245
lime & shale	3600
lime	3700
lime & shale	4210
Total Depth	

TOPS:

Anhydrite	2550
Heebner	3910
Toronto	3938
Lansing	3950
Base KC	4164
Marmaton	4184

DST #1: 3976-4005, open 1 hr. rec.
200' watery mud SI 15 min. BHP 1300#

DST #2: 3996-4030, open 1 hr. rec.
47' clean oil & 127' HOCM, SI 15 min.
BHP 1400#

DST #3: 4075-4126, open 1 hr. rec.
10' mud. SI 15 min. BHP 0#

Perf. 28 shots 4014 1/2-28, Bail 10 COPH,
Acid 2000 Swab 3 BOPH

Per. 17 shots 4106-12, acid 1500,
no increase

PI 110010
FILE SEC 28 T. 6 R. 29W
BOOK PAGE 112 LINE 1

RECEIVED
STATE CORPORATE COMMISSION
JUL 1 - 1958
CONSERVATION DIVISION
Wichita, Kansas



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS

JEWEL M. OGDEN, Director

July 2, 1938

GEORGE DOCKING Governor
MARION BEATTY Chairman
HARRY G. WILES Commissioner
RICHARD C. BYRD Commissioner
RAYMOND B. HARVEY Secretary
CLYDE E. MILLIGAN Counsel


Well No. 1
Lease 212-1-204
Description 212-1-204
County Sheridan
File No. 112-1

Organizers & Operator
Box 481
Tuswell, Kansas

Text/20001

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

Very truly yours,

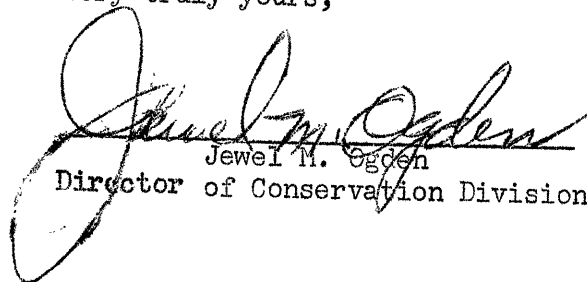
Jewel M. Ogden
Director of Conservation Division

Mr. _____
is hereby assigned to supervise the plugging of the above named well.

In the event you need any further information regarding this well feel free to write or call me at any time.

J. Lewis Brock
Western Kansas Field Supervisor
P. O. Box 569
Great Bend, Kansas
Phone: GL-33022