




SPECTRAL DENSITY DUAL SPACED NEUTRON LOG


Service Ticket No.: 9003572003				API Serial No.: 15187212220000				PGM Version: WL INSITE R3.6.0 (Build 3)			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE						RESISTIVITY SCALE CHANGES					
Date	Sample No.					Type Log	Depth	Scale Up Hole		Scale Down Hole	
Depth-Driller											
Type Fluid in Hole											
Density	Viscosity										
Ph	Fluid Loss										
Source of Sample						RESISTIVITY EQUIPMENT DATA					
Rm @ Meas. Temp		@		@		Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other	
Rmf @ Meas. Temp.		@		@							
Rmc @ Meas. Temp.		@		@							
Source Rmf	Rmc										
Rm @ BHT		@		@							
Rmf @ BHT		@		@							
Rmc @ BHT		@		@							
EQUIPMENT DATA											
GAMMA		ACOUSTIC		DENSITY		NEUTRON					
Run No.	ONE	Run No.		Run No.	ONE	Run No.	ONE				
Serial No.	113	Serial No.		Serial No.	873	Serial No.	115				
Model No.	GTET	Model No.		Model No.	SDLT	Model No.	DSNT				
Diameter	3.625"	No. of Cent.		Diameter	4.5"	Diameter	3.625"				
Detector Model No.	A-102	Spacing		Log Type	GAM-GAM	Log Type	NEU-NEU				
Type	SCINT.			Source Type	Cs 137	Source Type	AM 241 BE				
Length	8"	LSA [Y/N]		Serial No.	20791B	Serial No.	DSN 382				
Distance to Source	10'	FWDA [Y/N]		Strength	1.5 Ci	Strength	15 Ci				



5 INCH MAIN LOG

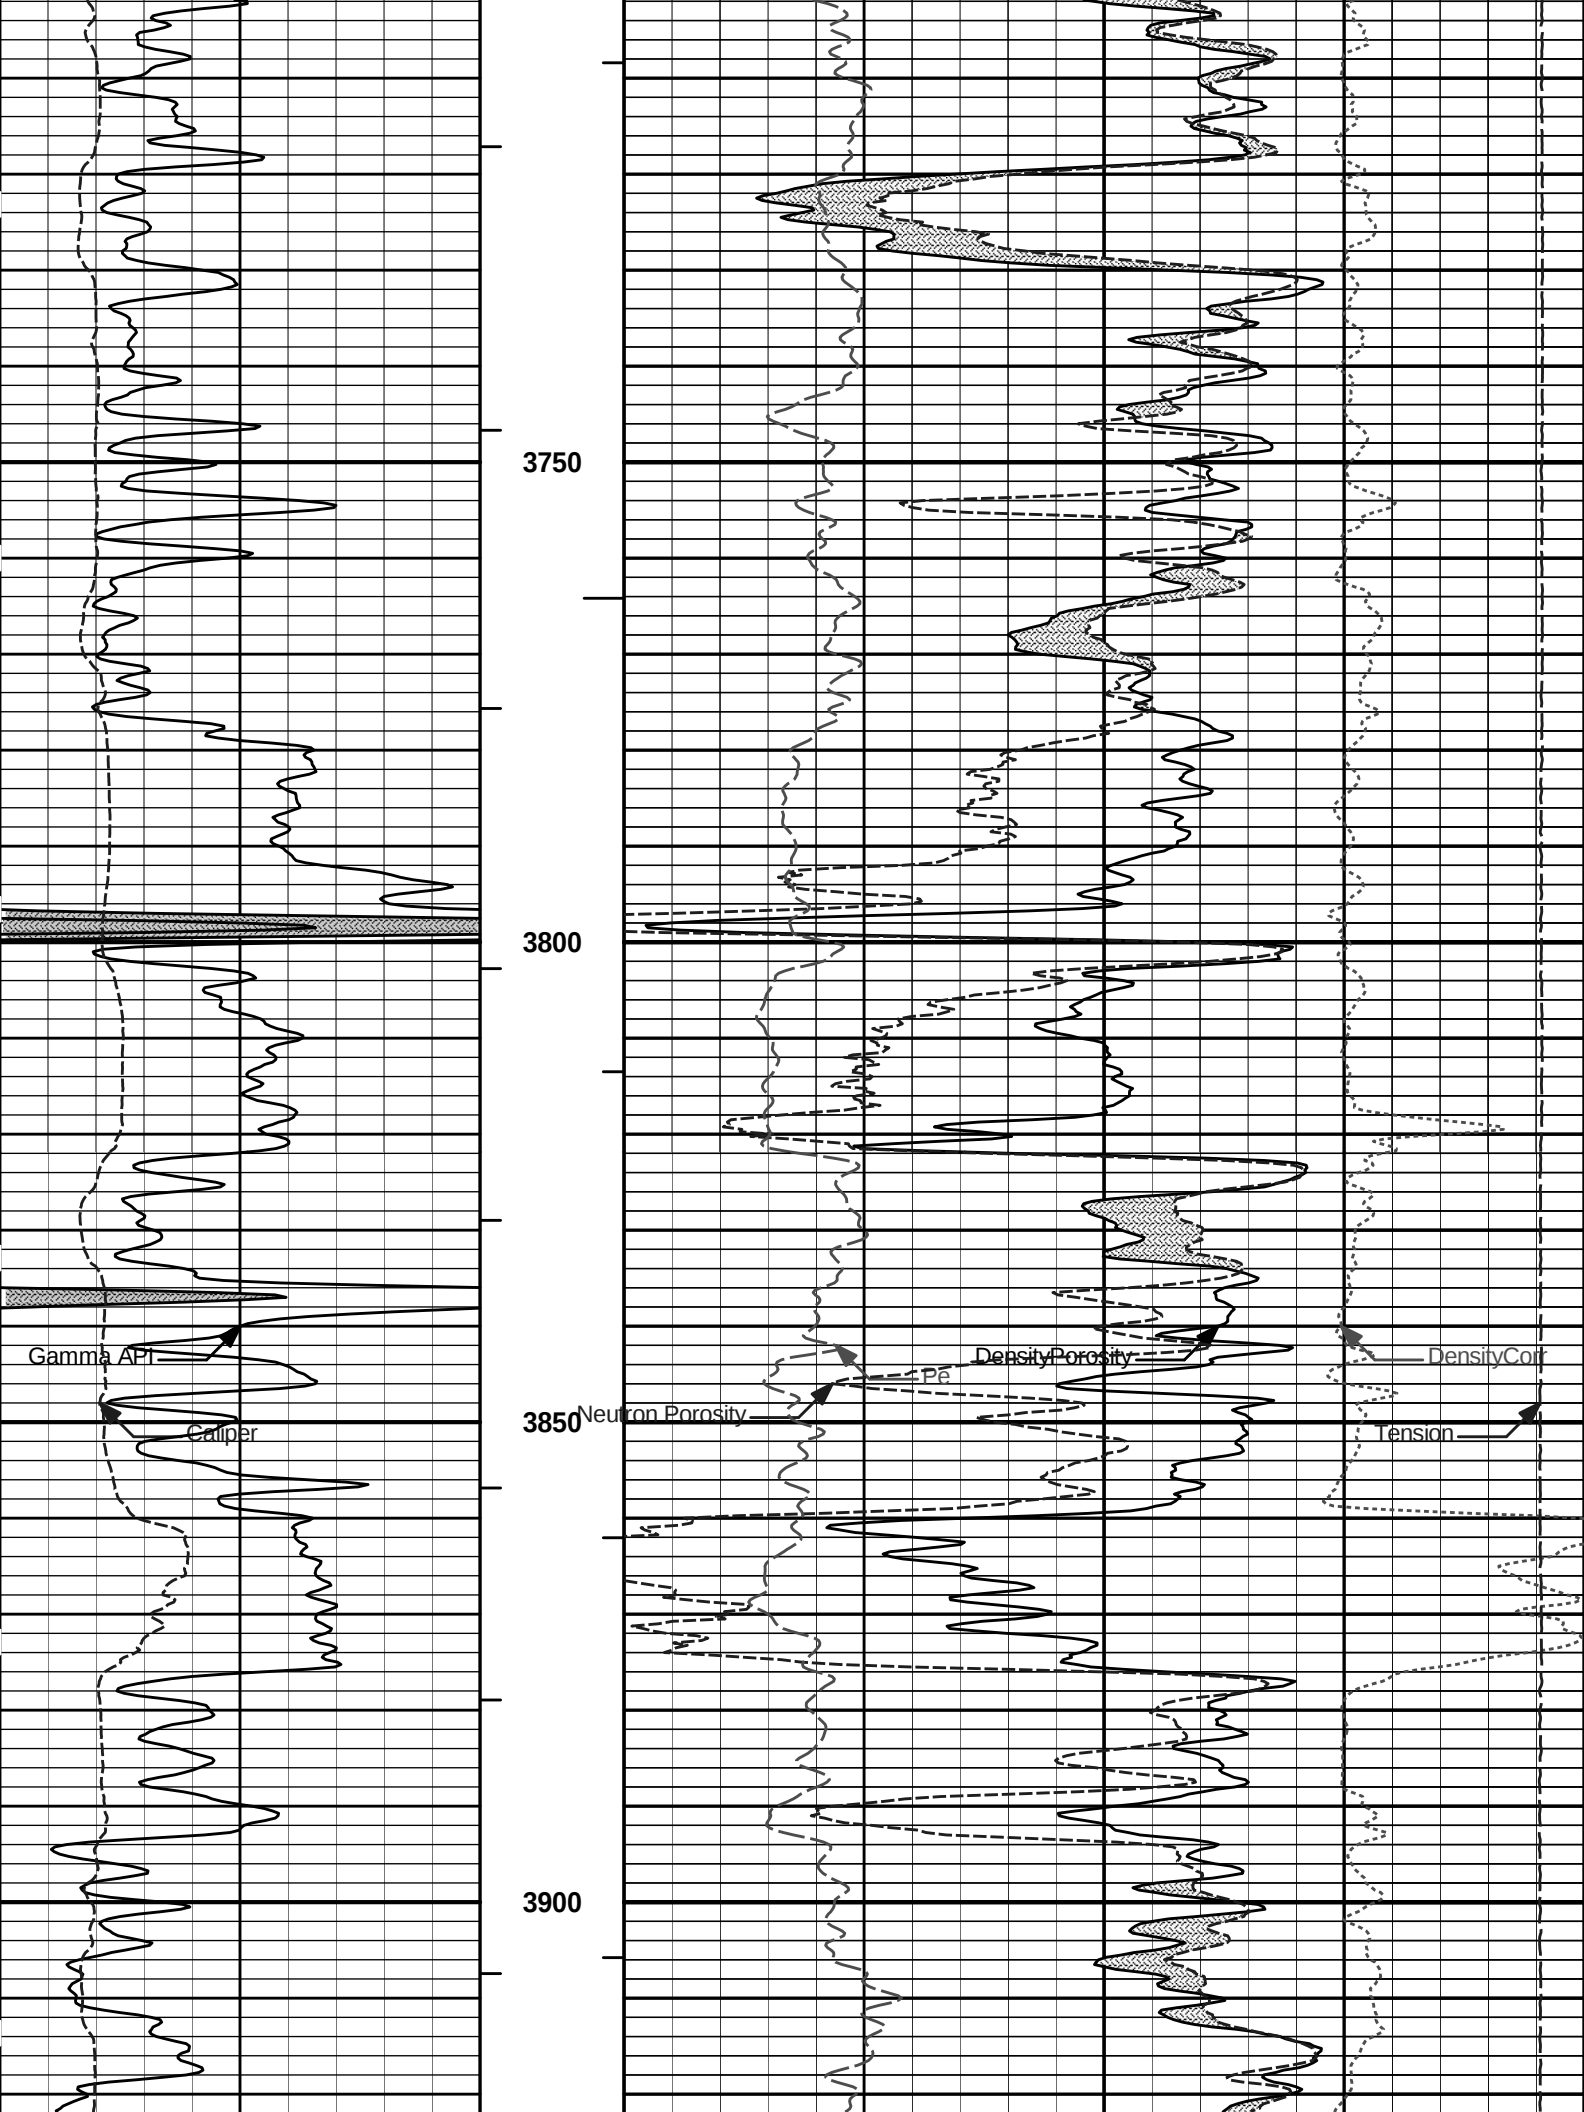



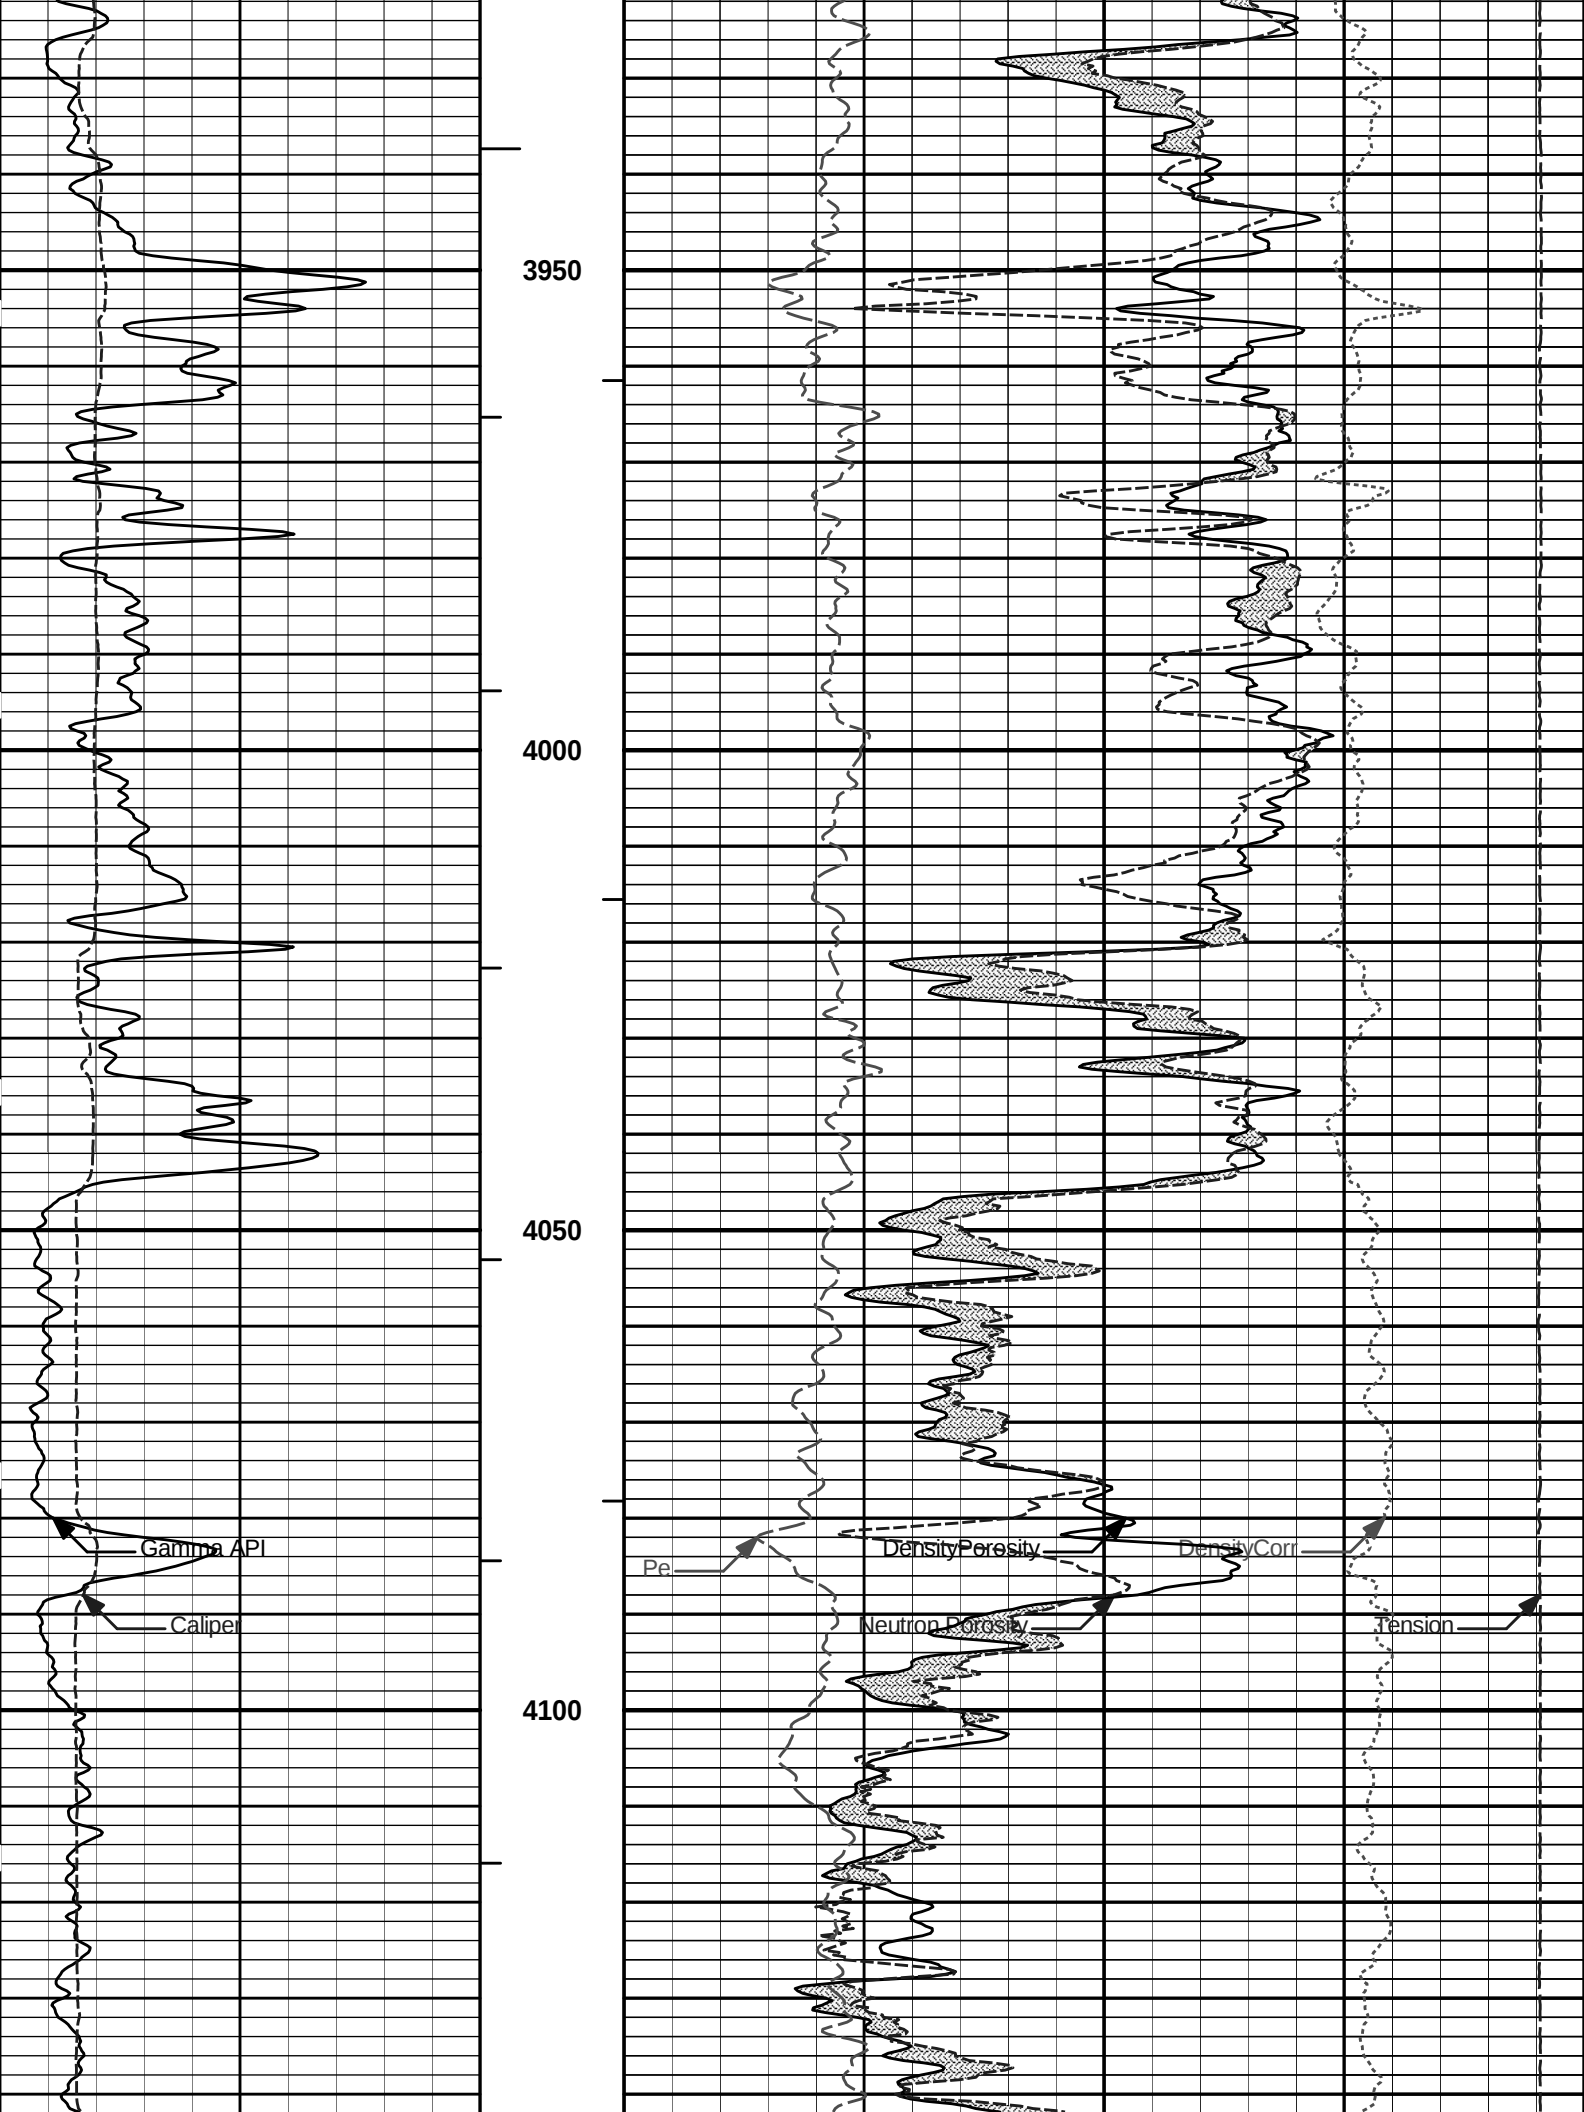


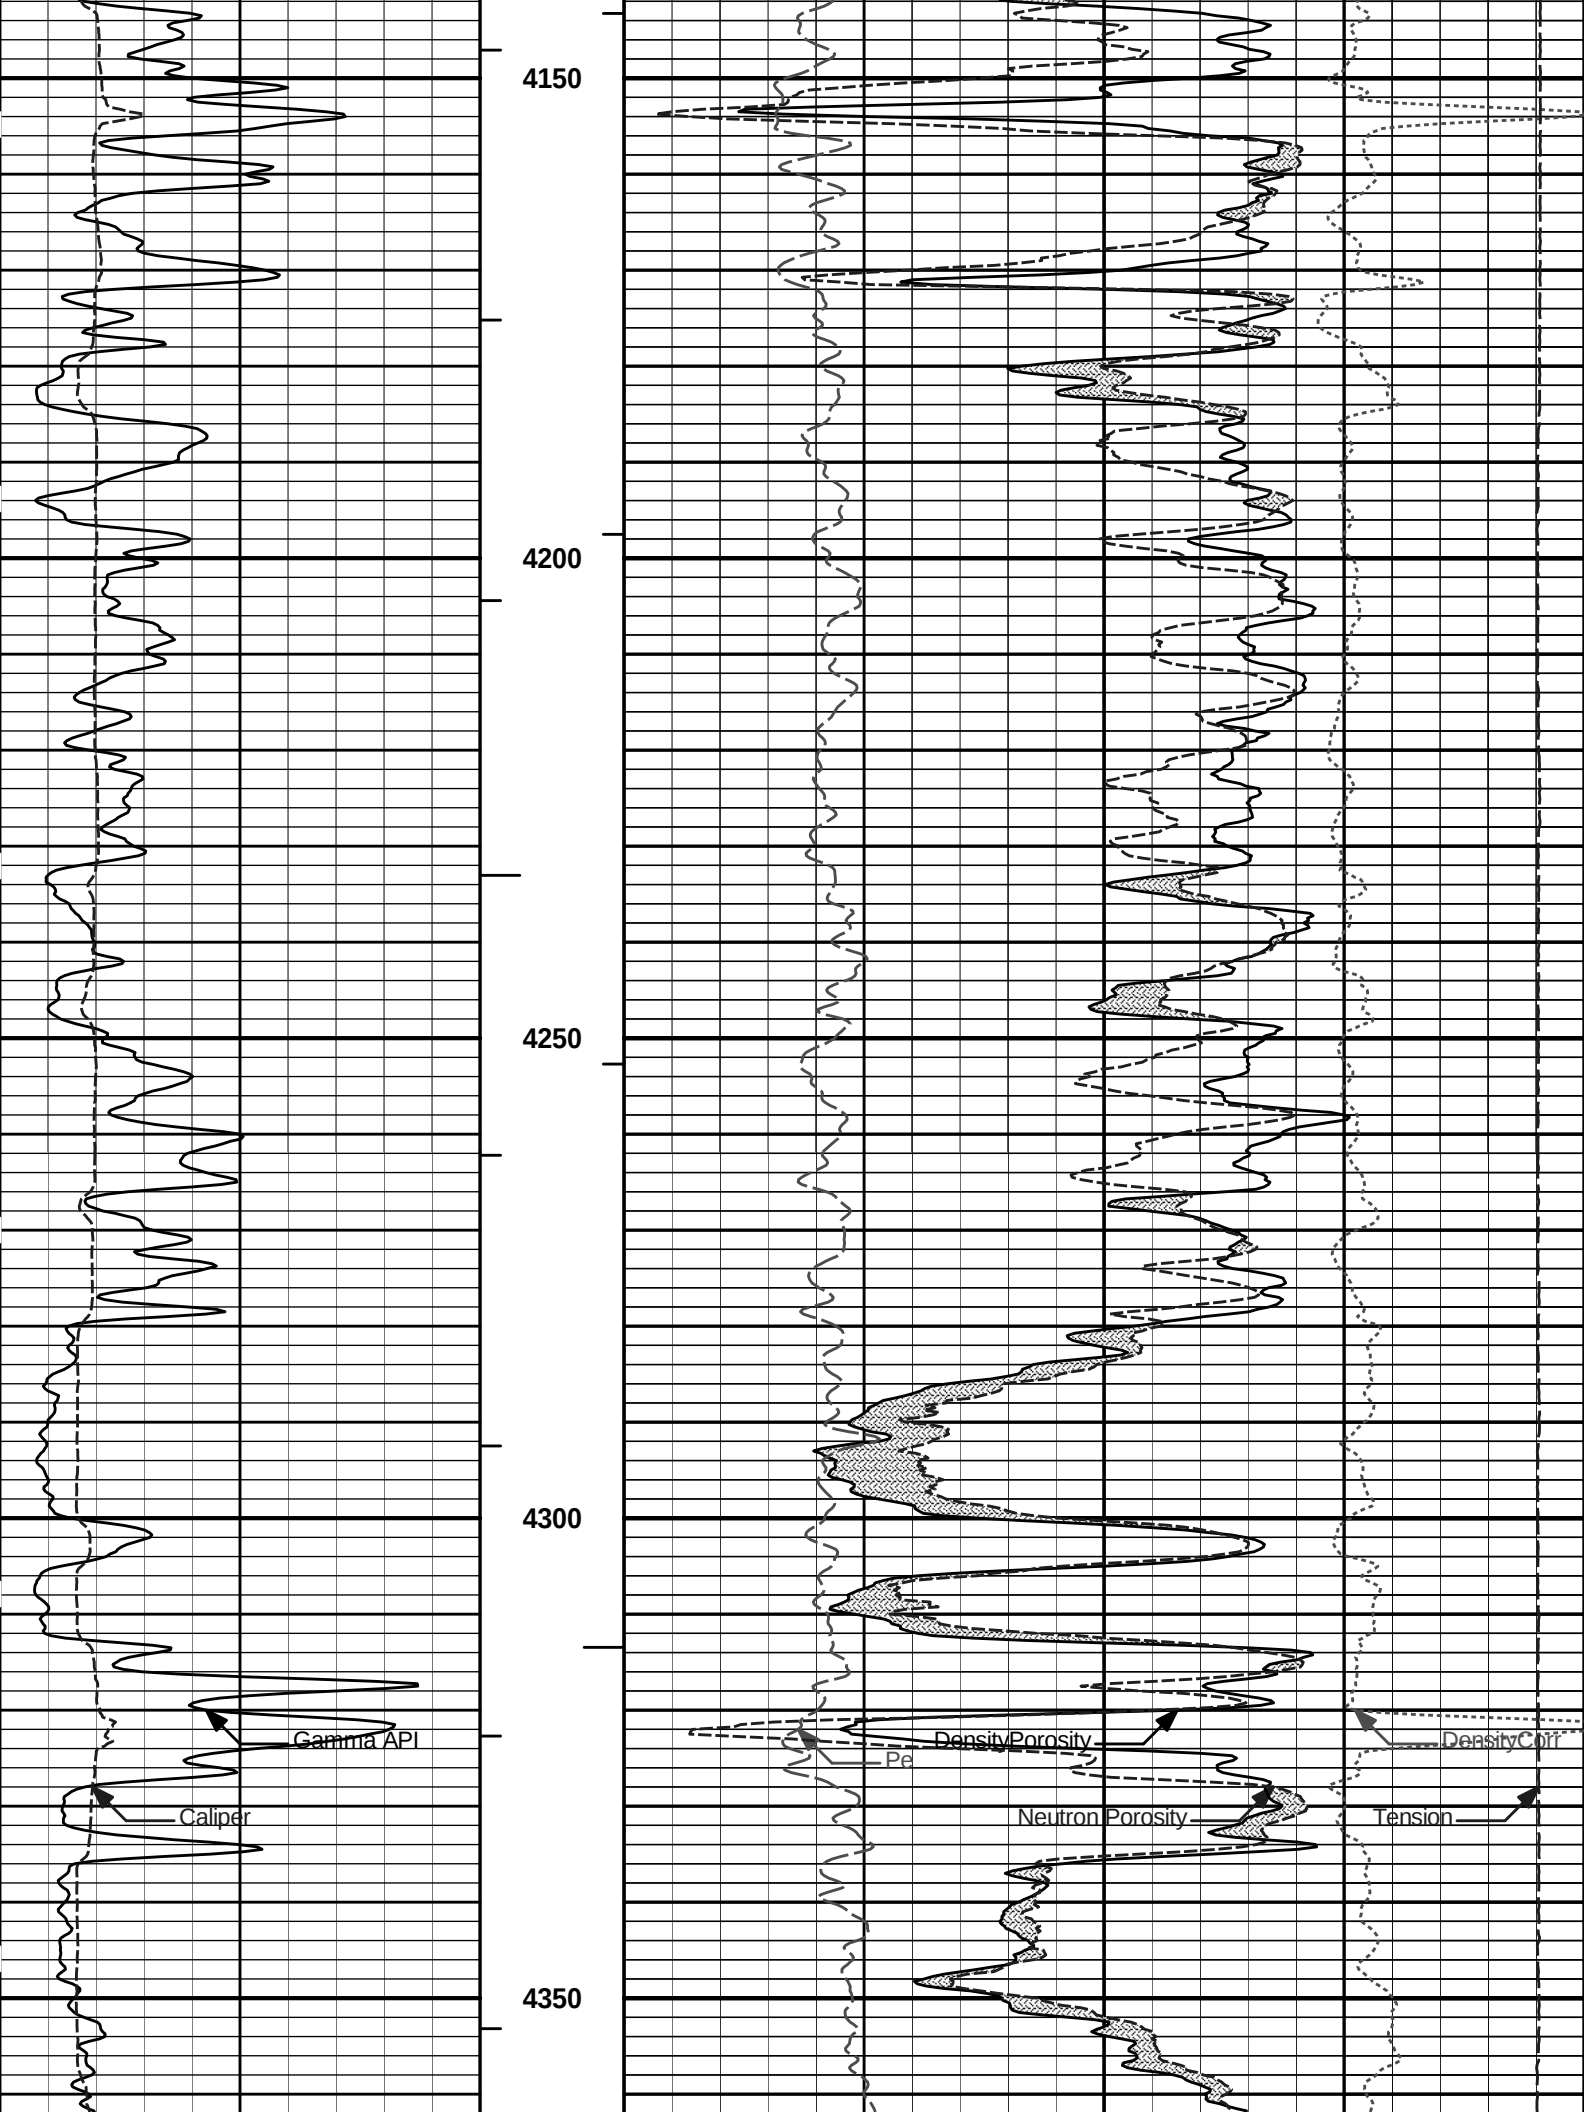



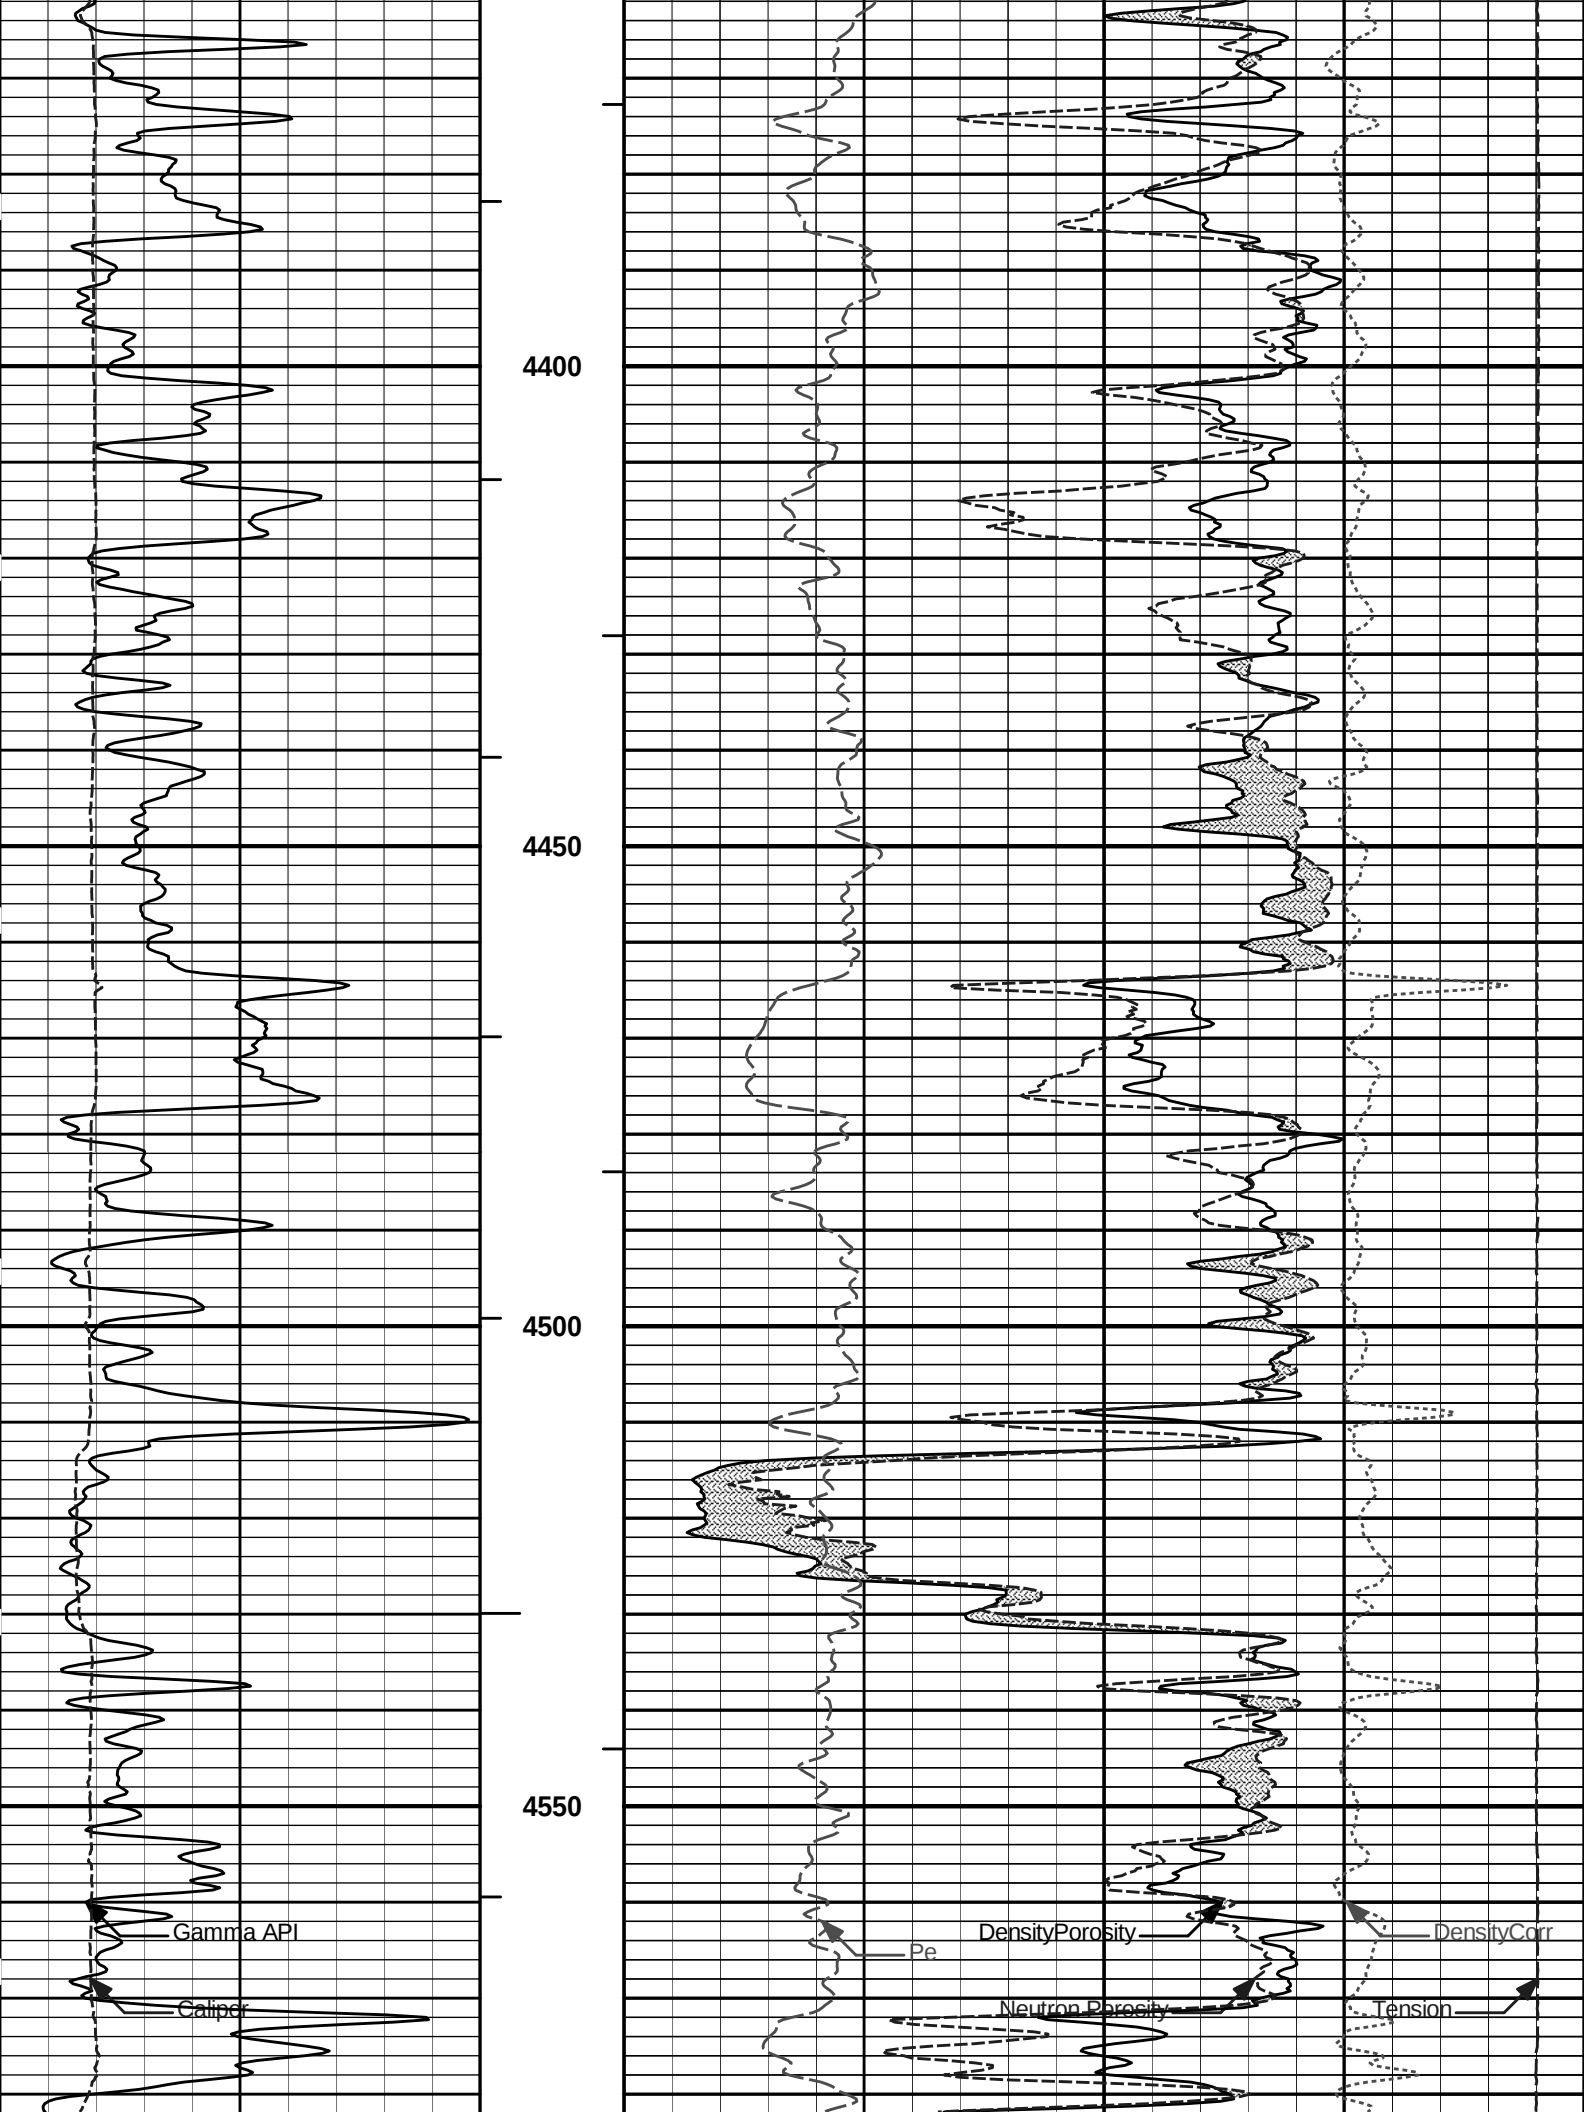


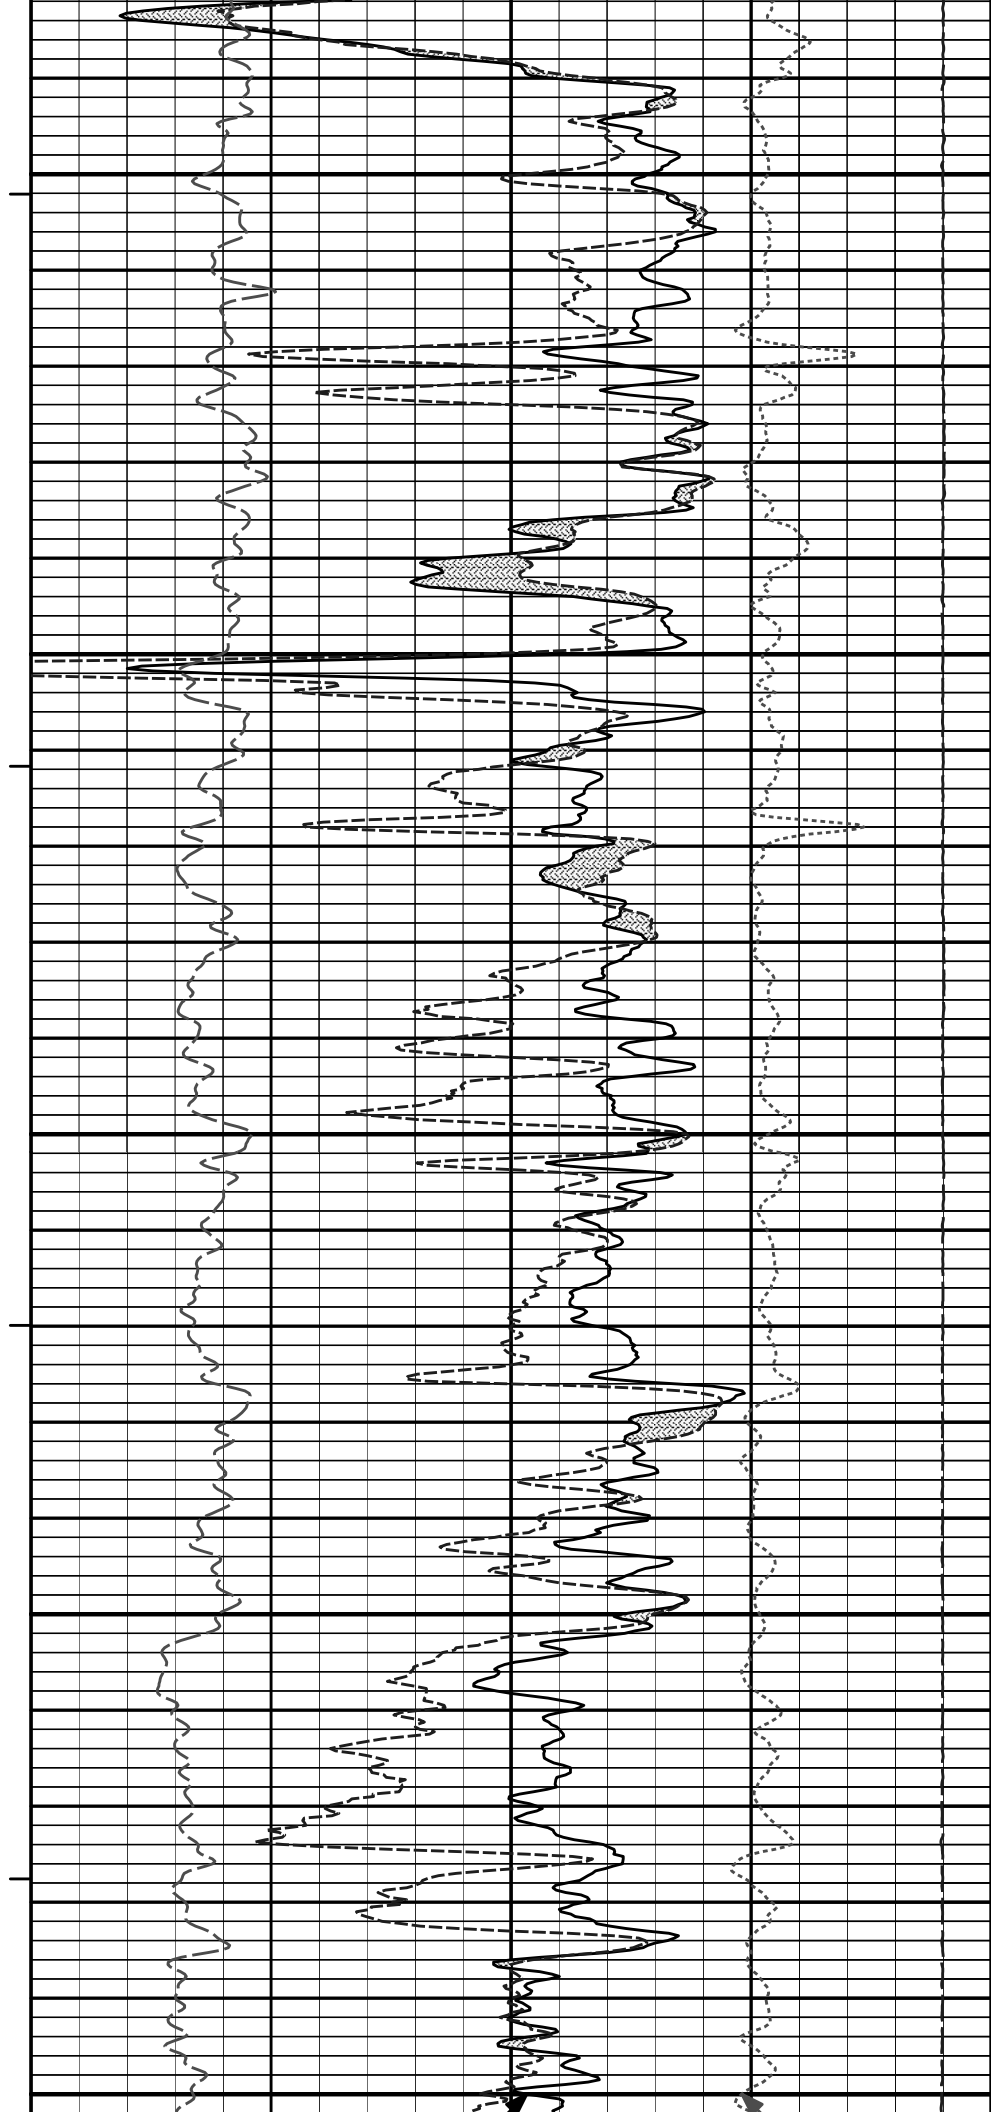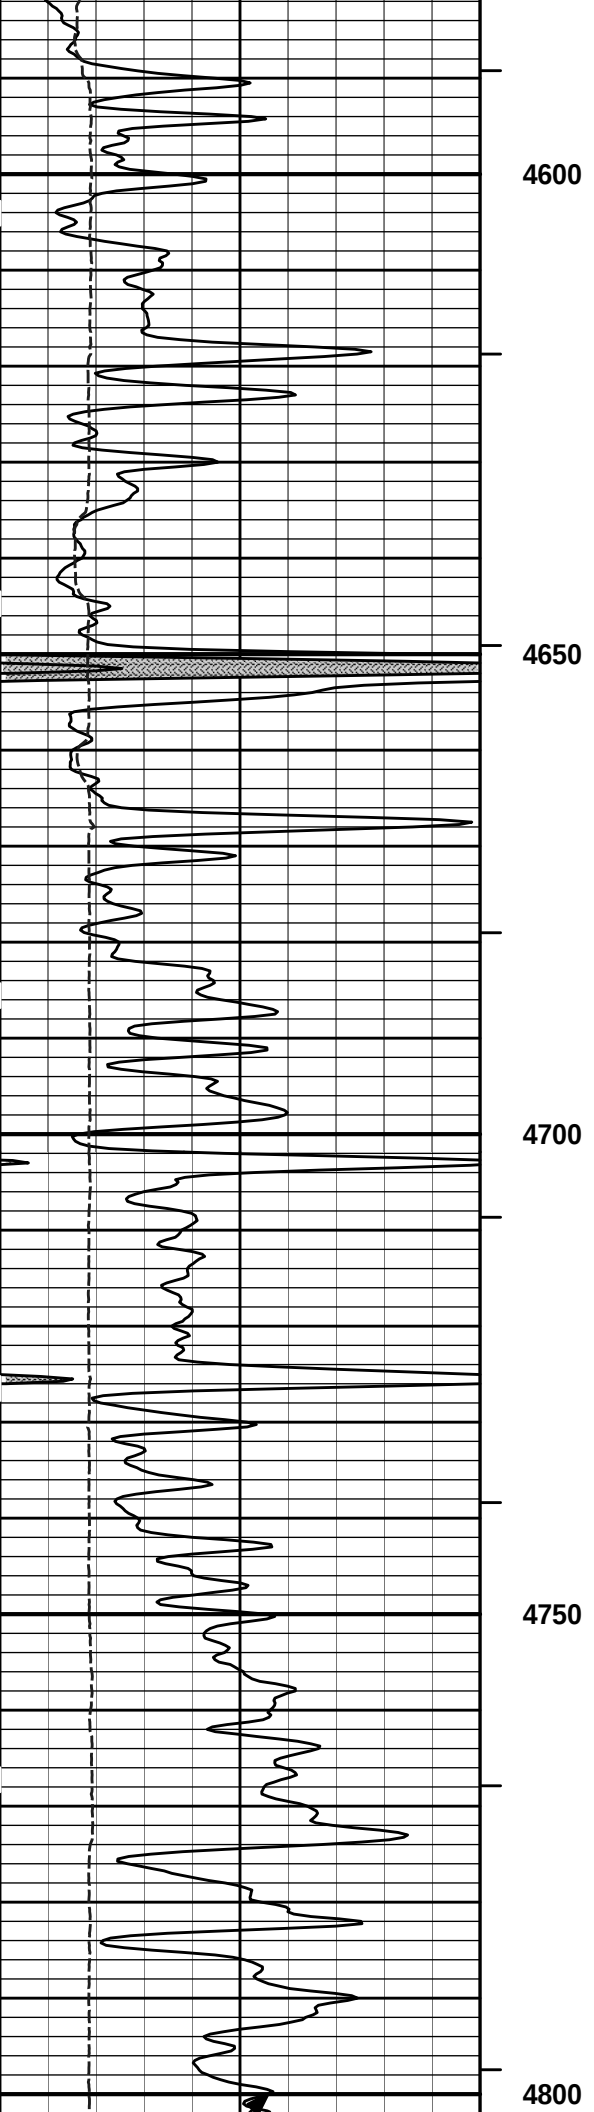


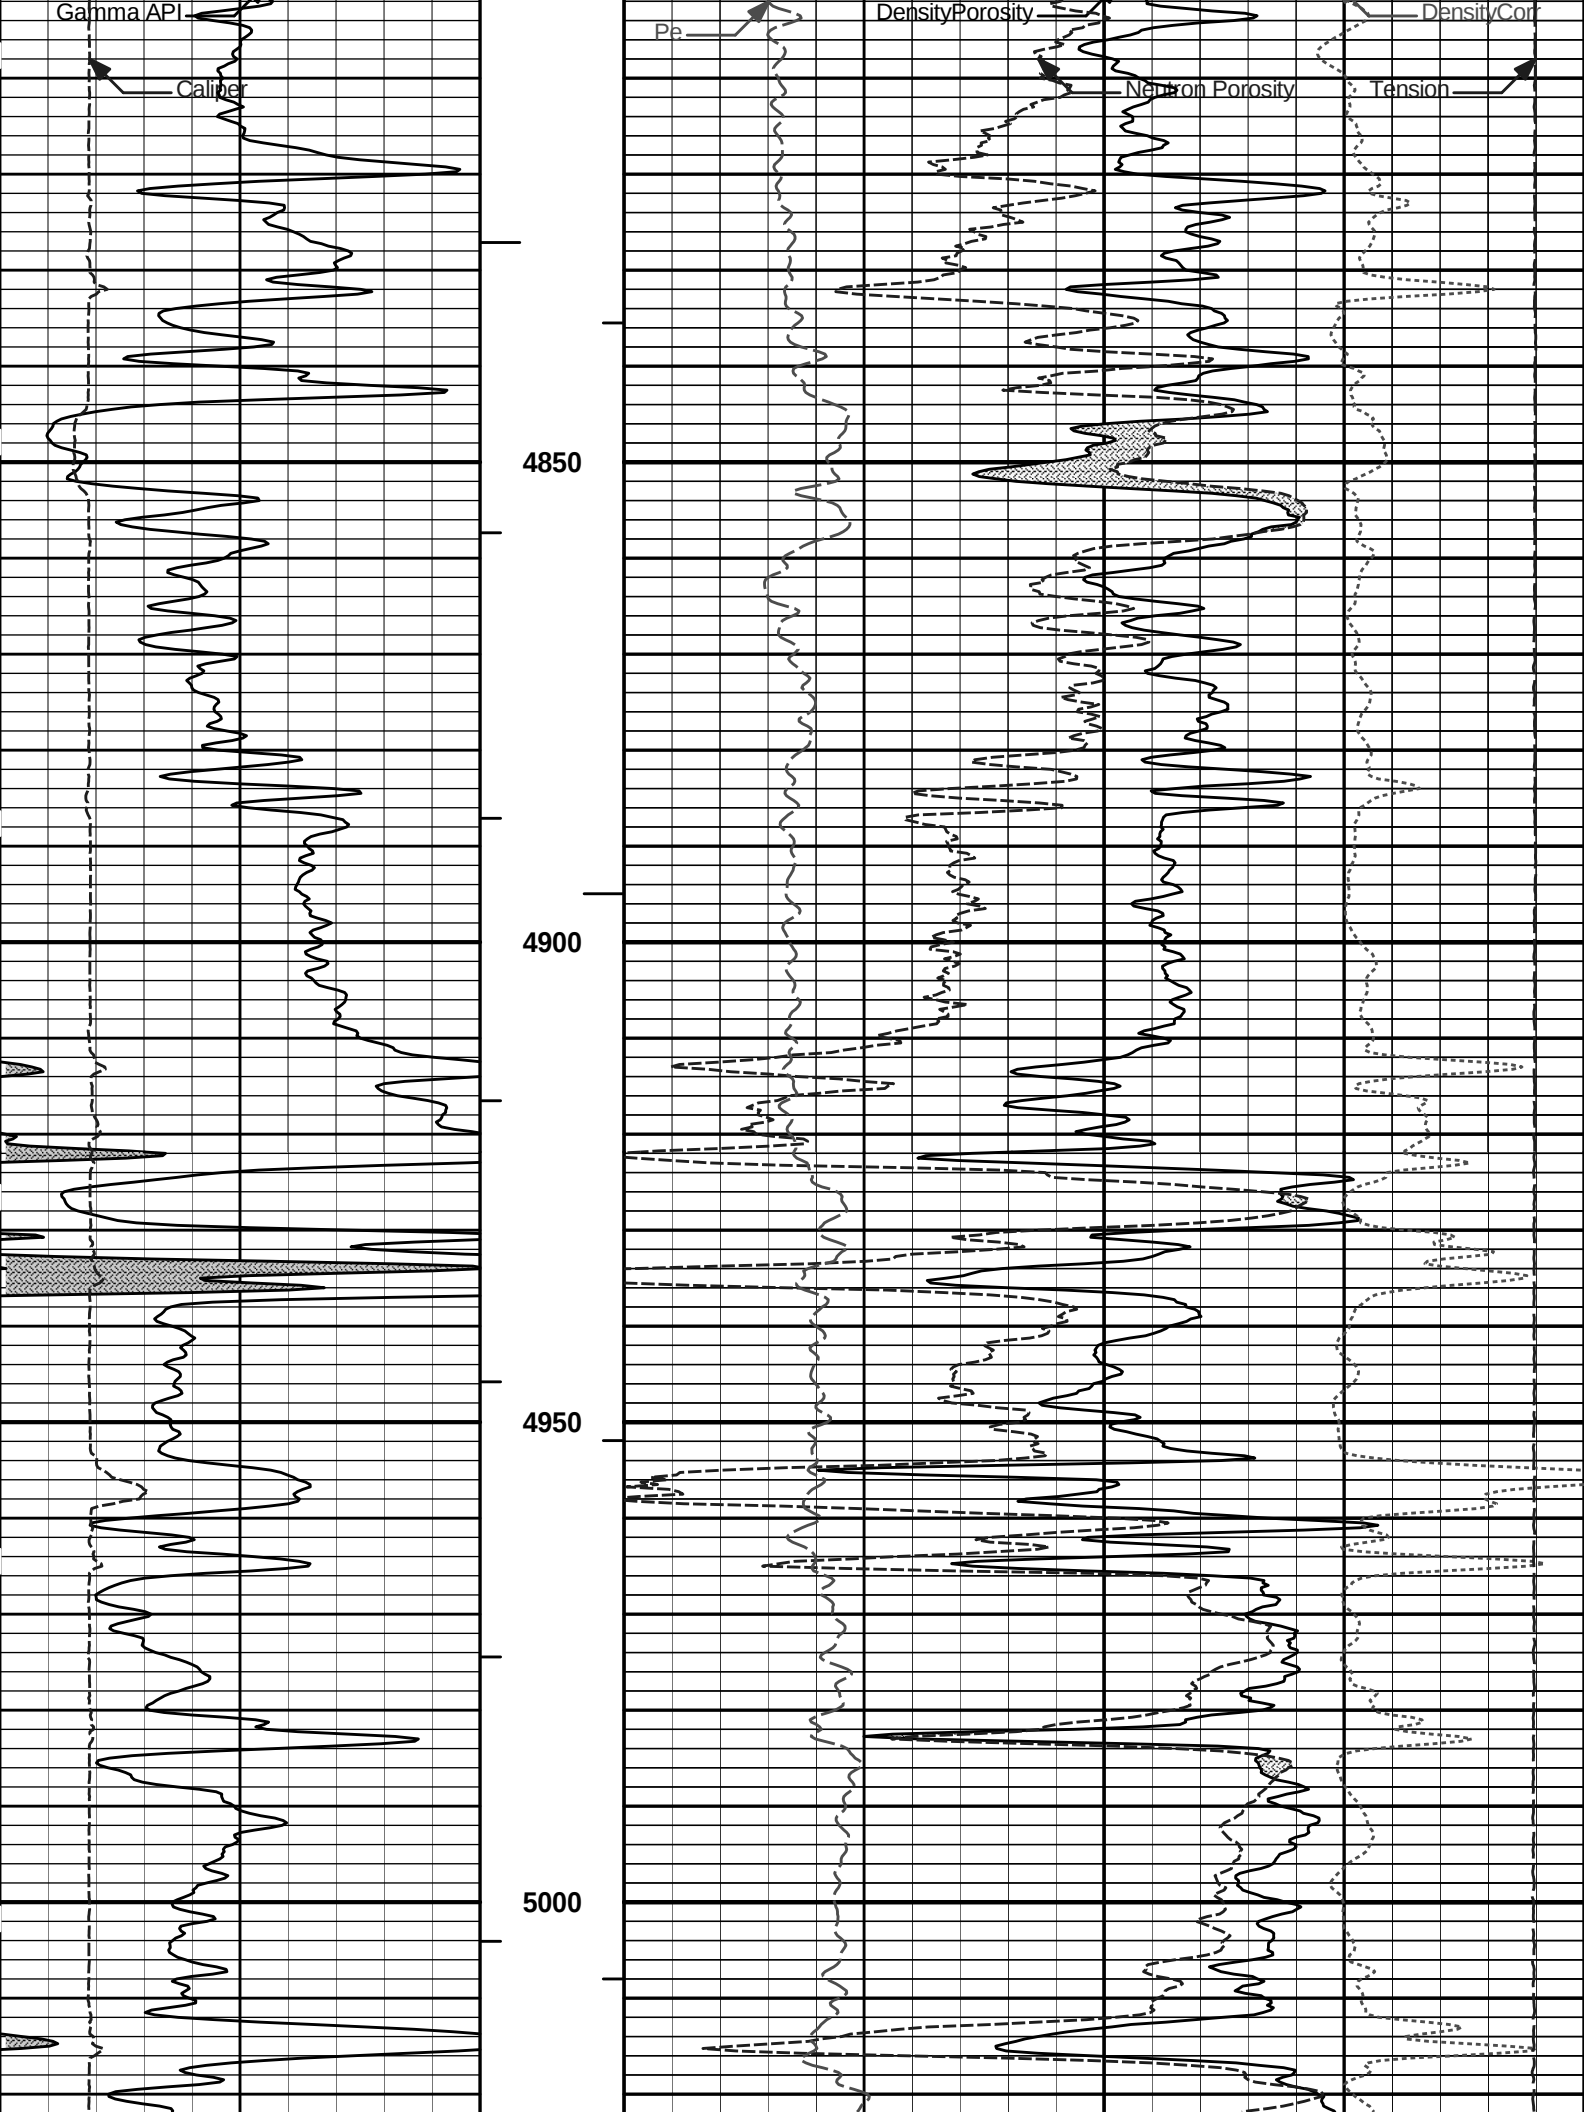


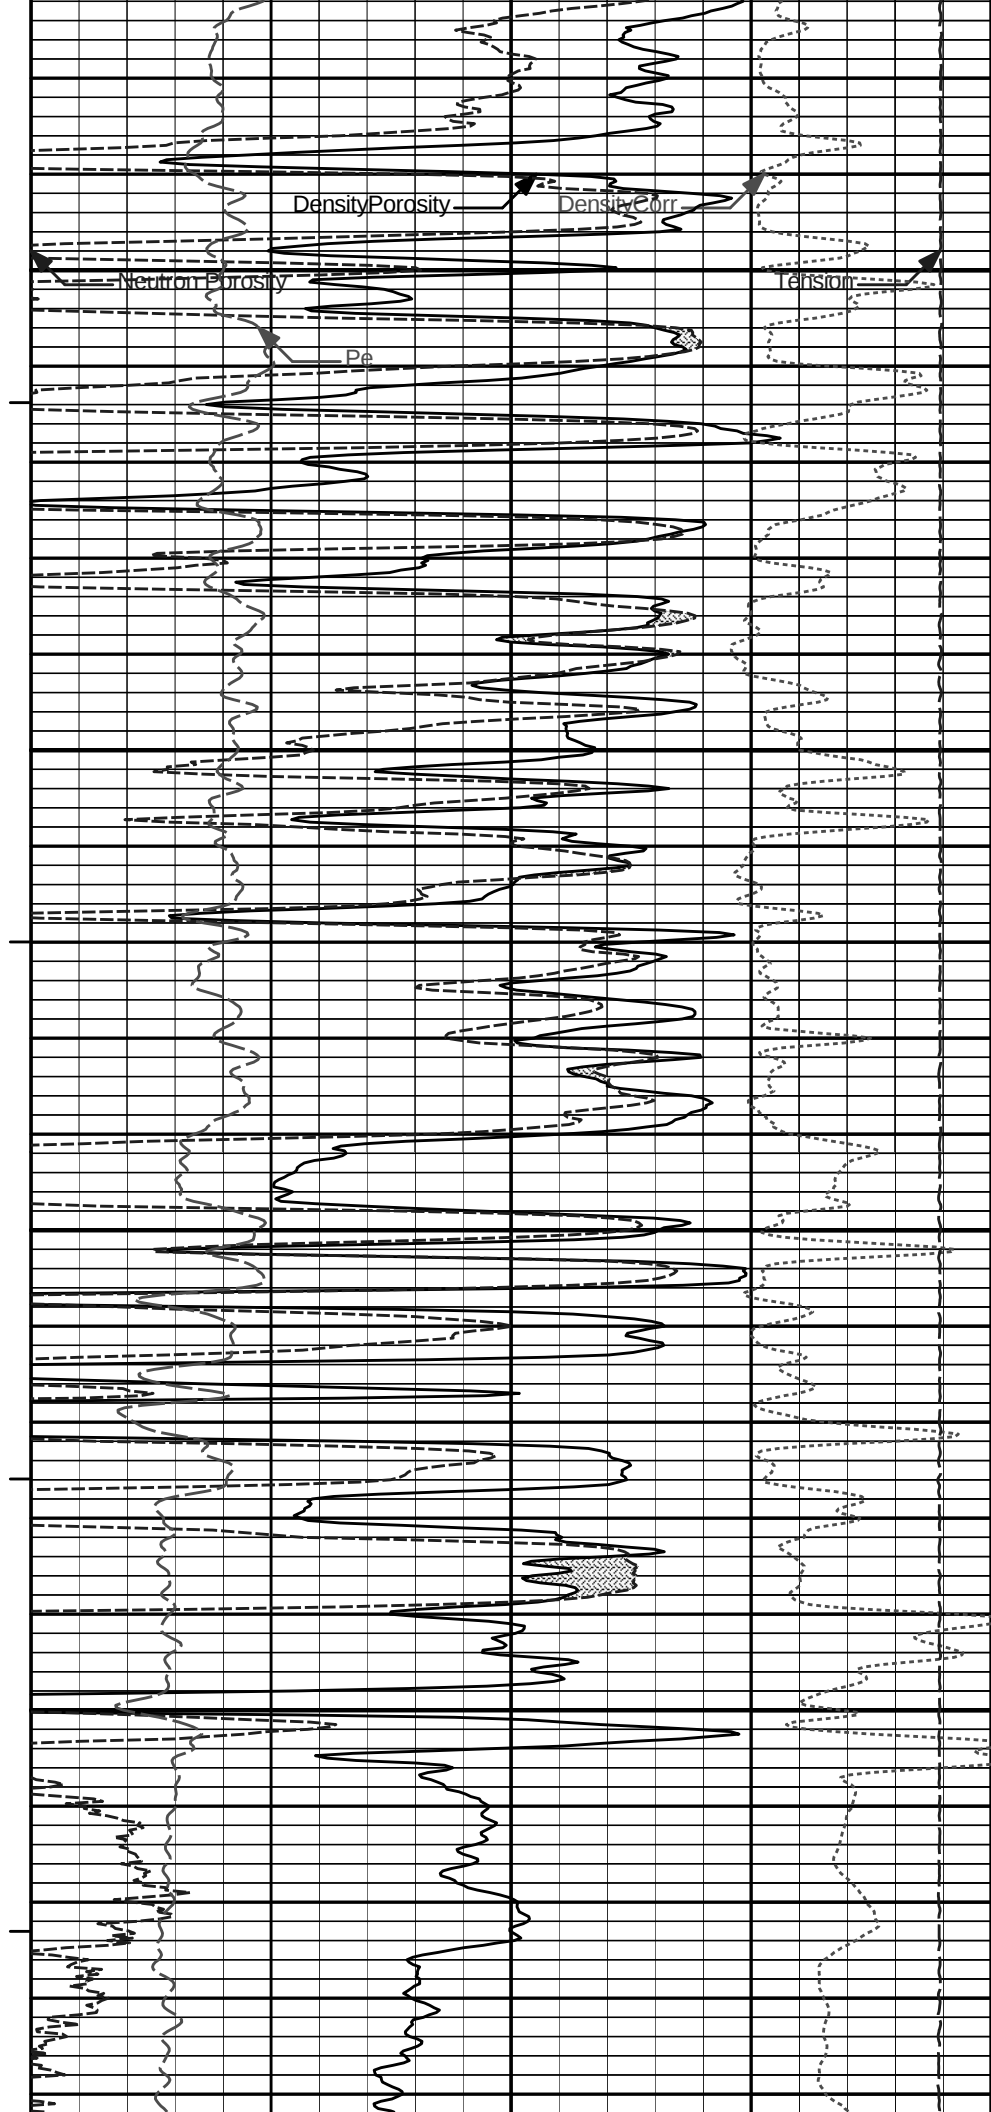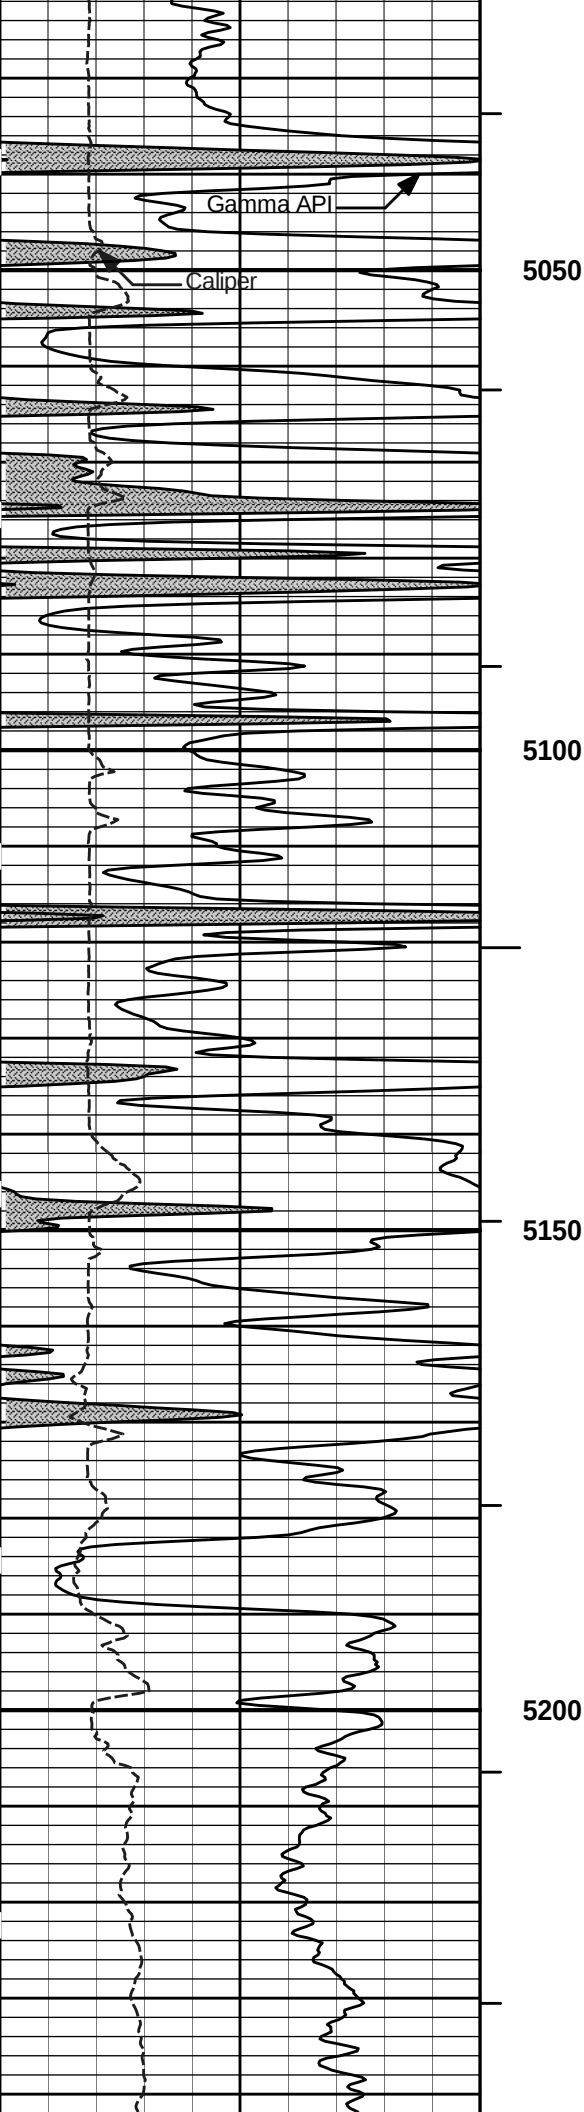

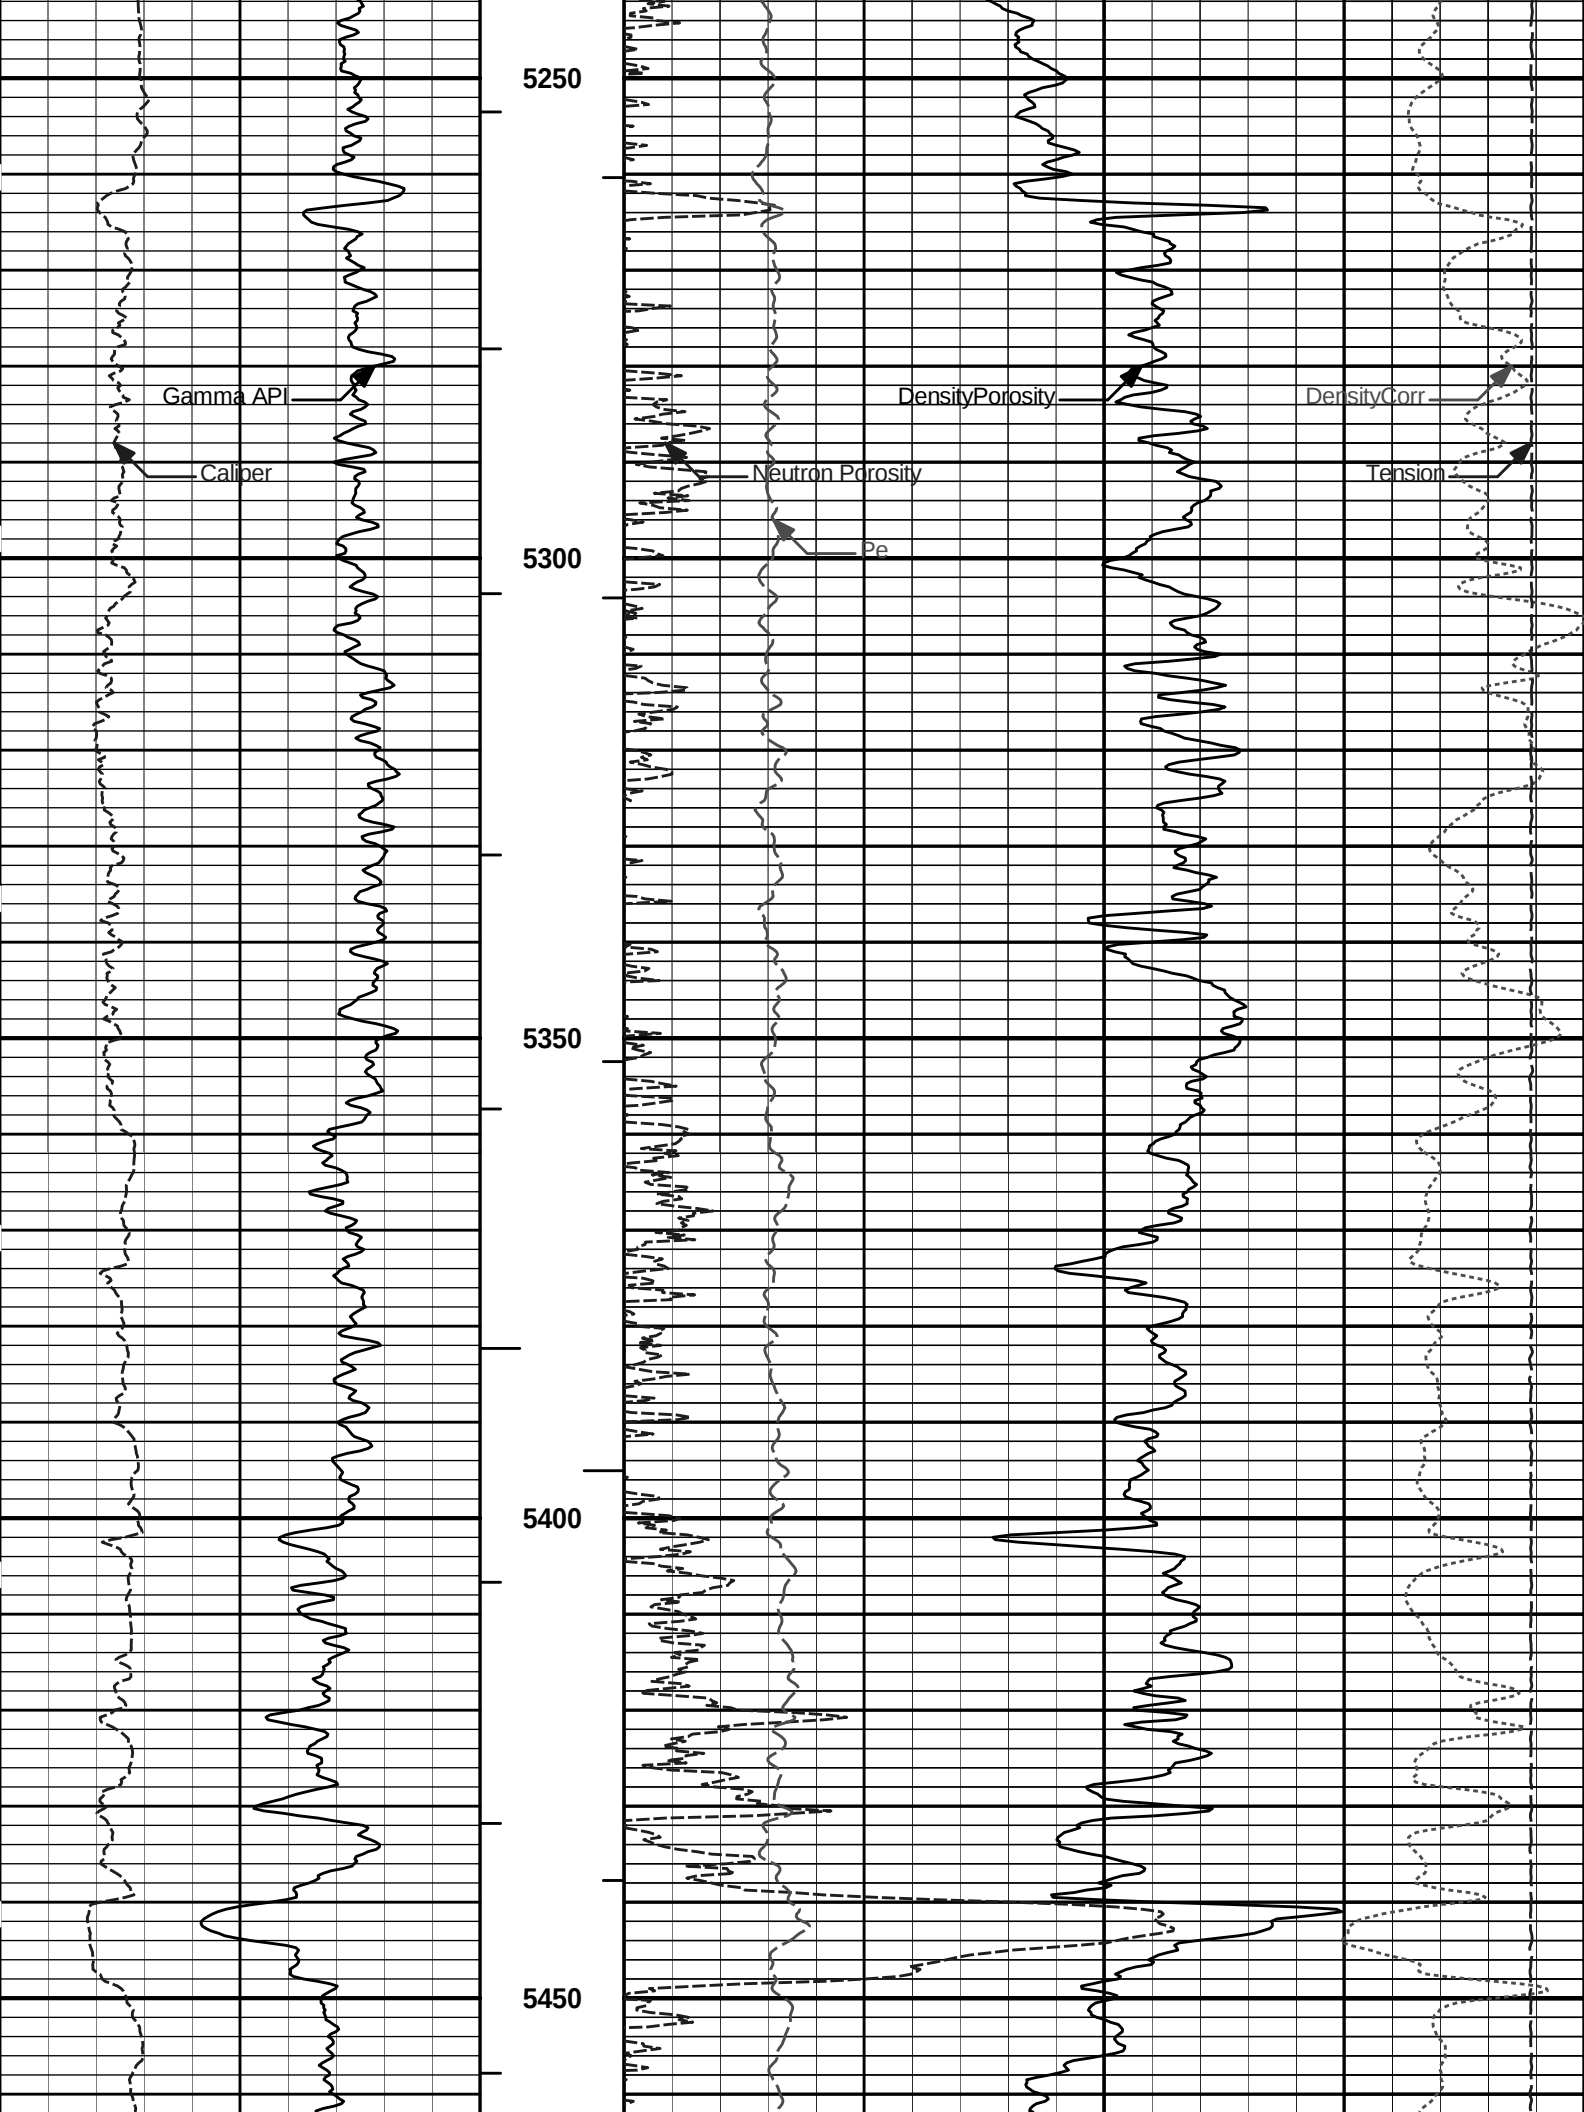

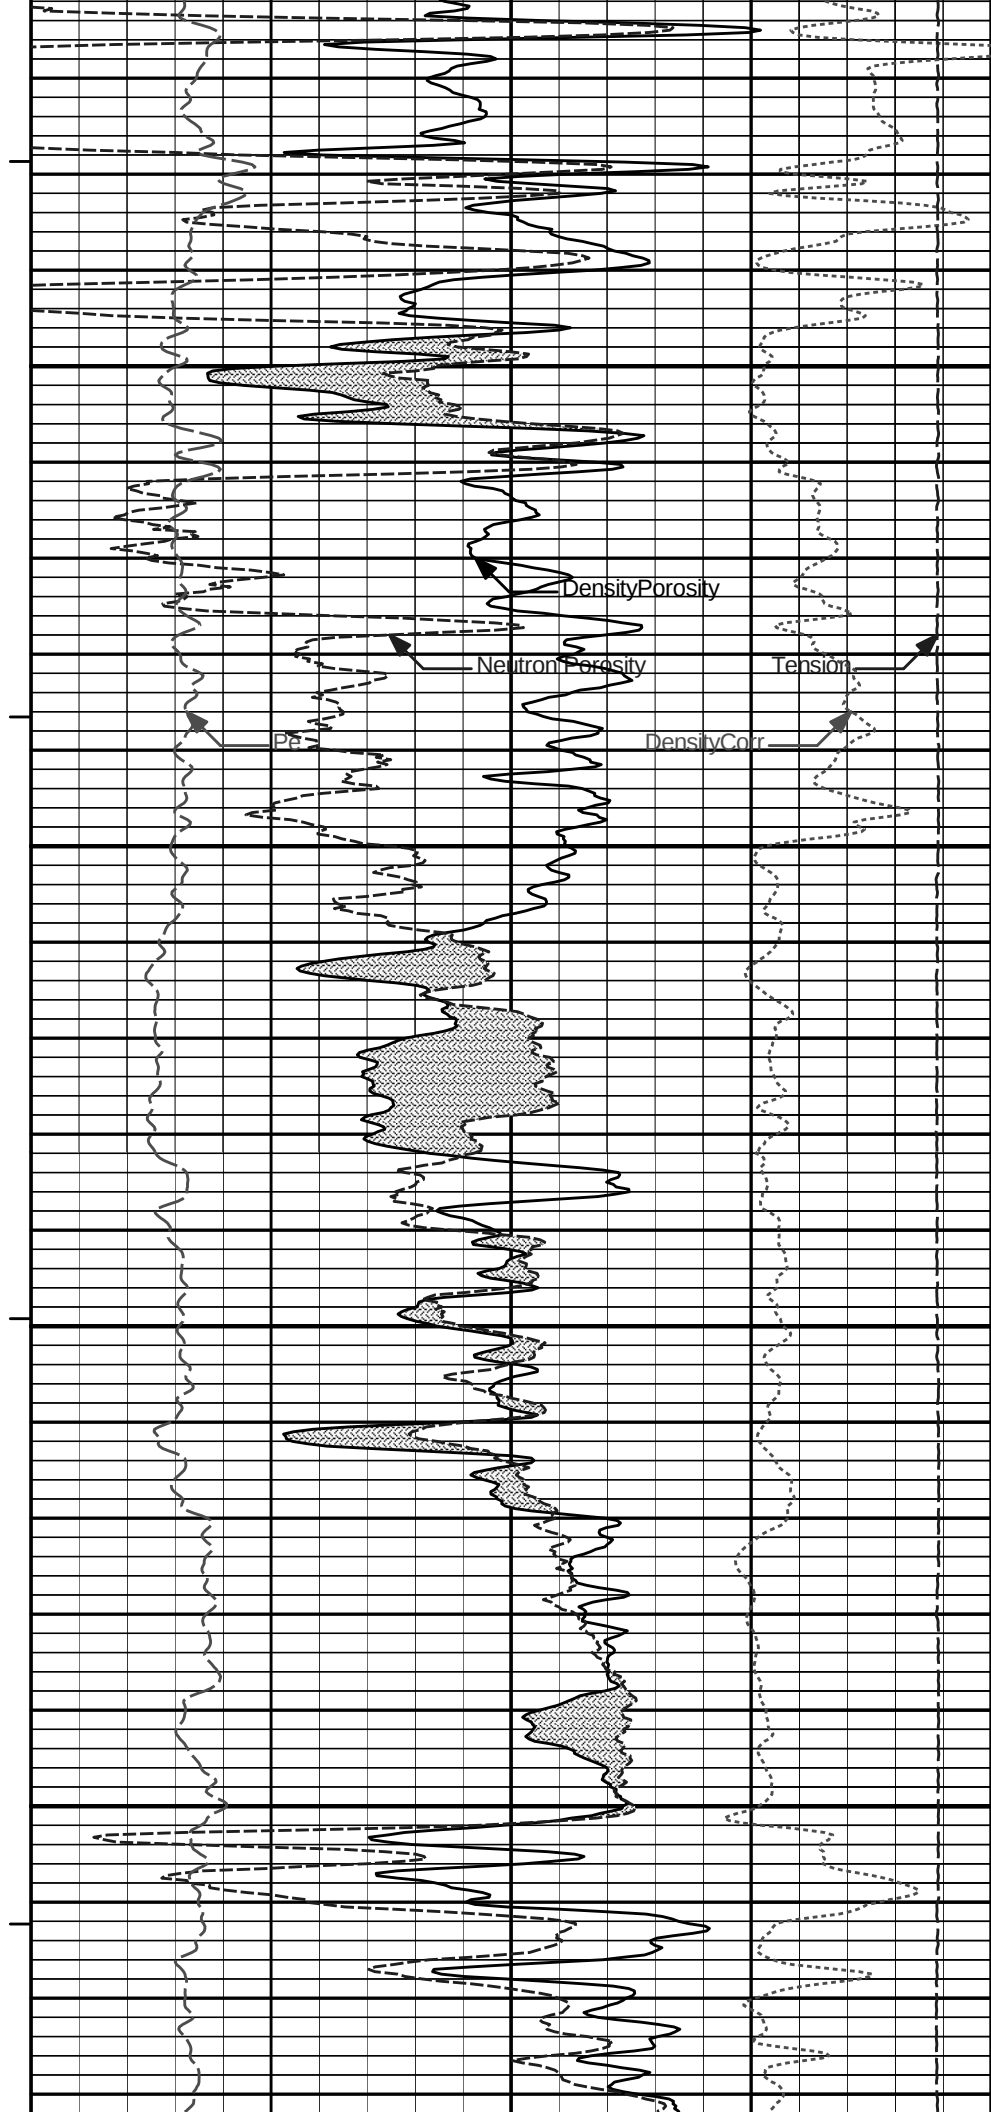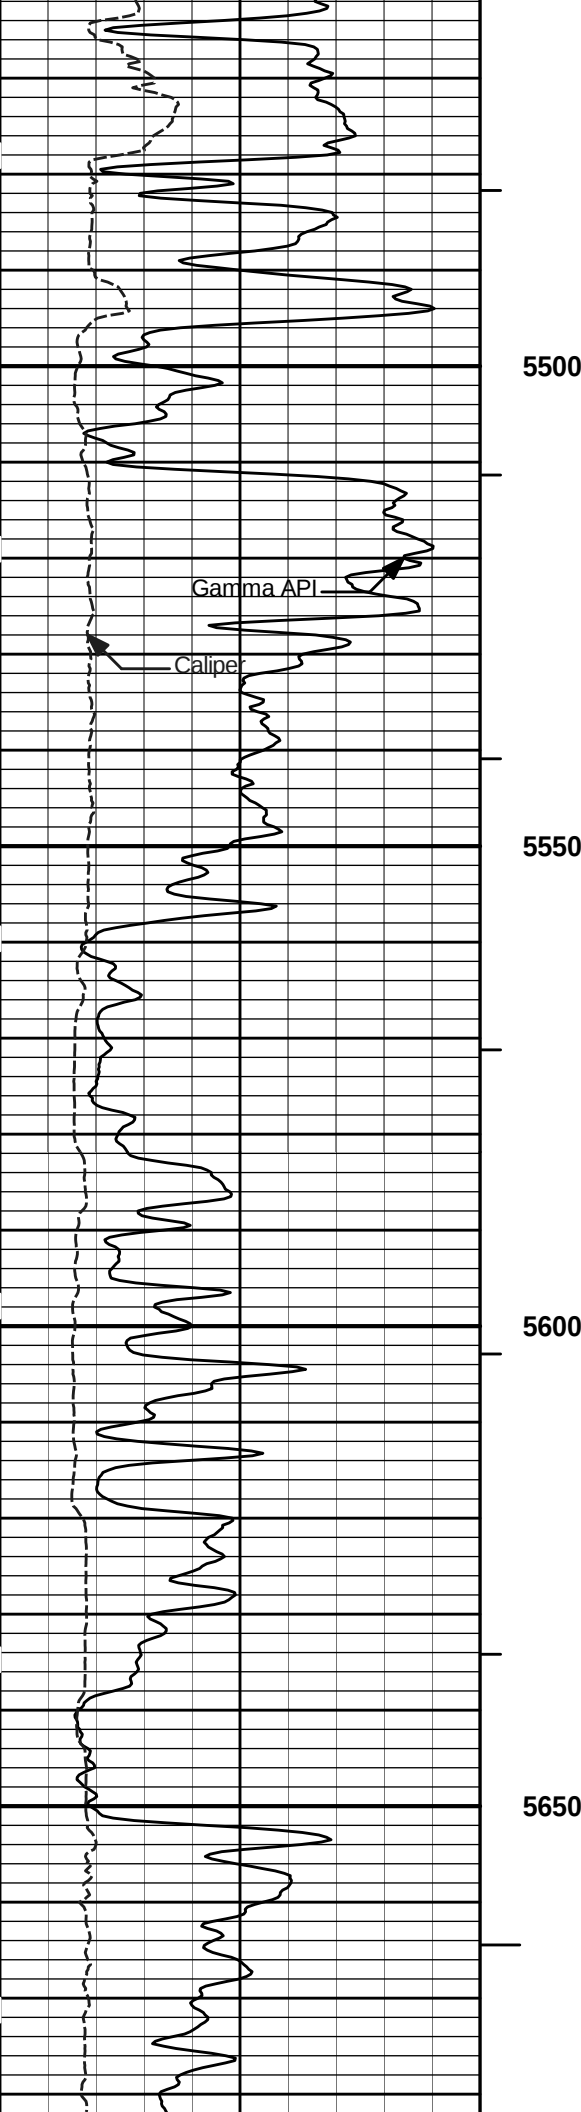

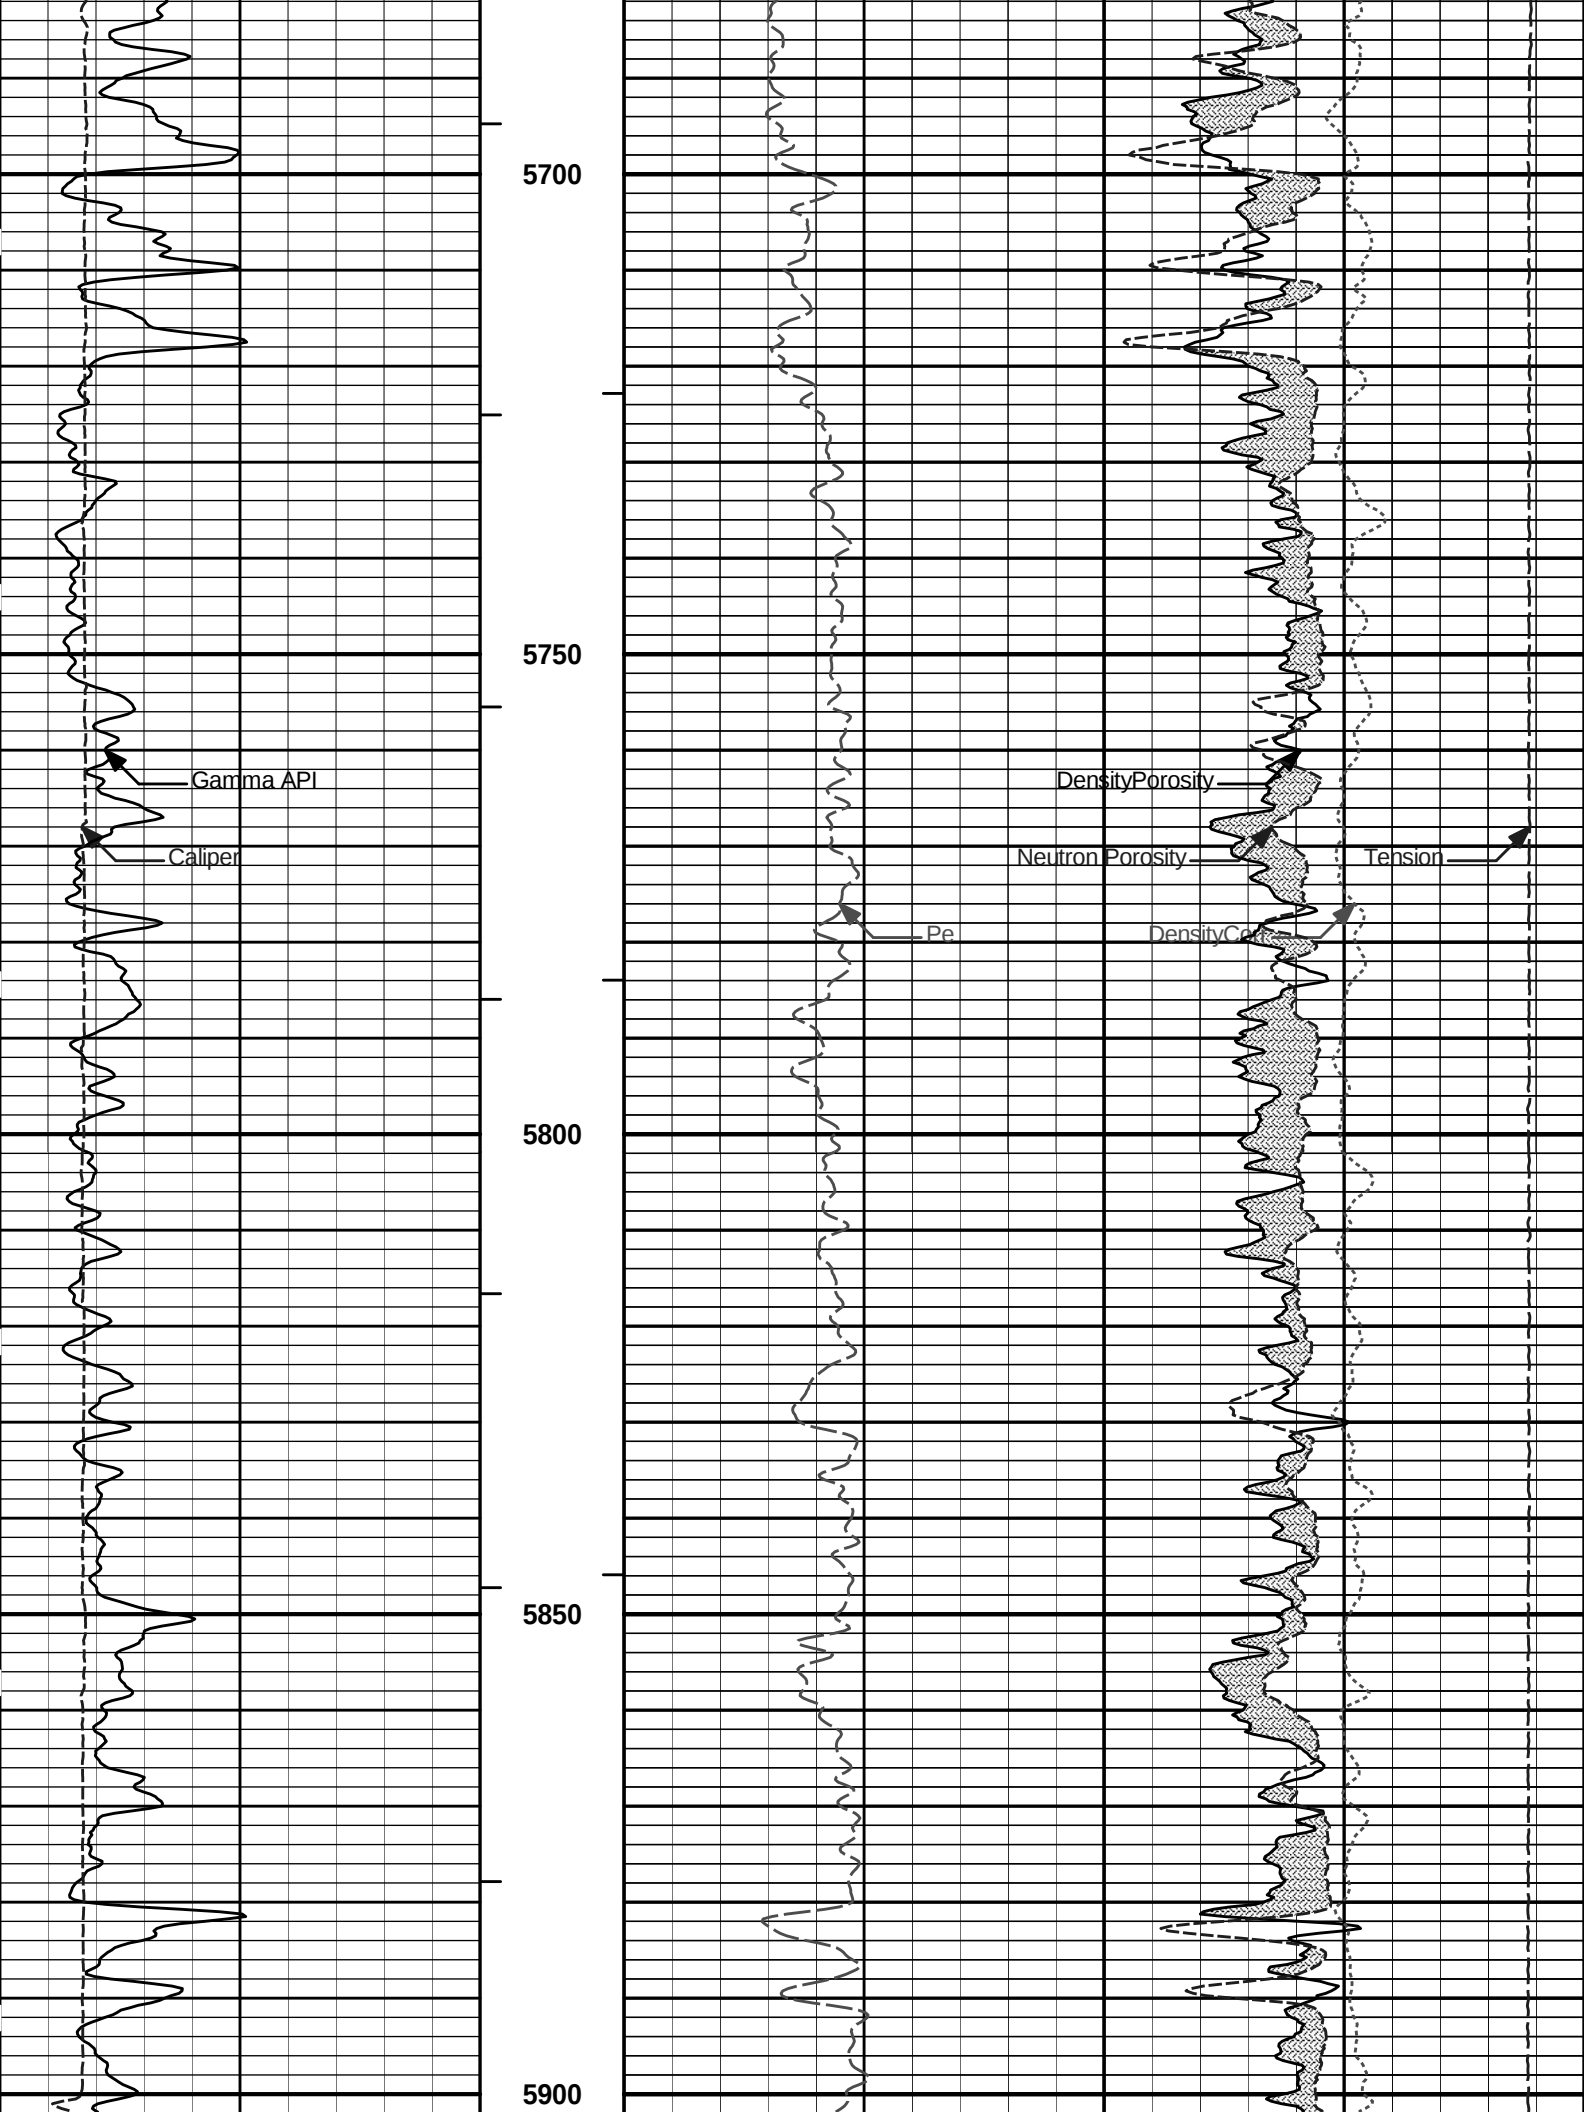

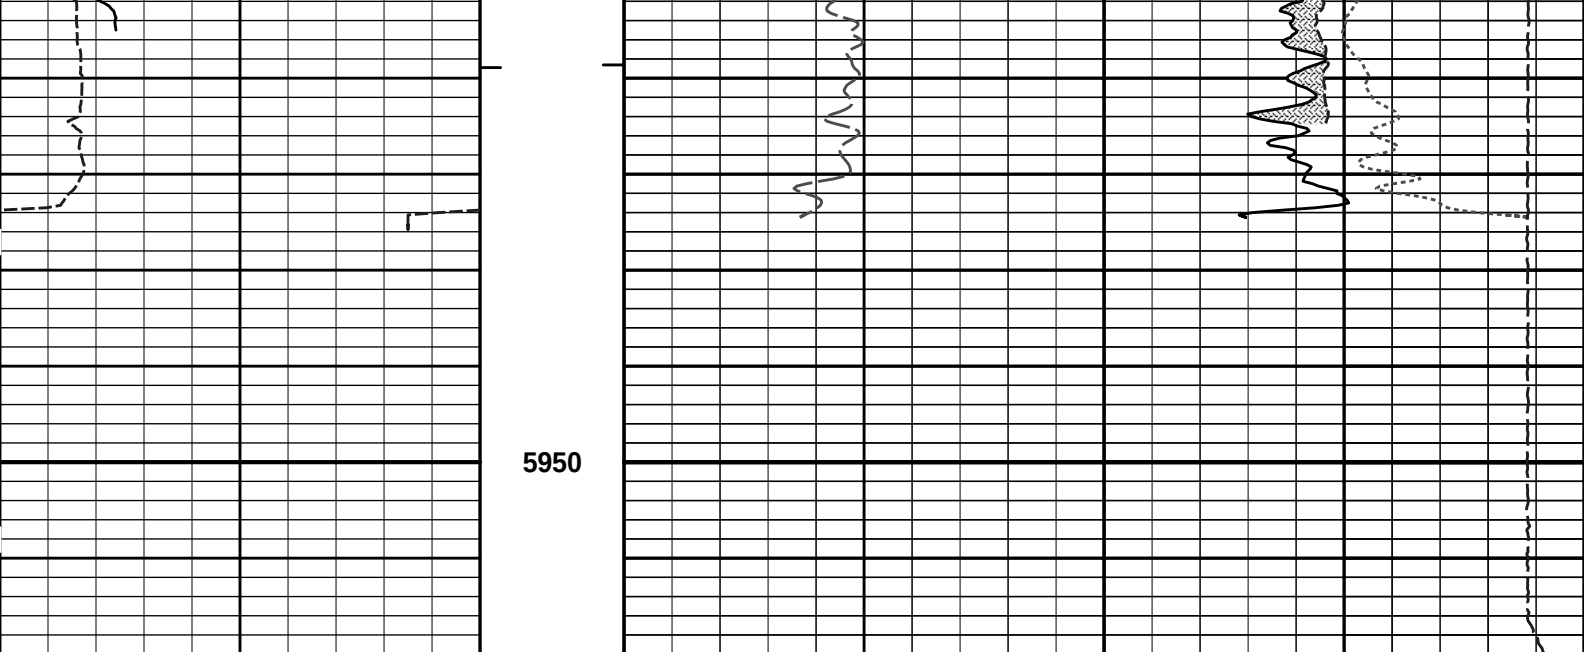

6	Caliper	16	1 : 240	0	Pe	10	-0.25	Density	0.25
	inches		ft					gram per cc	
0	Gamma API	150	AHVT				15K	Tension	0
	api							pounds	
			BHVT	30	Density	Porosity			-10
					percent				
			Tension Pull	30	Neutron Porosity				-10
			10	0	percent				

HALLIBURTON


Plot Time: 13-Apr-13 23:25:22
Plot Range: 3650 ft to 5970.08 ft
Data: {ActiveWell}\Well Based\DAQ-0001-003\
Plot File: \\PORO1_Poro_5_mainx



5 INCH MAIN LOG


HALLIBURTON


Plot Time: 13-Apr-13 23:25:23
Plot Range: 5100 ft to 5971.33 ft
Data: {ActiveWell}\Well Based\DAQ-0001-002\
Plot File: \\PORO1_Poro_5_rptx

REPEAT SECTION

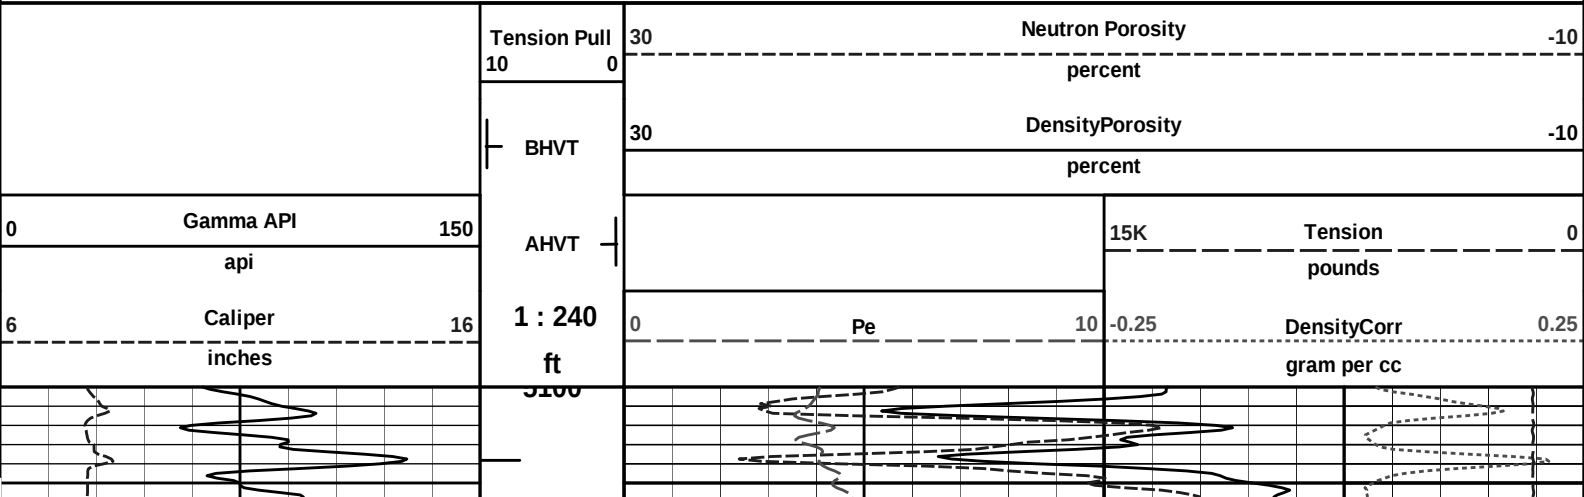

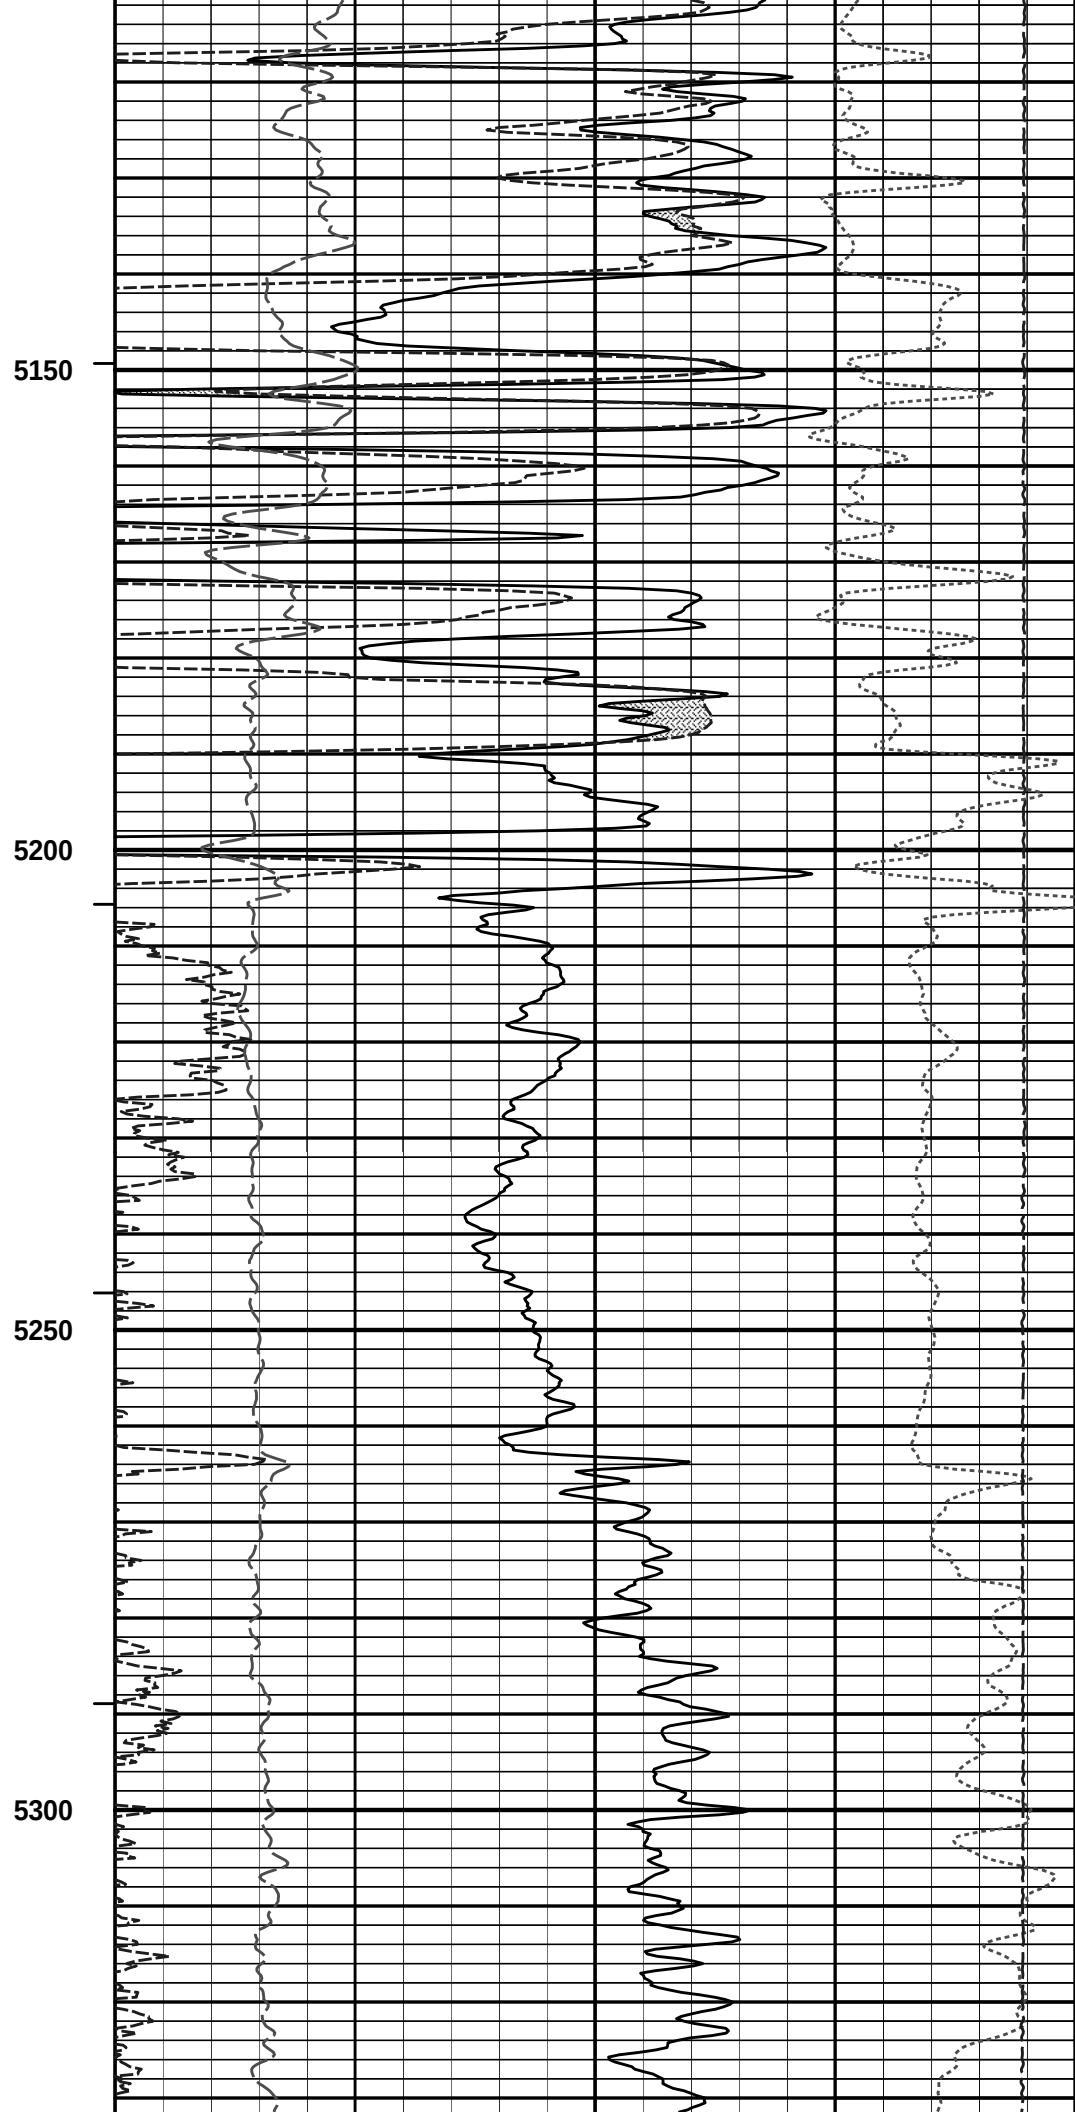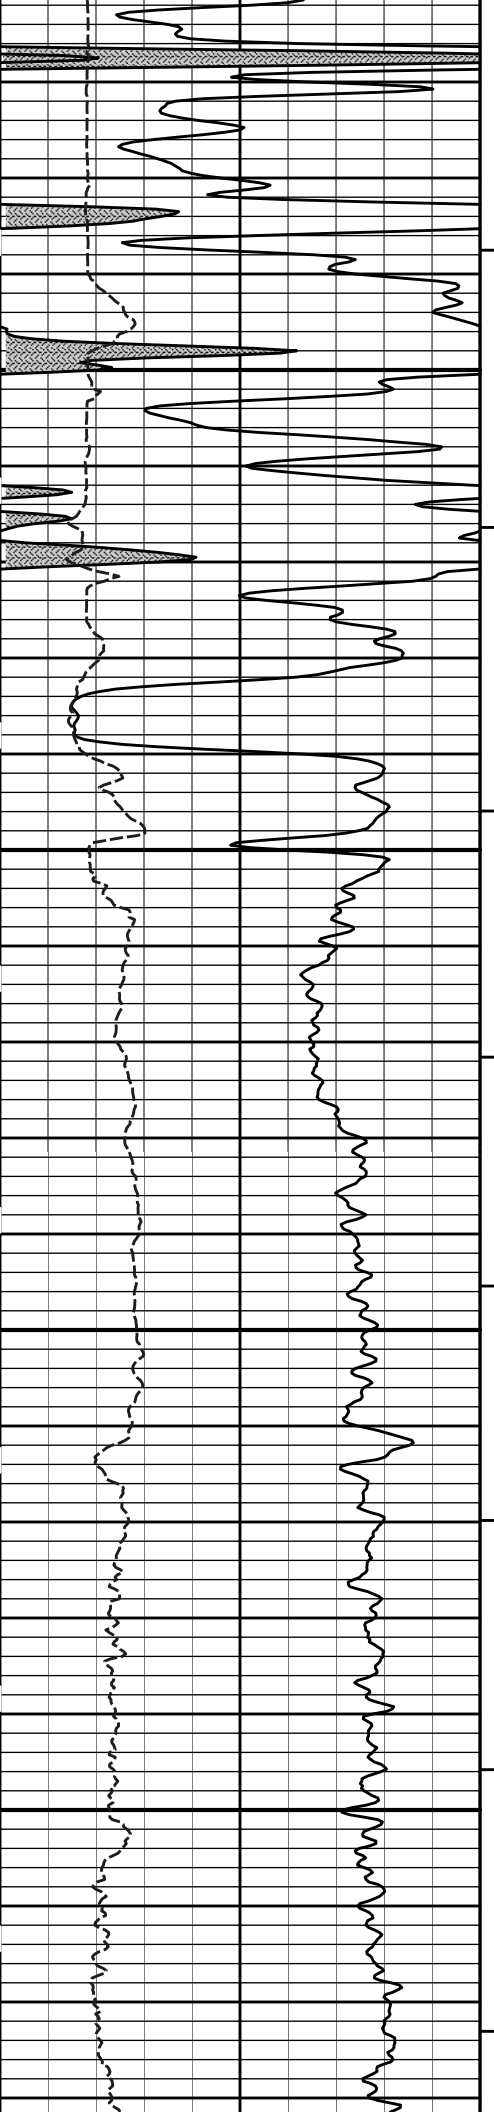

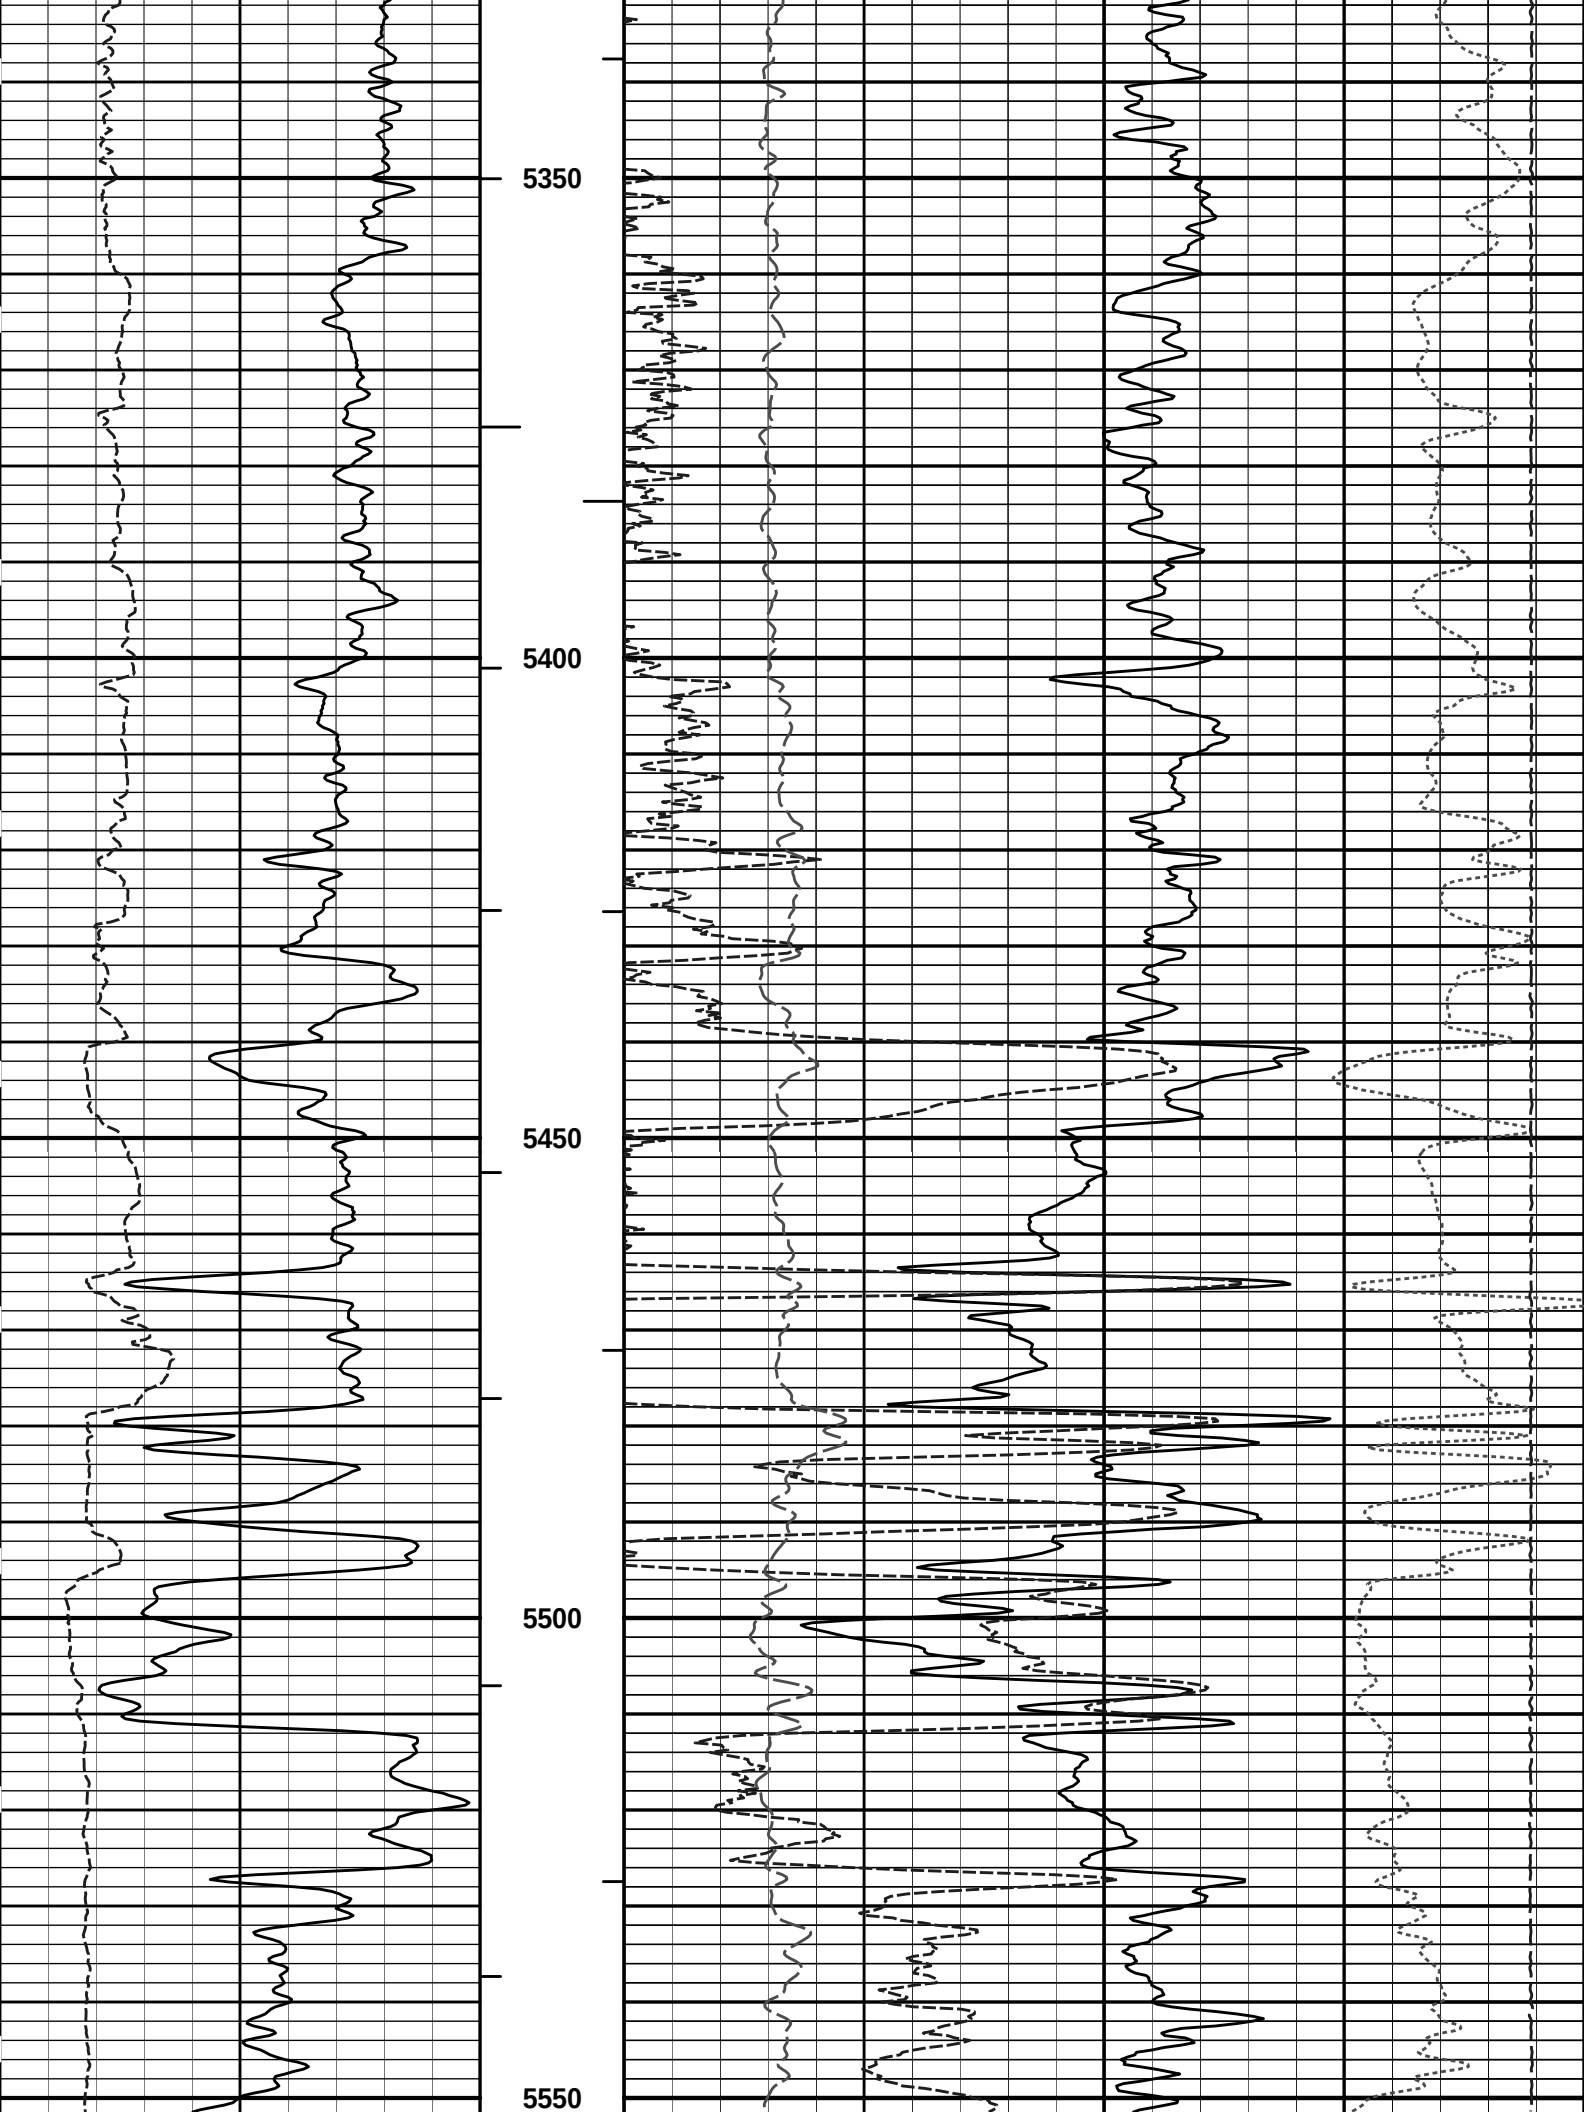

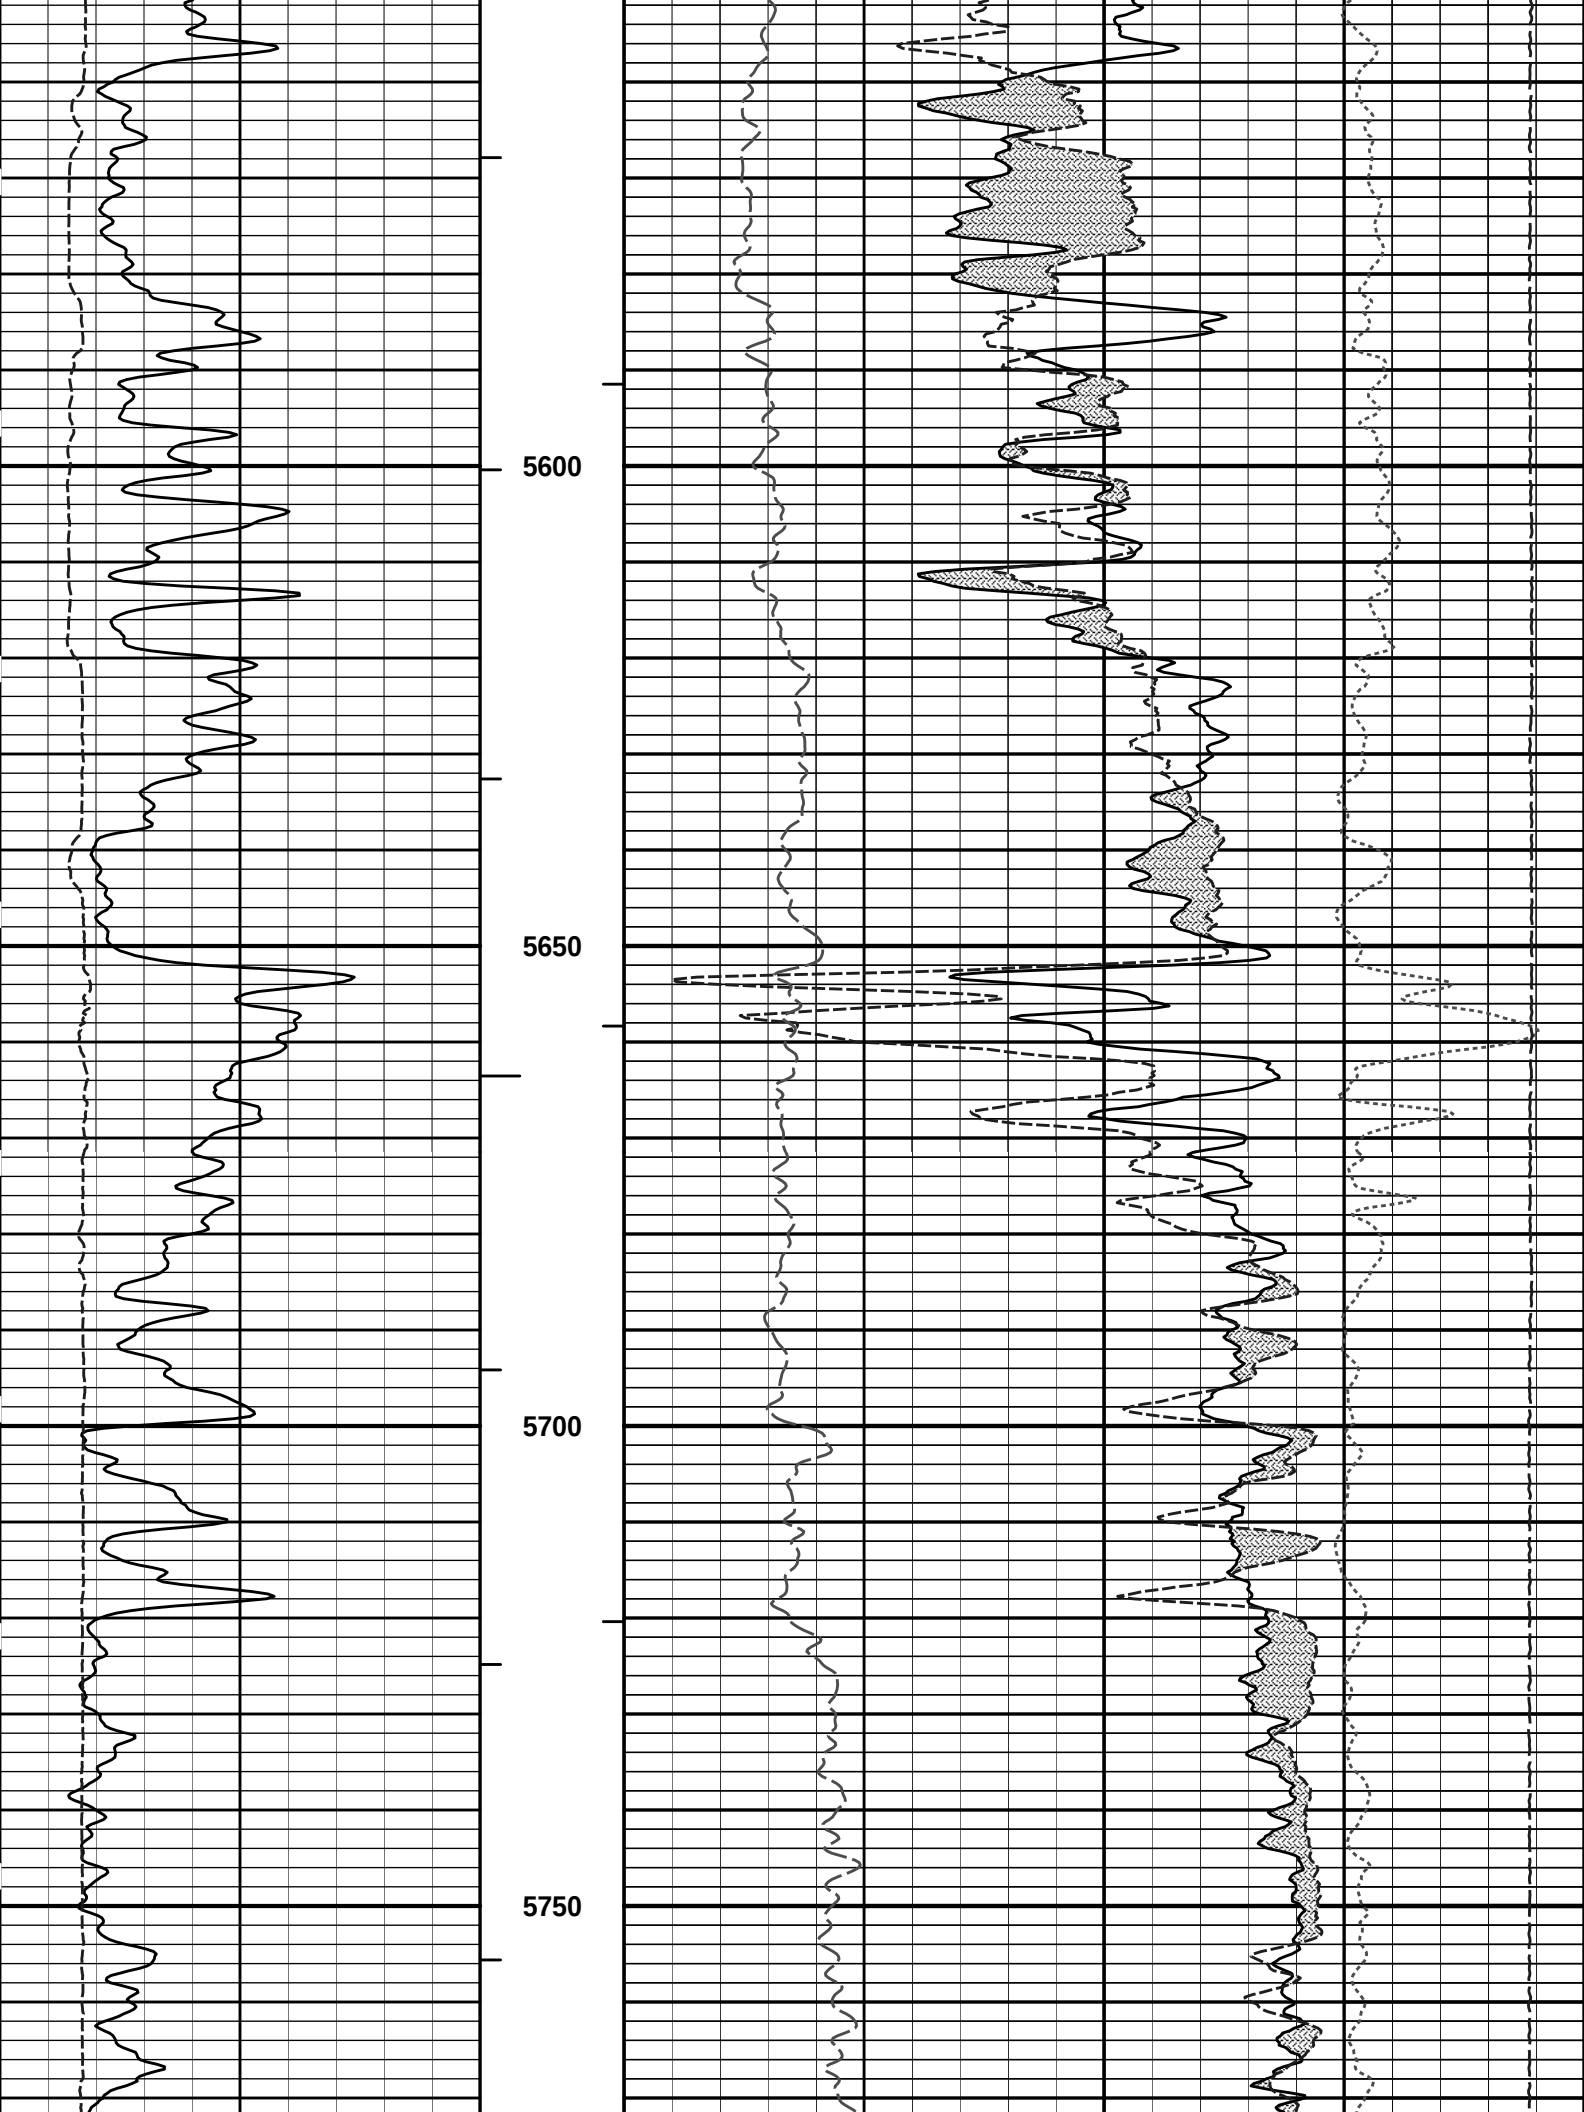




6	Caliper	16	1 : 240	0	Pe	10	-0.25	DensityCorr	0.25
	inches		ft					gram per cc	
0	Gamma API	150	AHVT			15K		Tension	0
	api							pounds	


HALLIBURTON


Plot Time: 13-Apr-13 23:25:25
Plot Range: 5100 ft to 5971.33 ft
Data: {ActiveWell}\Well Based\DAQ-0001-002\
Plot File: \\PORO1_Poro_5_rptx


REPEAT SECTION


Gamma API		Tension Pull		Bulk Density	
0	150	10	0	2	3
api		BHVT		gram per cc	
6	16				
Caliper					
inches					
18	-2	AHVT		-0.25	0.25
Far Quality				Density Corr	
				gram per cc	
-18	2	1 : 240		0	10
Near Quality		ft		Pe	
				Tension	
				pounds	
		3650			
		3700			
		3750			

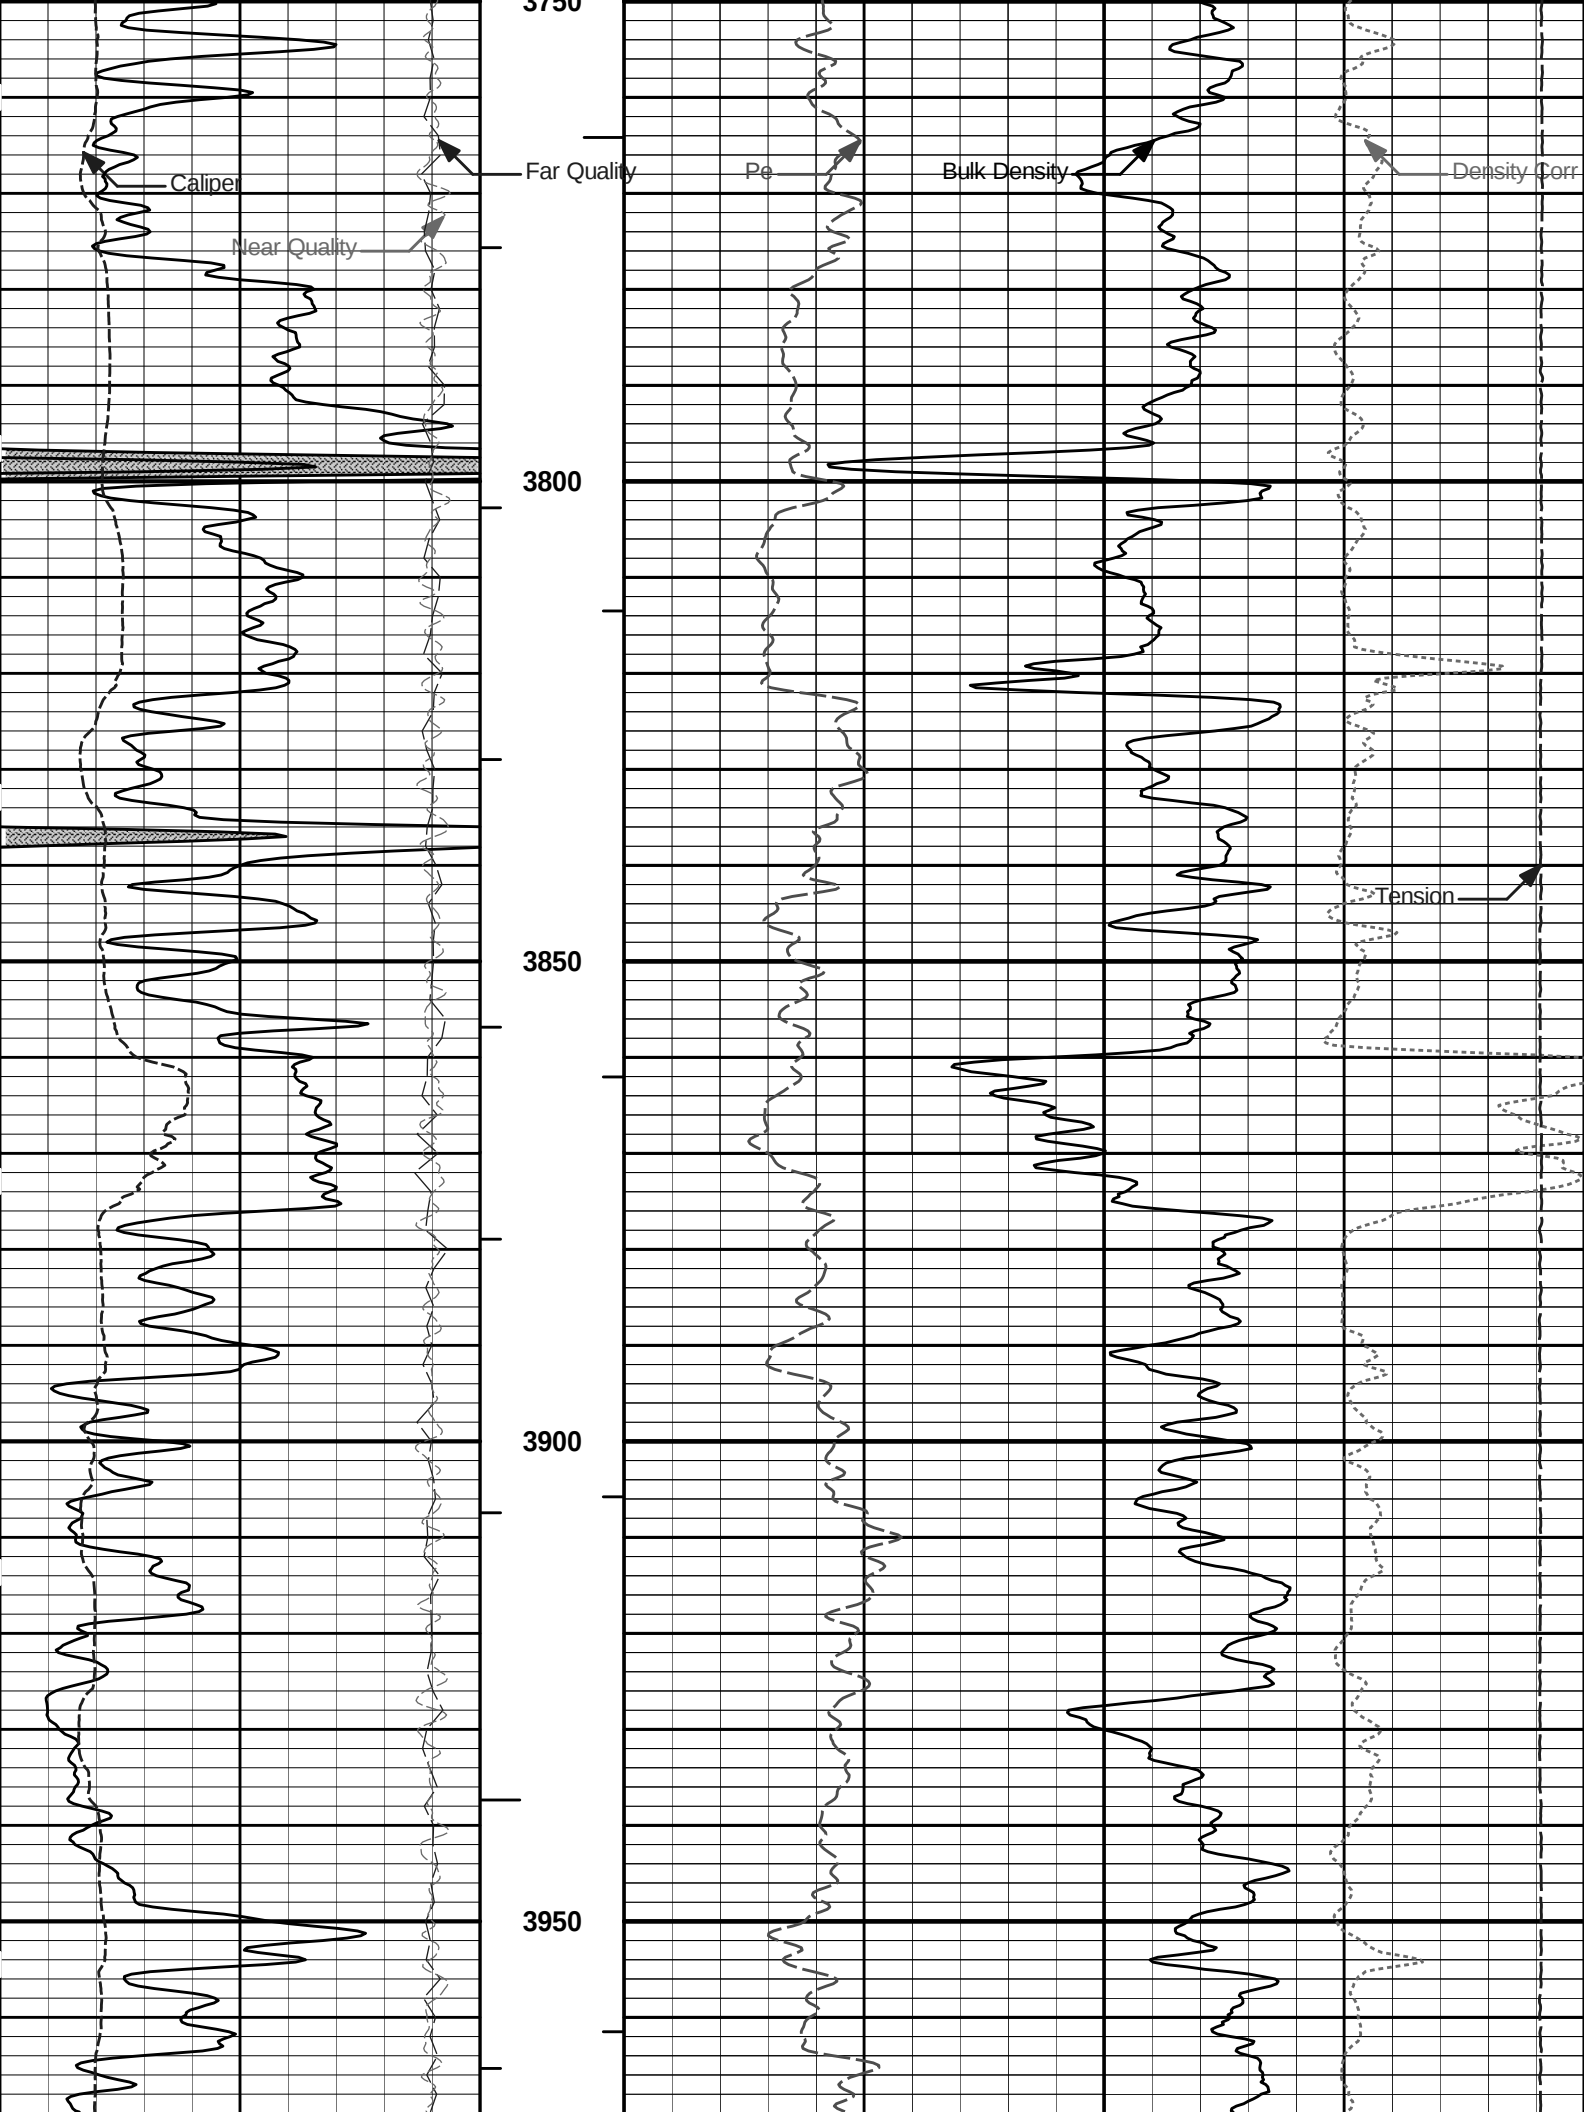


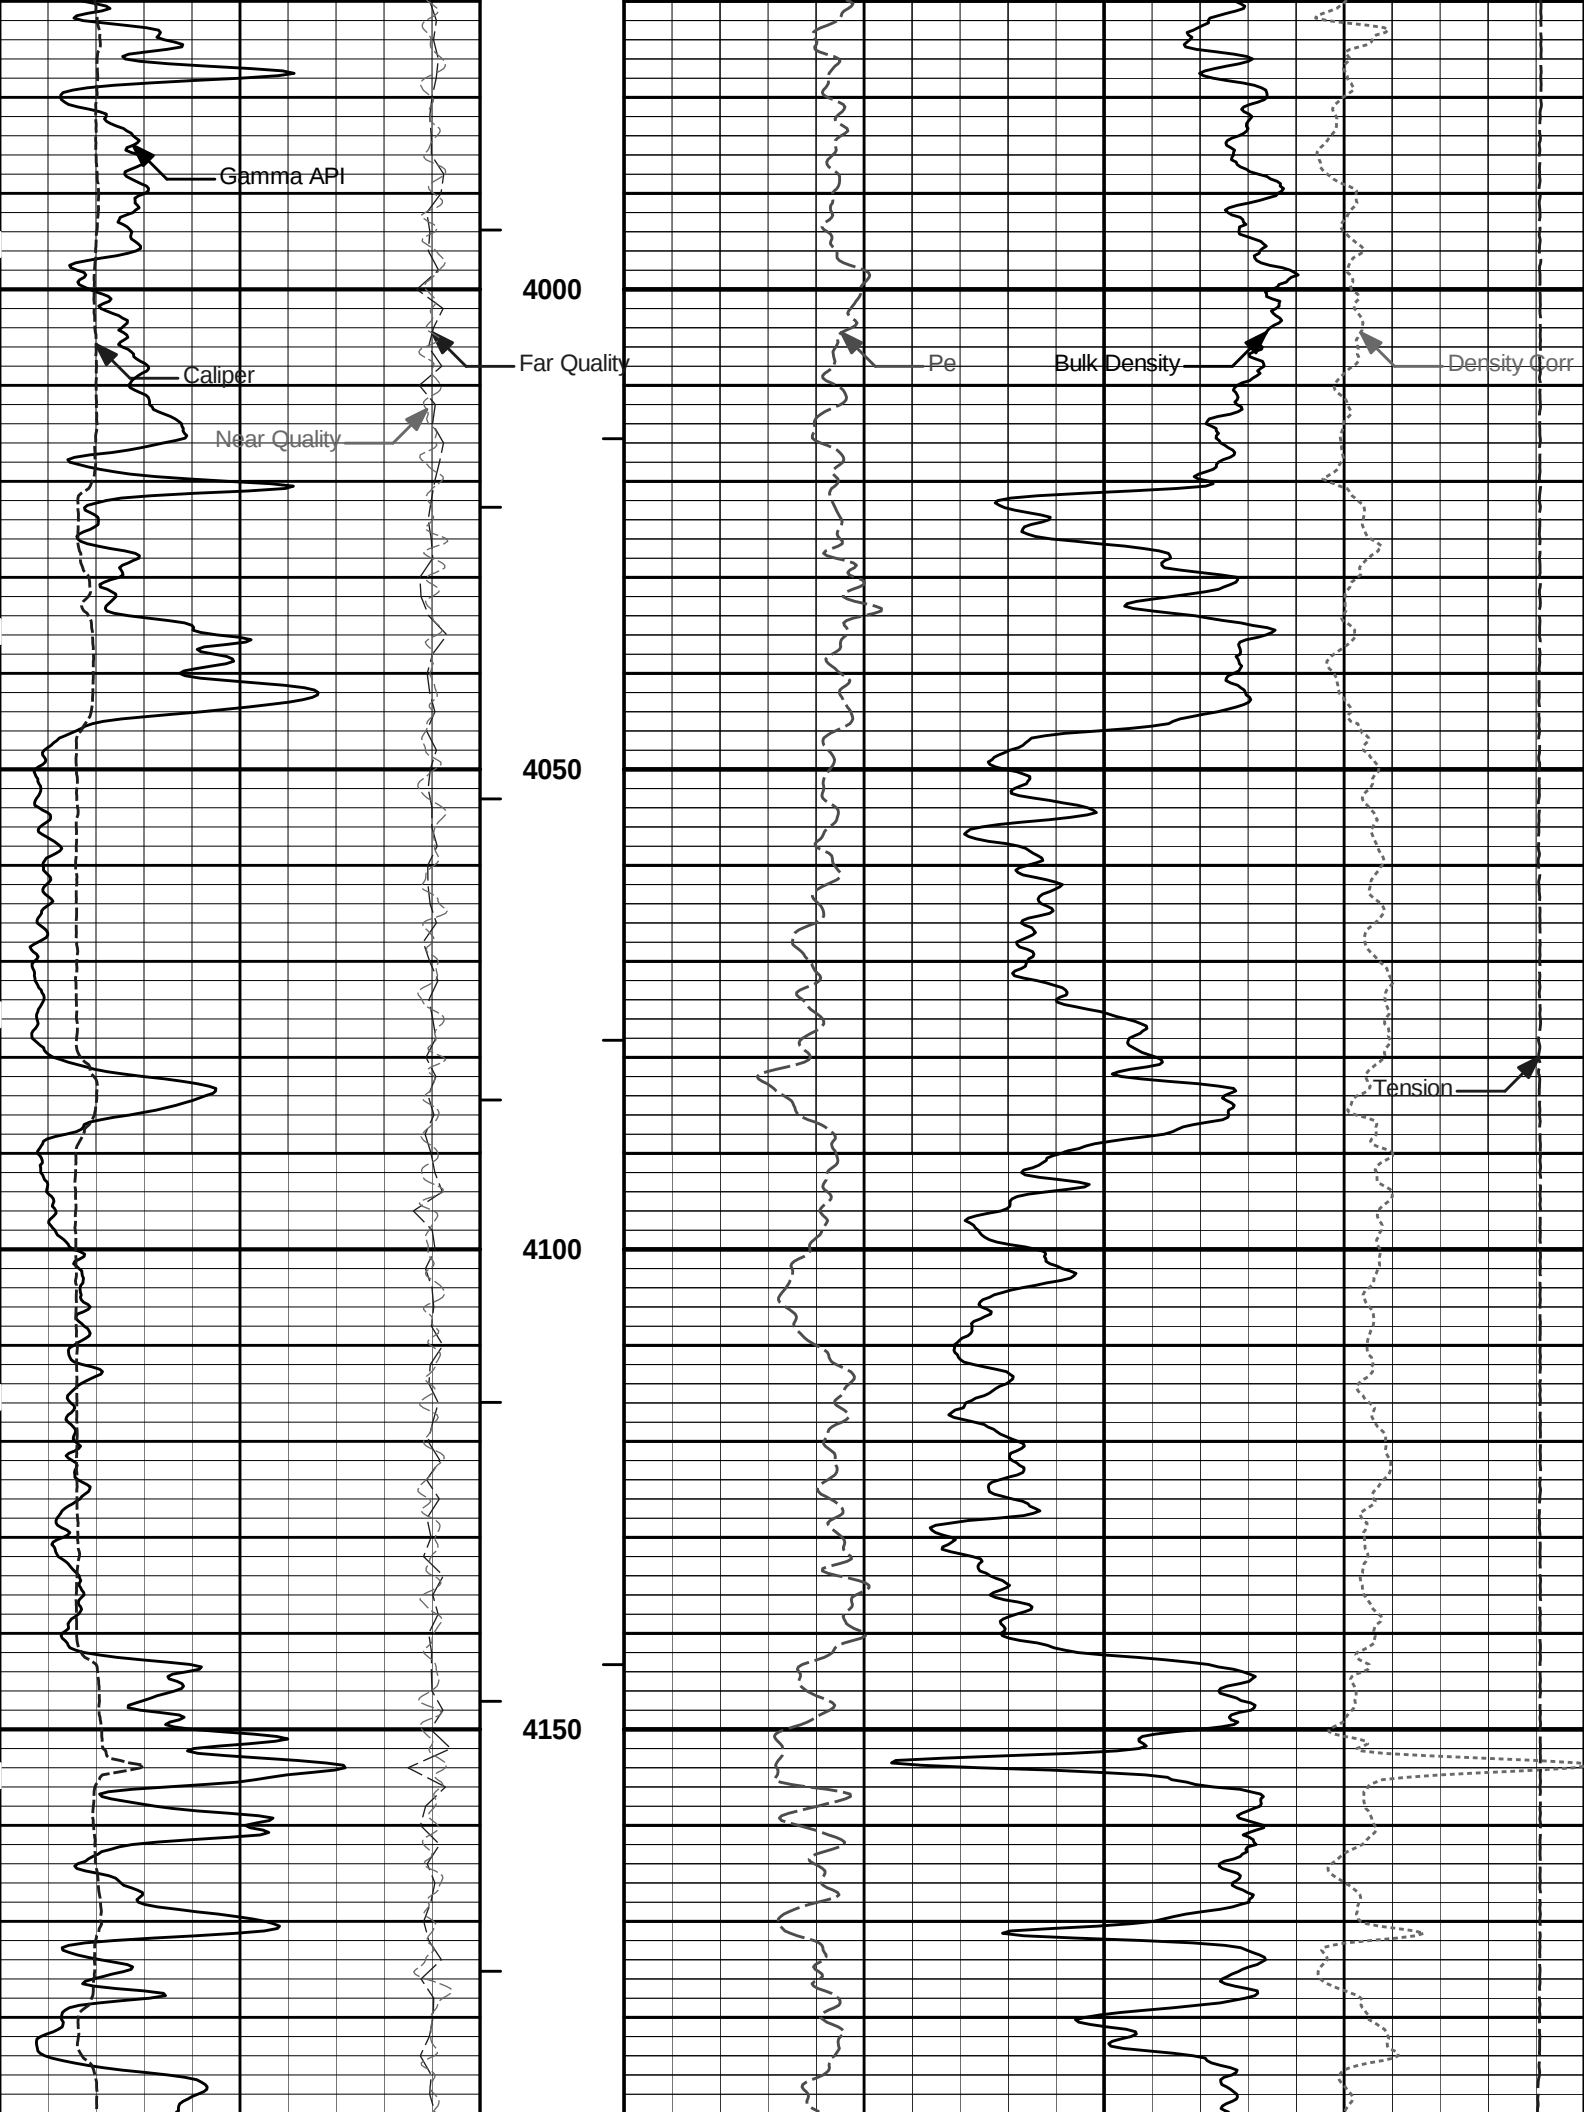


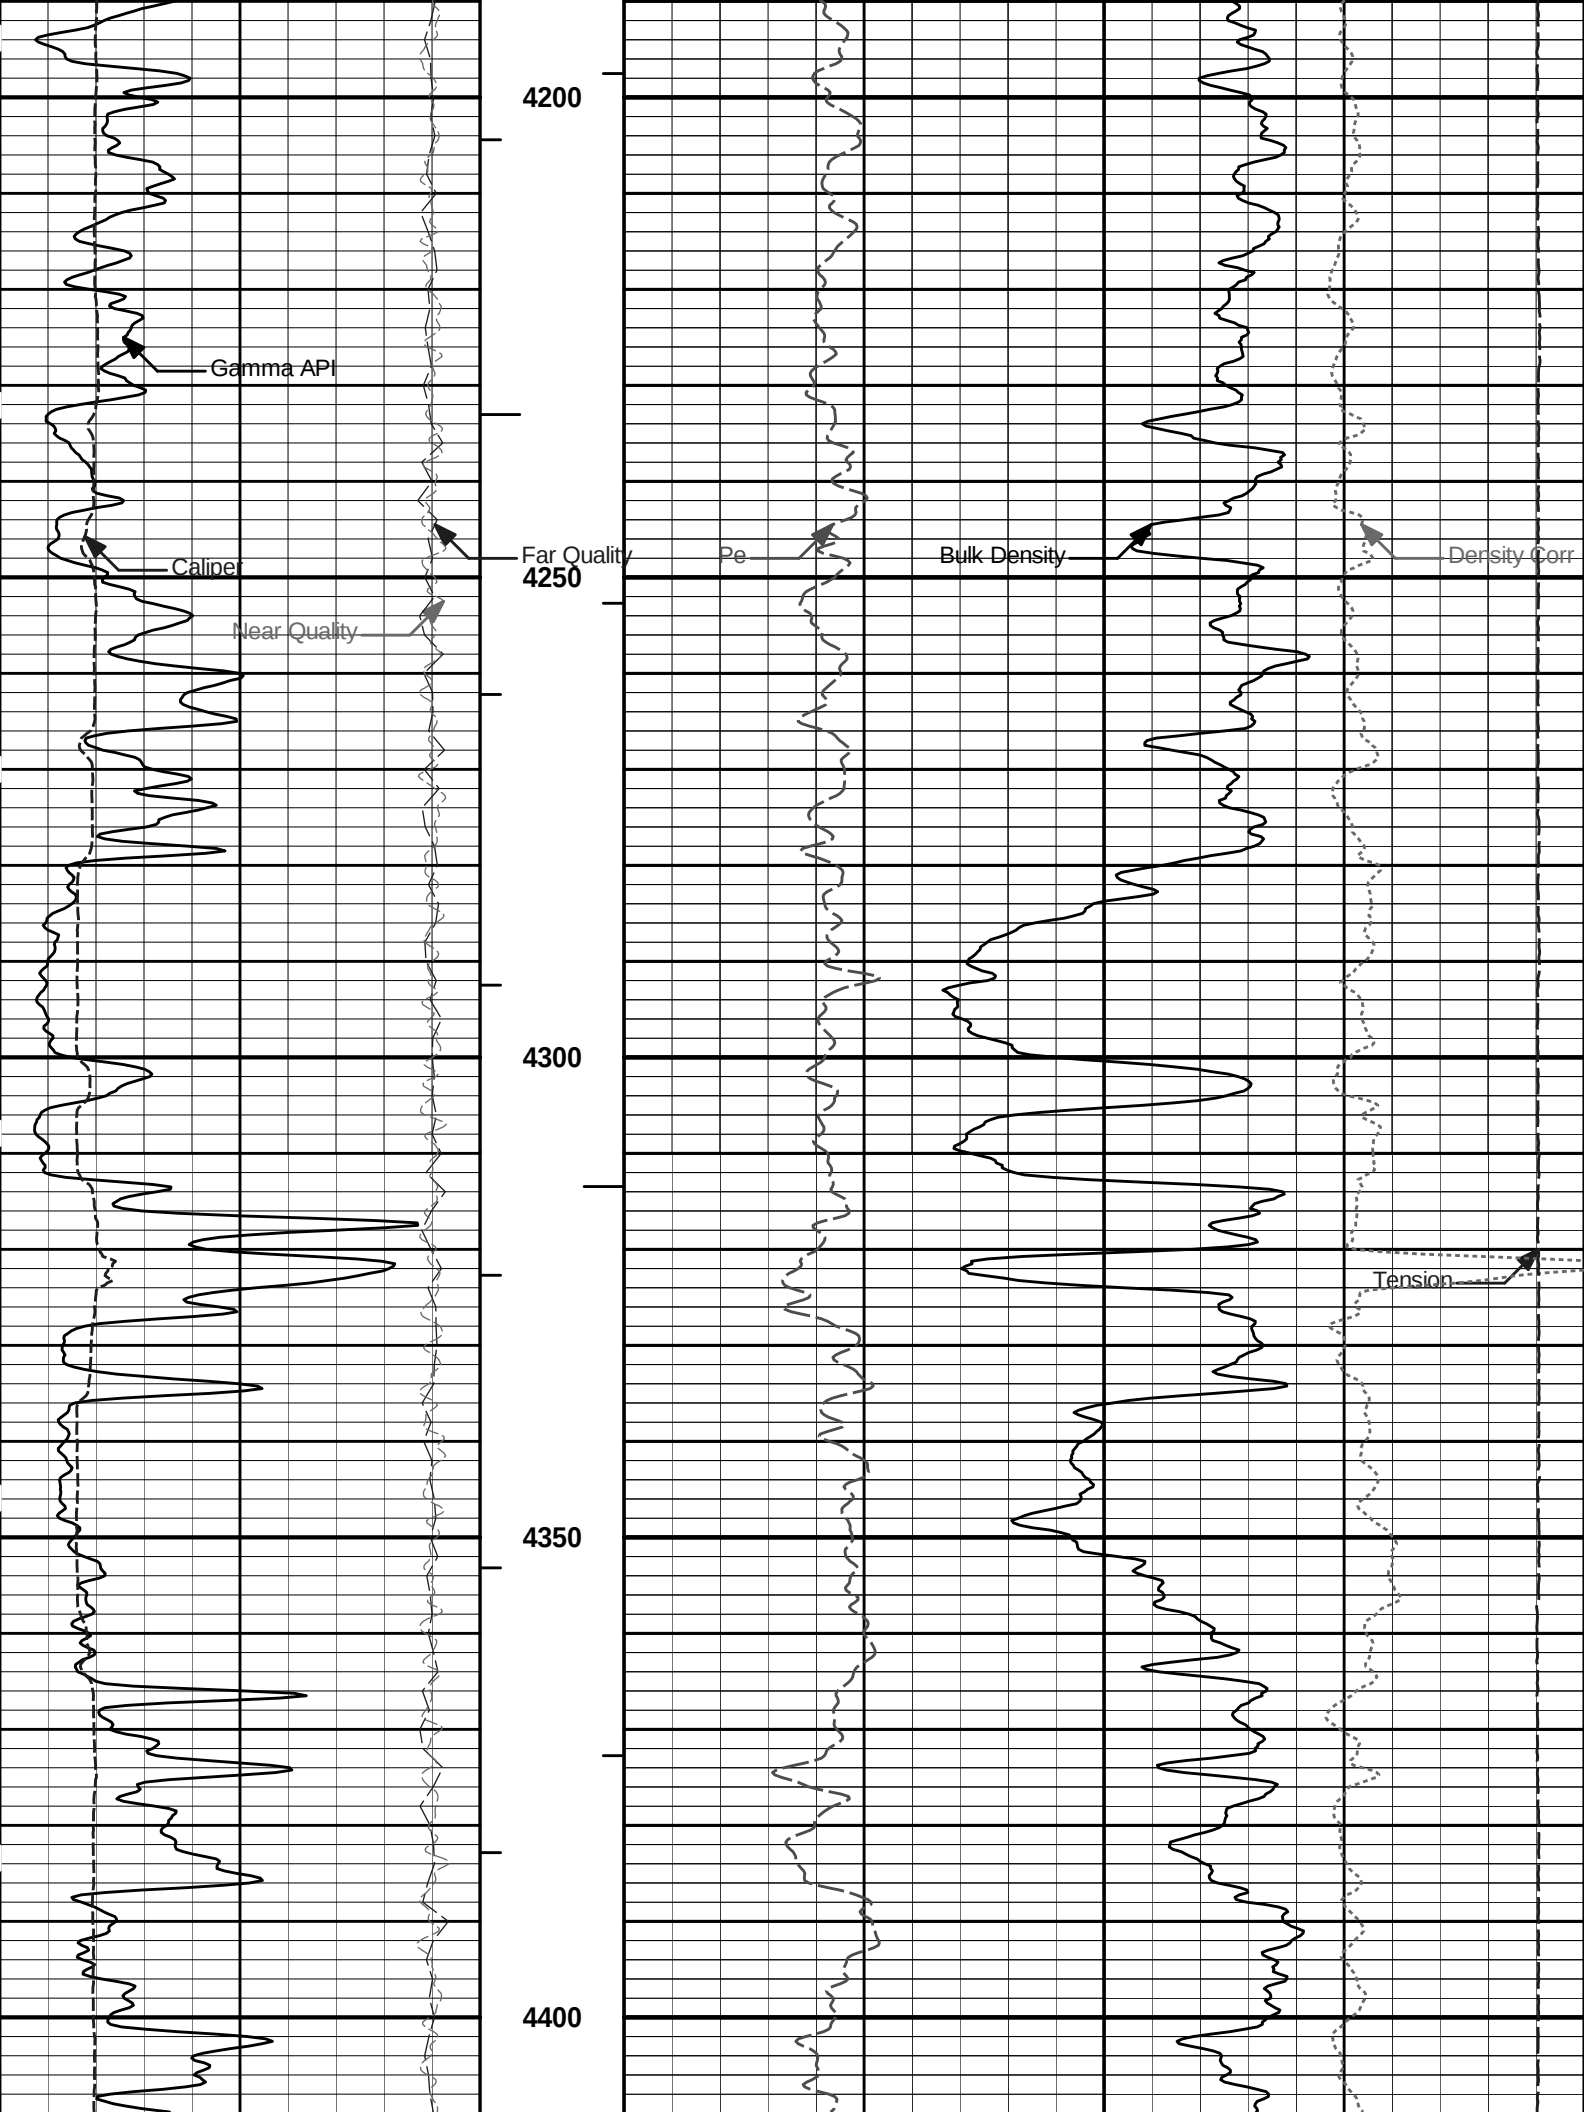


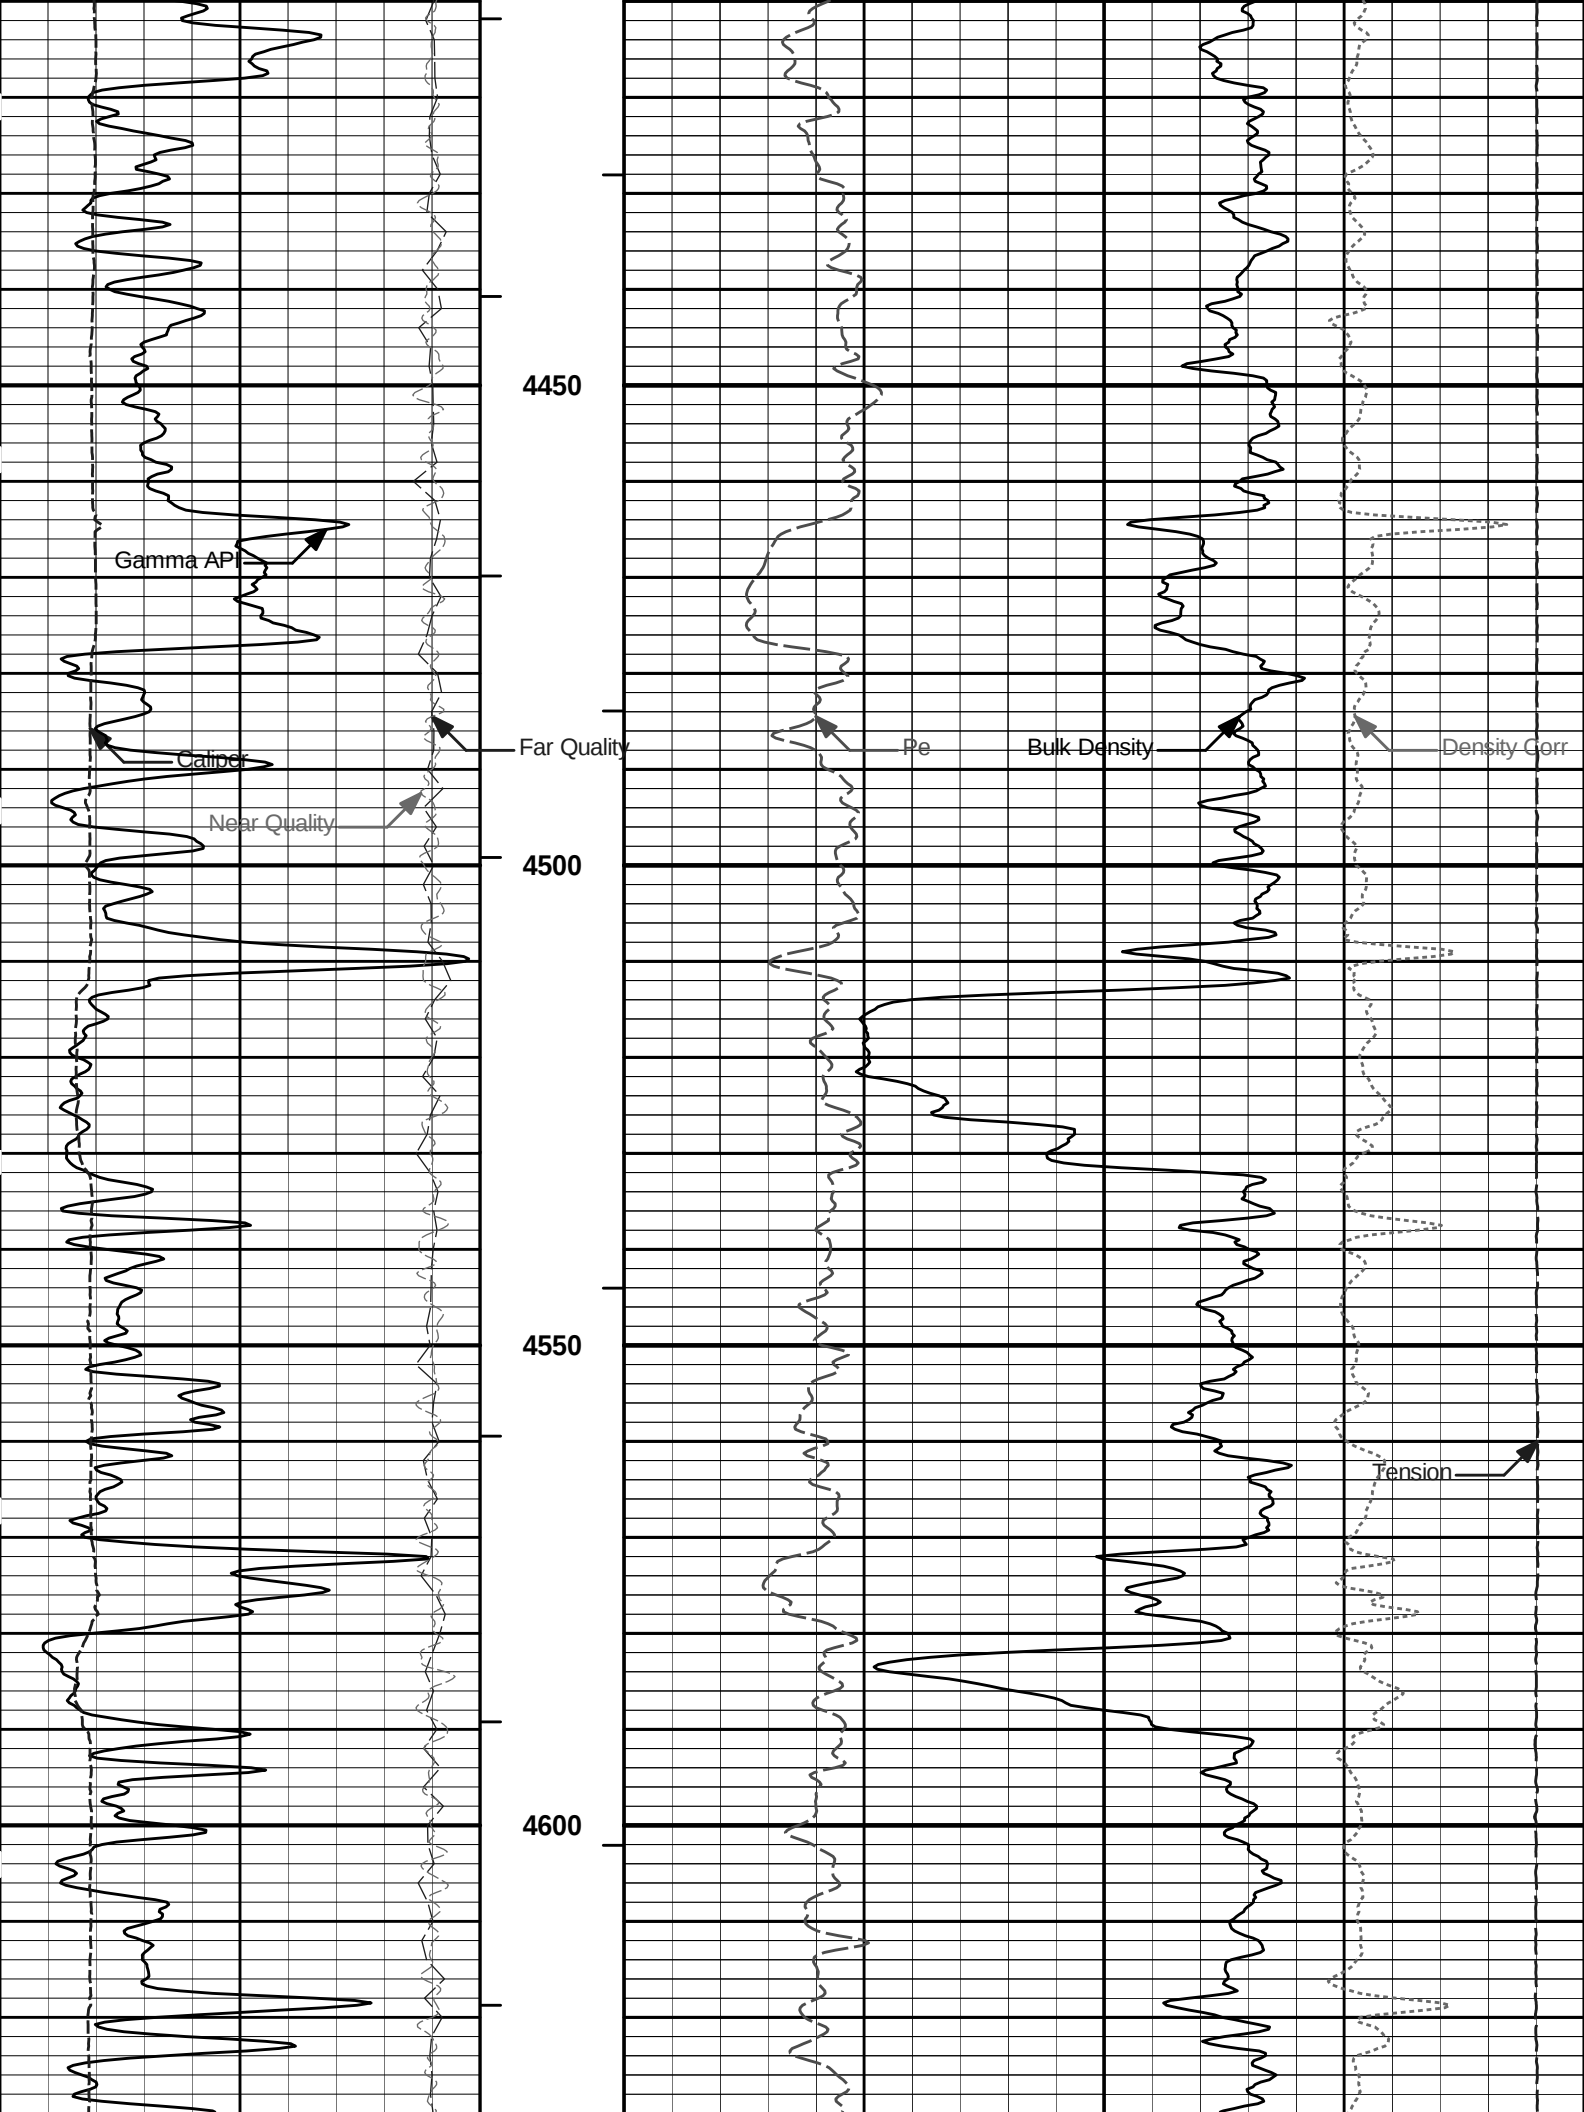


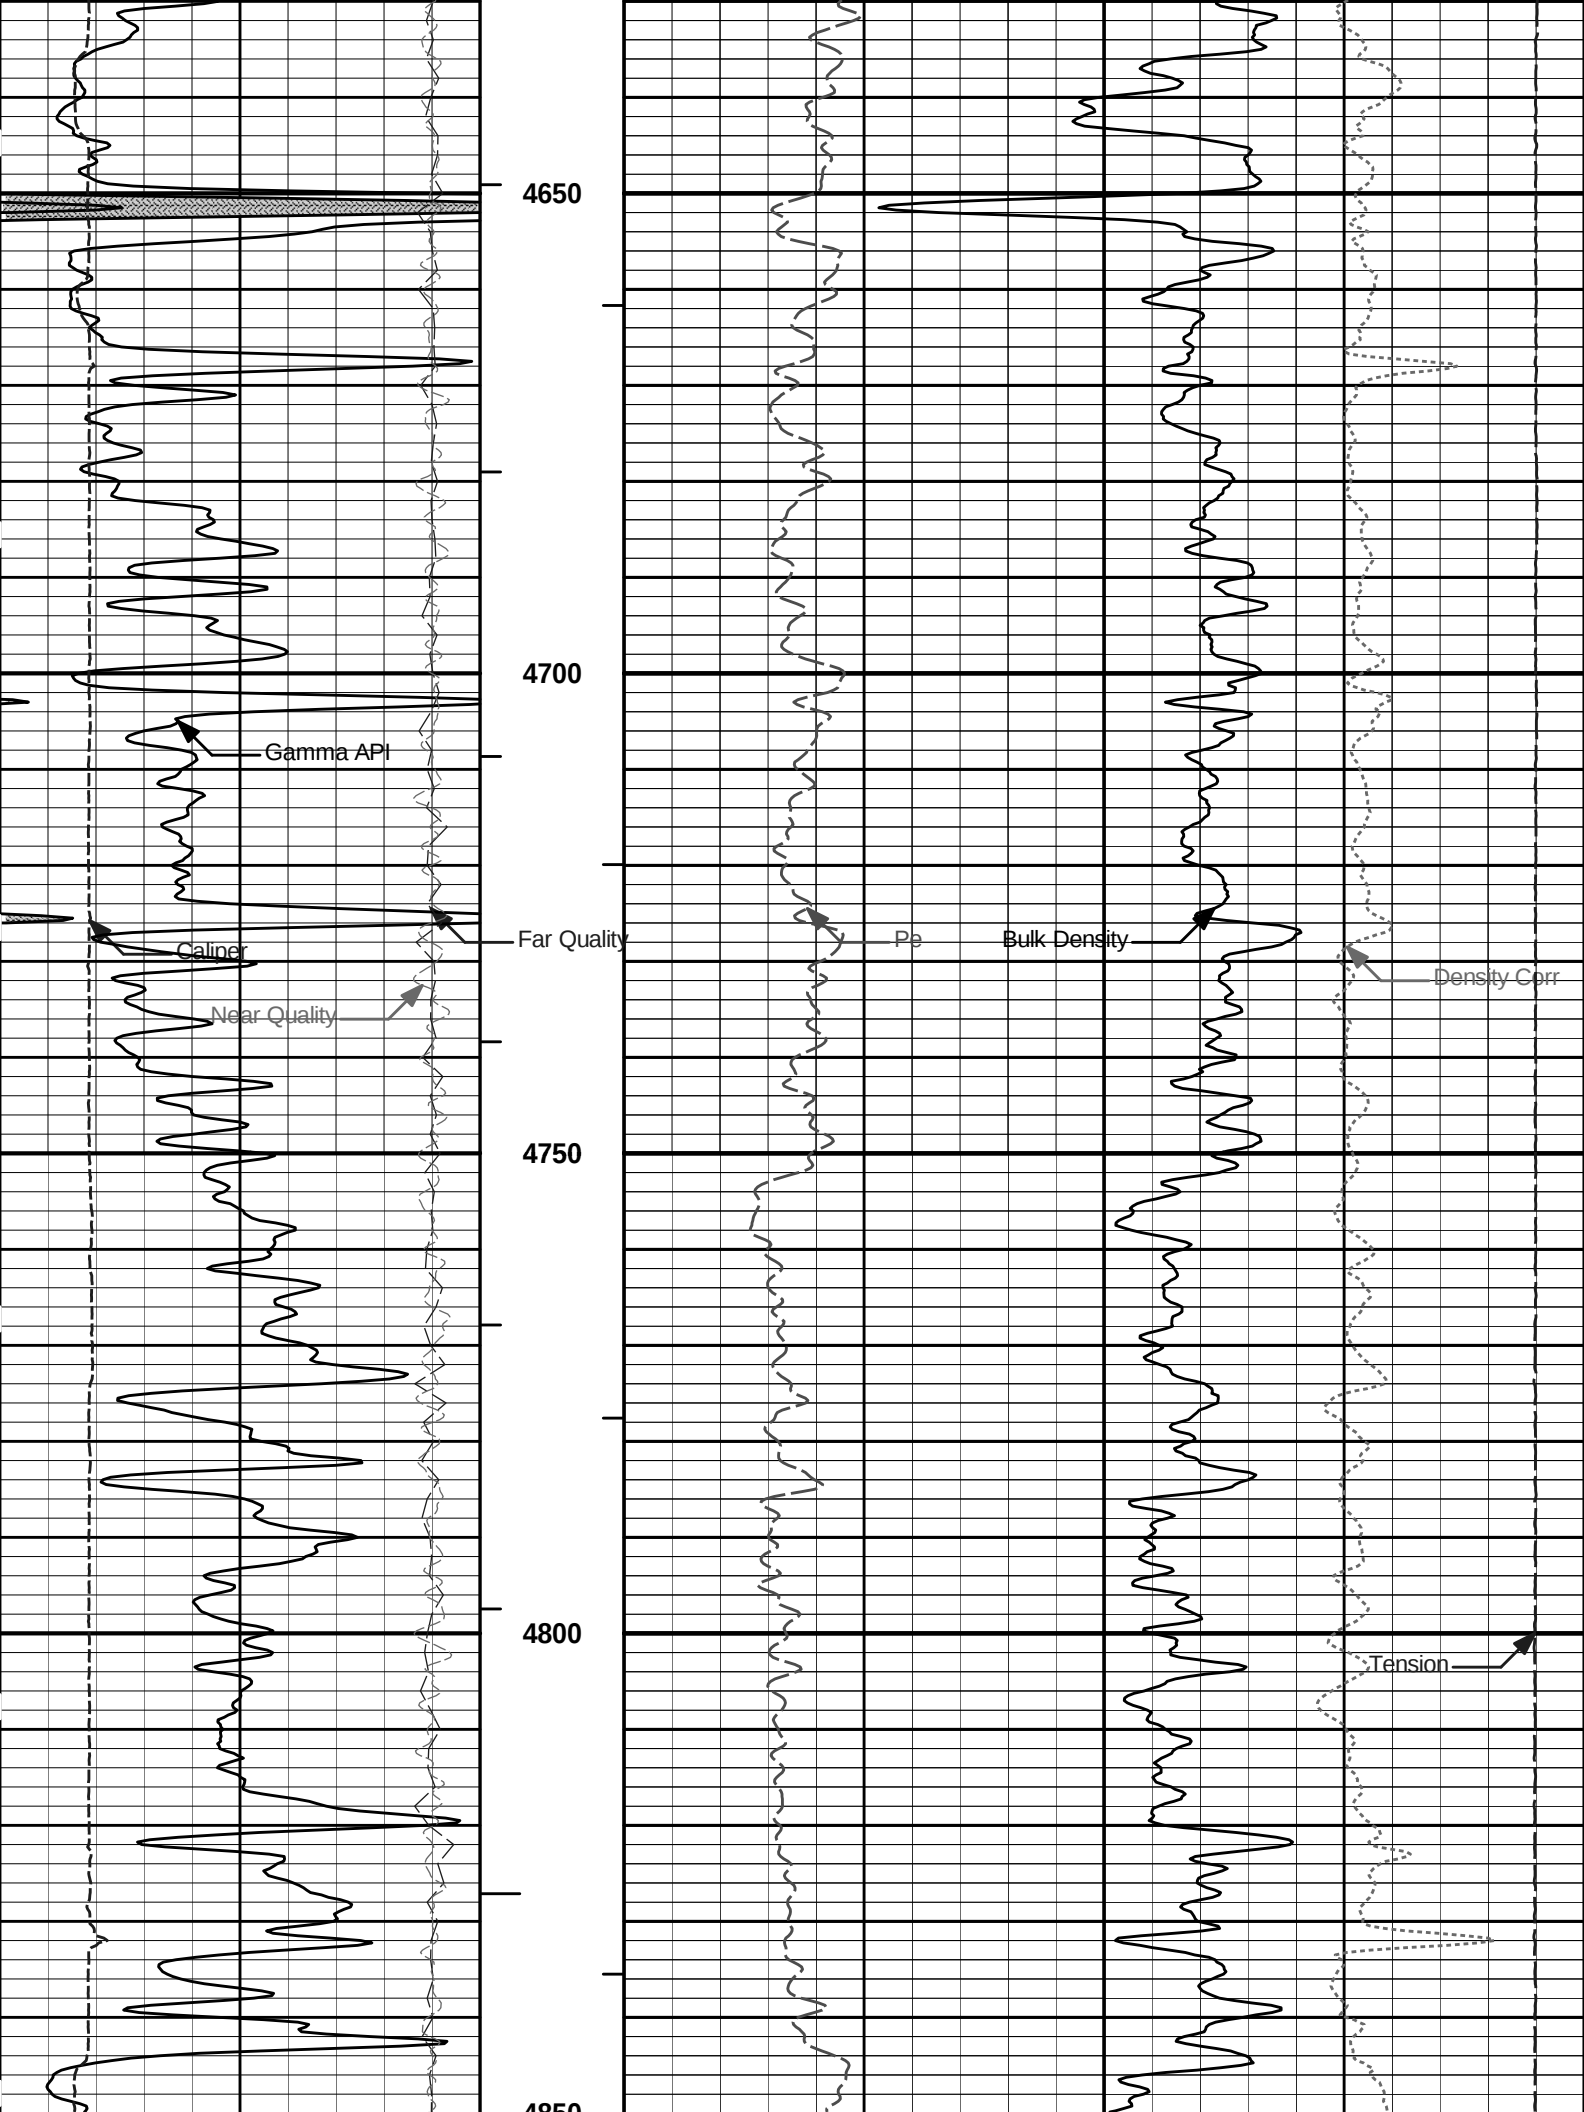


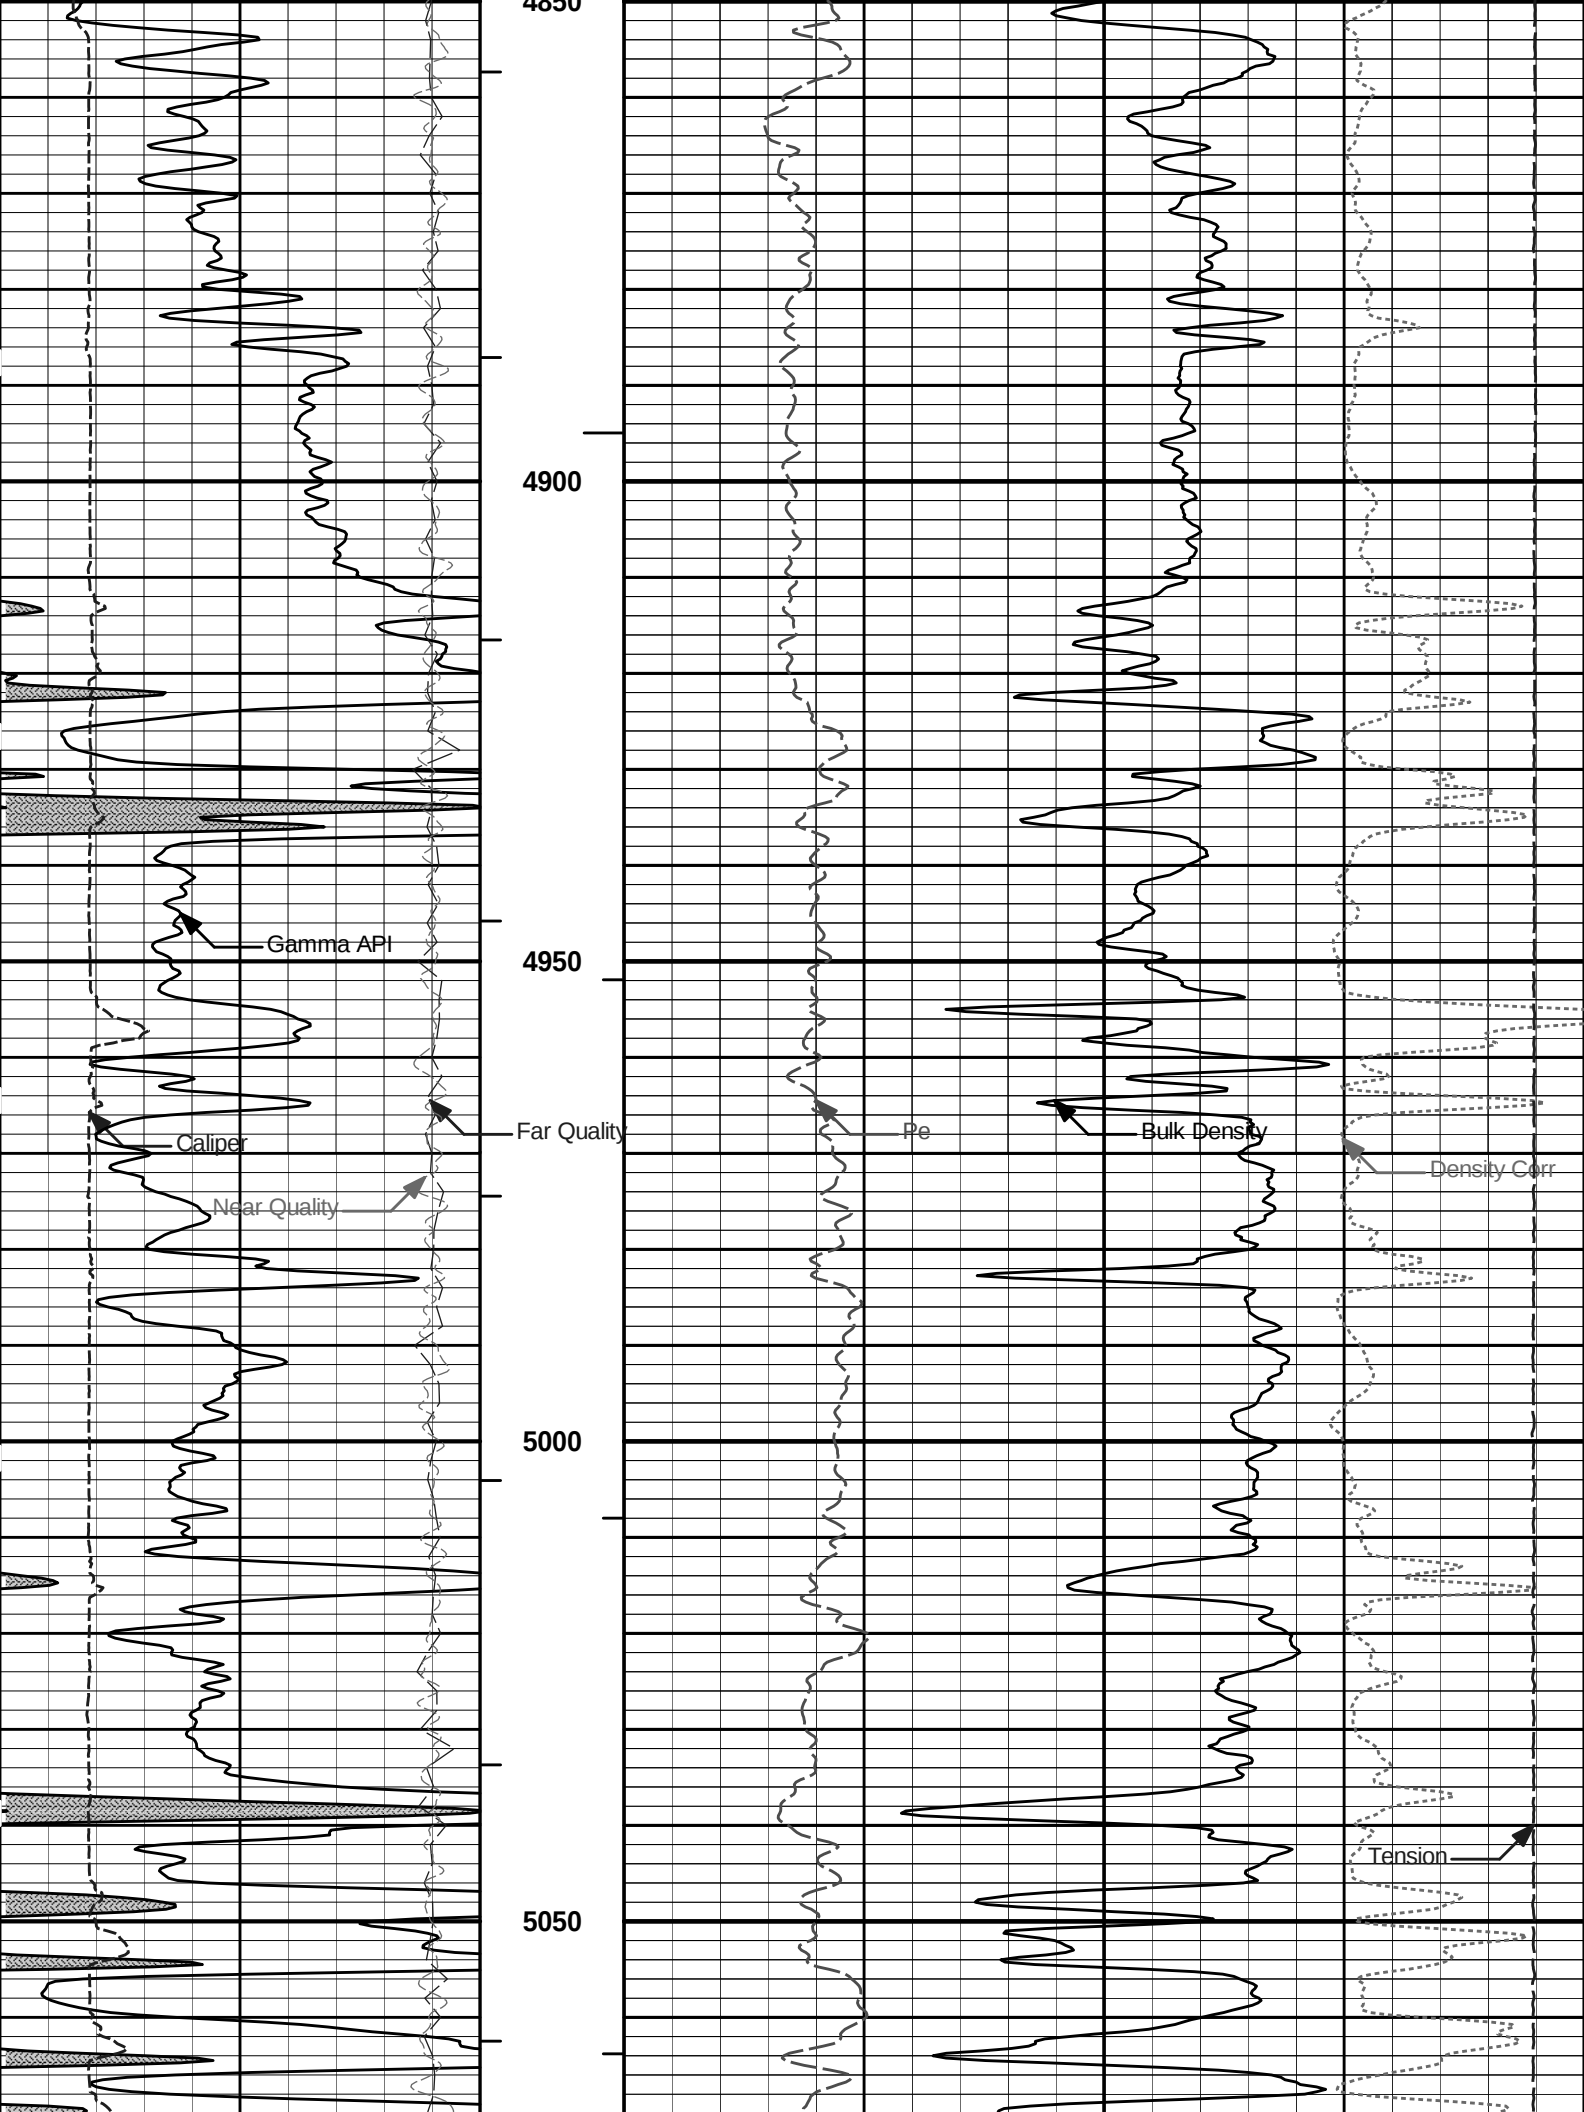


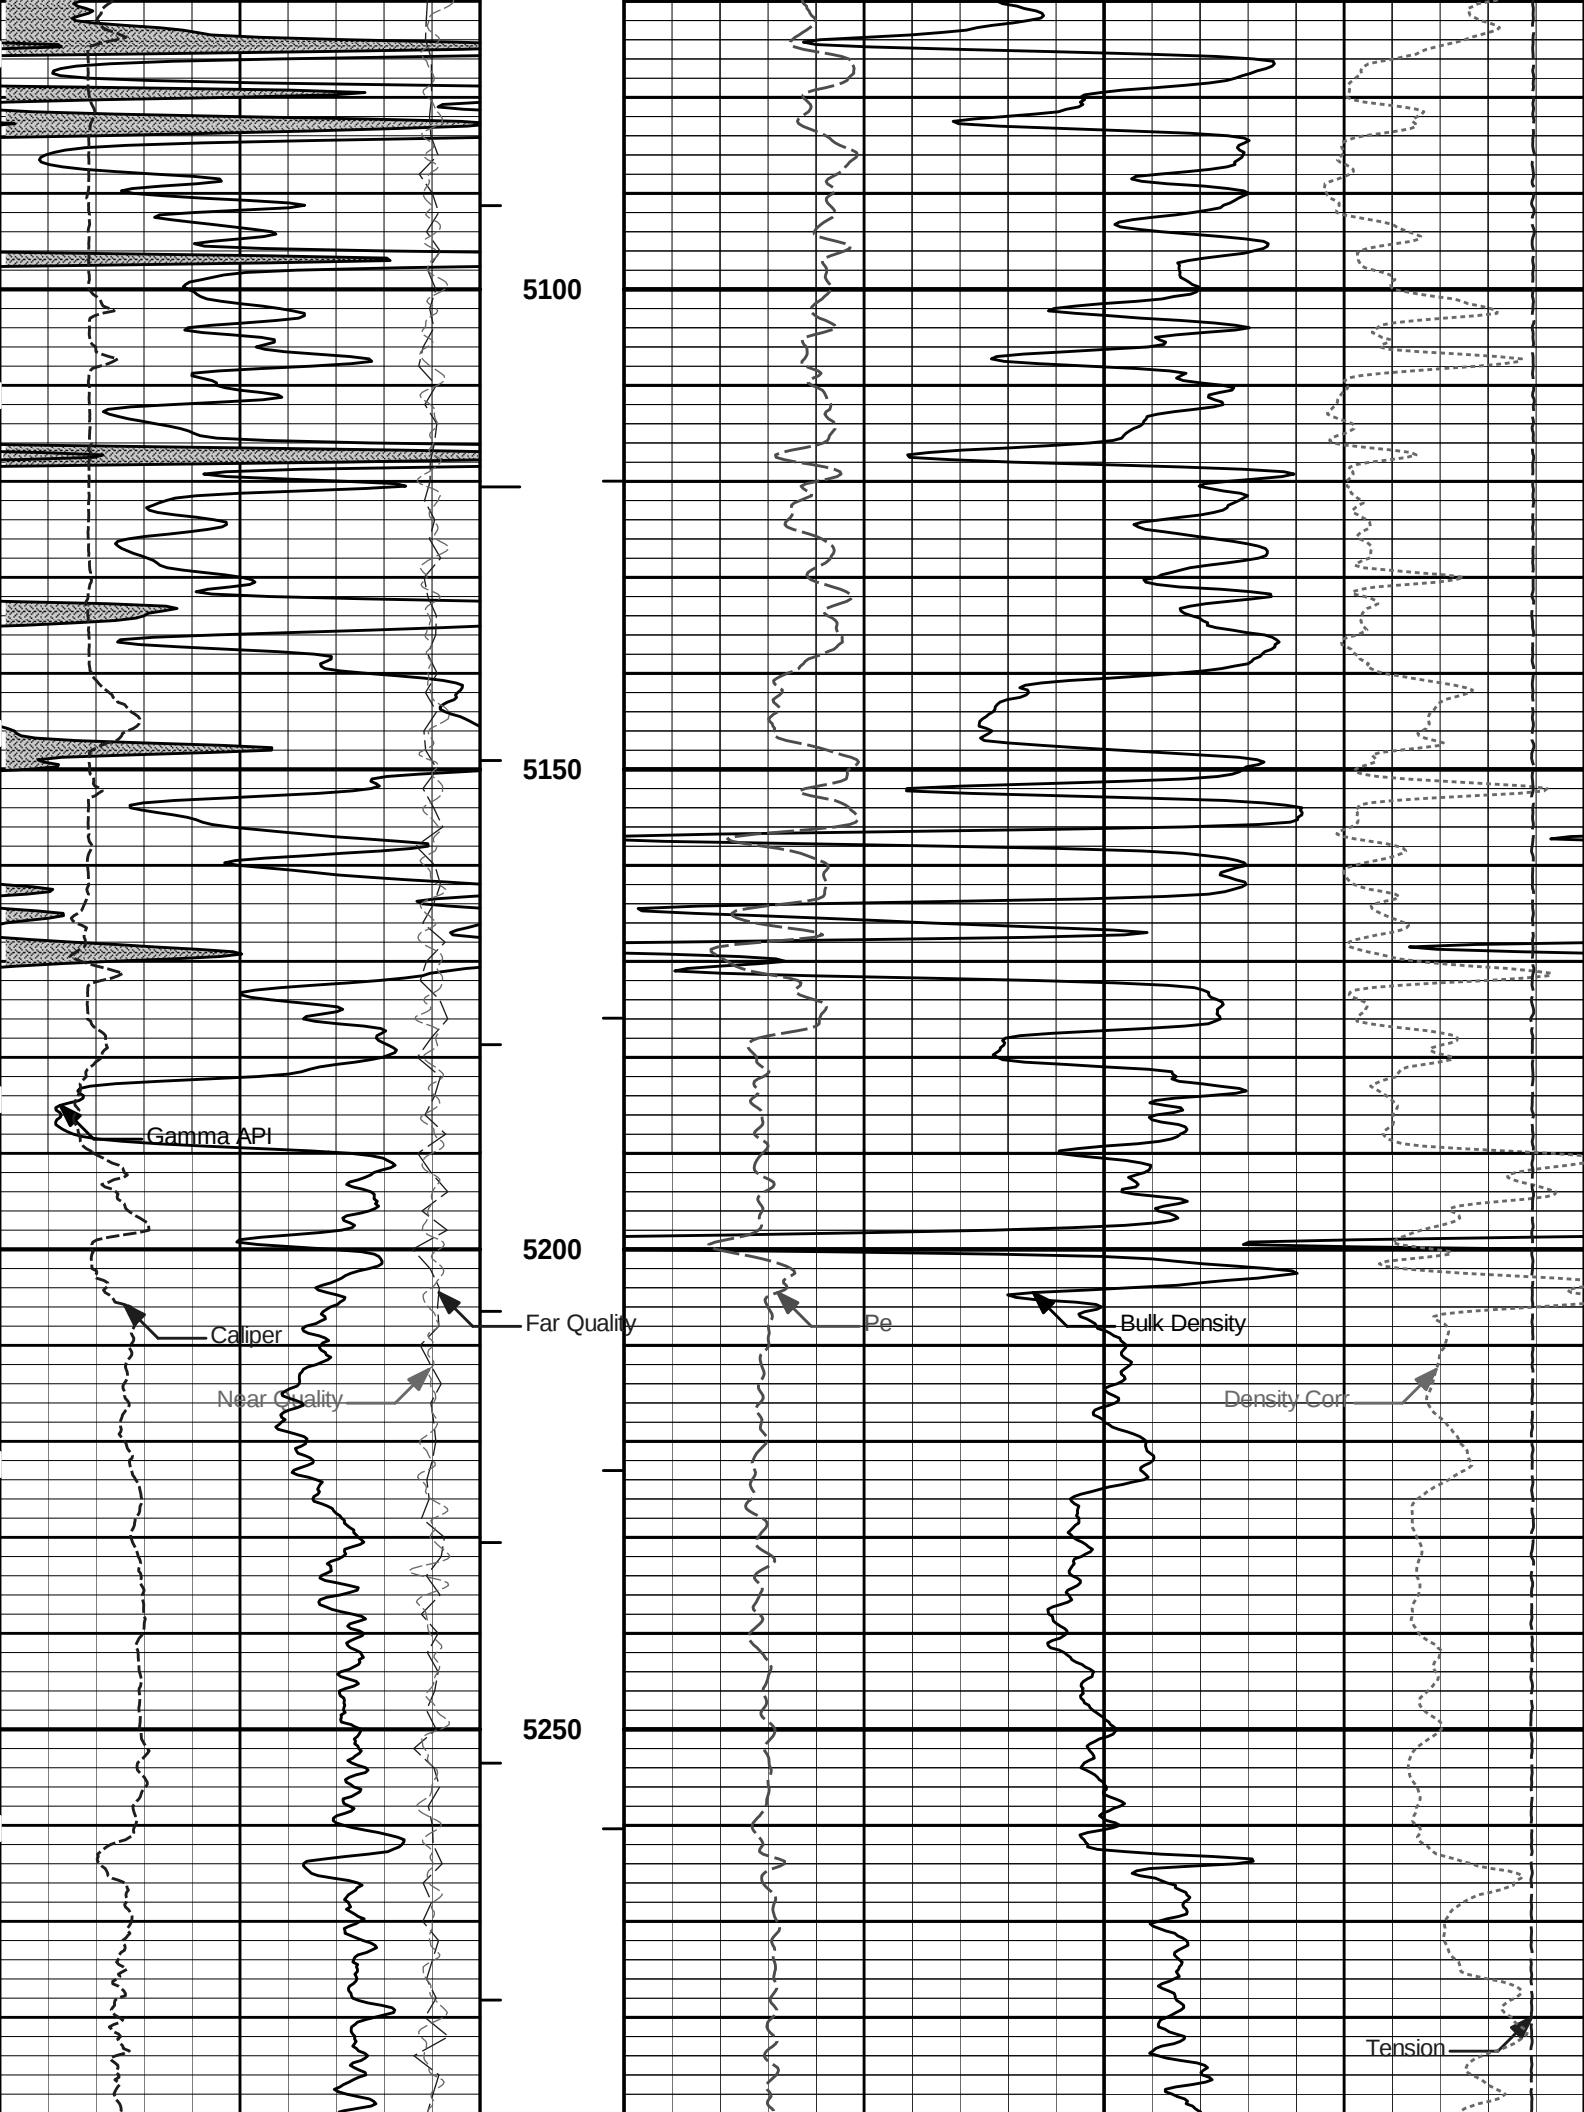


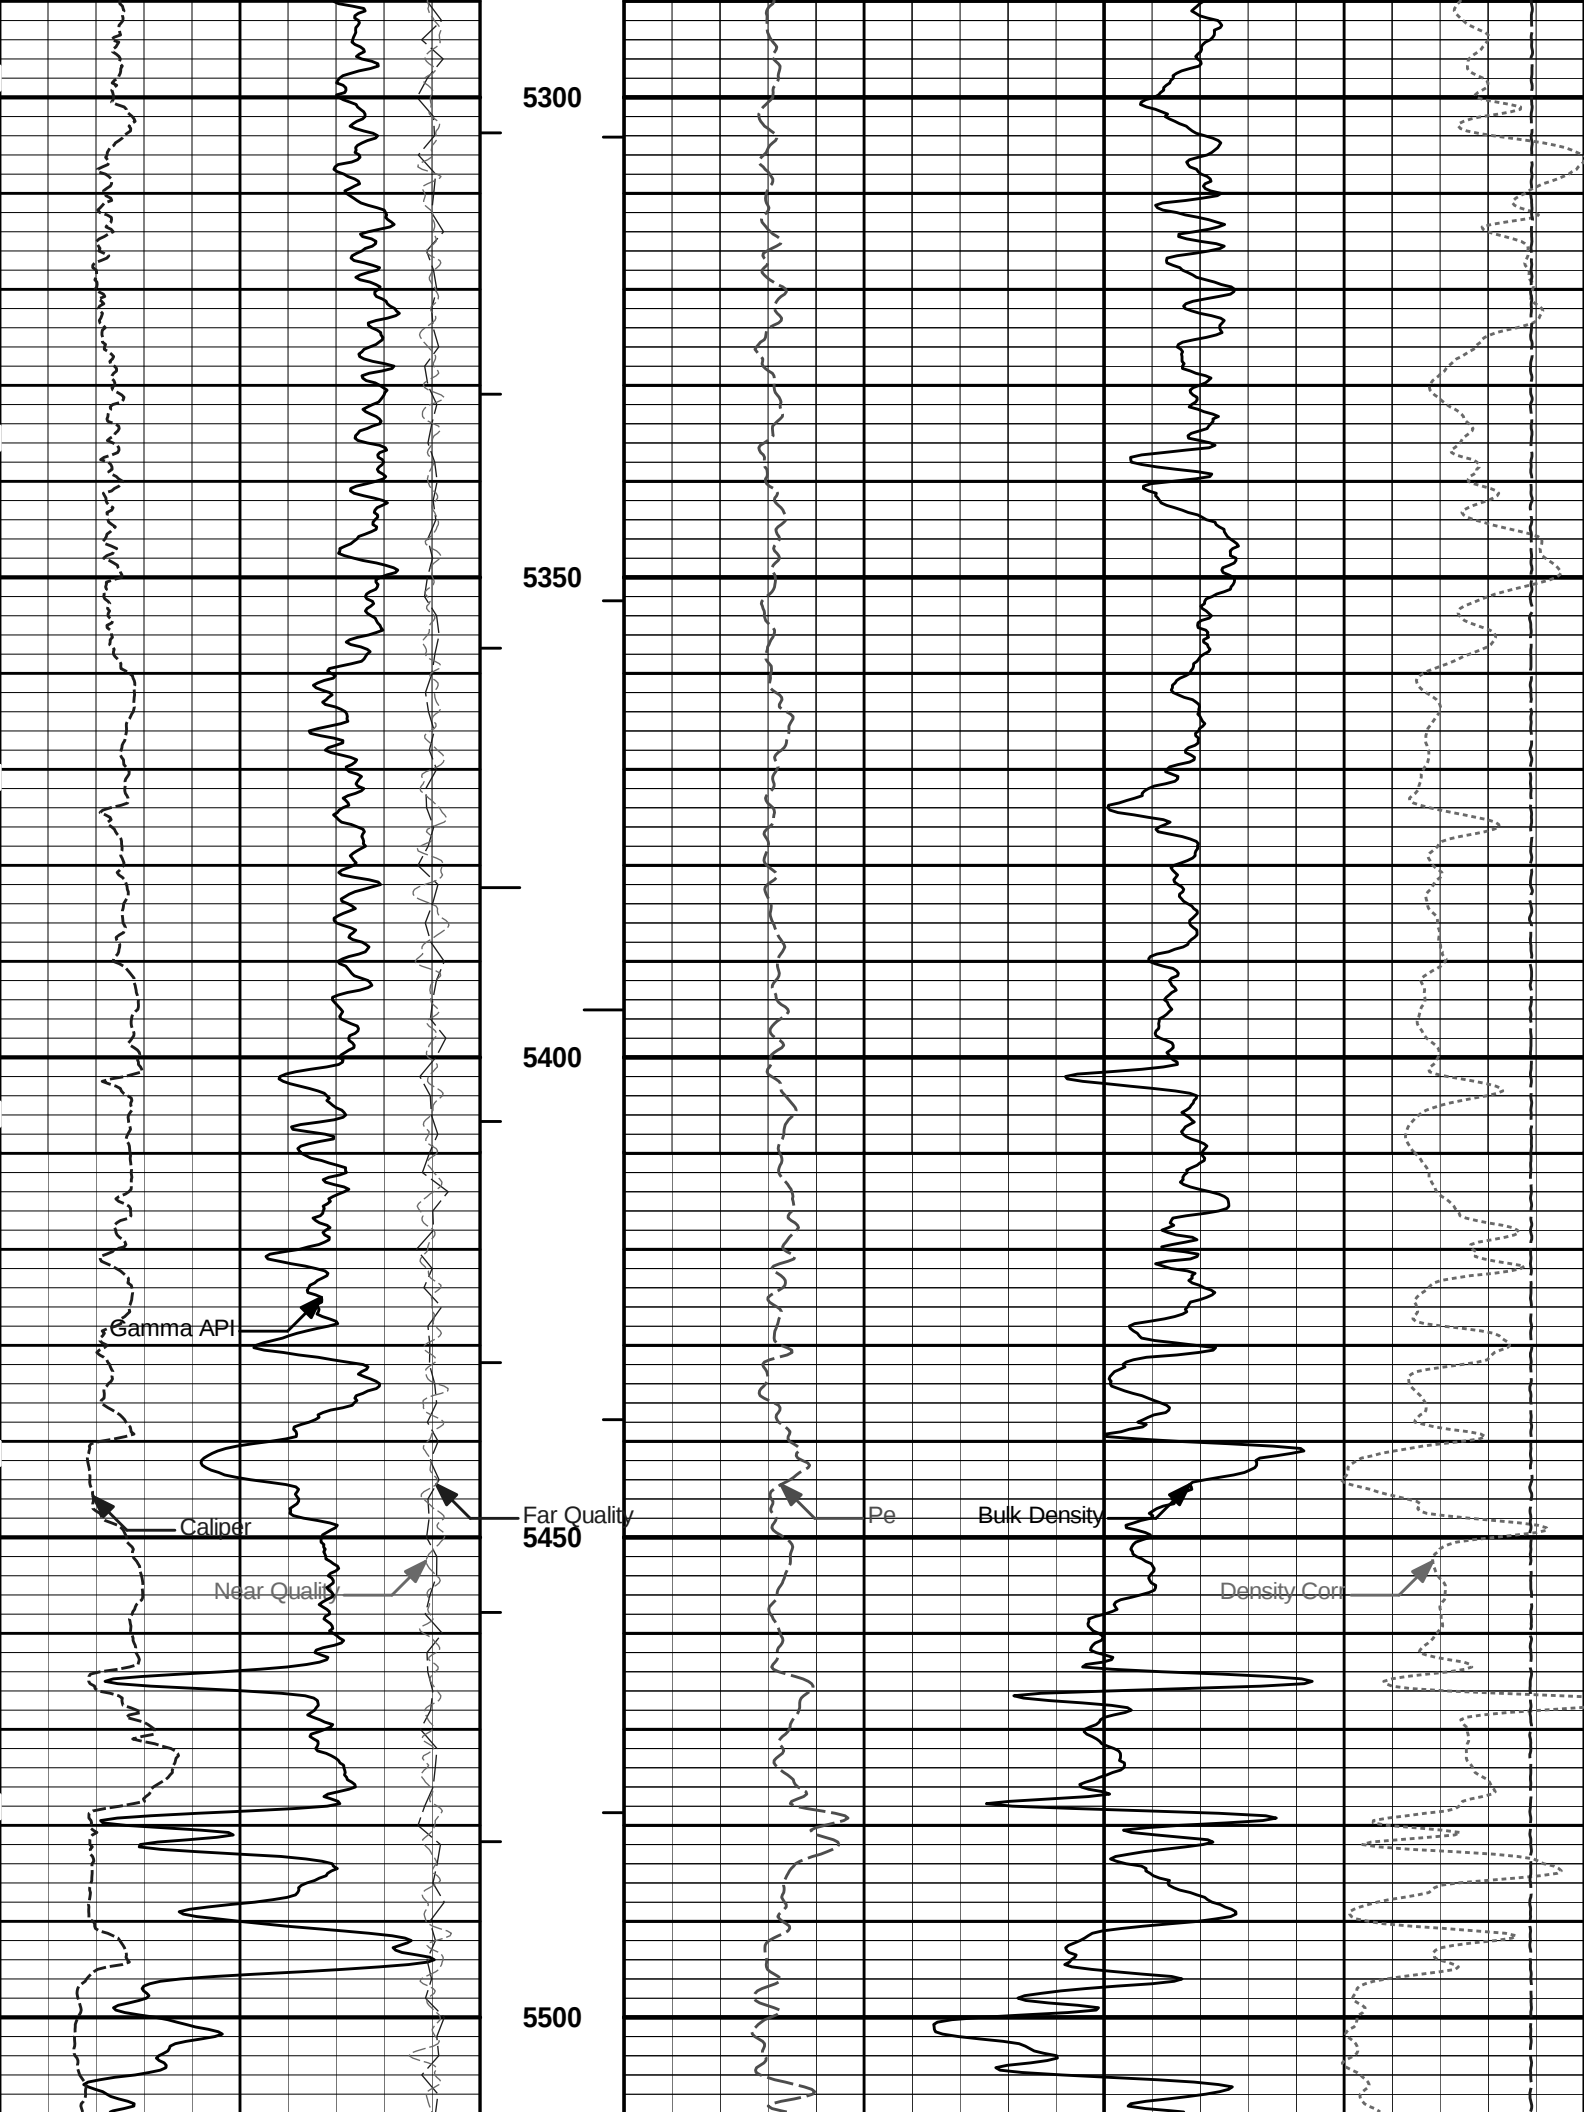


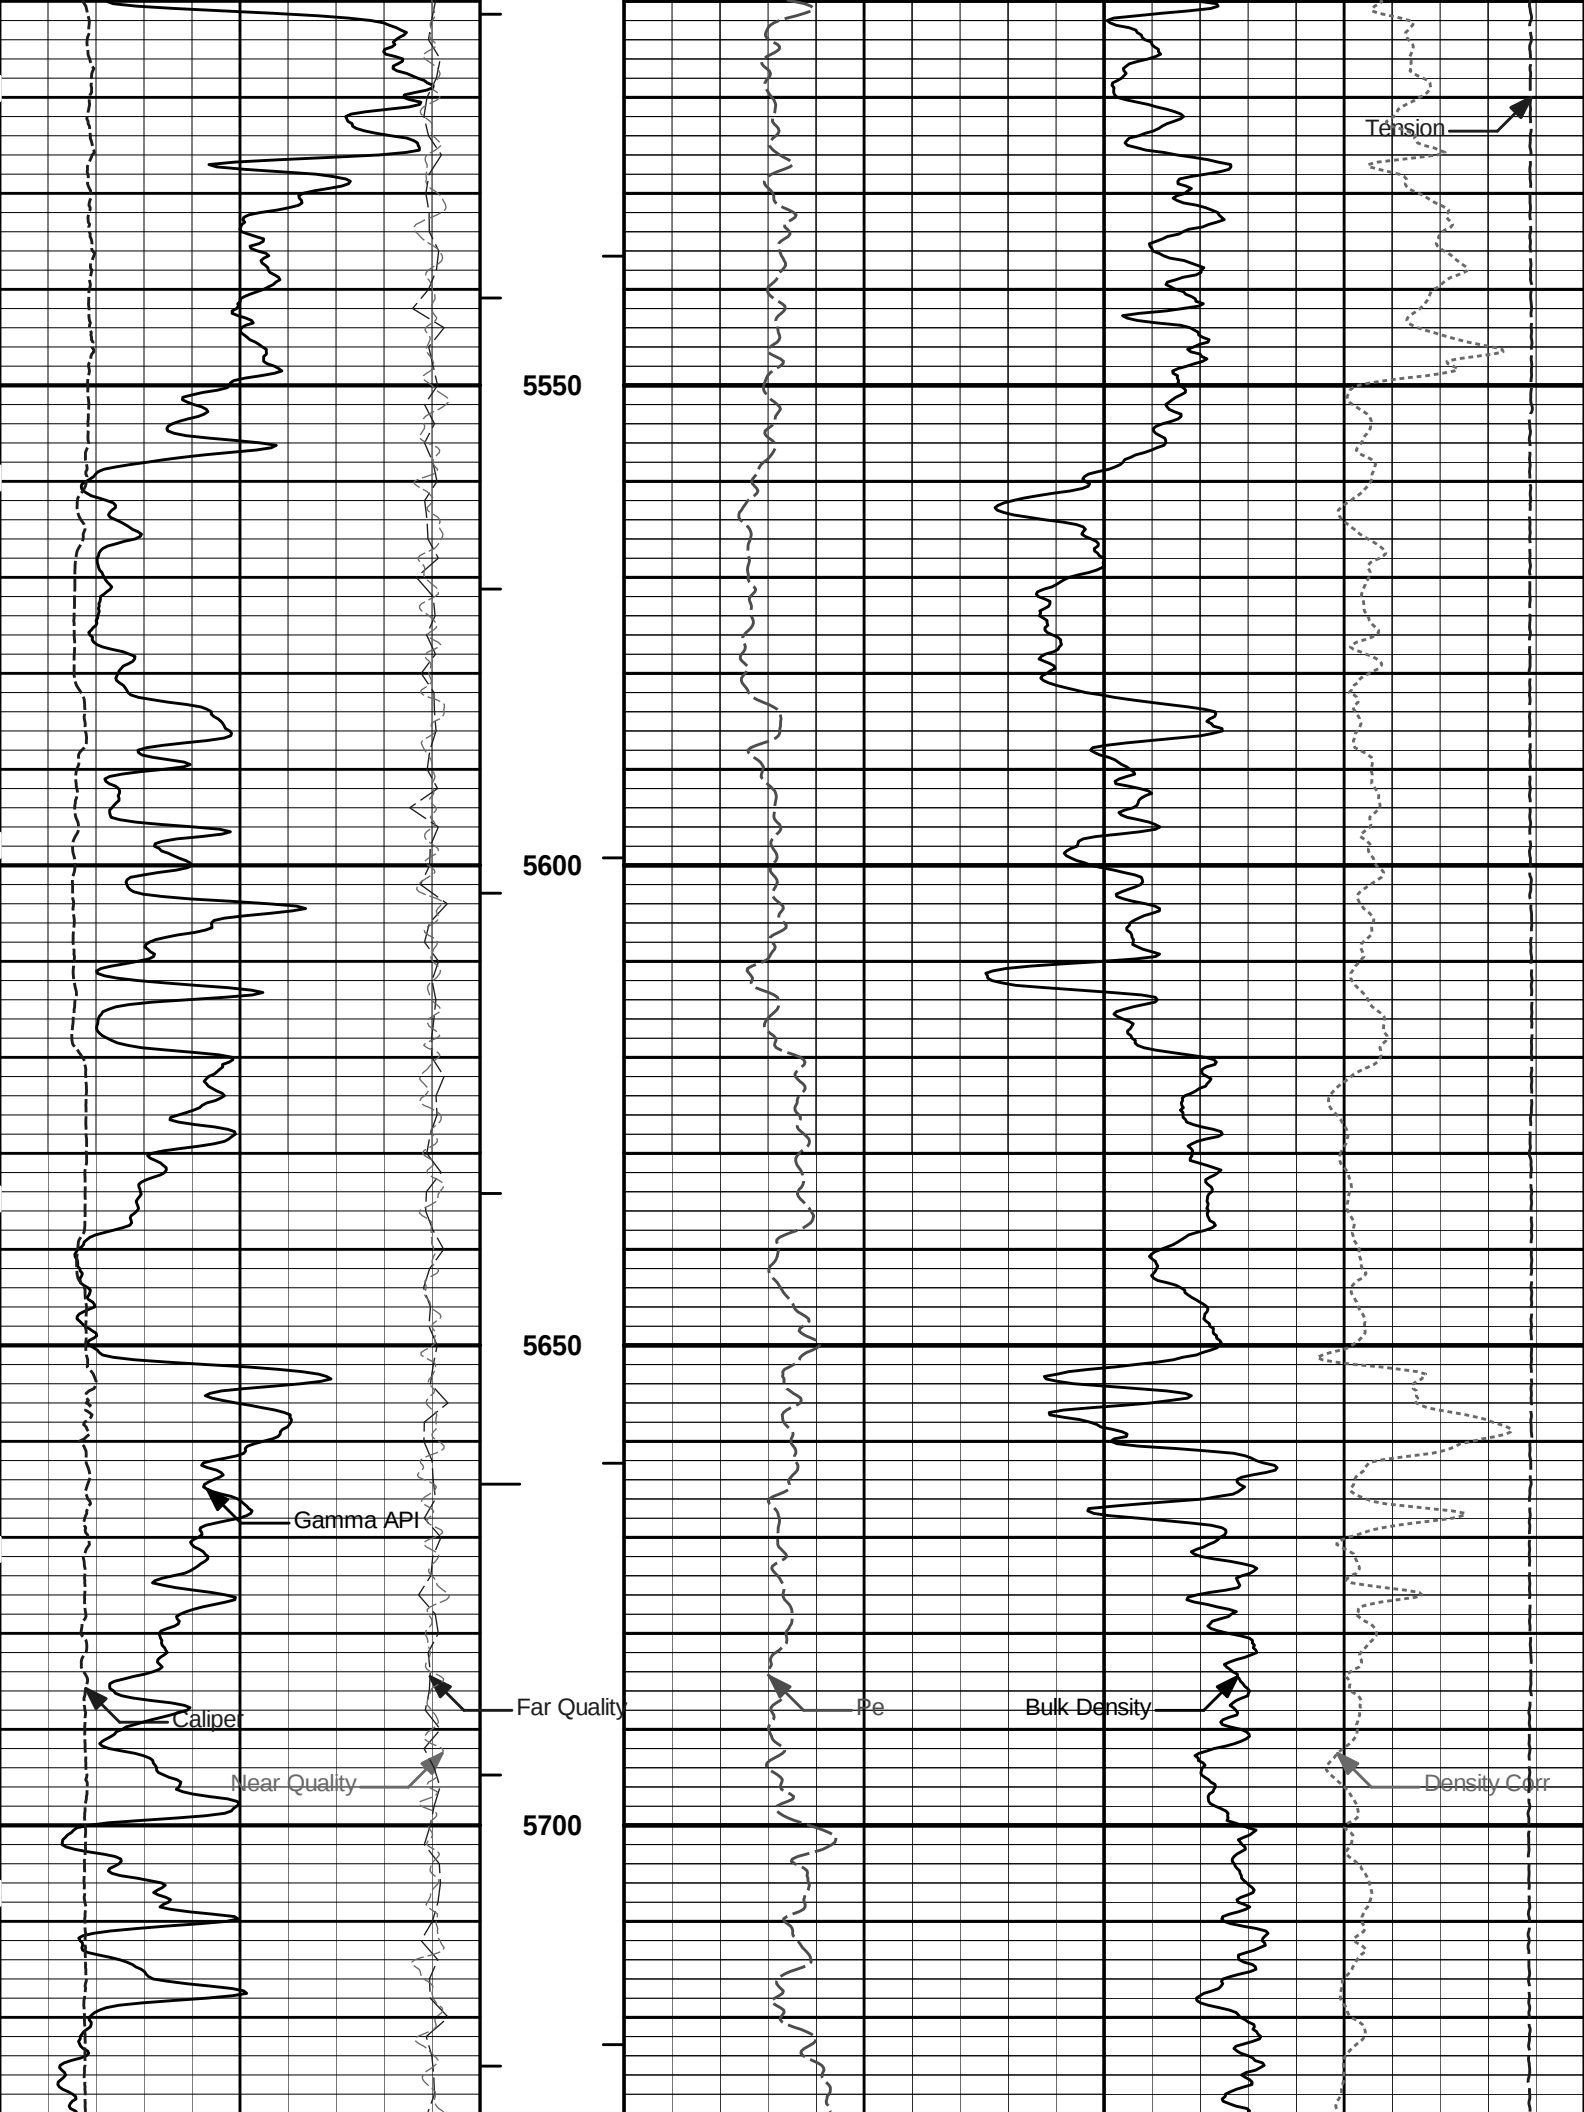


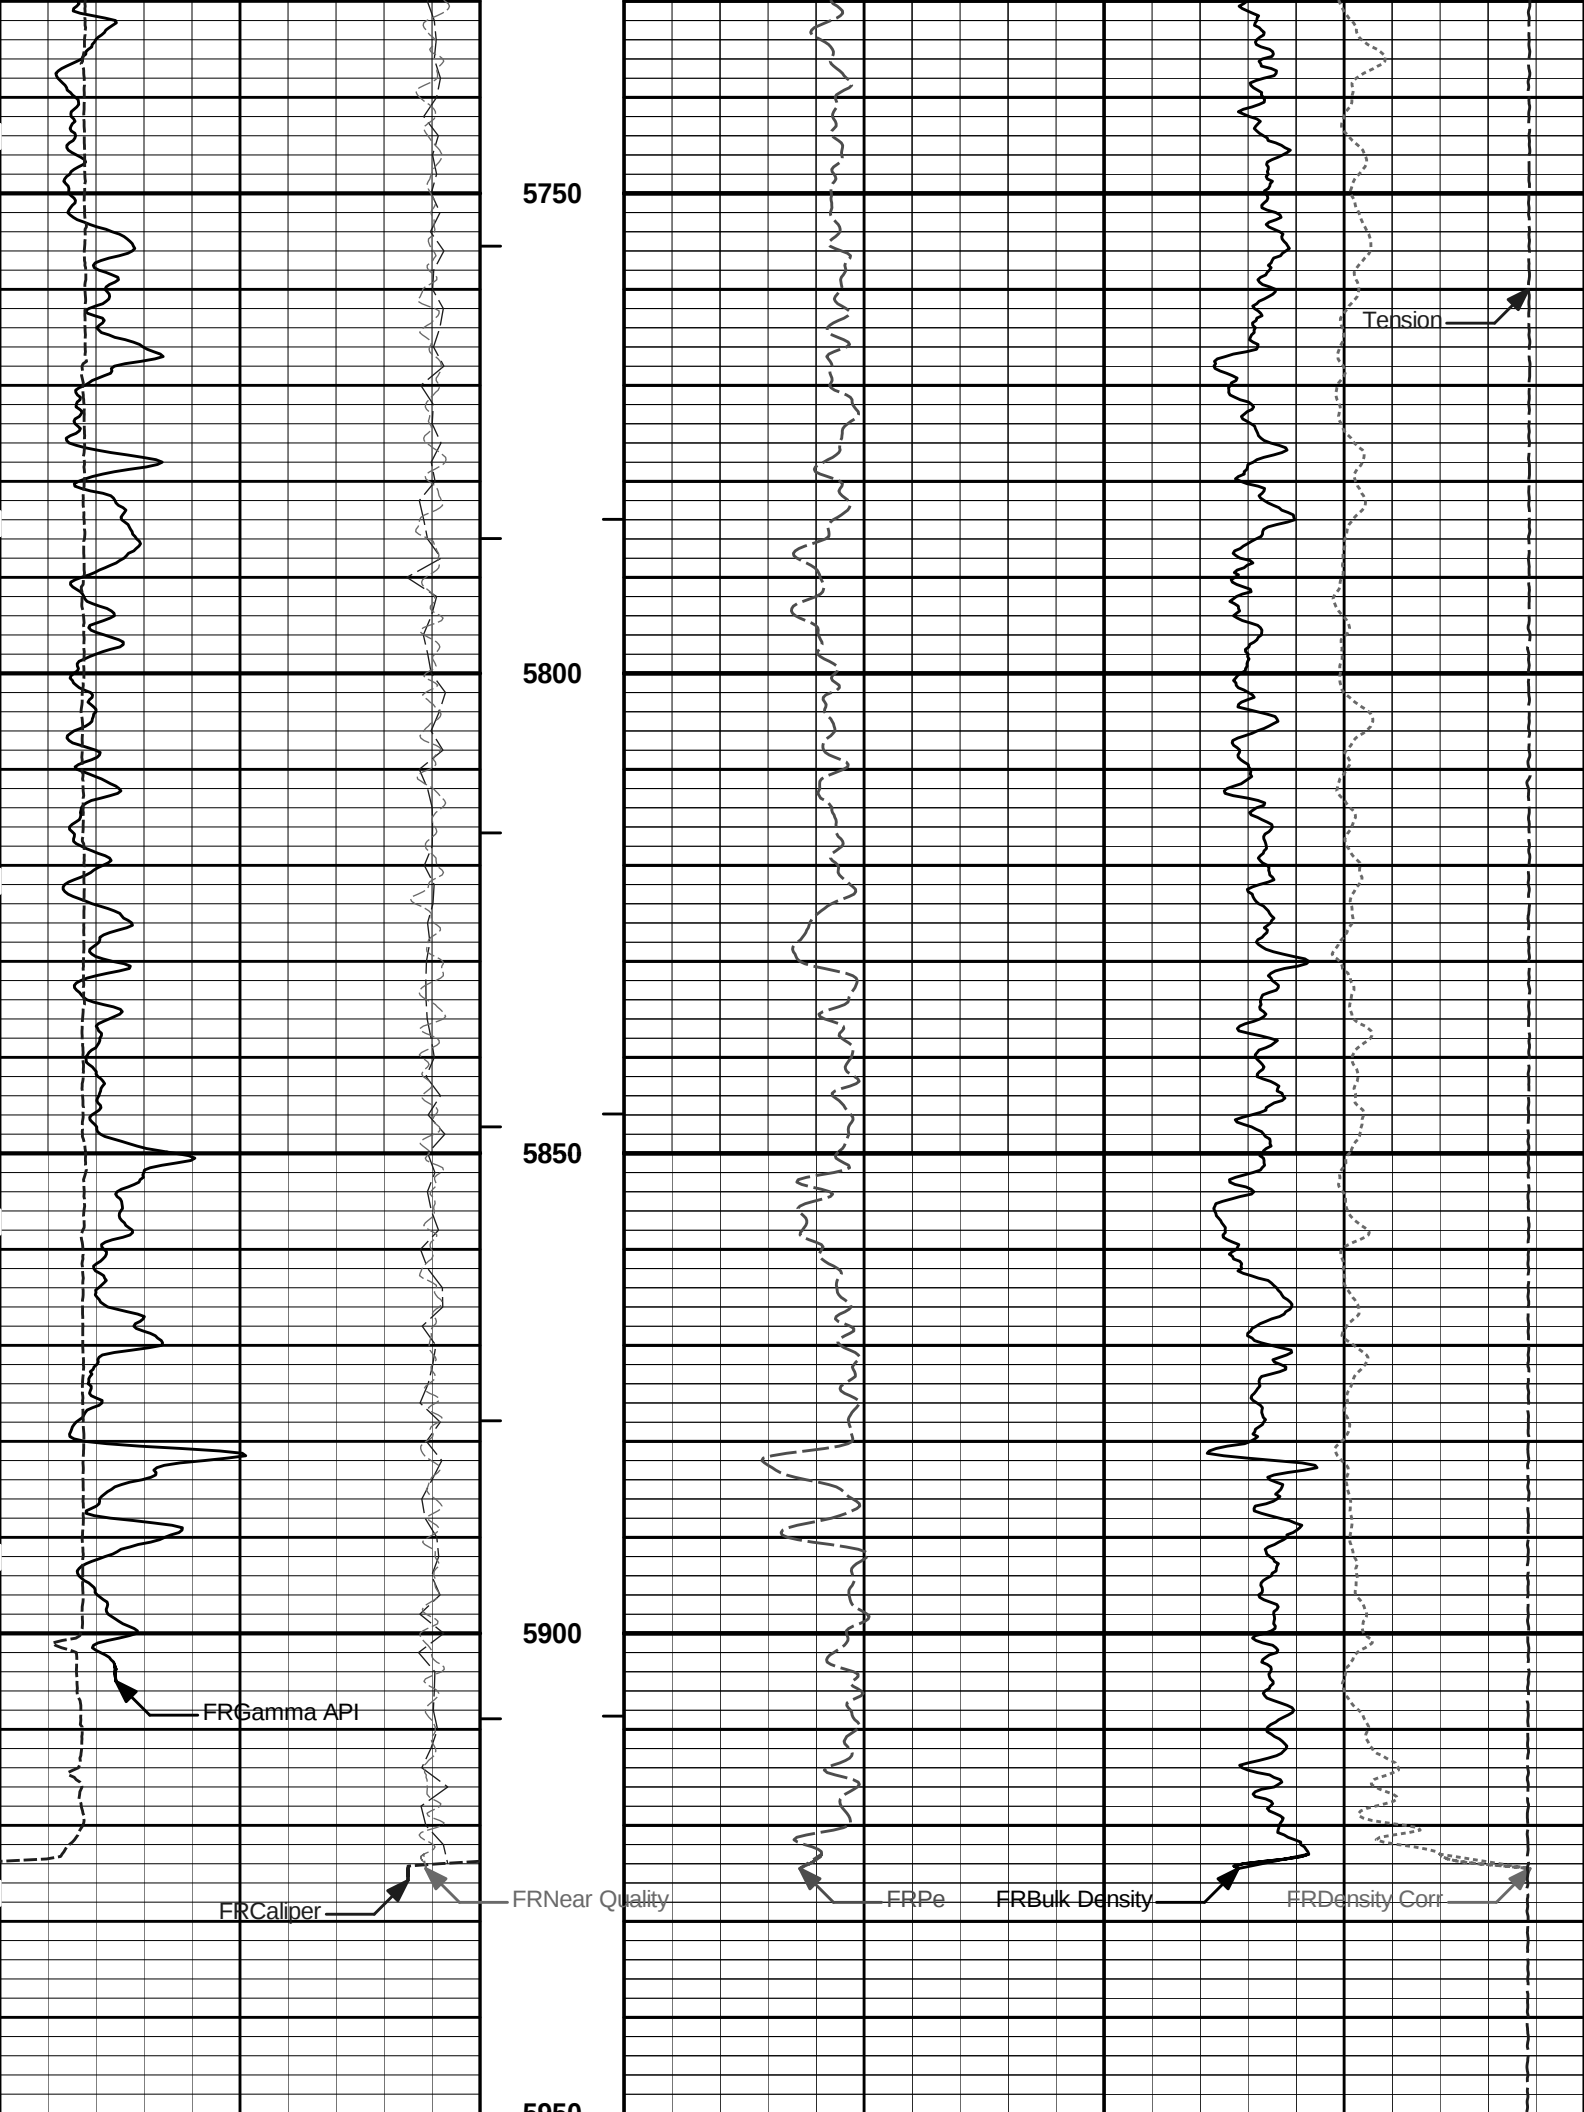


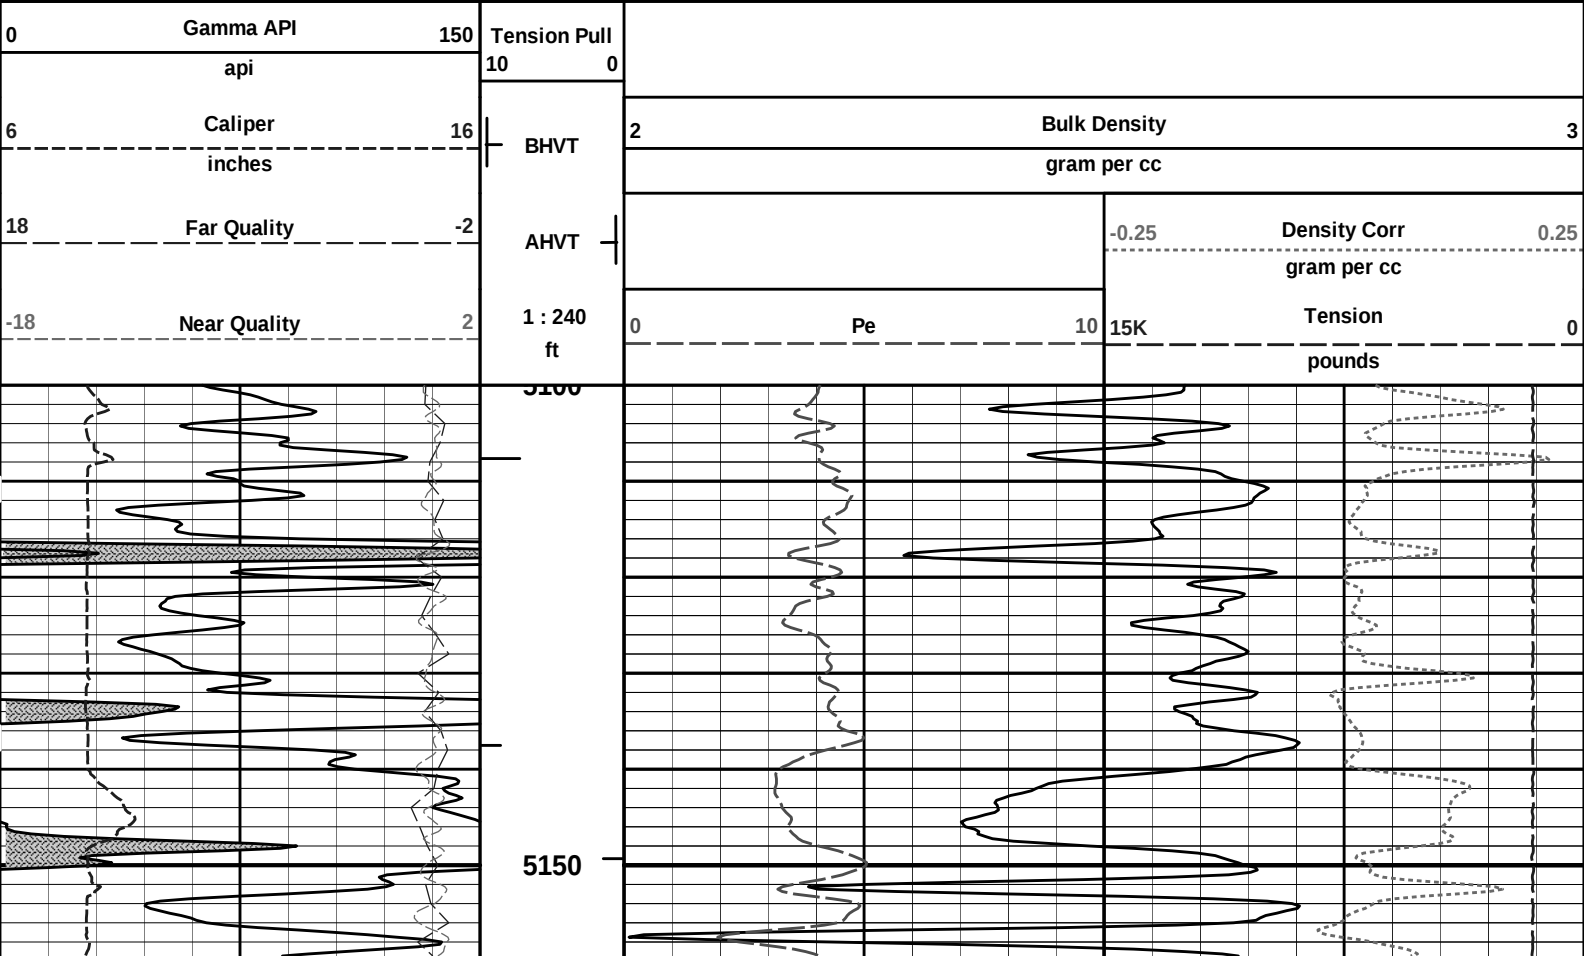

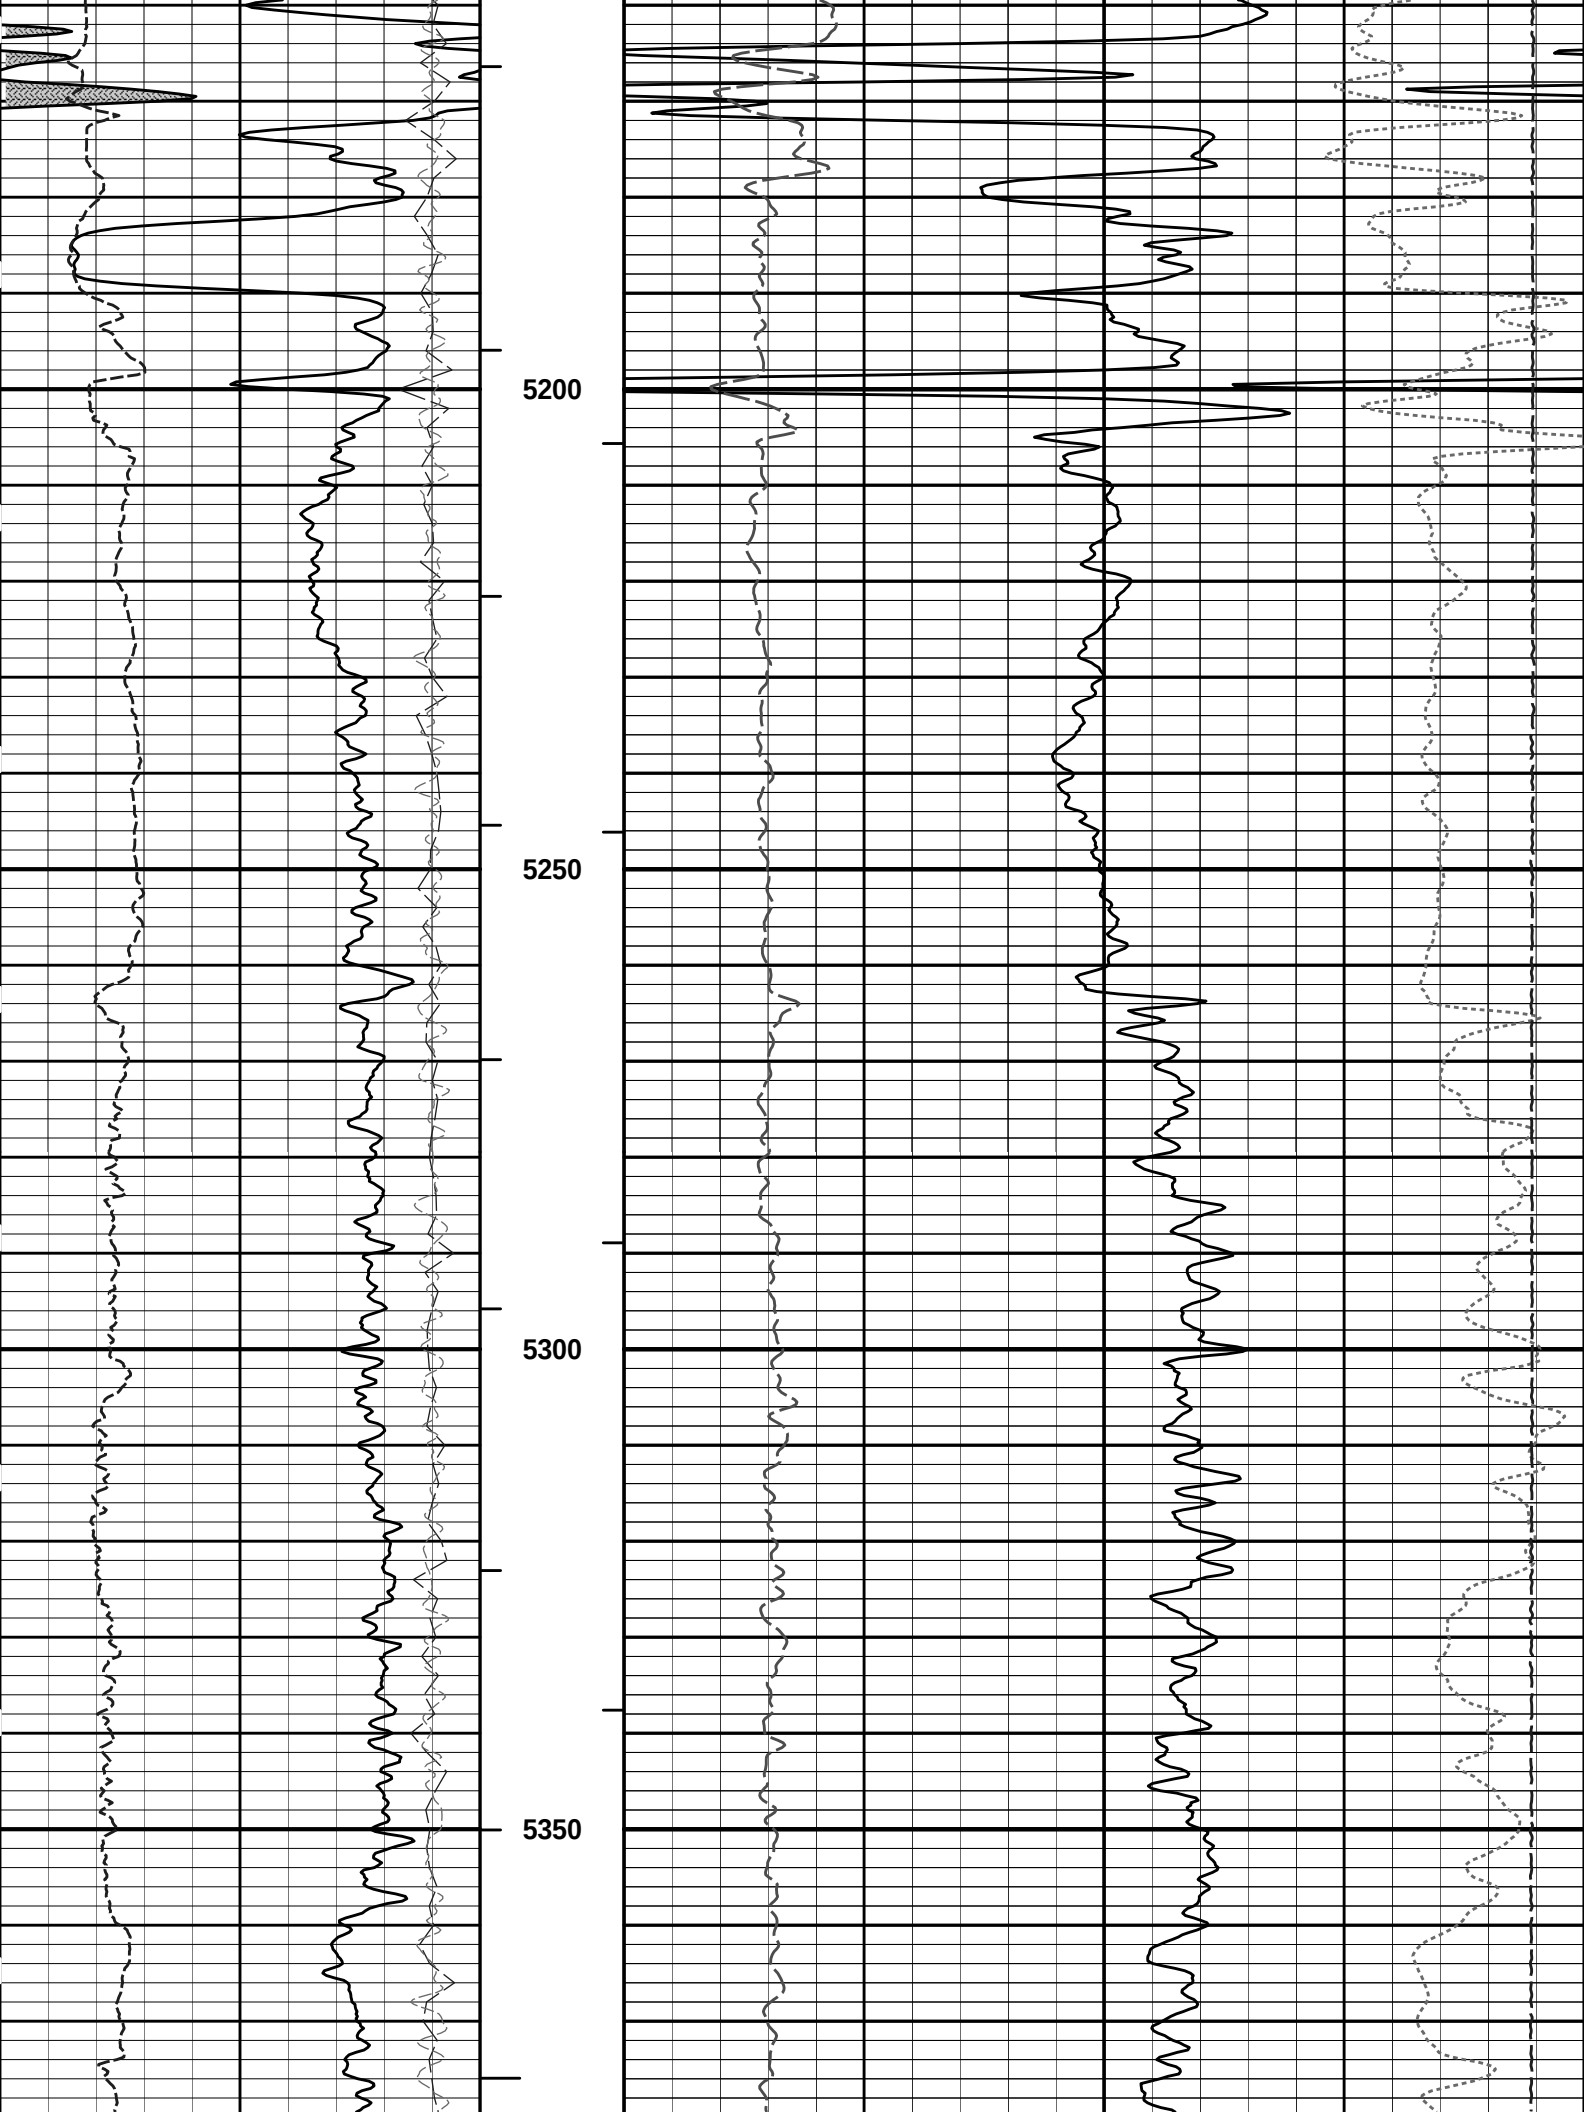

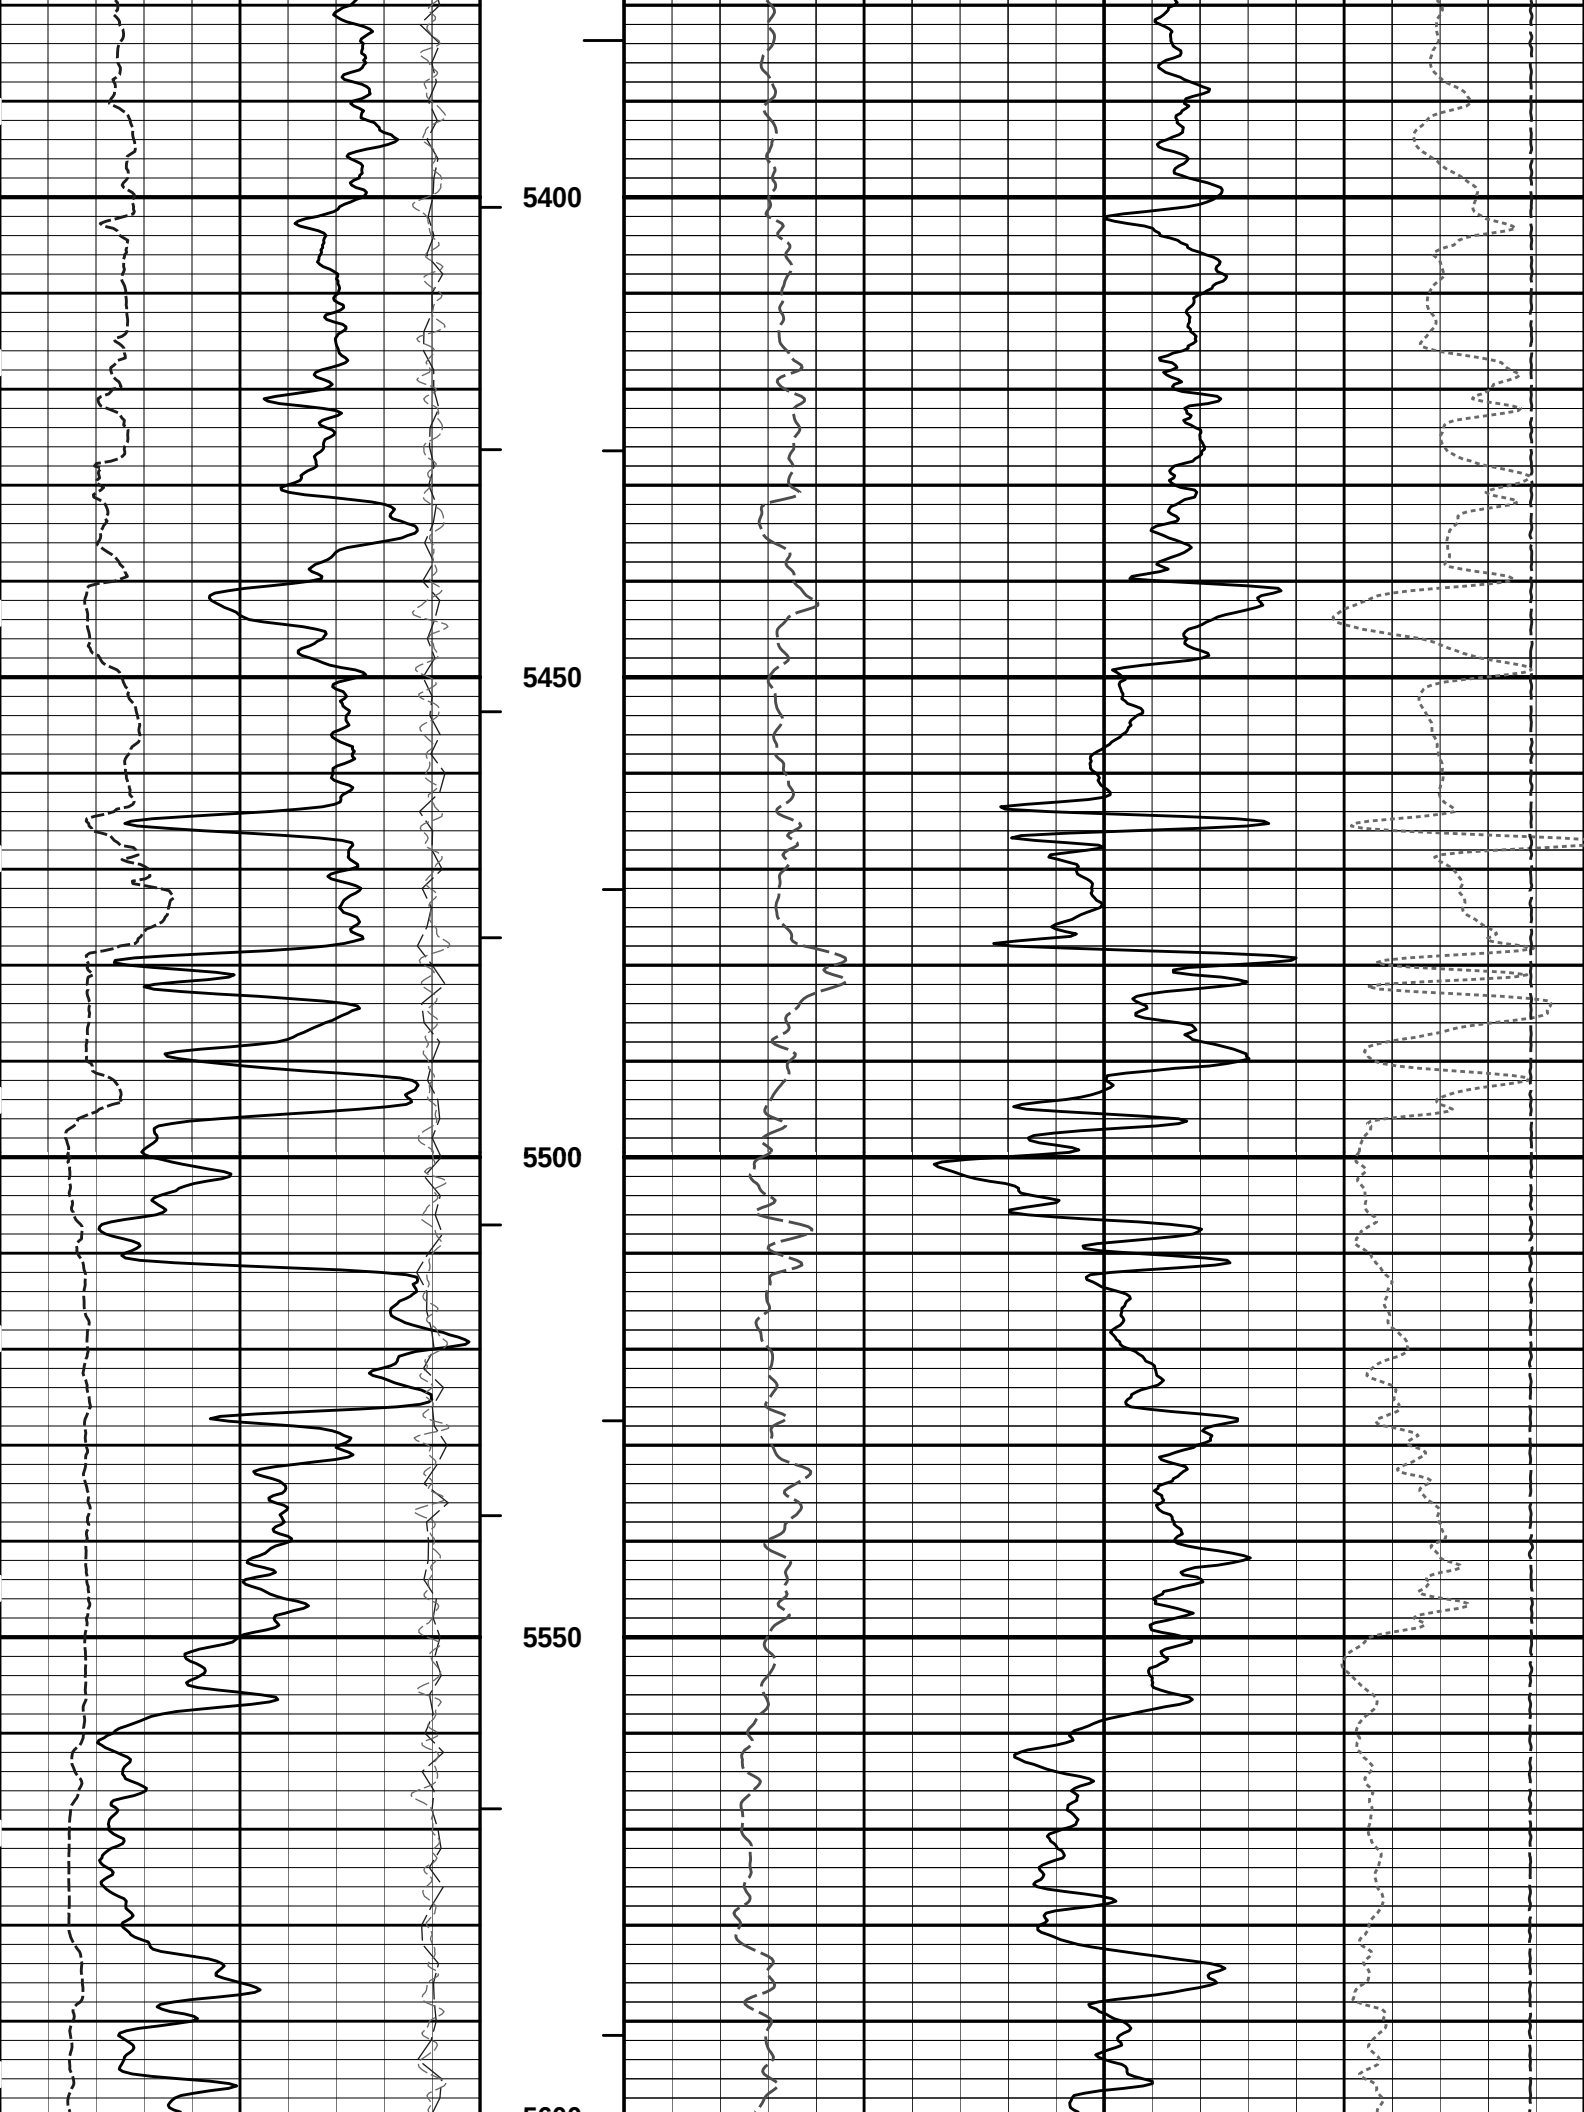

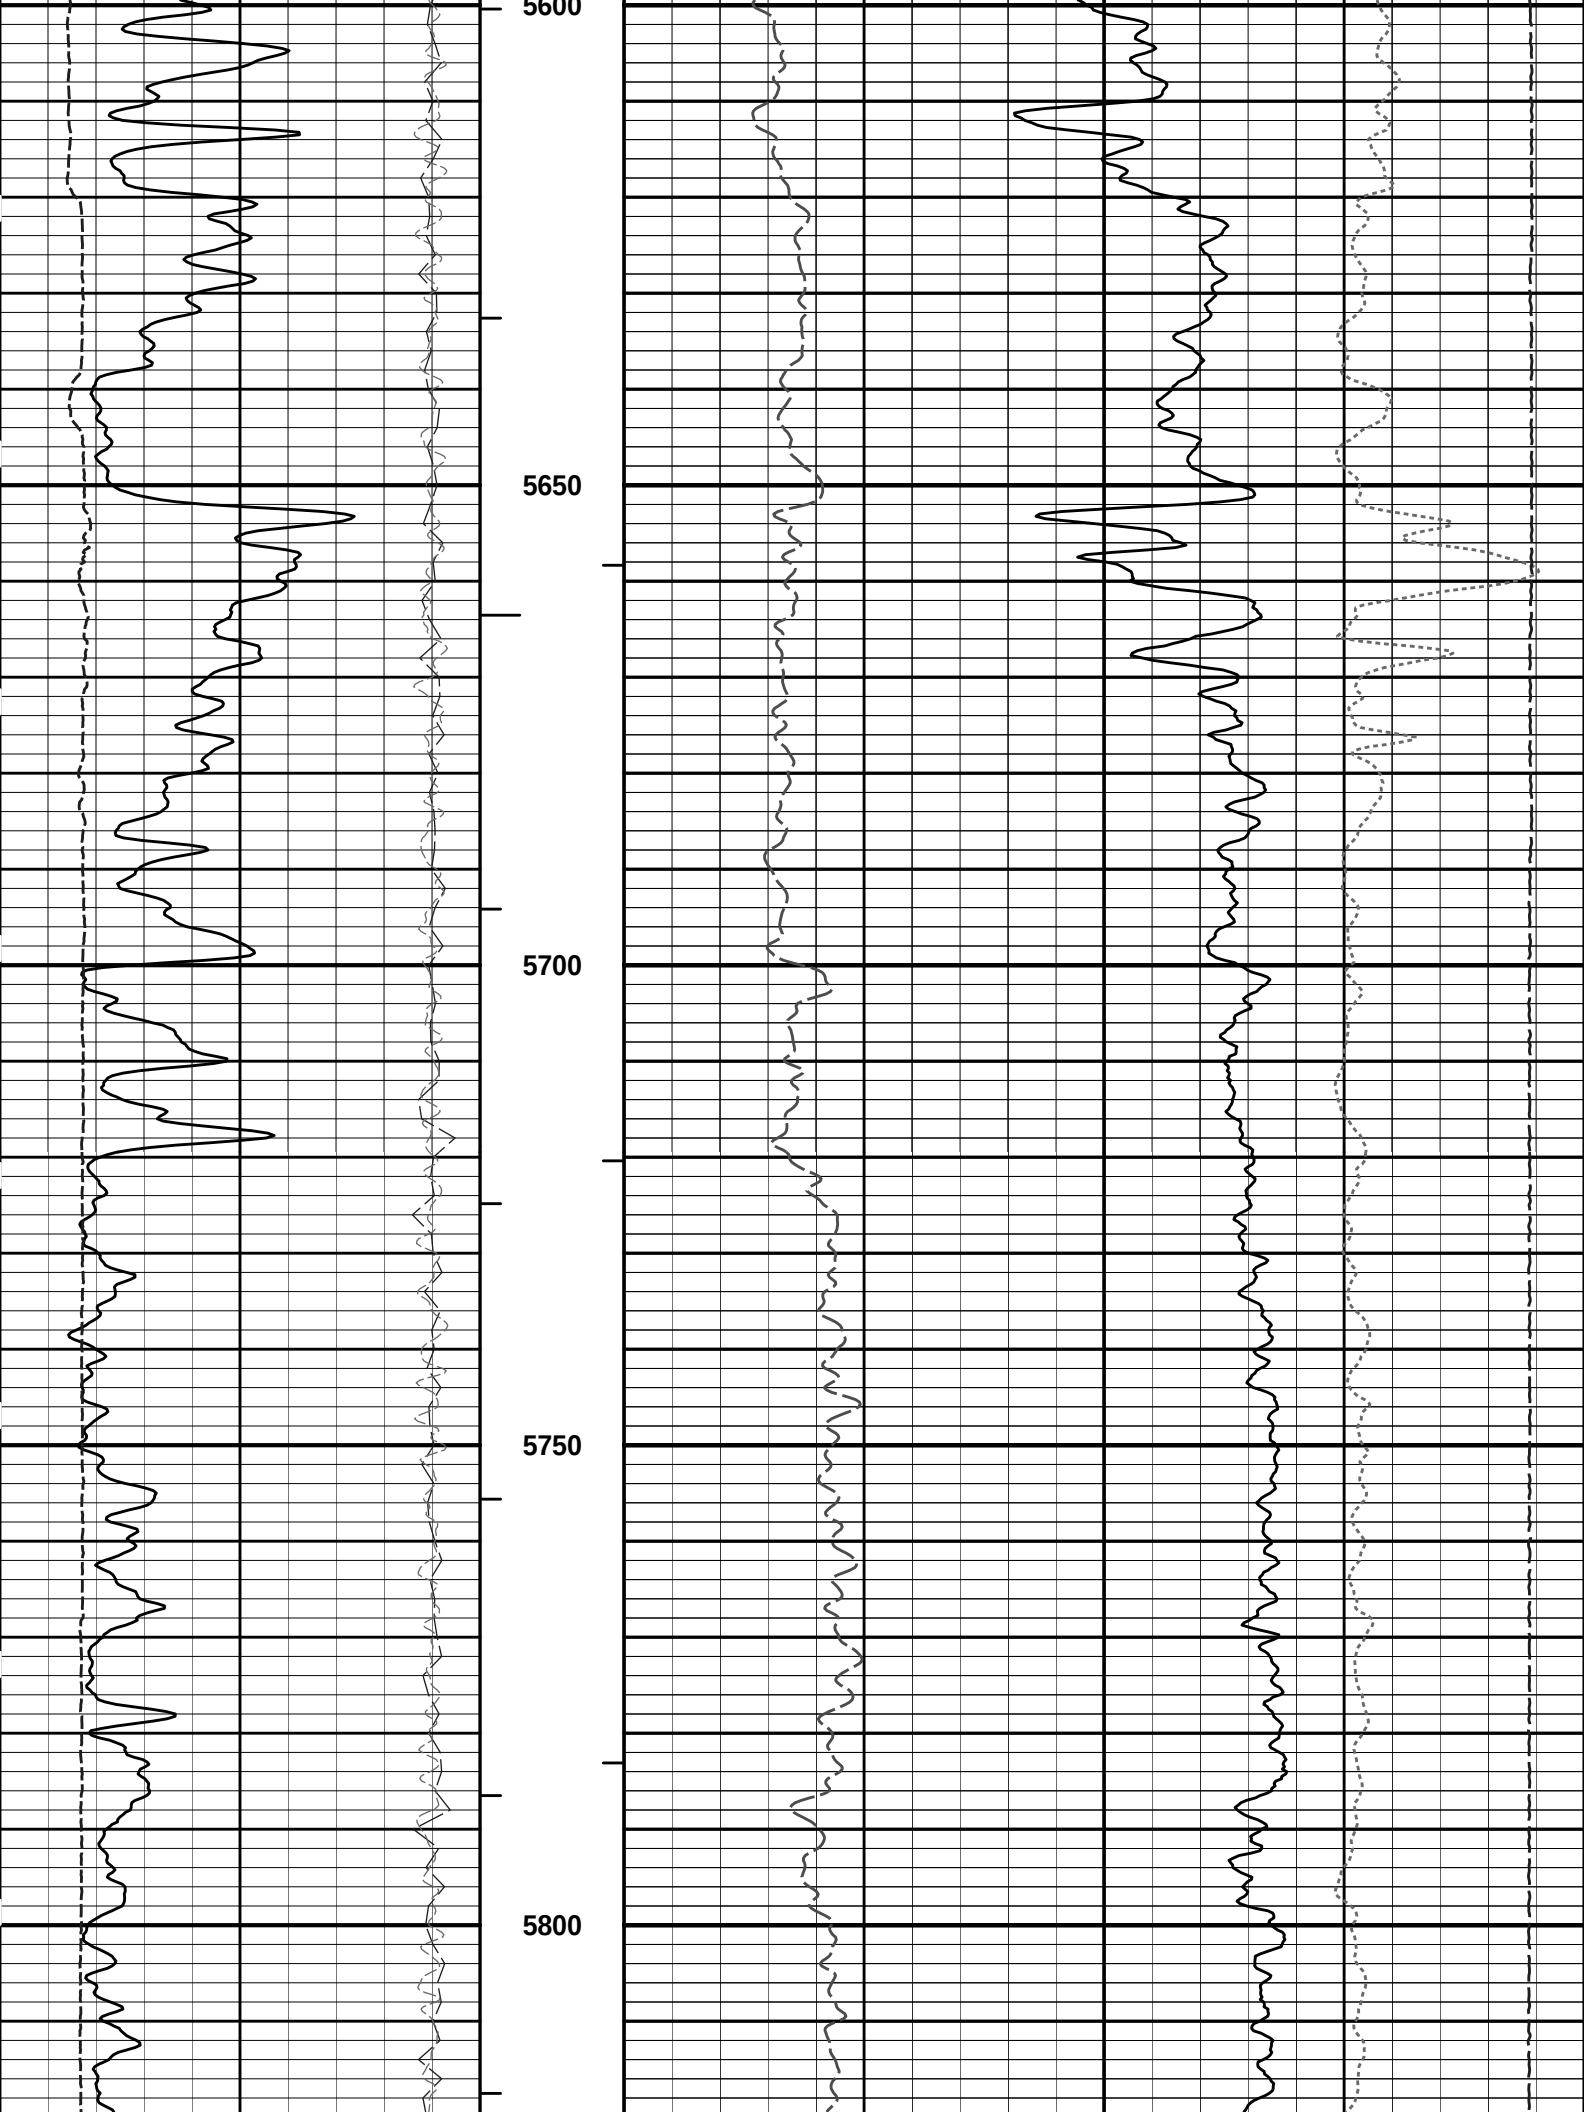

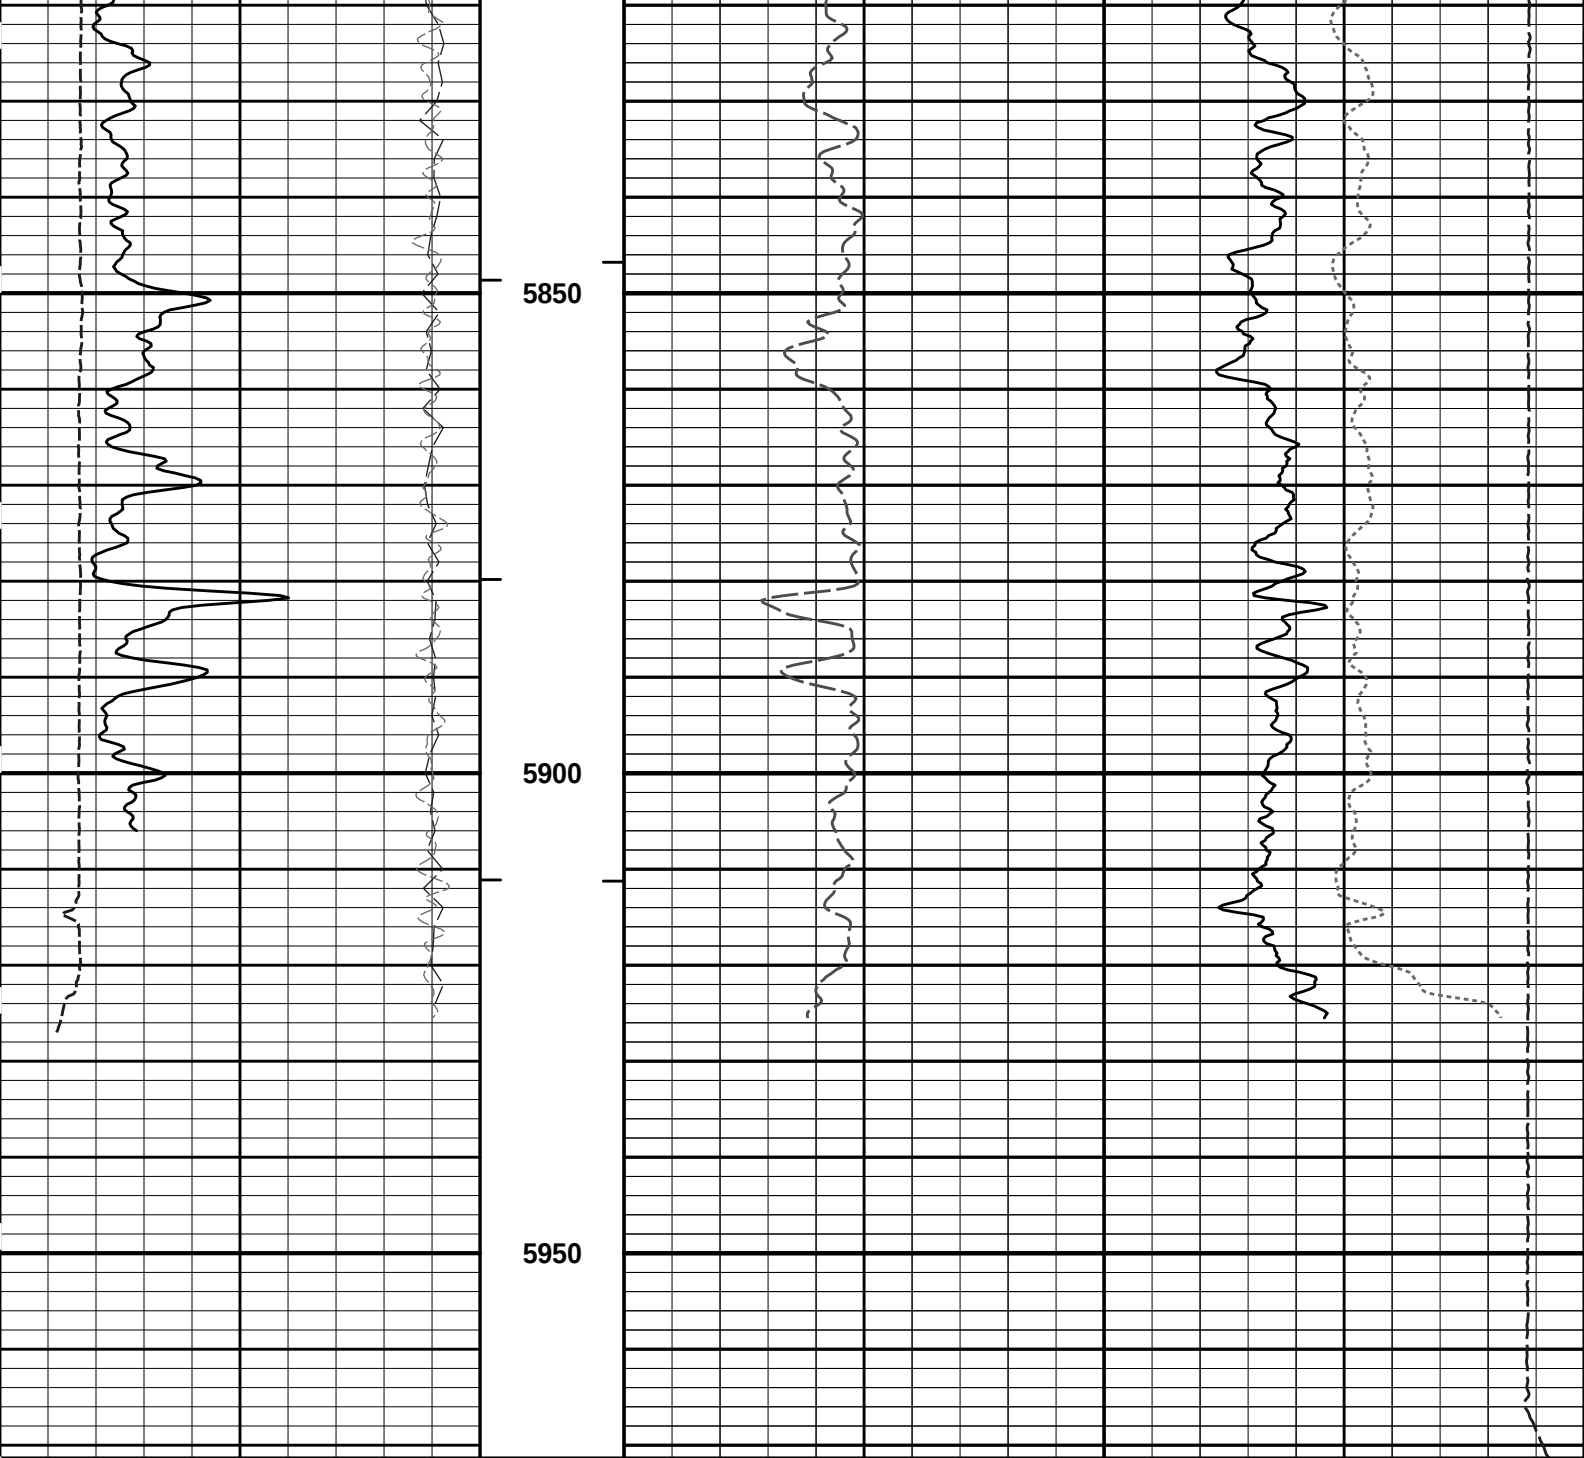

5850

5900

5950

-18	Near Quality	2	1 : 240 ft	0	Pe	10	15K	Tension	0
								pounds	
18	Far Quality	-2	AHVT				-0.25	Density Corr	0.25
								gram per cc	
6	Caliper	16	BHVT	2	Bulk Density				
	inches				gram per cc				
0	Gamma API	150	Tension Pull						
	api		10 0						

HALLIBURTON

Plot Time: 13-Apr-13 23:25:33
Plot Range: 5100 ft to 5971.33 ft
Data: {ActiveWell}\Well Based\DAQ-0001-002\
Plot File: \\PORO1_Bulk_5_rptx

REPEAT SECTION

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Barite	
	SHARED	BSAL	Borehole salinity	2000.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	6000.00	ft
	SHARED	BHT	Bottom Hole Temperature	110.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTP	Temperature Correction Type	None	
	DSNT	DPRS	DSN Pressure Correction Type	None	
	DSNT	SHCO	View More Correction Options	No	
	DSNT	UTVD	Use TVD for Gradient Corrections?	No	
	DSNT	LHWT	Logging Horizontal Water Tank?	No	
	SDLT	CLOK	Process Caliper Outputs?	Yes	
	SDLT Pad	DNOK	Process Density?	Yes	
	SDLT Pad	DNOK	Process Density EVR?	No	

SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.5	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
BOTTOM				
Data: EDWARDS_B_110001 BLACK_TRIPLE			IDLE	
			Date: 13-Apr-13 18:27:07	

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name:

GTET - 11013113

Reference Calibration Date:

12-Nov-12 00:44:16

Engineer:

CORY HANSON

Calibration Date:

10-Apr-13 12:26:20

Software Version:

WL INSITE R3.6.0 (Build 3)

Calibration Version:

1

Calibrator Source S/N: 150

Calibrator API Reference:225.00 api

Equivalent Calibrator API Reference:228.9 api

Measurement	Measured	Calibrated	Units
Background	29.8	29.8	api
Background + Calibrator	258.9	258.7	api
Calibrator	229.1	228.9	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name:

GTET - 11013113

Reference Calibration Date:

10-Apr-13 12:26:20

Engineer:

JEREMY COTHREN

Calibration Date:

13-Apr-13 18:01:14

Software Version:

WL INSITE R3.6.0 (Build 3)

Calibration Version:

1

Calibrator Source S/N: 150

Calibrator API Reference:225.00 api

Equivalent Calibrator API Reference:228.9 api

Field Verification	Shop	Field	Units
Background	29.8	25.1	api
Background + Calibrator	258.7	246.5	api
Calibrator	228.9	221.3	api

Shop	Field	Difference	Tolerance
228.9	221.3	7.6	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name:	DSNT - 10993115	Reference Calibration Date:	15-Dec-12 11:10:22
Engineer:	JEREMY COTHREN	Calibration Date:	23-Jan-13 10:41:50
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

Logging Source S/N: DSN 382
Tank Serial Number: PV
Reference value assigned to Tank: 56.100
Snow Block S/N: 592
Calibration Tank Water Temperature: 55 degF
Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.993	0.991	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2361	0.2358	0.0004	+/- 0.0020
Calibrated Ratio:	10.57	10.56	0.013	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0827	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name:	DSNT - 10993115	Reference Calibration Date:	23-Jan-13 10:41:50
Engineer:	JEREMY COTHREN	Calibration Date:	13-Apr-13 18:07:01
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

Logging Source S/N: DSN 382
Snow Block S/N: 592

NEUTRON FIELD-CHECK SUMMARY				
	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0827	0.0855	0.0028	+/- 0.0150

PASS/FAIL SUMMARY	
Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION

Tool Name:	SDI T - 10960494	Reference Calibration Date:	10-Apr-13 14:06:08
------------	------------------	-----------------------------	--------------------

Tool Name:	SDLT - 10993115	Reference Calibration Date:	10-Apr-13 14:00:00
Engineer:	CORY HANSON	Calibration Date:	10-Apr-13 14:07:36
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1
Host Tool Name:	DSNT - 10993115		

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3074.26	-3038.52	-7000.00 - -1000.00
Pad Gain	0.0003797	0.0003765	0.000200 - 0.000600
Arm Offset	-722.38	-772.81	-5000.00 - 3000.00
Arm Gain	0.0005114	0.0005132	0.000300 - 0.000700
Arm Power	-0.000004650	-0.000004767	-0.000010000 - 0.000010000

The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER

Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.77	3.75	-0.02	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed
PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

SPECTRAL DENSITY SHOP CALIBRATION			
Tool Name:	SDLT Pad - 10865873	Reference Calibration Date:	15-Dec-12 10:11:58
Engineer:	JEREMY COTHREN	Calibration Date:	23-Jan-13 11:36:30
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

Logging Source S/N: 20791B

Aluminum Block S/N: pv

Density: 2.584g/cc

Pe: 3.140

Magnesium Block S/N: PV

Density: 1.683g/cc

Pe: 2.594

DENSITY CALIBRATION SUMMARY			
Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0027	0.9827	0.90 - 1.10
Near Dens Gain	1.0013	0.9895	0.90 - 1.10
Near Peak Gain	0.9823	0.9714	0.90 - 1.10
Near Lith Gain	0.9688	0.9506	0.90 - 1.10
Far Bar Gain	0.9965	0.9925	0.90 - 1.10
Far Dens Gain	0.9871	0.9836	0.90 - 1.10
Far Peak Gain	0.9817	0.9789	0.90 - 1.10
Far Lith Gain	0.9632	0.9653	0.90 - 1.10
Near Bar Offset	0.1326	0.3137	NONE
Near Dens Offset	0.1344	0.2340	NONE
Near Peak Offset	0.2737	0.3585	NONE

Near Lith Offset	0.3791	0.5200	NONE
Far Bar Offset	0.1332	0.1705	NONE
Far Dens Offset	0.2104	0.2418	NONE
Far Peak Offset	0.2362	0.2586	NONE
Far Lith Offset	0.3708	0.3481	NONE
Near Bar Background	931.11	929.32	700 - 1450
Near Dens Background	306.34	303.08	230 - 480
Near Peak Background	135.18	132.56	100 - 210
Near Lith Background	163.55	162.70	125 - 260
Far Bar Background	523.50	523.03	450 - 900
Far Dens Background	204.55	206.47	175 - 345
Far Peak Background	82.93	82.40	70 - 140
Far Lith Background	84.47	83.85	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.687	1.683	-0.004	+/- 0.015
Pe	2.477	2.545	0.068	+/- 0.150
ALUMINUM				
Density (g/cc)	2.589	2.584	-0.005	+/- 0.01500
Pe	3.033	3.089	0.056	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	-0.0002	+/- 0.0110	-0.0011	+/- 0.0140
Magnesium Block	0.0010	+/- 0.0110	-0.0024	+/- 0.0140
Aluminum Block	0.0015	+/- 0.0110	-0.0001	+/- 0.0140
Resolution	10.11	6.00 - 11.50	8.85	6.00 - 11.50
Internal Verifier(B+D+P+L)	1528	1200 - 2700	896	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK			
Tool Name:	SDLT Pad - 10865873	Reference Calibration Date:	23-Jan-13 11:36:30
Engineer:	JEREMY COTHREN	Calibration Date:	13-Apr-13 18:05:15
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

Pad Temperature: 47.1 degF

DENSITY FIELD CALIBRATION SUMMARY

Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1527.659	1523.367	-4.292	15.740
Far (B+D+P+L) cps	895.741	890.015	-5.726	16.287
Near Resolution	10.11	10.01	-0.100	0.50
Far Resolution	8.85	8.92	0.070	1.00

PASS/FAIL SUMMARY	
Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

SDLT CALIPER FIELD CALIBRATION			
Tool Name:	SDLT - 10960494	Reference Calibration Date:	10-Apr-13 14:07:36
Engineer:	CORY HANSON	Calibration Date:	10-Apr-13 14:08:12
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

MEASURED CALIPER VALUES				
Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.75	0.00	+/- 0.10
Ring Diameter	8.25	8.25	-0.00	+/- 0.15

PASS/FAIL SUMMARY	
Pad Extension Check:	Passed
Diameter Check:	Passed

CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11013113						
Gamma Ray Calibrator	228.9	221.3	-----	7.6	+/- 9.00	api
DSNT-10993115						
Snow-Block Porosity	0.0827	0.0855	-----	-0.0028	+/- 0.0150	decp
SDLT-10960494						
Pad Extension	3.75	3.75	-----	0.00	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
SDLT Pad-10865873						
Near(B+D+P+L)	1527.659	1523.367	-----	4.292	+/-15.740	cps
Far(B+D+P+L)	895.741	890.015	-----	5.726	+/-16.287	cps

Data: EDWARDS B 110001 BLACK TRIPL FIDLE	Date: 13-Apr-13 18:28:24
--	--------------------------

HALLIBURTON
TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
CH_HOS-590_RED 37.50 lbs		Ø 2.750 in →		← Temperature @ 73.25 ft	3.03 ft	74.27 ft
XOHD-01 20.00 lbs		Ø 2.750 in → Ø 3.625 in →			0.95 ft	71.25 ft
						70.30 ft

GTET-11013113
165.00 lbs

Ø 3.625 in →

8.52 ft

← GammaRay @ 64.23 ft

61.78 ft

DSNT-10993115
174.00 lbs

DSN Decentralizer-
10993115
6.60 lbs

Ø 5.000 in* →

Ø 3.625 in →

9.69 ft

← DSN Far @ 54.84 ft

← DSN Near @ 54.09 ft

52.09 ft

SDLT-10960494
360.00 lbs

SDLT Pad-10865873
65.00 lbs
Microlog Pad-I15M94P73
8.00 lbs

Ø 4.500 in →

Ø 4.750 in* →

Ø 4.750 in* →

10.81 ft

Microlog @ 44.28 ft
SDL Caliper @ 44.09 ft
SDL @ 44.08 ft

41.28 ft

IQ Flex-BLACK
140.00 lbs

Ø 3.625 in →

5.67 ft

35.61 ft

BSAT-10939050
300.00 lbs

Ø 3.625 in →

15.77 ft

← Sonic Receivers @ 27.09 ft

19.83 ft

ACRt Instrument-
989
50.00 lbs

Ø 3.625 in →


5.03 ft

ShortAxisKit-910
60.00 lbs

Ø 5.380 in* →

14.80 ft

← Mud Resistivity @ 13.44 ft

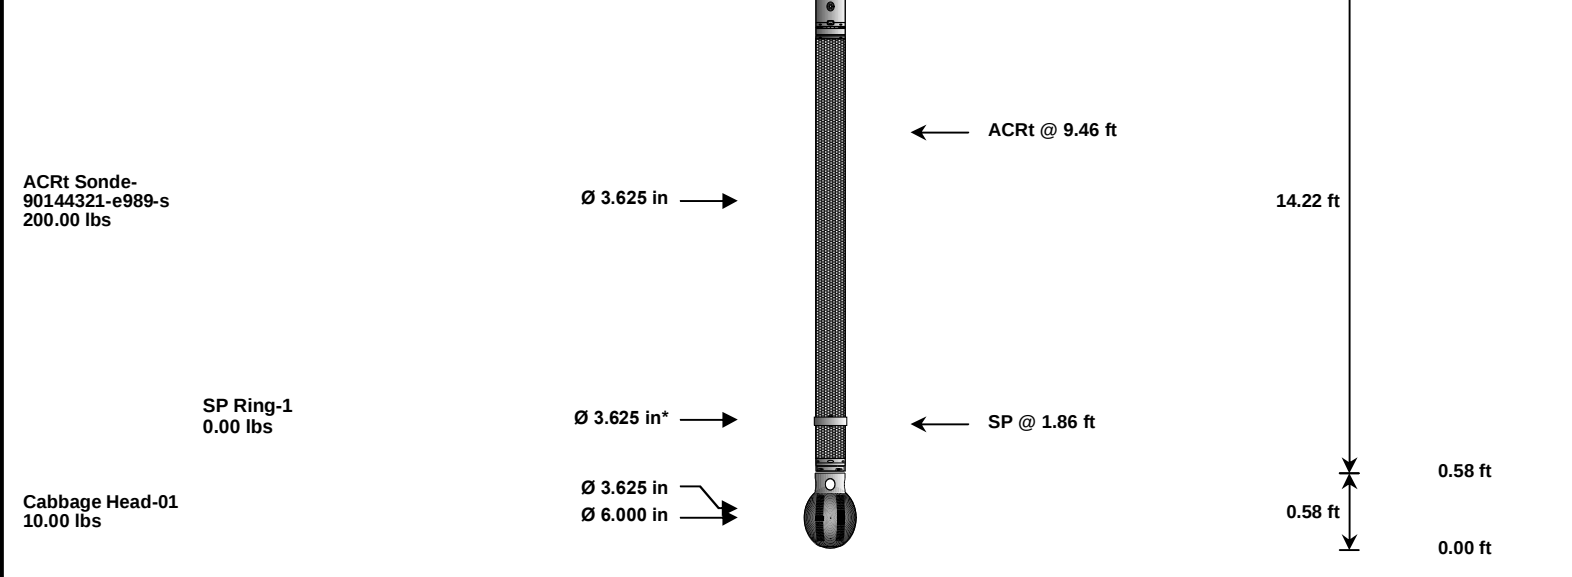

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)	
CH_HOS	Hostile Cable Head with Load Cell		590_RED	37.50	3.03	71.25	300.00	
XOHD	Hostile to Dits Cross Over		01	20.00	0.95	70.30	300.00	
GTET	Gamma Telemetry Tool		11013113	165.00	8.52	61.78	60.00	
DSNT	Dual Spaced Neutron		10993115	174.00	9.69	52.09	60.00	
DCNT	DSN Decentralizer		10993115	6.60	5.13	*	55.42	300.00
SDLT	Spectral Density Tool		10960494	360.00	10.81	41.28	60.00	
MICP	Microlog Pad		I15M94P73	8.00	1.00	*	43.78	60.00
SDLP	Density Insite Pad		10865873	65.00	2.55	*	43.49	60.00
IQF	IQ Flex tool		BLACK	140.00	5.67	35.61	300.00	
BSAT	Borehole Sonic Array Tool		10939050	300.00	15.77	19.83	60.00	
ACRt	Array Compensated True Resistivity Instrument Section		989	50.00	5.03	14.80	300.00	
SAK	Short Axis Kit for logging short axis of a borehole.		910	60.00	1.02	*	14.80	300.00
ACRt	Array Compensated True Resistivity Sonde Section		90144321-e989-s	200.00	14.22	0.58	300.00	
SP	SP Ring		1	0.00	0.25	*	1.86	300.00
CBHD	Cabbage Head		01	10.00	0.58	0.00	300.00	
Total				1,596.10	74.27			
* Not included in Total Length and Length Accumulation.								
Data: EDWARDS_B_1\0001 BLACK_TRIPLE\IDLE								
Date: 13-Apr-13 18:28:57								

COMPANY	OXY USA INC		
WELL	EDWARDS B-1		
FIELD	BIG BOW WEST		
COUNTY	STANTON	STATE	KANSAS
HALLIBURTON		SPECTRAL DENSITY DUAL SPACED NEUTRON LOG	