

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev. 6/4/84

WELL PLUGGING APPLICATION FORM
(File One Copy)

API NUMBER 15-163-22,577000 (of this well) 6/88
(This must be listed; if no API# was issued, please note drilling completion date.)

LEASE OPERATOR Petx. Petroleum Corp. OPERATORS LICENSE NO. 5107

ADDRESS 1616 Glenarm Pl., Ste. 1700, Denver, Colorado 80202 PHONE # (303) 629-0552

LEASE (FARM) Gottschalk WELL NO. 1-C WELL LOCATION NW SE SE COUNTY Rooks

SEC. 3 TWP. 7 RGE. 20 ~~(E)~~ (W) TOTAL DEPTH 3690 PLUG BACK TO 3600

Check One:

OIL WELL XX GAS WELL _____ D & A _____ SWD or INJ WELL _____ DOCKET NO. _____

SURFACE CASING SIZE 8 5/8 SET AT 258 CEMENTED WITH 160 SACKS

CASING SIZE 5 1/2 SET AT 3689 CEMENTED WITH 125 SACKS

PERFORATED AT 3614'-20, 3523'-28, 3478'-82, 3374'-79

CONDITION OF WELL: GOOD XX POOR _____ CASING LEAK _____ JUNK IN HOLE _____

OPERATOR'S SUGGESTED METHOD OF PLUGGING THIS WELL Sand off perfs to 50' above top perf and spot 5 sxs sand with dump bailer, shoot off casing at free point and lay down, pump 10 sxs gel followed by 50 sxs cmt followed by 10 sxs gel followed by 100 sxs cmt, cut off casing 3' below surface
(If additional space is needed use back of form)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Yes
(If not, explain)

DATE AND HOUR PLUGGING IS DESIRED TO BEGIN October, 19 1987

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et seq AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Don Erickson

PHONE # (303) 293-8883

RECEIVED
STATE CORPORATION COMMISSION

ADDRESS 621 17th Street Ste. 845, Denver, Colorado 80293

OCT 13 1987

PLUGGING CONTRACTOR Hembree Well Service

LICENSE NO. _____

CONSERVATION DIVISION
Wichita, Kansas

ADDRESS 302 E. Sycamore, Box 458 Ness City, Kansas 67560

PHONE # _____

PAYMENT WILL BE GUARANTEED BY OPERATOR OR AGENT
Please send copy of approved plugging notice to

SIGNED: Rich W. [Signature]

(Operator or Agent)

*621 17th Street Ste. 845 Denver, Colorado 80293

DATE: October 9, 1987

(4)

GREAT GUNS

Correlation Log

15763-22577-0000

FILING NO. _____

COMPANY Petr Petroleum Corp.

WELL Gottschalks No. C-2

FIELD _____

COUNTY Roos STATE Kansas

LOCATION: NW-SE-SE OTHER SERVICES _____

SEC. 3 TWP. 7^s RGE. 20^w

Permanent Datum Ground Level Elev. 2150 Elev.: K.B. 2155


Measured From Kelly Bushing, 5 Ft. Above Perm. Datum D.F. --

Drilling Measured From Kelly Bushing G.L. 2150

Date	<u>1-14-85</u>	
Run No.	<u>one</u>	<u>one</u>
Log	<u>Gamma Ray</u>	<u>CCL</u>
Depth—Driller	<u>3690</u>	<u>3690</u>
Depth—Logger	<u>3670</u>	<u>3610</u>
From Logged Interval	<u>3669</u>	<u>3665.5</u>
To Logged Interval	<u>3200</u>	<u>3200</u>
Fluid In Hole	<u>water</u>	
Salinity, PPM CL.		
Density		
Level	<u>3350</u>	
Max Rec. Temp., Deg F.		
Operating Rig Time	<u>1 hr.</u>	
Recorded By	<u>O. Yunker</u>	
Checked By		

FIELD
PRINT

Bore-Hole Record				Casing Record			
Depth	Bit	From	To	Size	Wgt.	From	To
1214		00	265	8 5/8	24	00	265
778		265	3290	5 1/2	14	00	N.A.

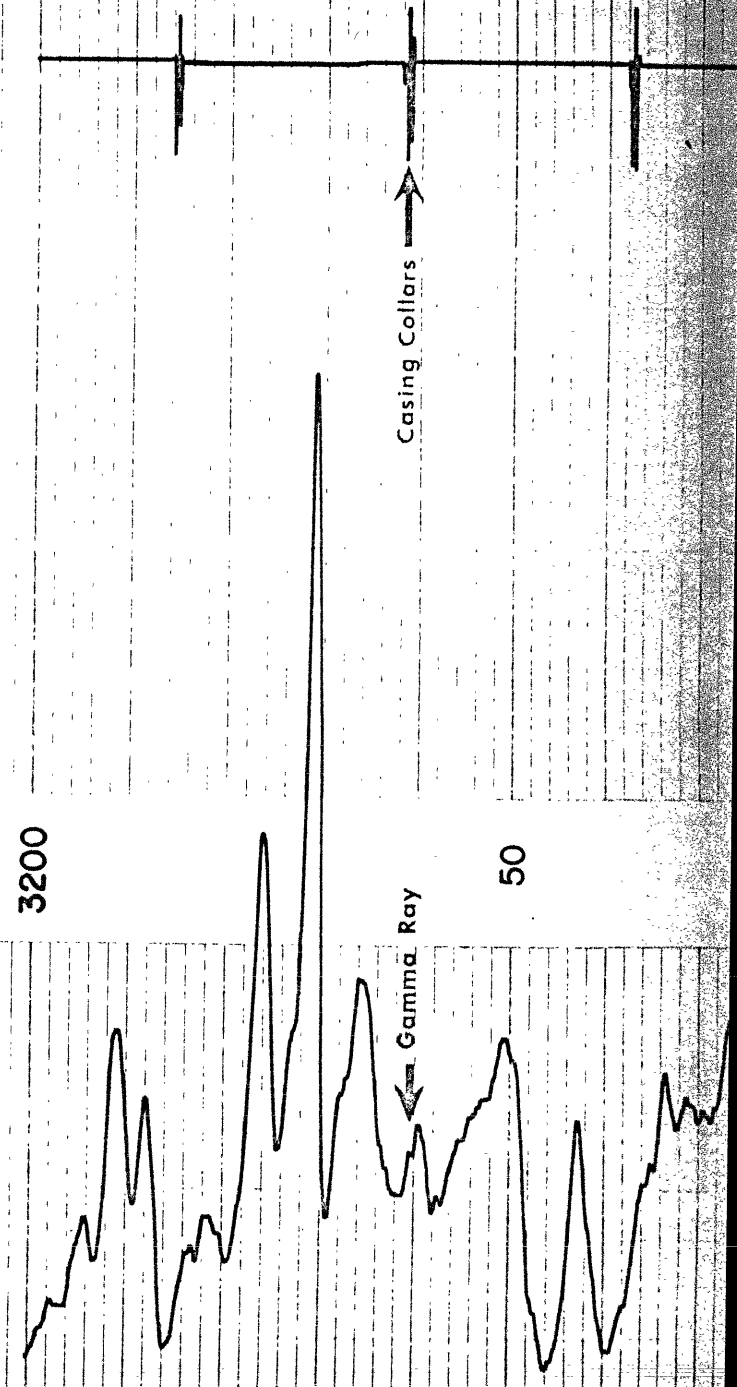



Mike Hayden	Governor
Keith R. Henley	Chairman
Rich Kowalewski	Commissioner
Margalee Wright	Commissioner
Judith A. McConnell	Executive Director

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 200 Colorado Derby Building
 202 West 1st Street
 WICHITA, KANSAS 67202-1286

THIS NOTICE

JAN 16 '88

EXPIRES

October 16, 1987

WELL PLUGGING NOTICE

15163-22577-0000

Gottschalk #1-C
 NW SE SE
 Sec. 03-07S-20W
 Rooks County

Petx Petroleum Corporation
 1616 Glenarm Place, Ste. 1700
 Denver, CO 80202

Gentlemen:

This is your notice to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

Please contact the district office listed below to review your suggested method of plugging five days prior to plugging the well (KAR-82-3-113).

This notice is void after ninety (90) days from the above date.

Sincerely,

Shari Feist

 Shari Feist
 Director
 State Corporation Commission

DISTRICT #4 2301 E. 13th, Hays, KS 67601 (913) 628-1200