


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-179-05238-00-01

WELL PLUGGING RECORD

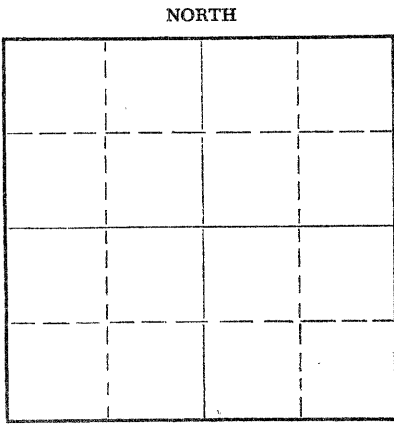

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines Sherdin County. Sec. 28 Twp. 6 Rge. 29 (E) (~~W~~)
Lease Owner Morgans tern & Spector
Lease Name Emigh Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil EOR
Date well completed 5-5-53 19
Application for plugging filed June 30, 1958 19
Application for plugging approved July 2, 1958 19
Plugging commenced 7/7/58 19
Plugging completed 7/25/58 19
Reason for abandonment of well or producing formation failure to produce profitably

If a producing well is abandoned, date of last production May, 1958 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Kansas City Depth to top 3950 Bottom 4164 Total Depth of Well 4210 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	299'	None
				5 1/2"OD	4210	1518 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 4,004 ft. dumped 4 sacks cement and mudded hole up to 299 ft. Set 10 ft. rock bridge. Dumped 25 sacks cement. Mudded hole up to 40 ft. set rock bridge dumped 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E & I Casing Pulling Co.
Address 1416 Coolidge, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

Morgenstern & Spector (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgan Spector

(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of July, 19 58

My commission expires Dec. 1, 1959

Elsie Coady

Notary Public.

