



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company VINCENT OIL CORPORATION
Well ELLIS LAND COMPANY #1-28
Field
County FORD State KANSAS

Company VINCENT OIL CORPORATION
Well ELLIS LAND COMPANY #1-28
Field
County FORD
State KANSAS

Location: API #: 15-057-20882-00-00
790' FSL & 725' FWL
SEC 28 TWP 29S RGE 22W
GROUND LEVEL Elevation 2455
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL/PE
DIL/SON
Elevation
K.B. 2467
D.F. 2465
G.L. 2455

Date	03/29/2013
Run Number	TW0
Depth Driller	5400
Depth Logger	5401
Bottom Logged Interval	5383
Top Log Interval	4200
Casing Driller	606
Casing Logger	602
Bit Size	7.875
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.3 / 59
pH / Fluid Loss	10.5 / 7.4
Source of Sample	FLOWLINE
Rim @ Meas. Temp	0.65 @ 55 F
Rmf @ Meas. Temp	0.49 @ 55 F
Rmc @ Meas. Temp	0.78 @ 55 F
Source of Rmf / Rmc	MEASURED
Rim @ BHT	0.28 @ 129 F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	
Maximum Recorded Temperature	128 F
Equipment Number	860
Location	HAYS, KS.
Recorded By	JEFF GRONEWEG
Witnessed By	KENLEBLANC

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


NABORS COMPLETION & PRODUCTION CO.
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: KINGSDOWN, KS - 2 1/2 MILES SOUTH ON RD 125 -1 MILE EAST
NORTH INTO

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

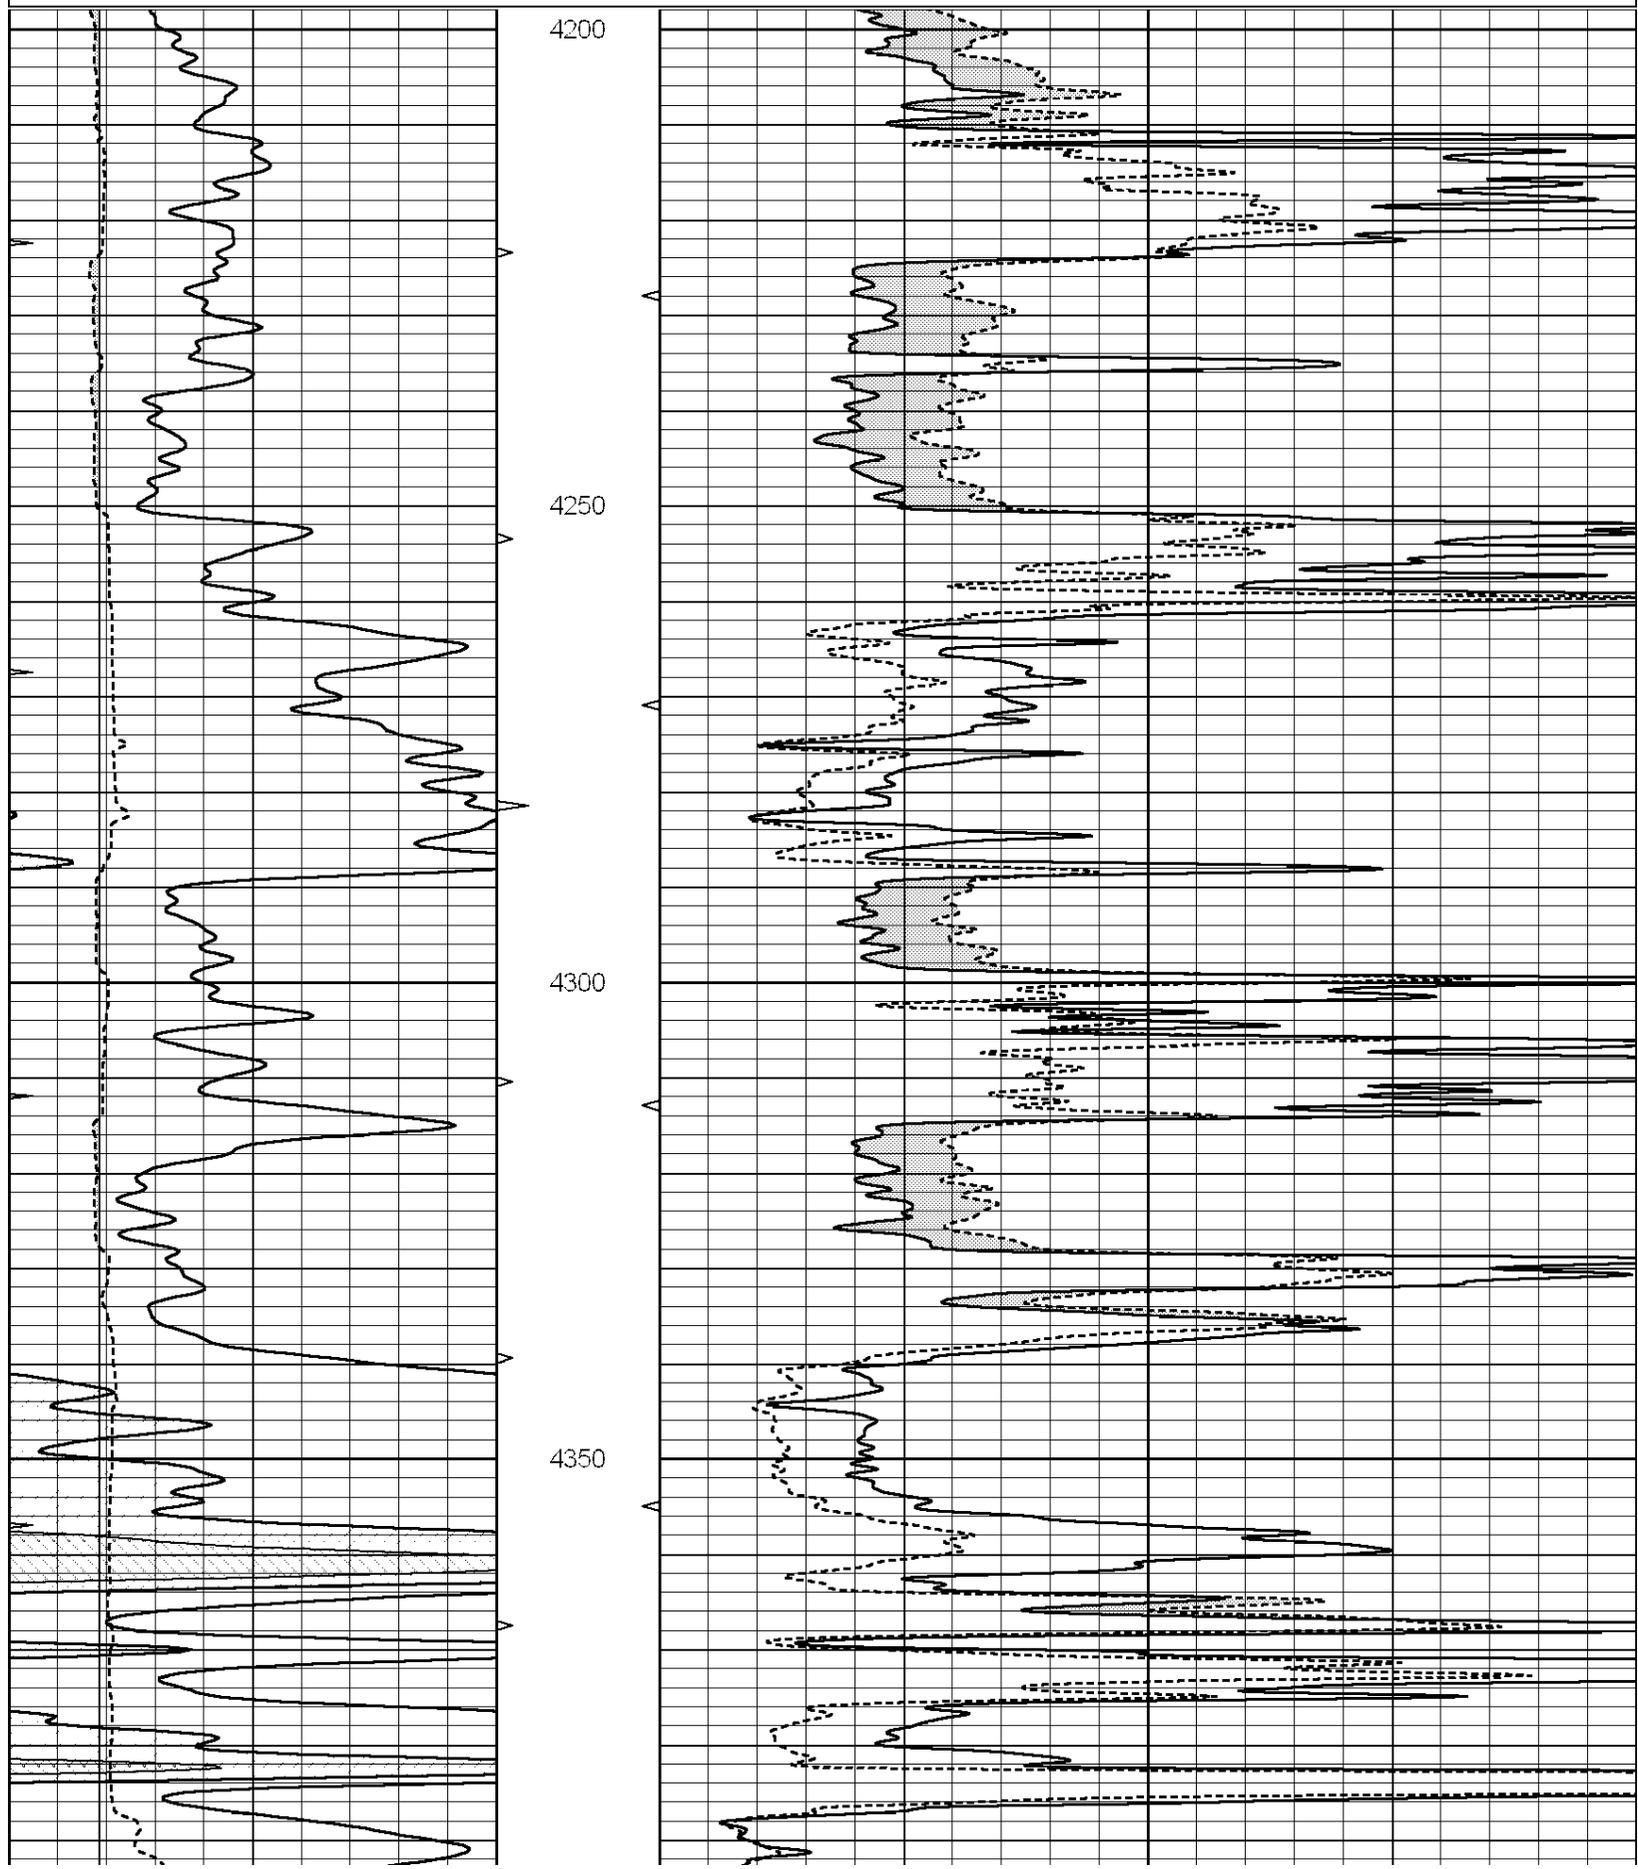

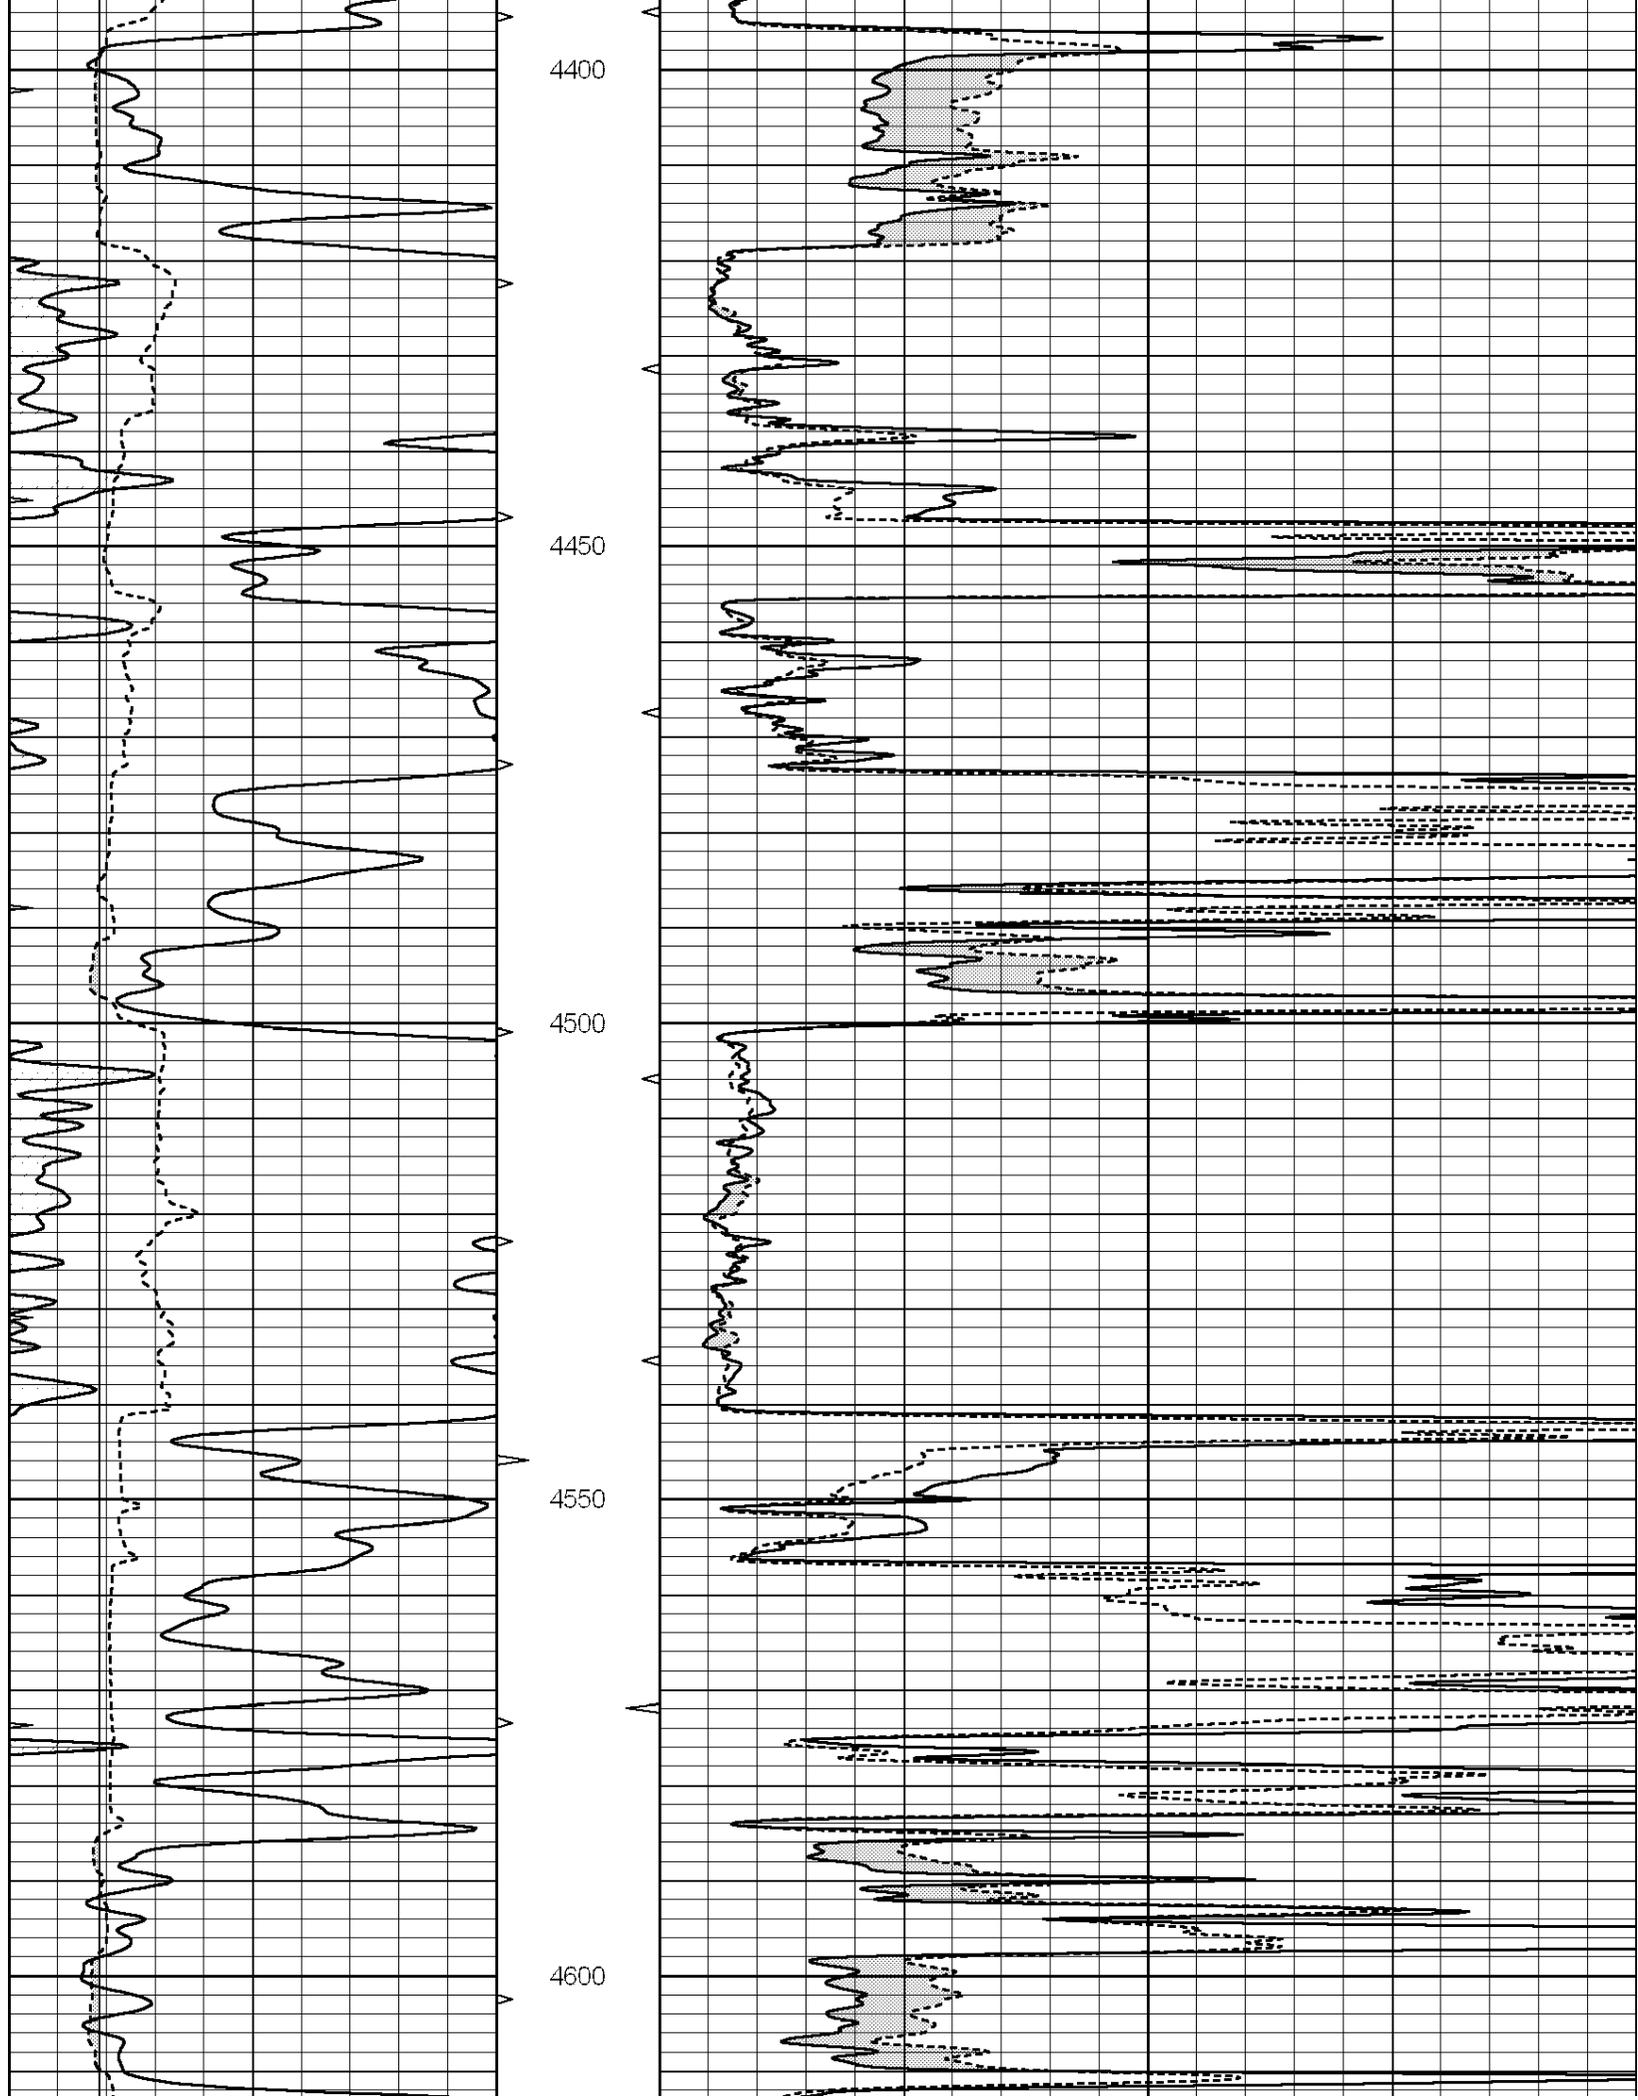

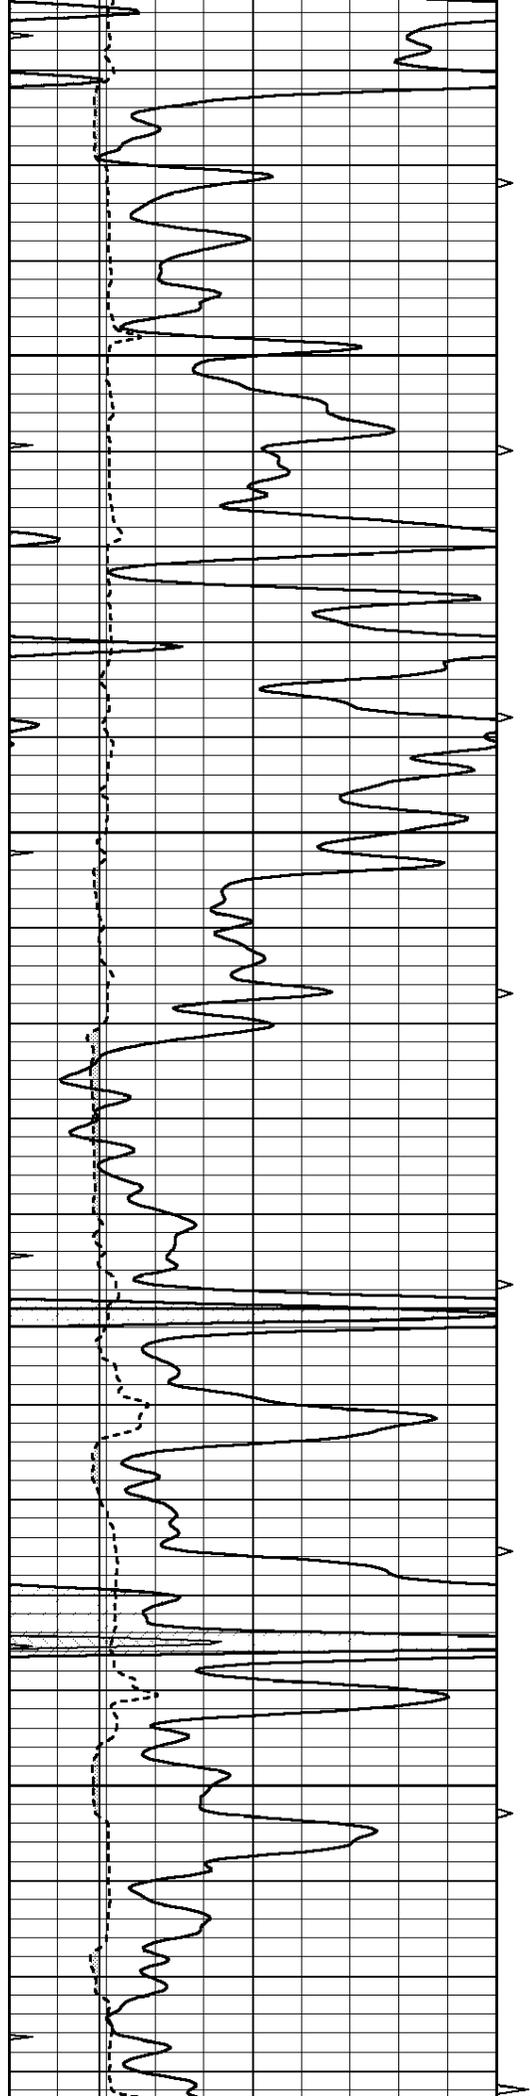



4650

4700

4750

4800

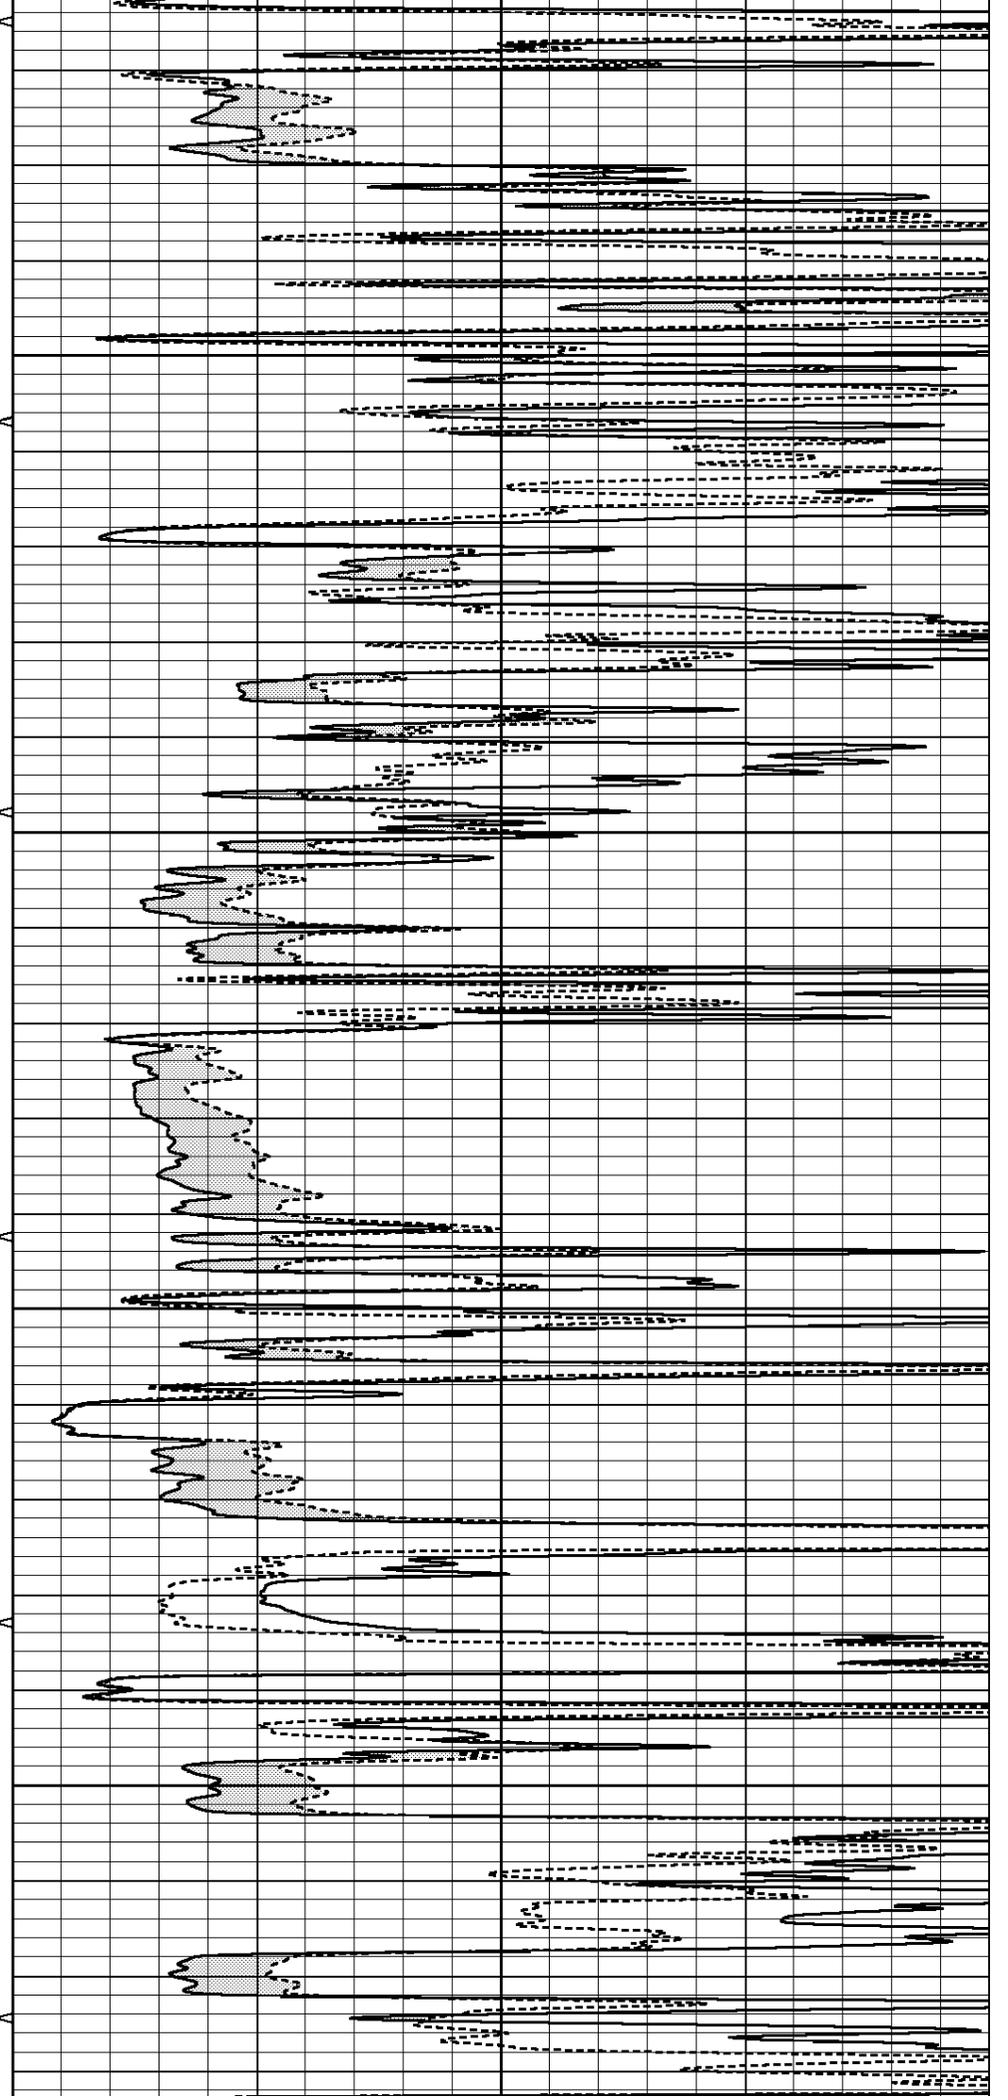

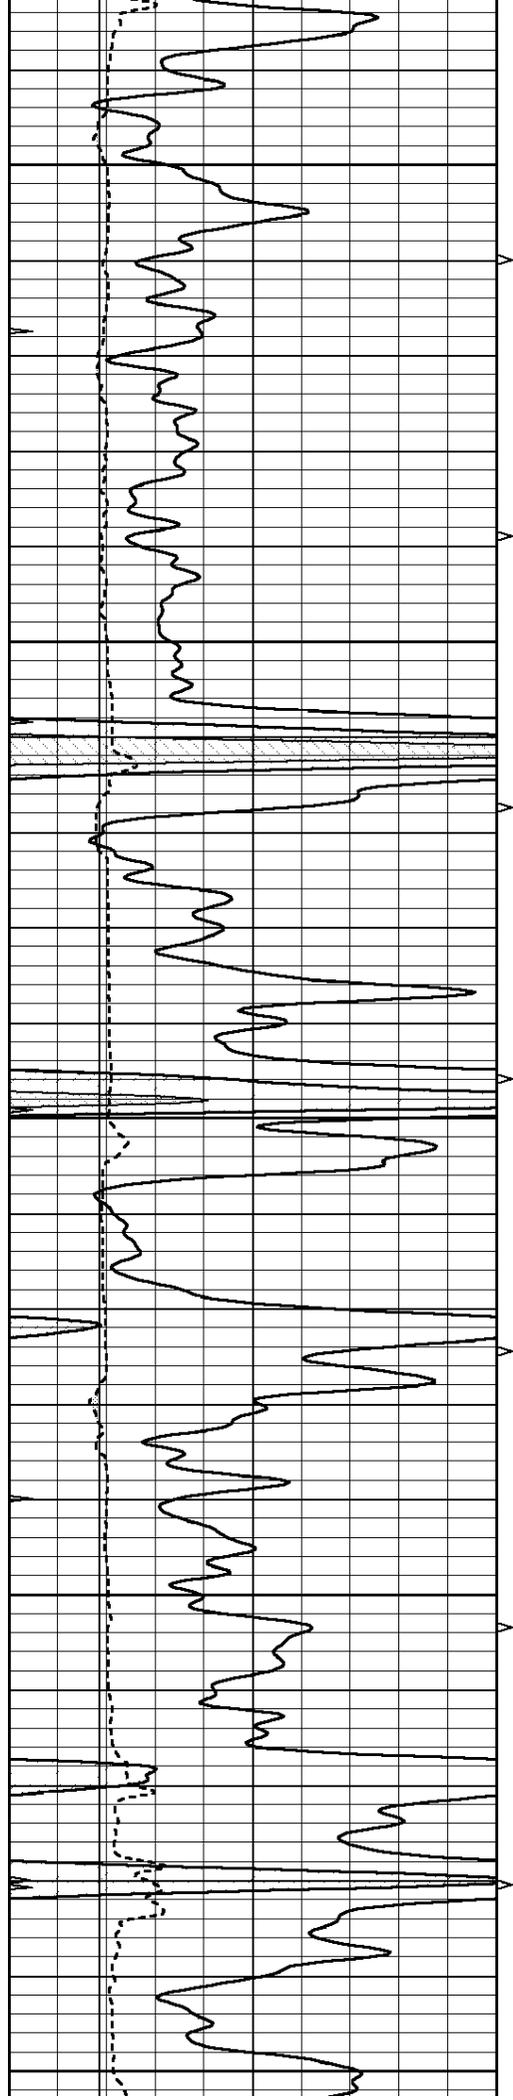


4850


4900


4950

5000

5050

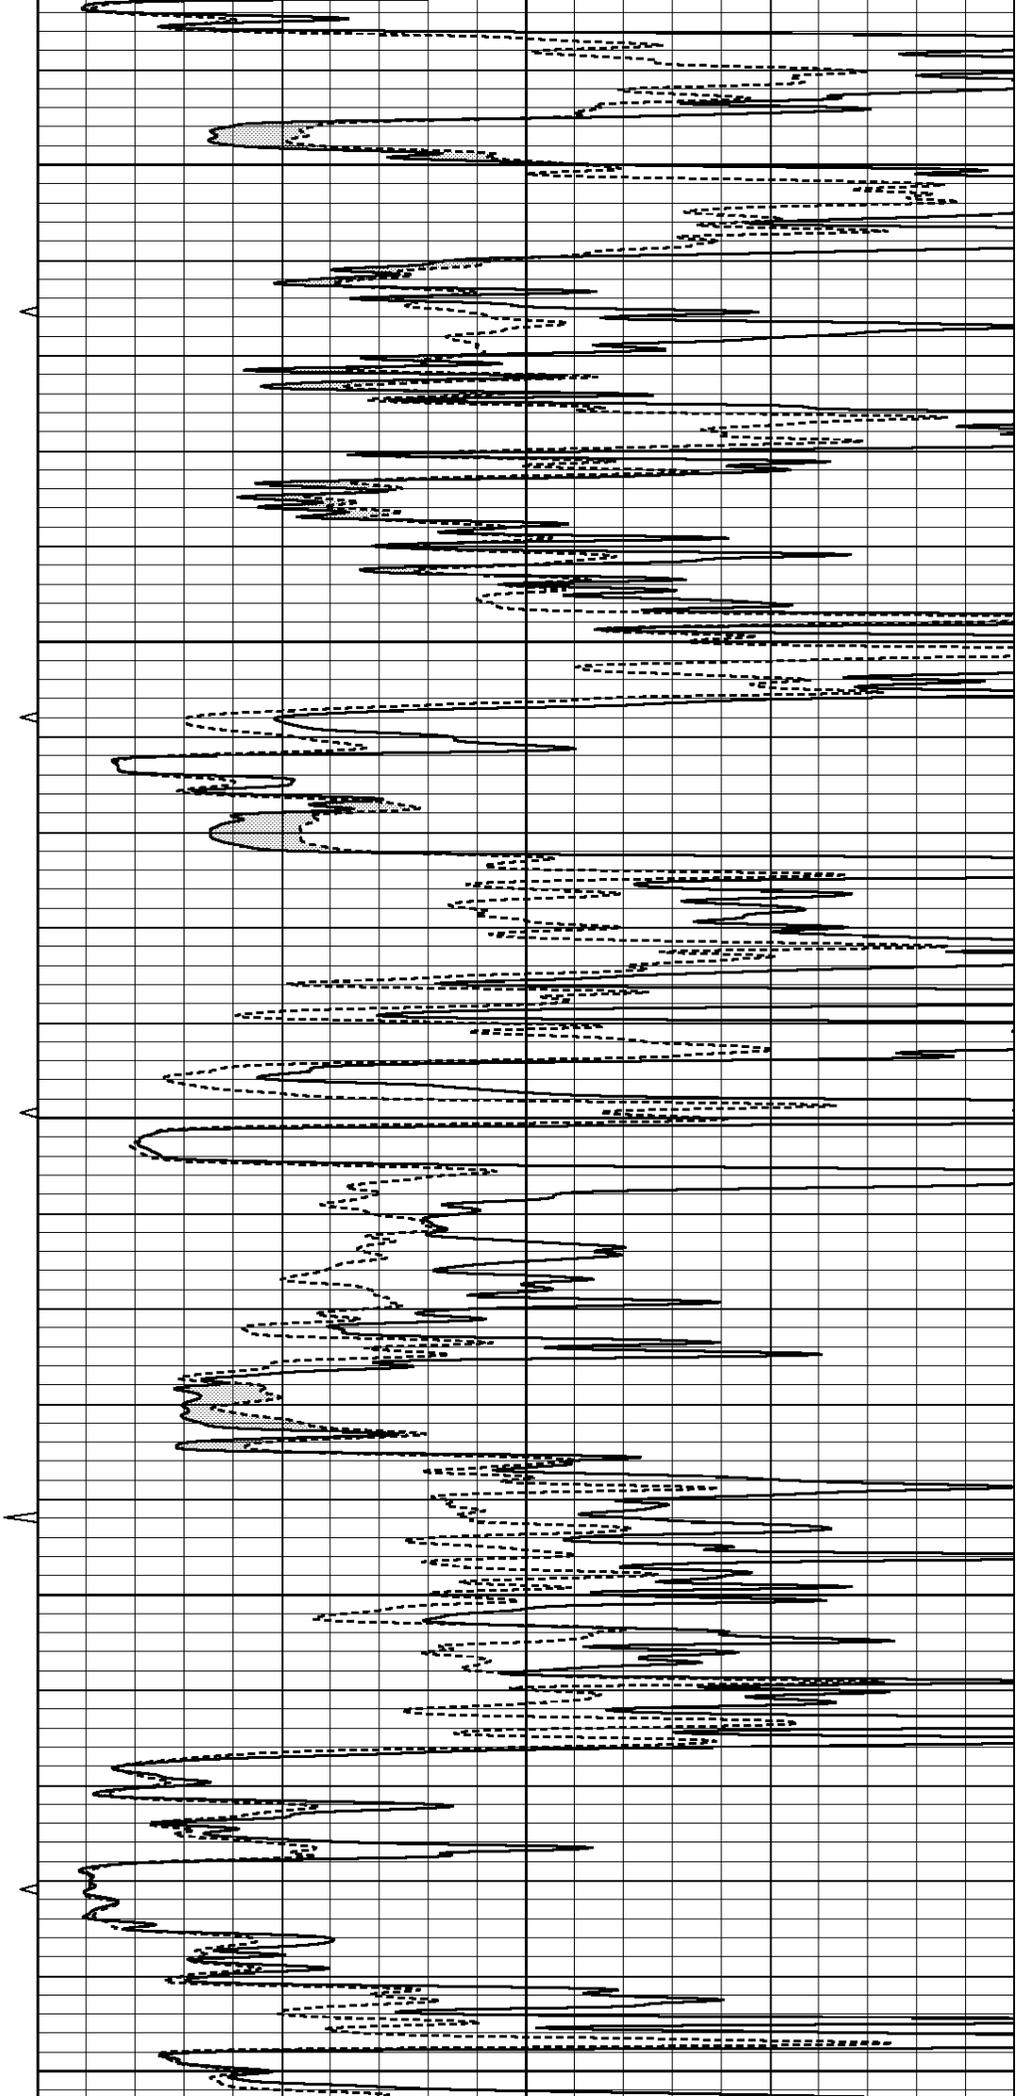

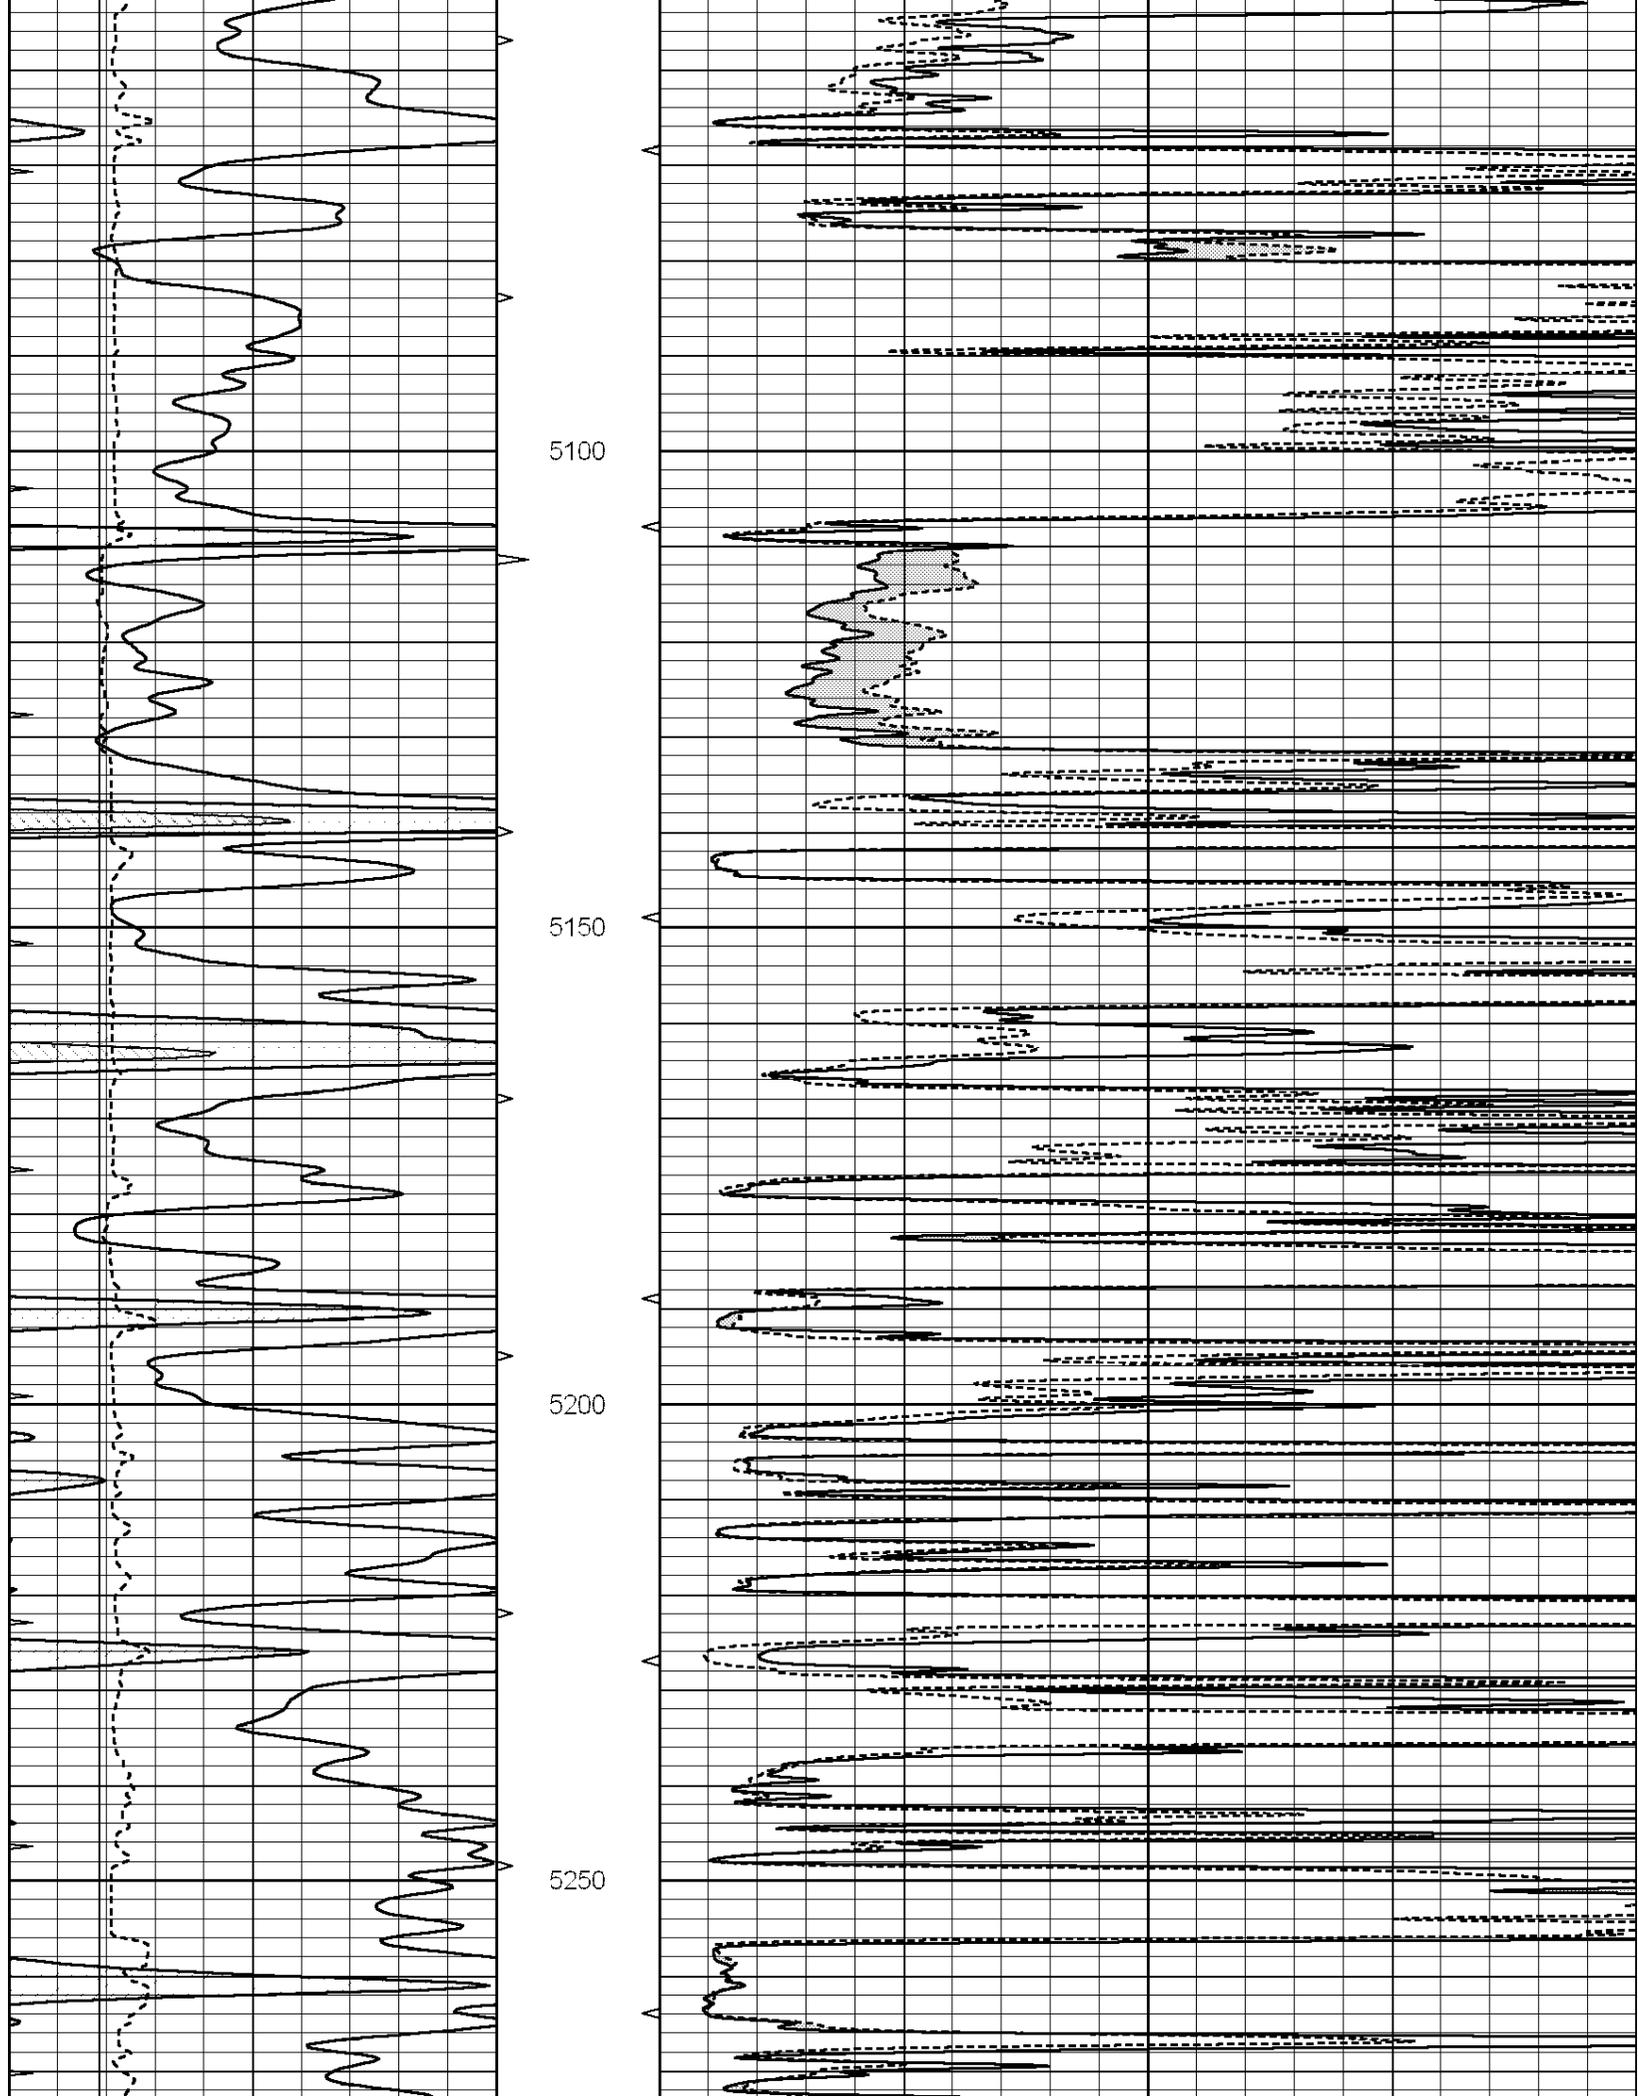

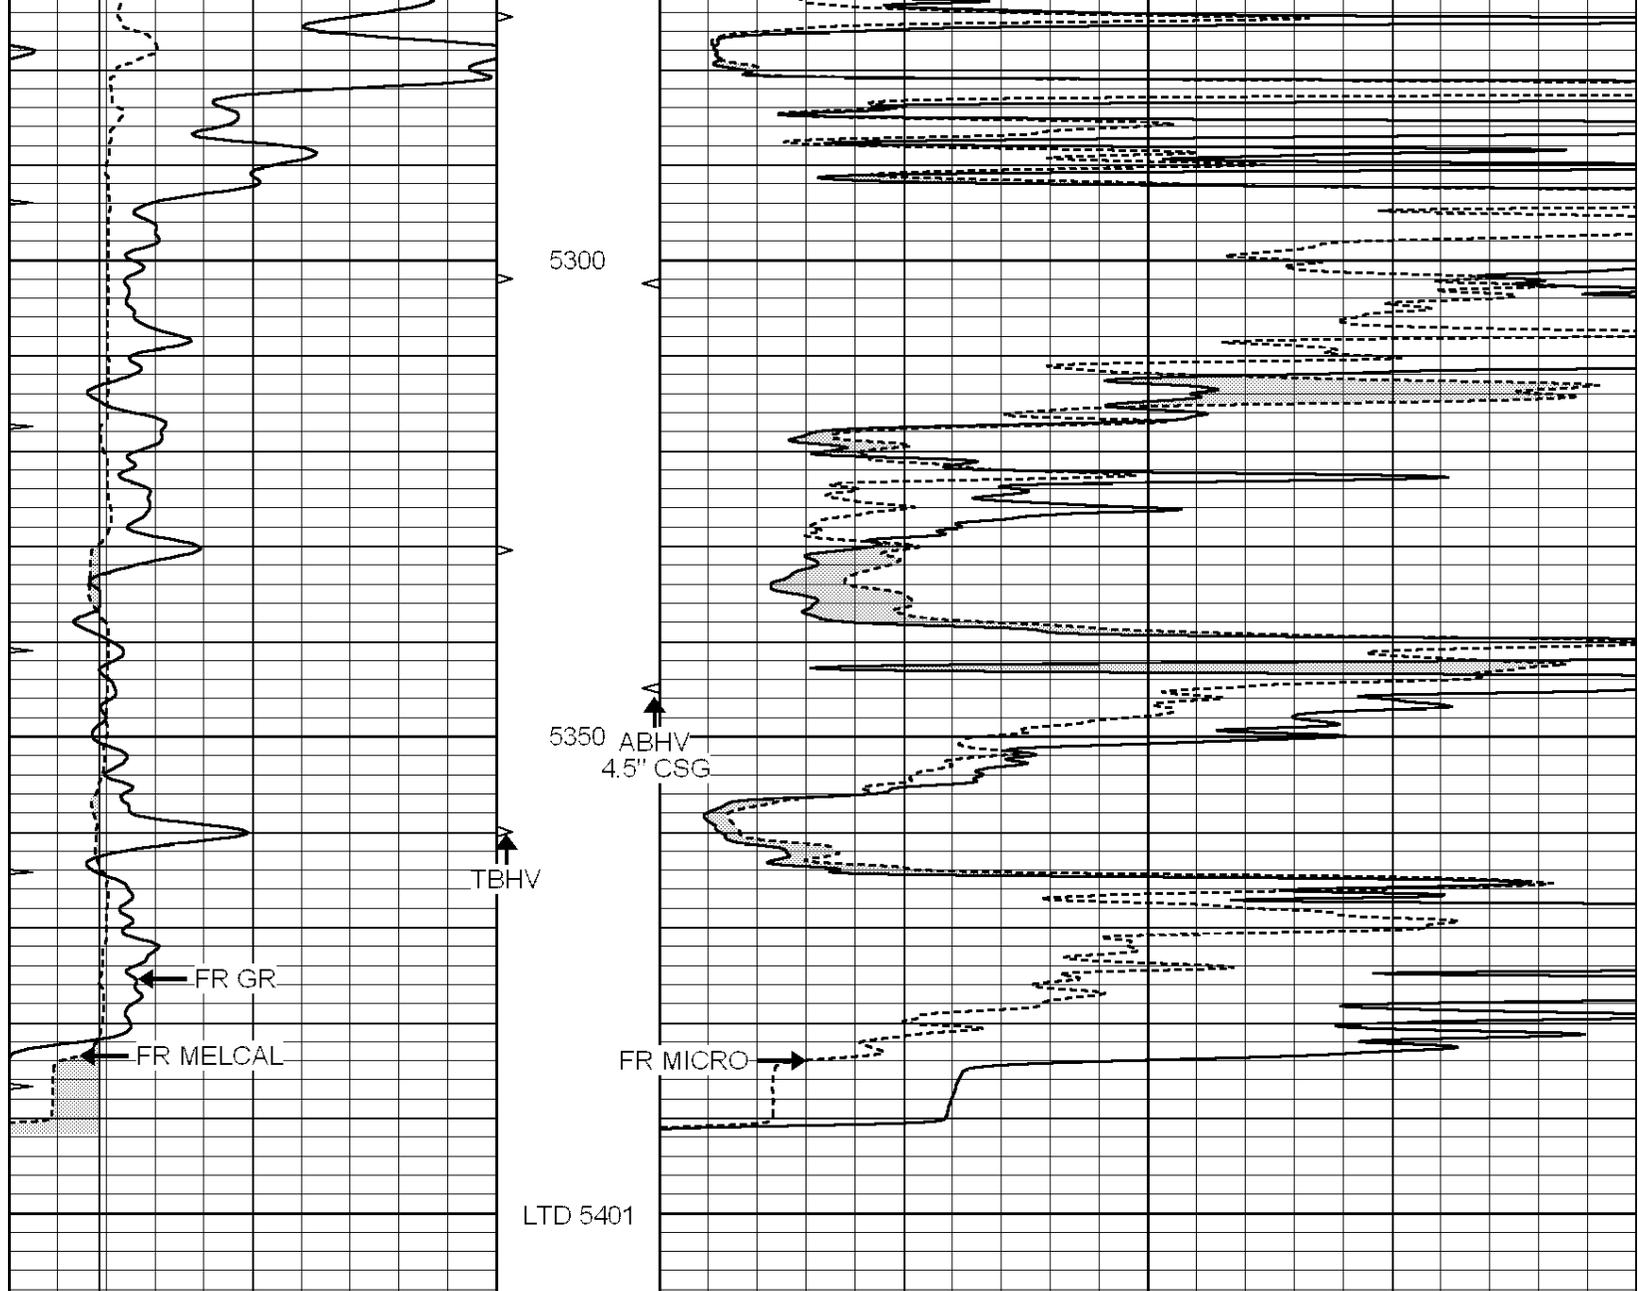

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40






REPEAT SECTION

Database File: 010847pe.db
 Dataset Pathname: pass5.3
 Presentation Format: micro
 Dataset Creation: Fri Mar 29 07:13:42 2013 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

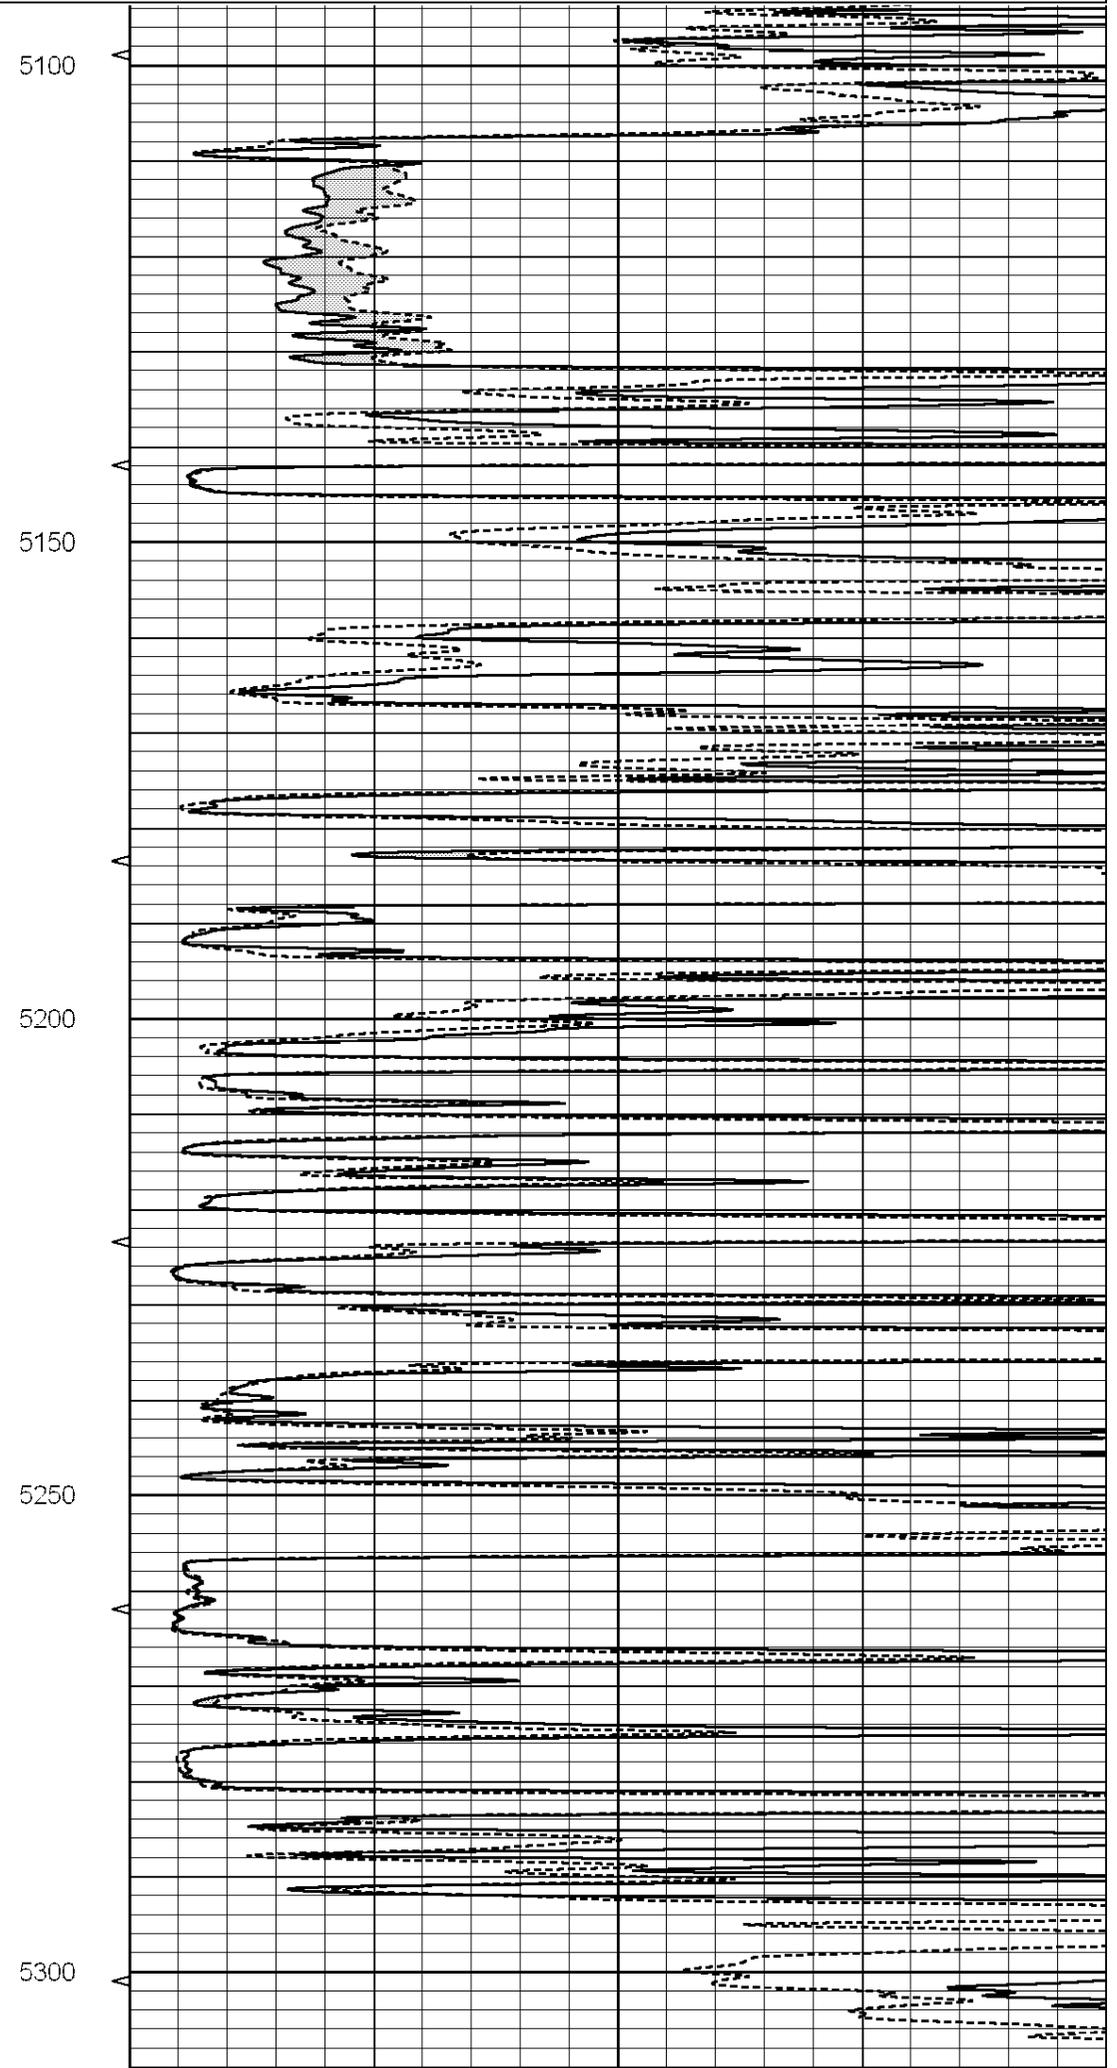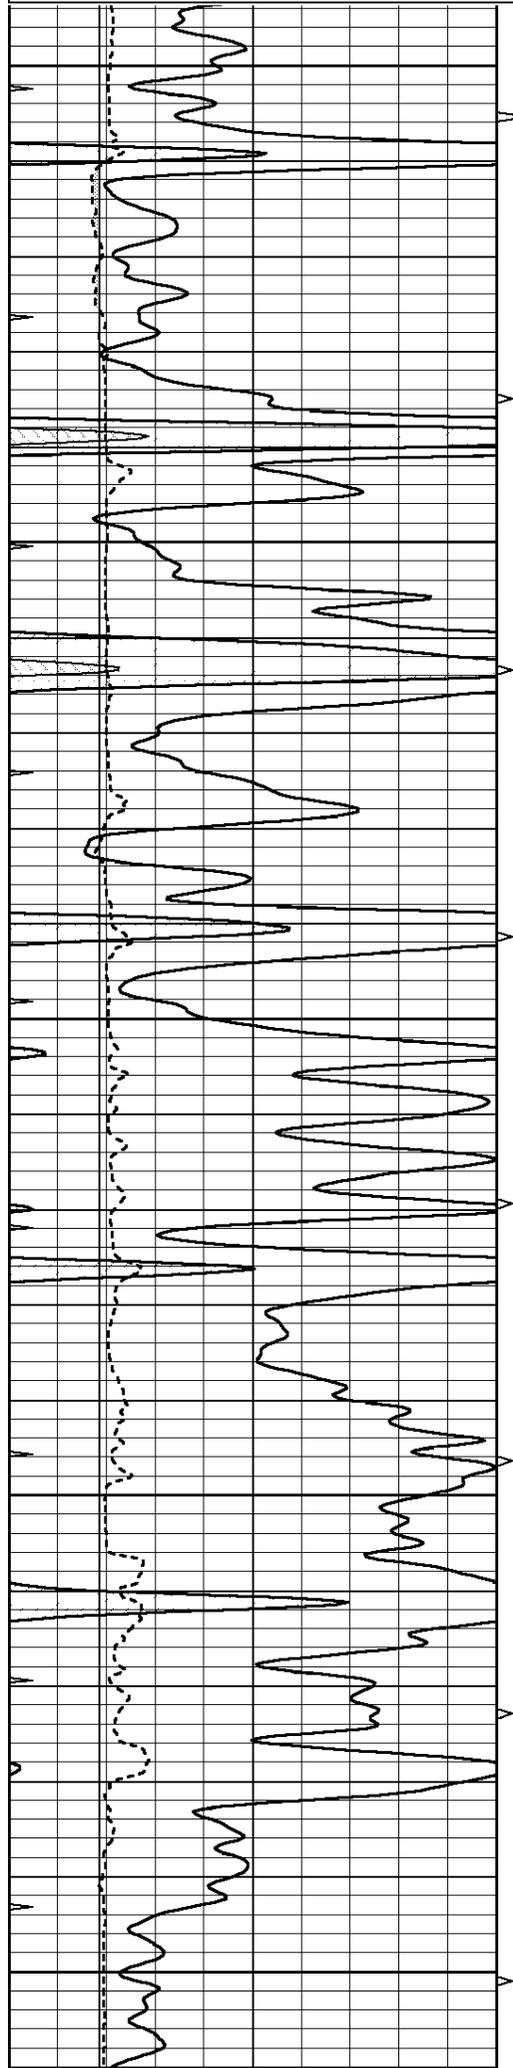

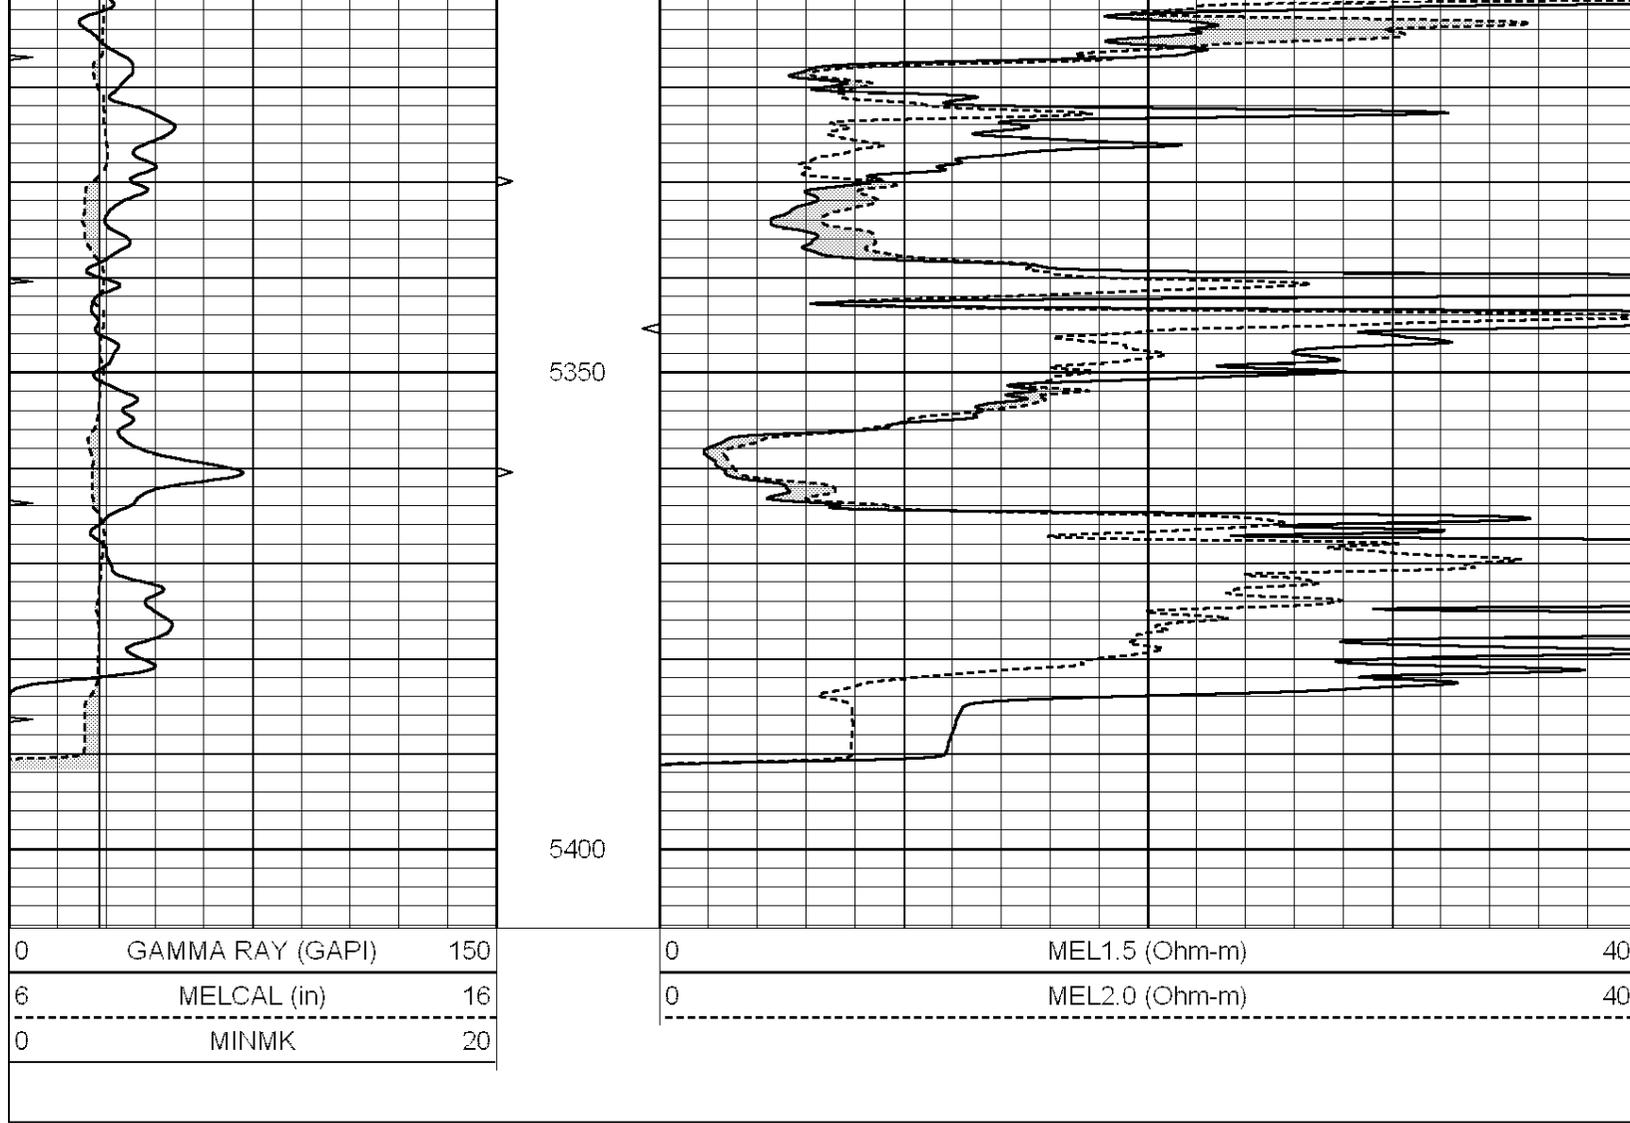

Calibration Report

Database File: 010847pe.db
 Dataset Pathname: pass6.1.1
 Dataset Creation: Fri Mar 29 07:15:26 2013

MICRO Calibration Report

Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Tue Mar 26 03:04:19 2013	
Caliper Calibration:	Gain=2.096	Offset=1.326
References	Low Cal 8.300	High Cal 12.000
Readings	3.327	5.092
1.5" Calibration:	Gain=90.000	Offset=-1.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.019	0.681
2" Calibration:	Gain=100.000	Offset=-3.000
References	Low Cal 0.000	High Cal 20.000
Readings	0.008	0.791

Gamma Ray Calibration Report

Serial Number: GR5
Tool Model: OPEN
Performed: Tue Mar 26 03:22:48 2013

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading: 1.0 cps

Sensitivity: 2.4000 GAPI/cps