



Microresistivity Log

Pioneer Energy Services

API No.

15-171-20,954-00-00

Company Landmark Resources, Inc.

Well Decker #1-8

Field Wildcat

County Scott State

Kansas

Location

1732' FSL & 1709' FEL

Other Services
CNL/CDL
DIL/BHCS

Sec: 8

Twp: 17S

Rge: 34W

Elevation

K.B. 3156
D.F. 3145
G.L. 3145

Permanent Datum Ground Level

Elevation 3145

Log Measured From Kelly Bushing

11 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Date

6/26/2013

Run Number

Two

Depth Driller

4940

Depth Logger

4943

Bottom Logged Interval

4942

Top Log Interval

3500

Casing Driller

8.625 @ 226

Casing Logger

221

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

6,100

Density / Viscosity

9.4 53

pH / Fluid Loss

10.0 9.6

Source of Sample

Flowline

Rm @ Meas. Temp

.40 @ 100

Rmf @ Meas. Temp

.30 @ 100

Rmc @ Meas. Temp

.54 @ 100

Source of Rmf / Rmc

Charts

Rm @ BHT

.32 @ 125

Operating Rig Time

5 Hours

Max Rec. Temp. F

125

Equipment Number

15

Location

Hays

Recorded By

J. Henrickson

Witnessed By


Terry McLeod

Comments

Thank you for using Pioneer Energy Services
www.pioneerres.com
785 625 3858
Scott City KS
8 W on HWY 96 to Dakota Rd. 1 N, 1 W
5 1/2 N to 215 Rd. 1 W, 1/2 N, W Into

Database File: c:\warrior\data\landmark_decker #1-8\landmark_decker_1_8hd.db
Dataset Pathname: DIL/landstk
Presentation Format: micro
Dataset Creation: Wed Jun 26 22:00:03 2013
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

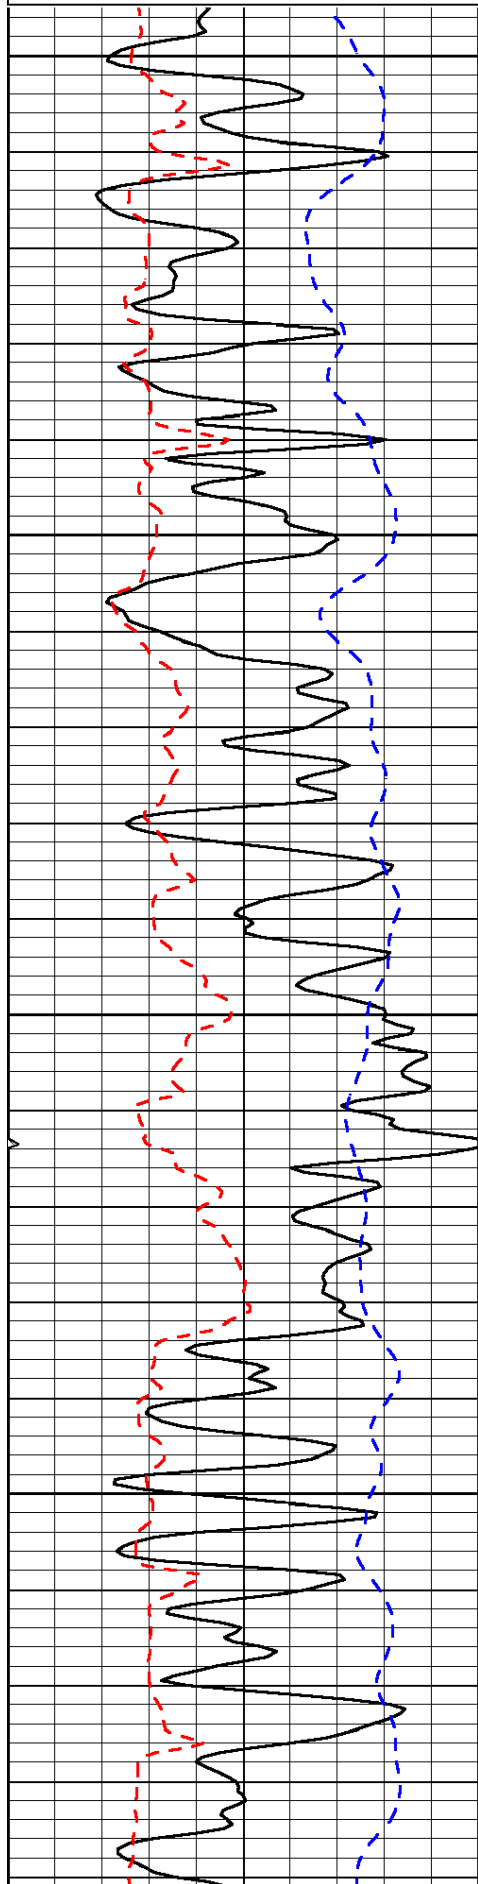

3500


3550

3600

3650

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

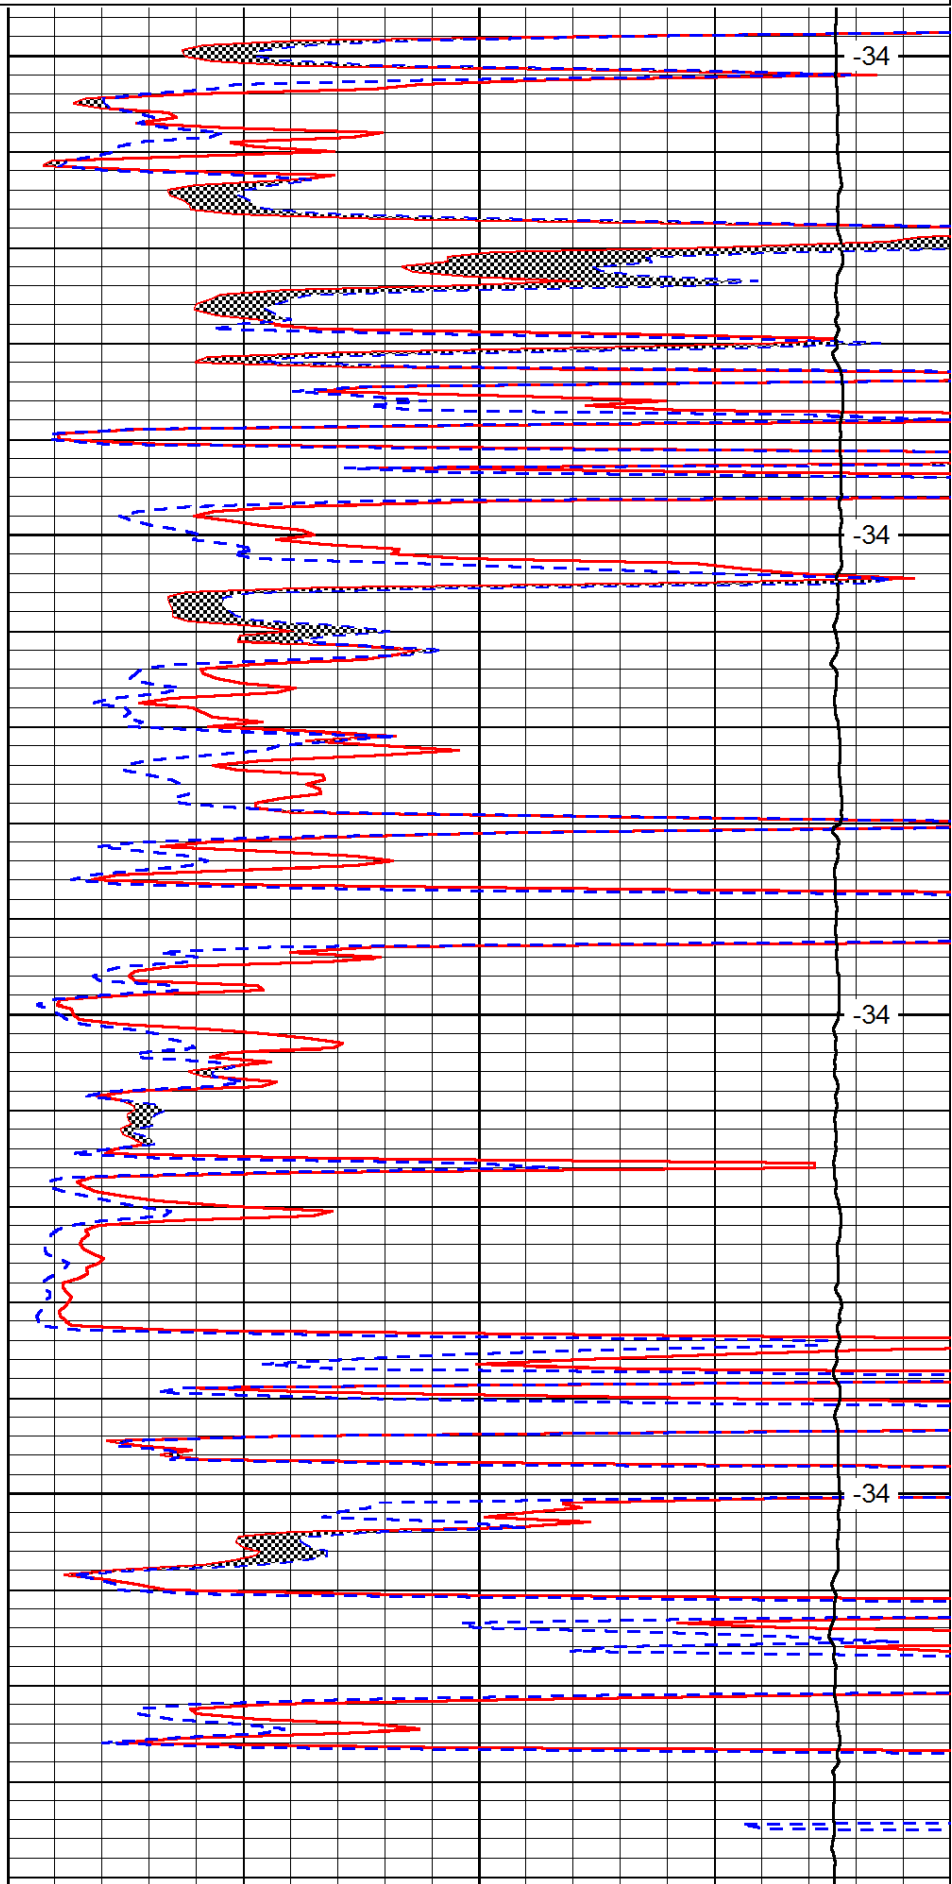


-34

-34

-34

-34

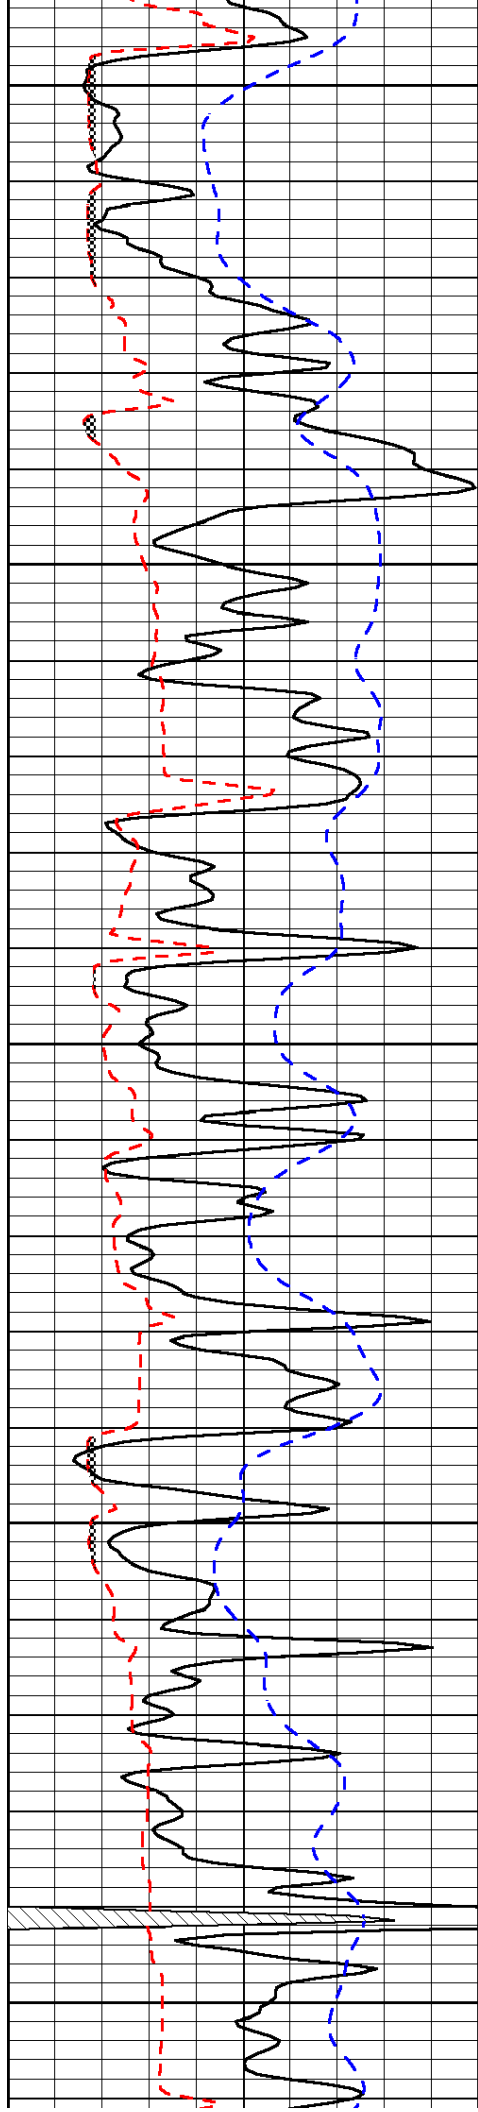


3700

3750

3800

3850

3900

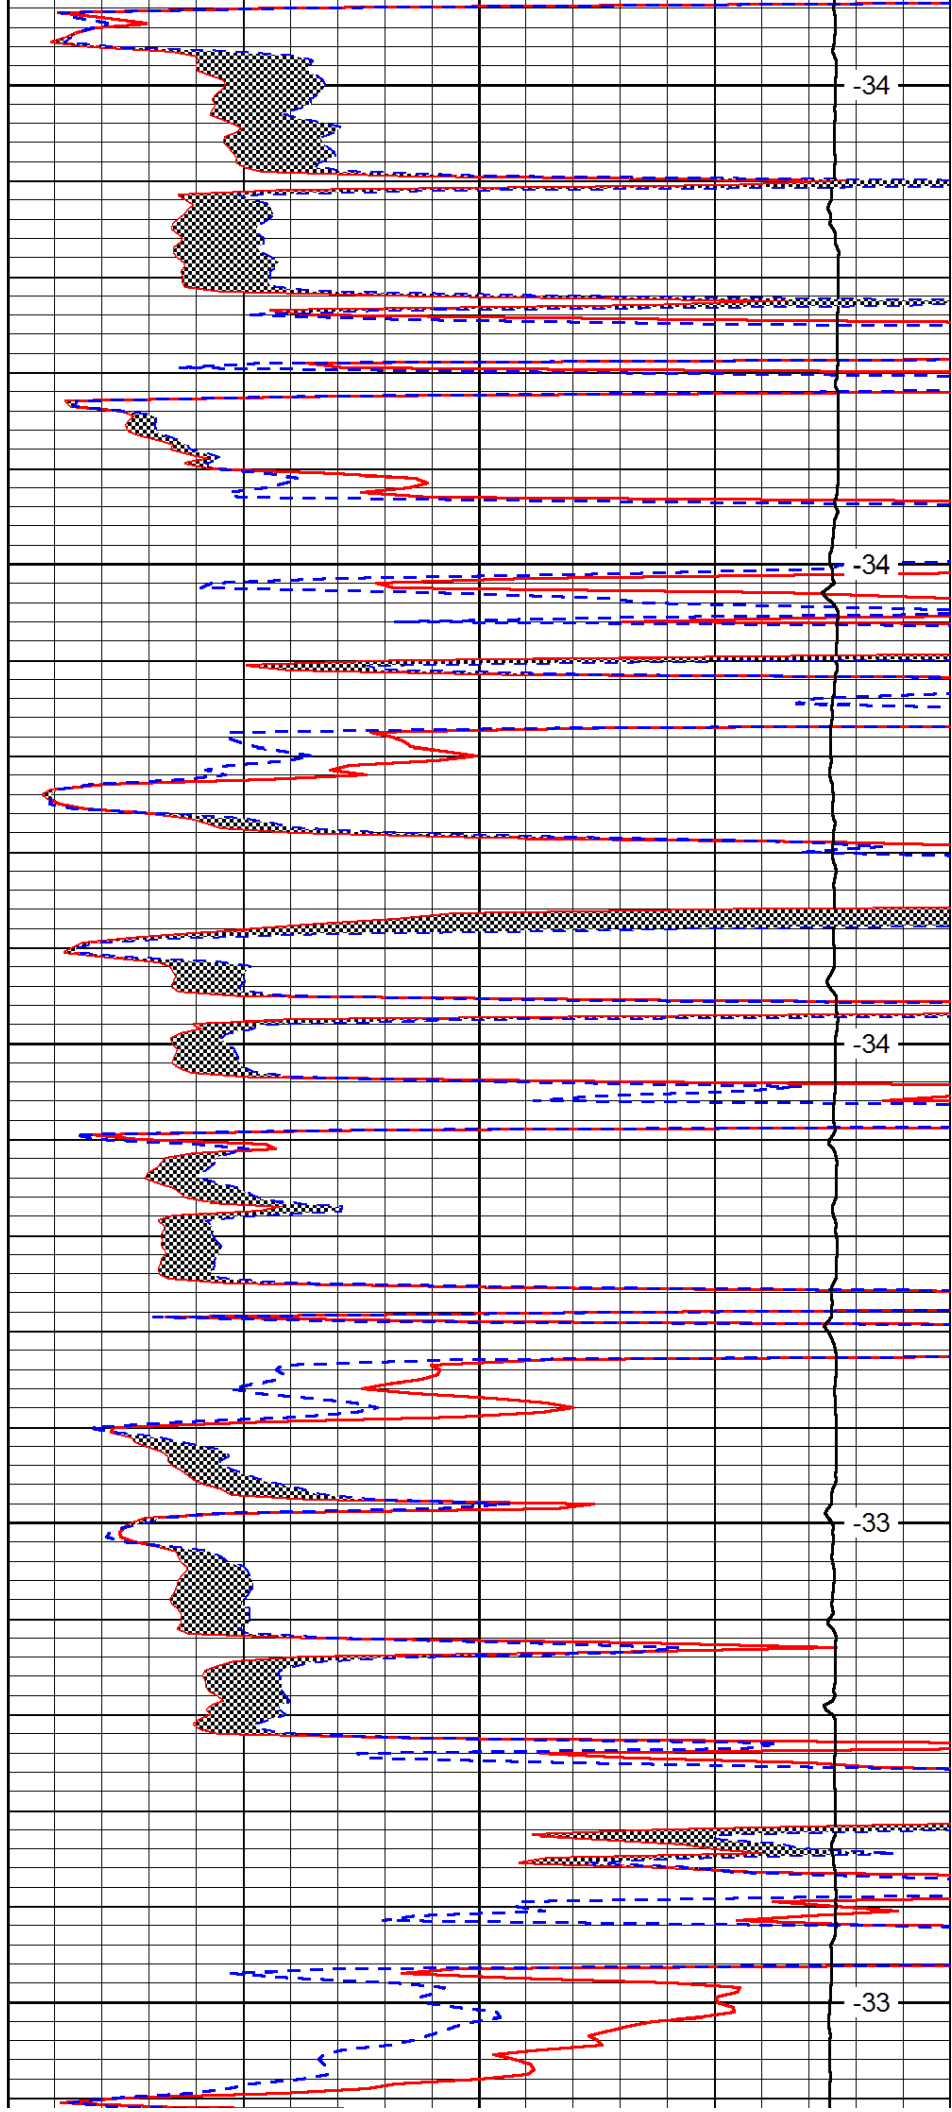


-34

-34

-34

-33

-33

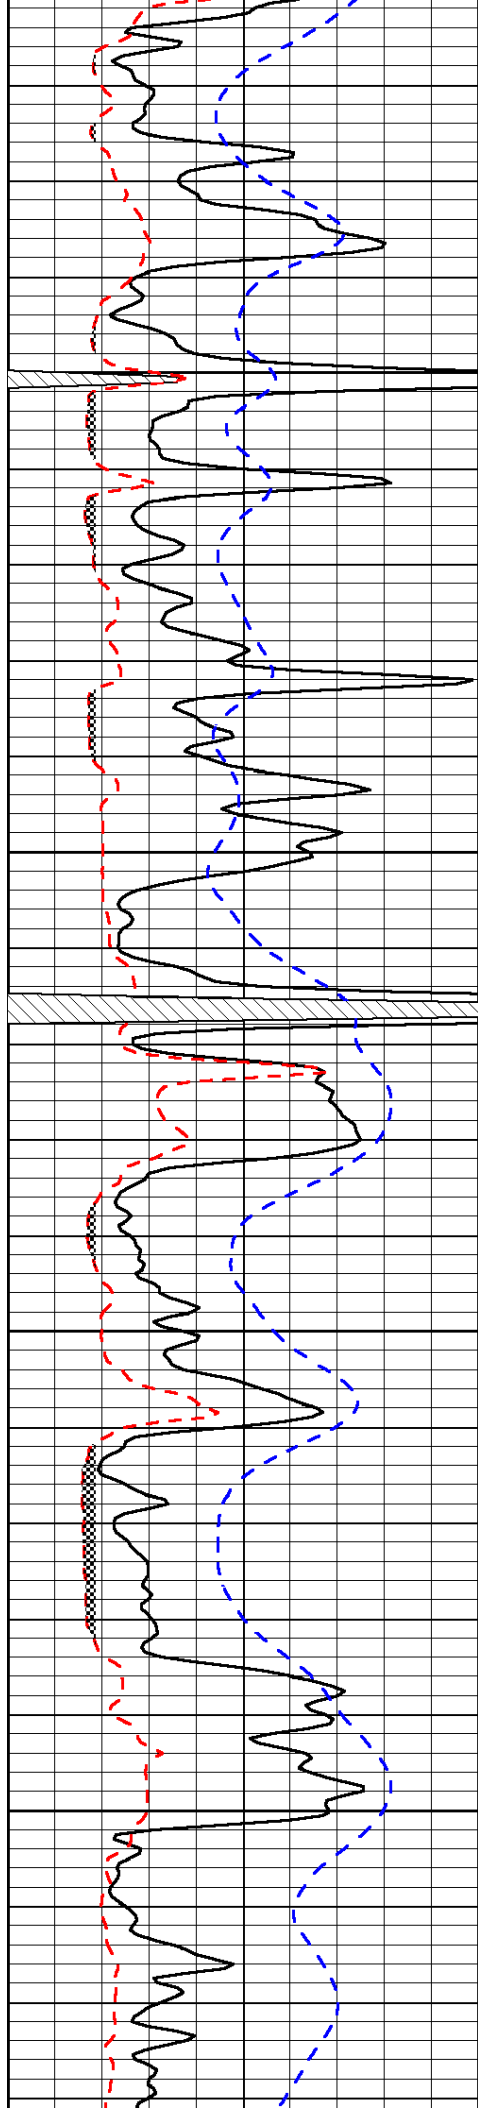


3950

4000

4050

4100

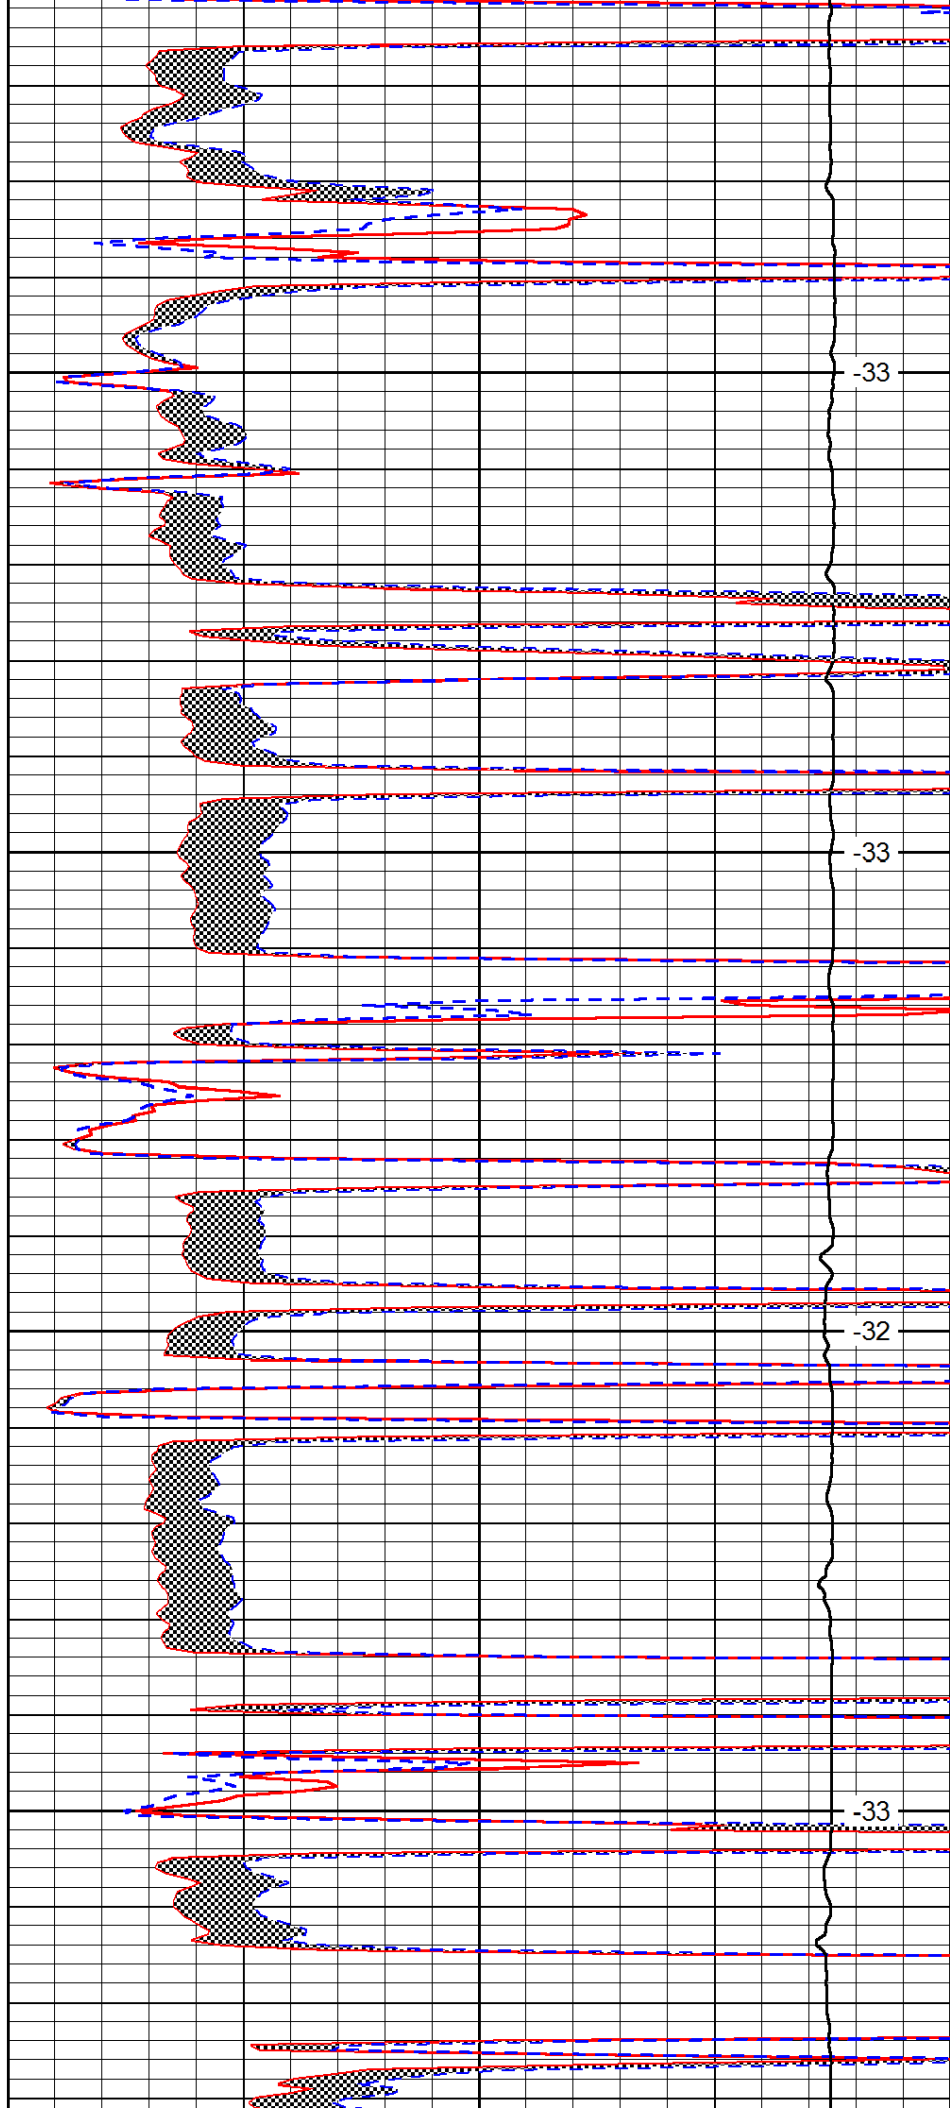


-33

-33

-32

-33

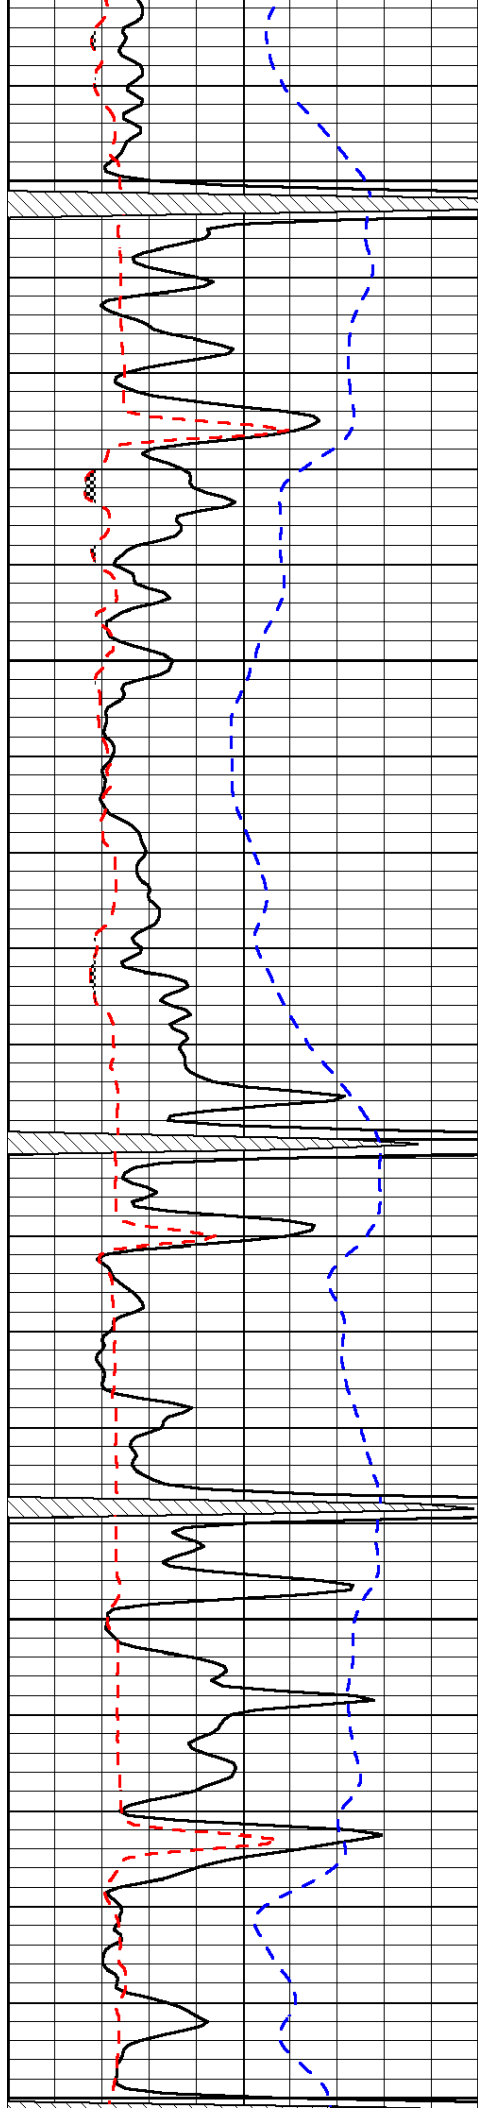


4150

4200

4250

4300

4350

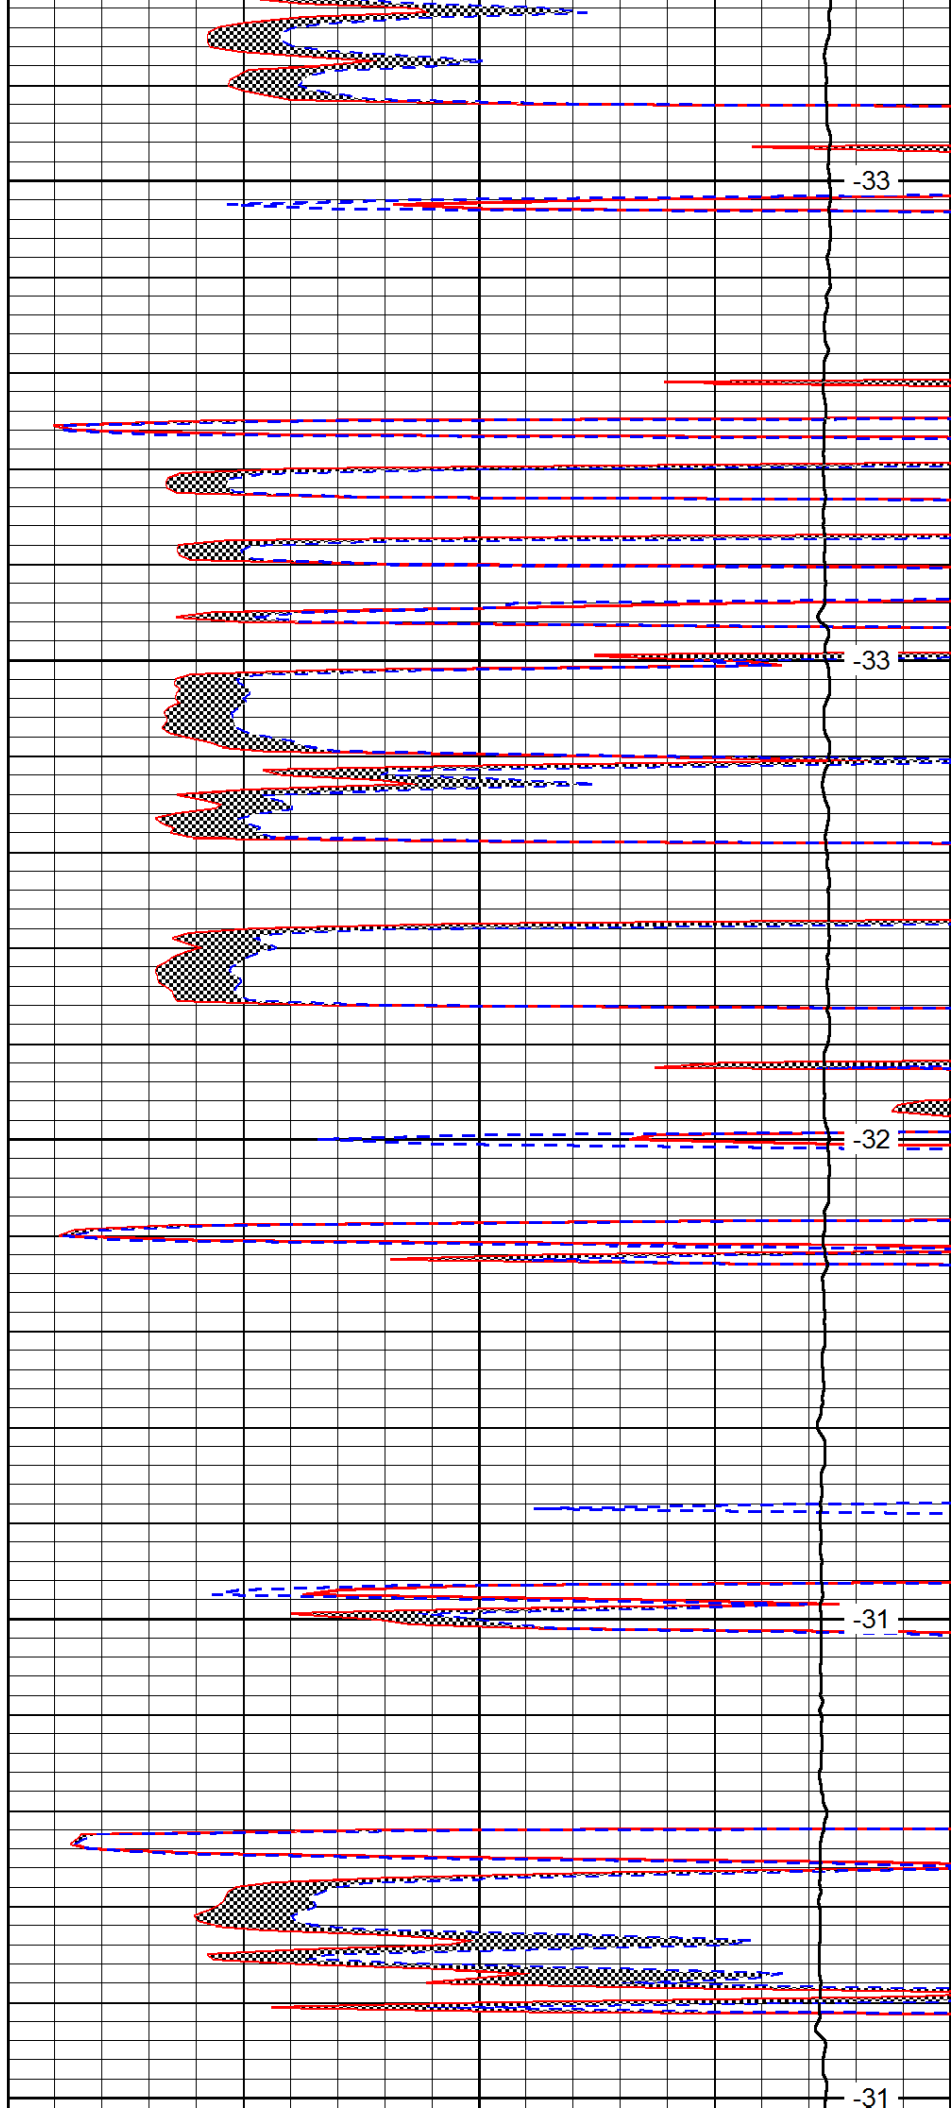


-33

-33

-32

-31

-31

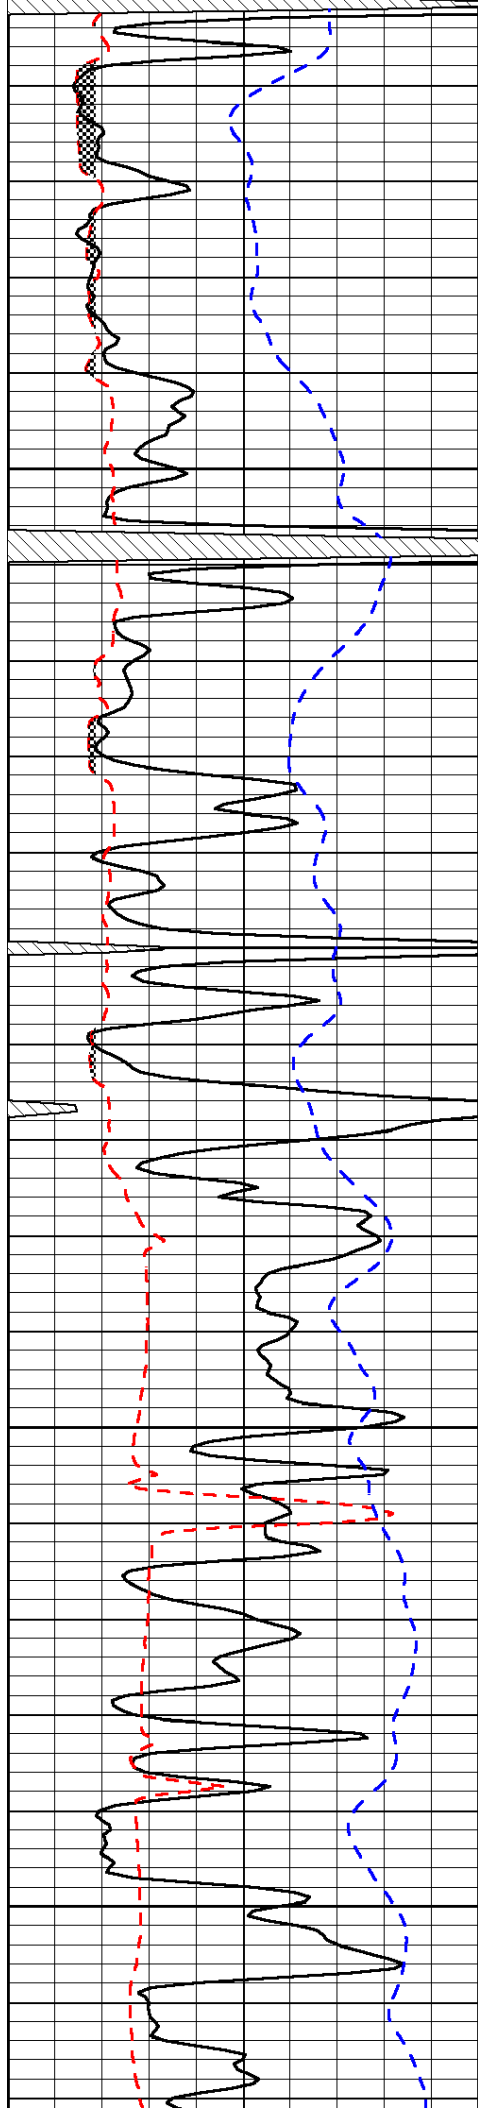


4400

4450

4500

4550

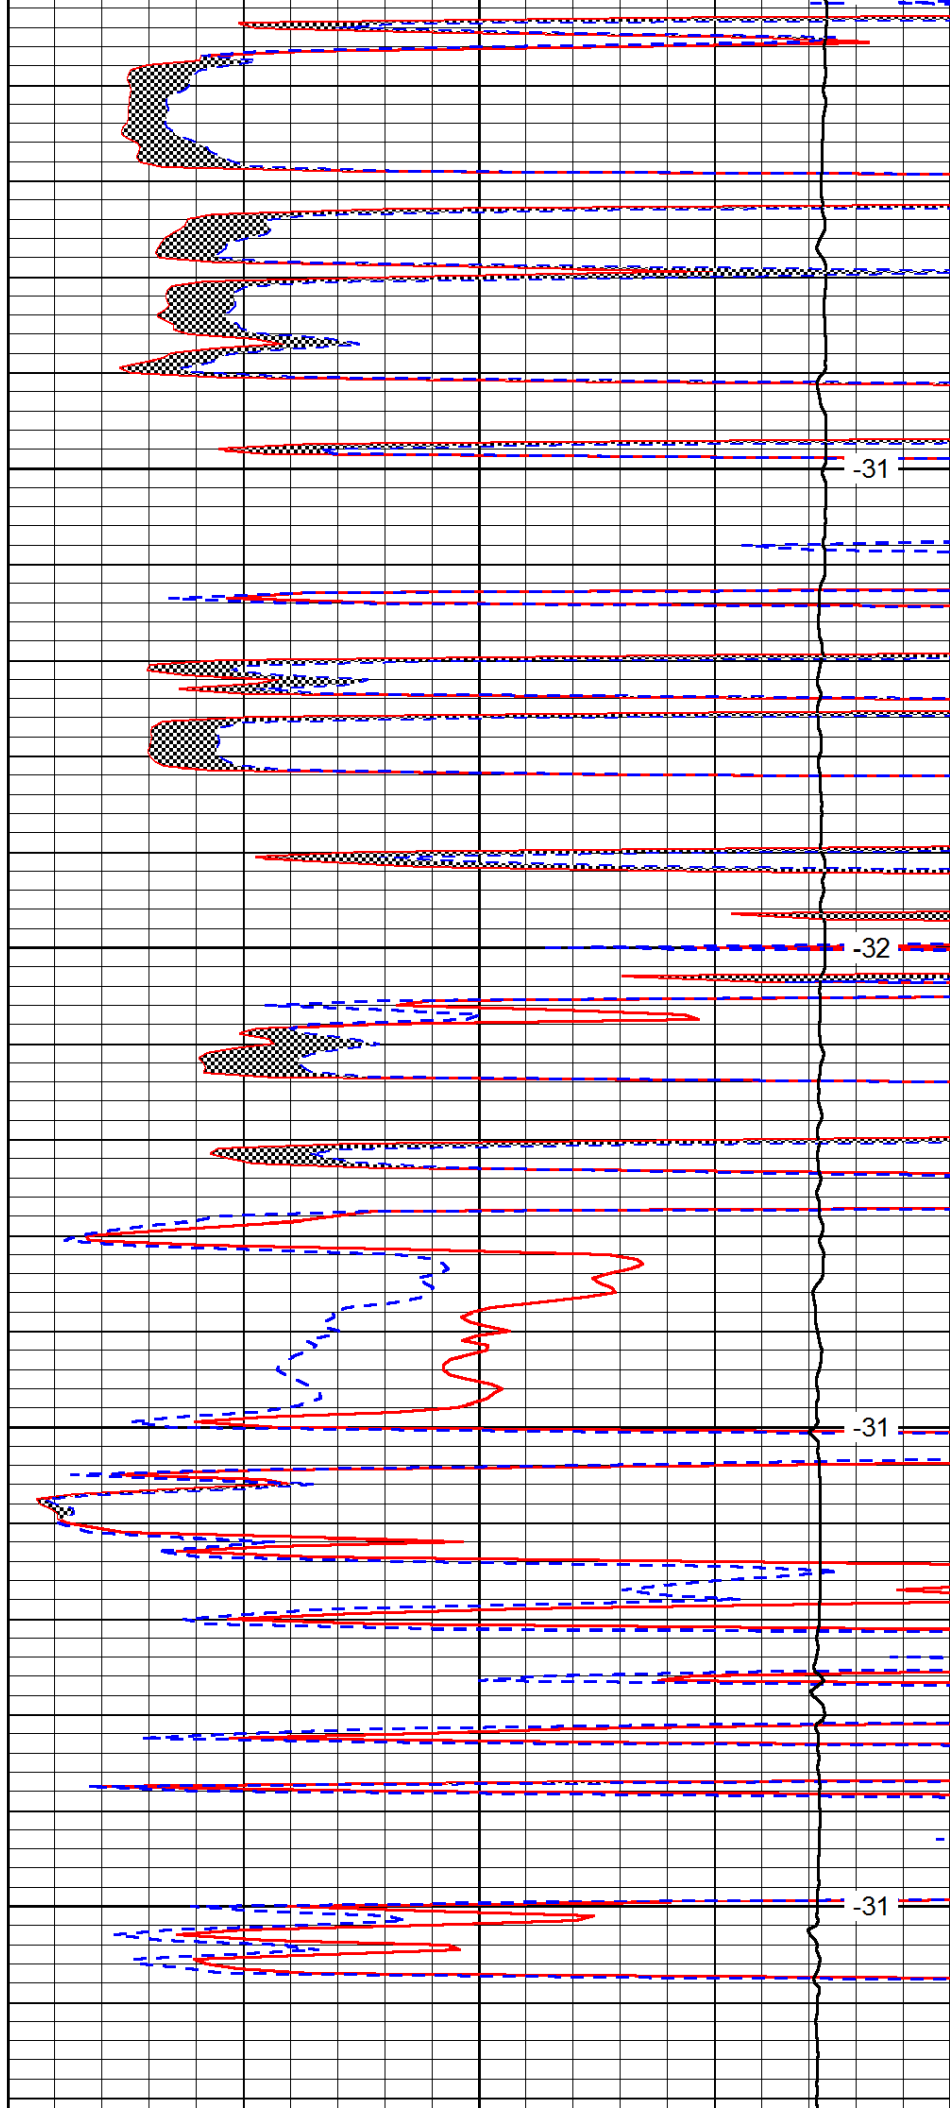


-31

-32

-31

-31

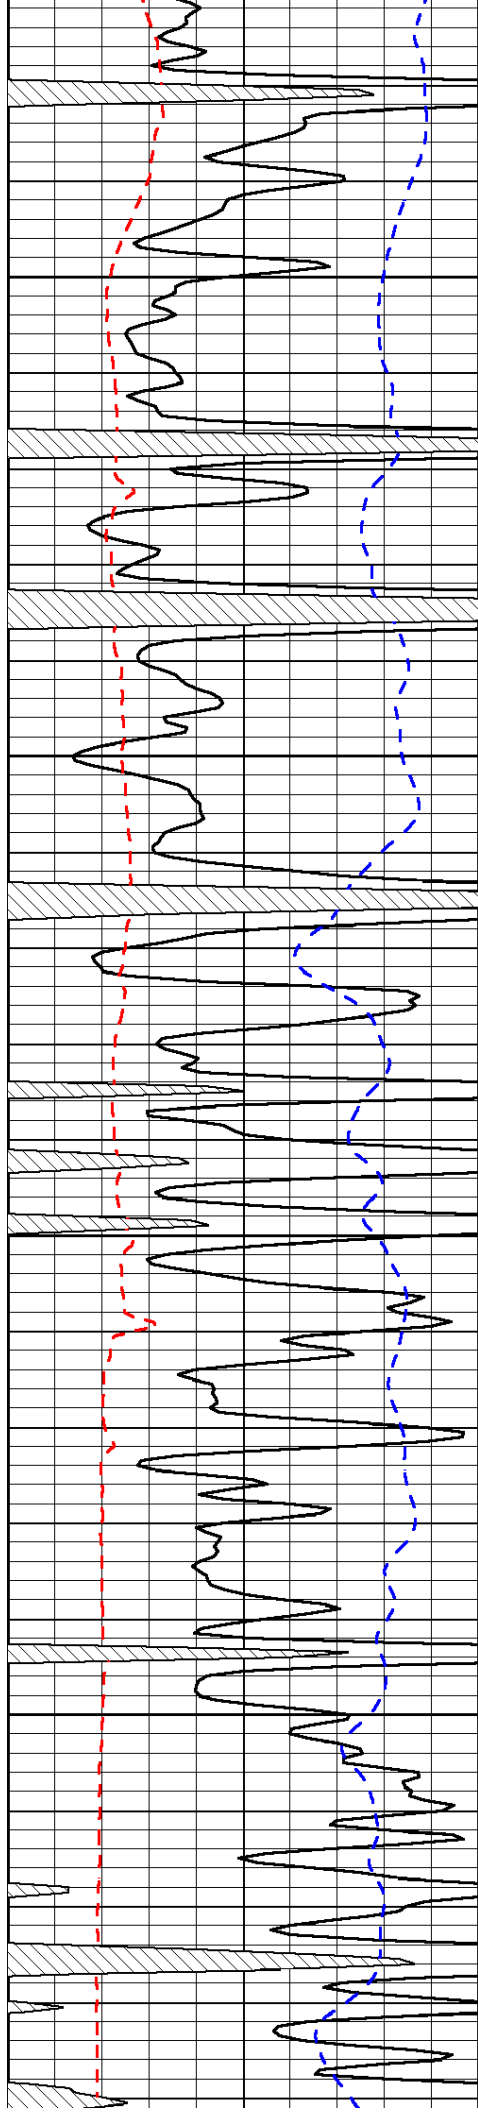


4600

4650

4700

4750

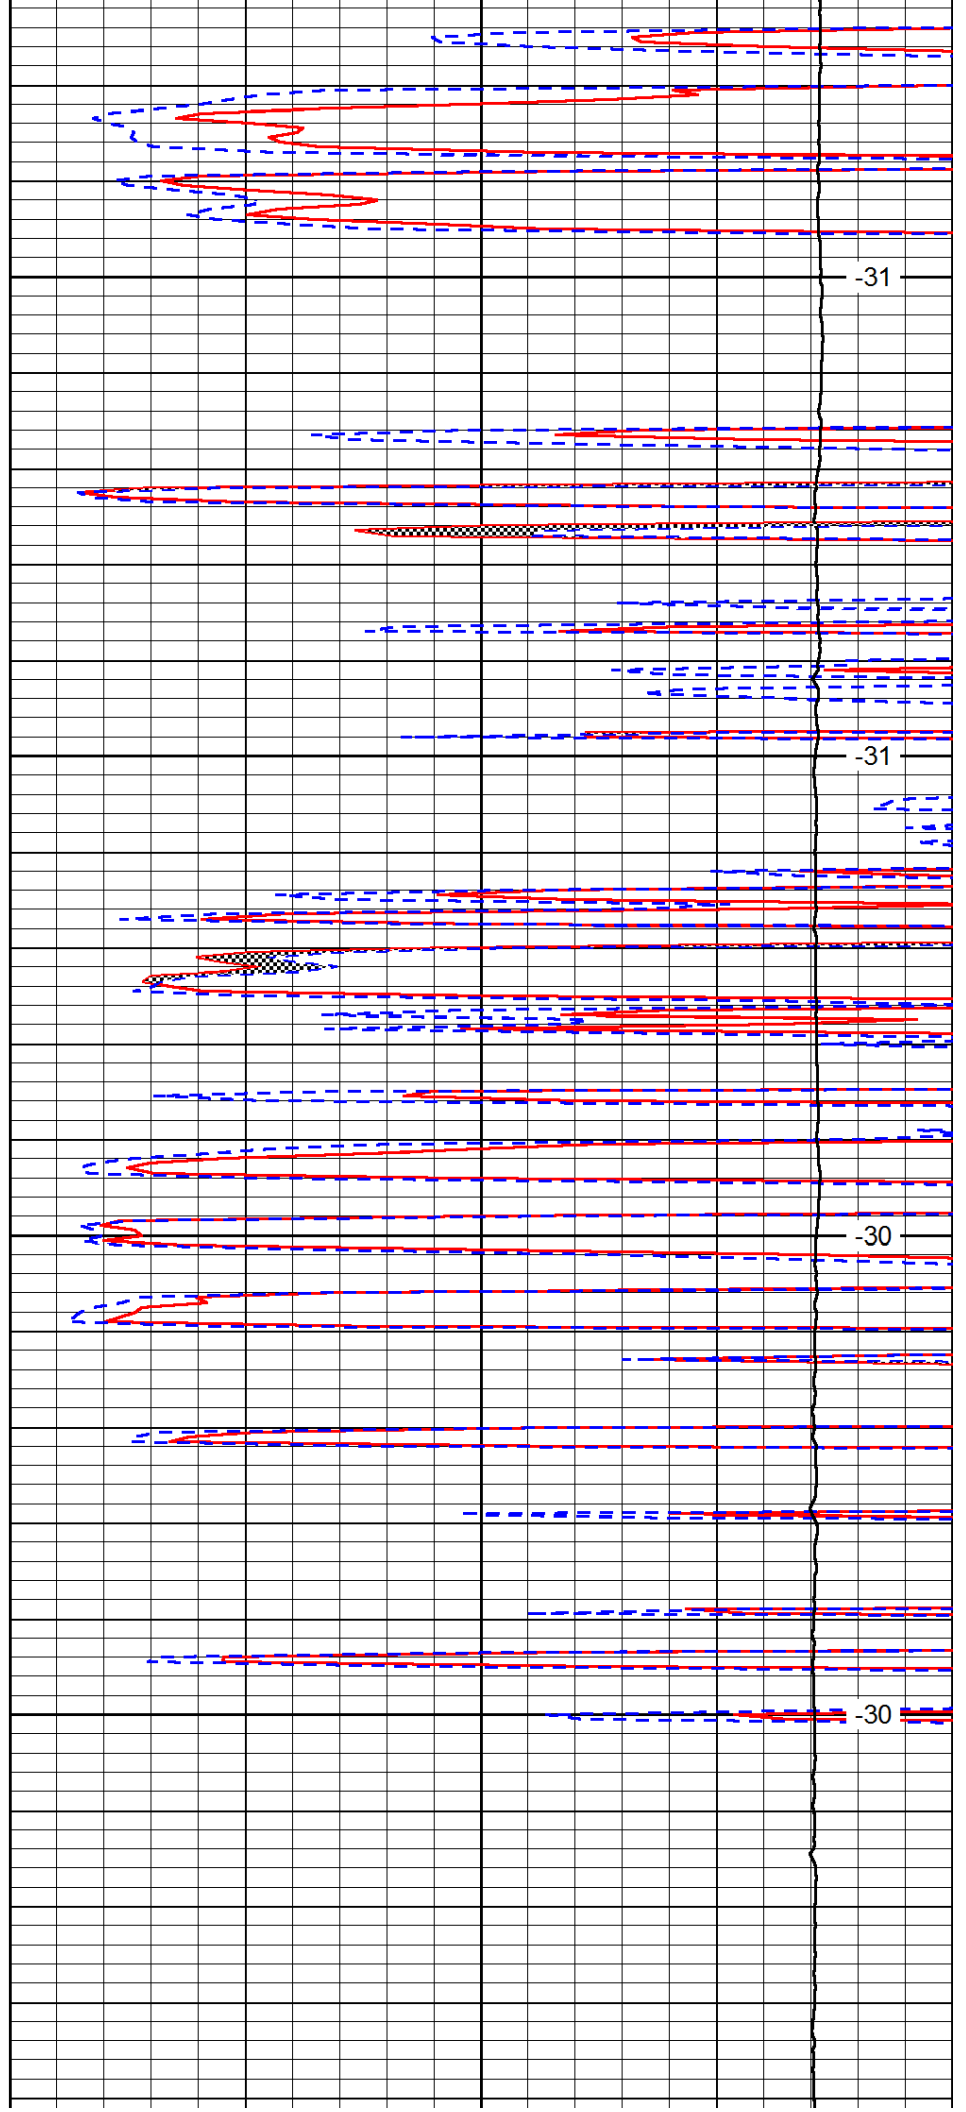

-31

-31

-30

-30

