



ThruBit
A Schlumberger Company

**DUAL SPACED NEUTRON
SPECTRAL DENSITY
GAMMA RAY
MEMORY LOG**

Company SANDRIDGE ENERGY
Well BRITT 3406 4-20H
Field EASTHAM
County HARPER
State KANSAS

Company SANDRIDGE ENERGY
Well BRITT 3406 4-20H
Field EASTHAM
County HARPER State KANSAS

Location: API 15-077-21927-0100
SHL: 200' FNL & 1600' FWL
SEC 29 TWP 34S RGE 06W
Permanent Datum G.L. Elevation 1294'
Log Measured From K.B. 15' ABOVE PERM DATUM
Drilling Measured From K.B.
Other Services
THRUBIT
PORTAL BIT
Elevation
K.B. 1309'
D.F. 1309'
G.L. 1294'

Date	11 MAY 2019		
Run Number	ONE		
Depth Driller	9458'		
Depth Logger	9402'		
Bottom Logged Interval	9385'		
Top Log Interval	5351'		
Casing Driller	7.00" @ 5365		
Casing Logger	5351'		
Bit Size	6.125		
Type Fluid in Hole	WBM		
Density / Viscosity	8.4 / 27		
pH / Fluid Loss	9.0 / 60		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.91 ohms @ 91 degf		
Rmf @ Meas. Temp	1.43 ohms @ 91 degf		
Rmc @ Meas. Temp	2.39 ohms @ 91 degf		
Source of Rmf / Rmc	CALCULATED		
Rm @ BHT	0.88 ohms @ 146 degf		
Time Circulation Stopped	22:30		
Time Logger on Bottom	23:50		
Maximum Recorded Temperature	146 degf		
Equipment Number	T013		
Location	TYLER, TX		
Recorded By	DENGLER		
Witnessed By	ANTONIO LEUA		

<<< Fold Here >>>

The use of and reliance upon this recorded-data by the herein named company (and any of its affiliates, partners, representatives, agents, consultants and employees) is subject to the terms and conditions agreed upon between ThruBit LLC and the company, including: (a) Restrictions on use of the recorded-data; (b) Disclaimers and waivers of warranties and representations regarding company's use of and reliance upon the recorded-data; and (c) Customer's full and sole responsibility for any inference drawn or decision made in connection with the use of this

Comments

SERVICE: LEVEL 4 HORIZONTAL PUMPDOWN MEMORY LOG FROM BIT DEPTH 9346 ' TO 5351'
ALL SCALES AND PRESENTATIONS PER CLIENT REQUEST
LIMESTONE MATRIX. 2.71g/cc USED FOR POROSITY MEASUREMENTS
TOOLSTRING RAN WITH DECENTRALIZER, SWIVEL AND NO STANDOFFS
TBHV REPRESENTS TOTAL BOREHOLE VOLUME, ft³
ABHV REPRESENTS ANNULAR HOLE VOLUME, CALCULATED FOR 4.5" CSG ft³
DEPTH REFERENCE: MWD LOG
RIGMINDER AND PASON USED TO CREATE DEPTH LOG

RIG: UNIT 310
CREW: J. DENGLER, T. BARCLAY, M. WAHLBERG, D. McNUTT

Service Ticket No. 1898

API No. 15-077-21927-0100

PGM Ver WARRIOR 7.0

The Well Name, Location, Borehole Description, and / or Cementing Data Furnished by Client

EQUIPMENT DATA


GAMMA RAY		NEUTRON		DENSITY		INDUCTION		
Run No.	ONE	Run No.	ONE	Run No.	ONE	Run No.	ONE	
Serial No.	PS30T	Serial No.	PS1N	Serial No.	PS36D	Serial No.	PS37R	
Model No.	PS	Model No.	PS	Model No.	PS	Model No.	PS	
Diameter	2.125"	Diameter	2.125"	Diameter	2.125"	Diameter	2.125"	
LOGGING DATA								
General Data								
Pass	Depths		Well Head	Speed	Logging Run Comments			
No.	From	To	Pressure	Ft/Min				
ONE	9402'	5351'		30				
	GAMMA RAY		NEUTRON		DENSITY		INDUCTION	
Pass	Scale		Scale		Scale		Scale	
No.	L	R	L	R	L	R	L	R
ONE	0 API	150 API	30%	-10%	30%	-10%	0.2 OHM-M	2000 OHM-M
DIRECTIONAL INFORMATION								
Maximum Deviation		93.07	deg. @	7999'	KOP	3946'		




MAIN PASS

Database File: britt_3406_mem.db
 Dataset Pathname: proc1/pass1.2
 Presentation Format: 6_2n_chk
 Dataset Creation: Sat May 11 09:05:48 2013
 Charted by: Depth in Feet scaled 1:600

0	GR (GAPI)	150	0	PEF (barn)	10	-0.5	DRHO (g/cc)	0.5
4	DCAL (in)	14	2	RHOB (g/cc)				
4	BOREID (in)	14						
-5	ACCY	5						

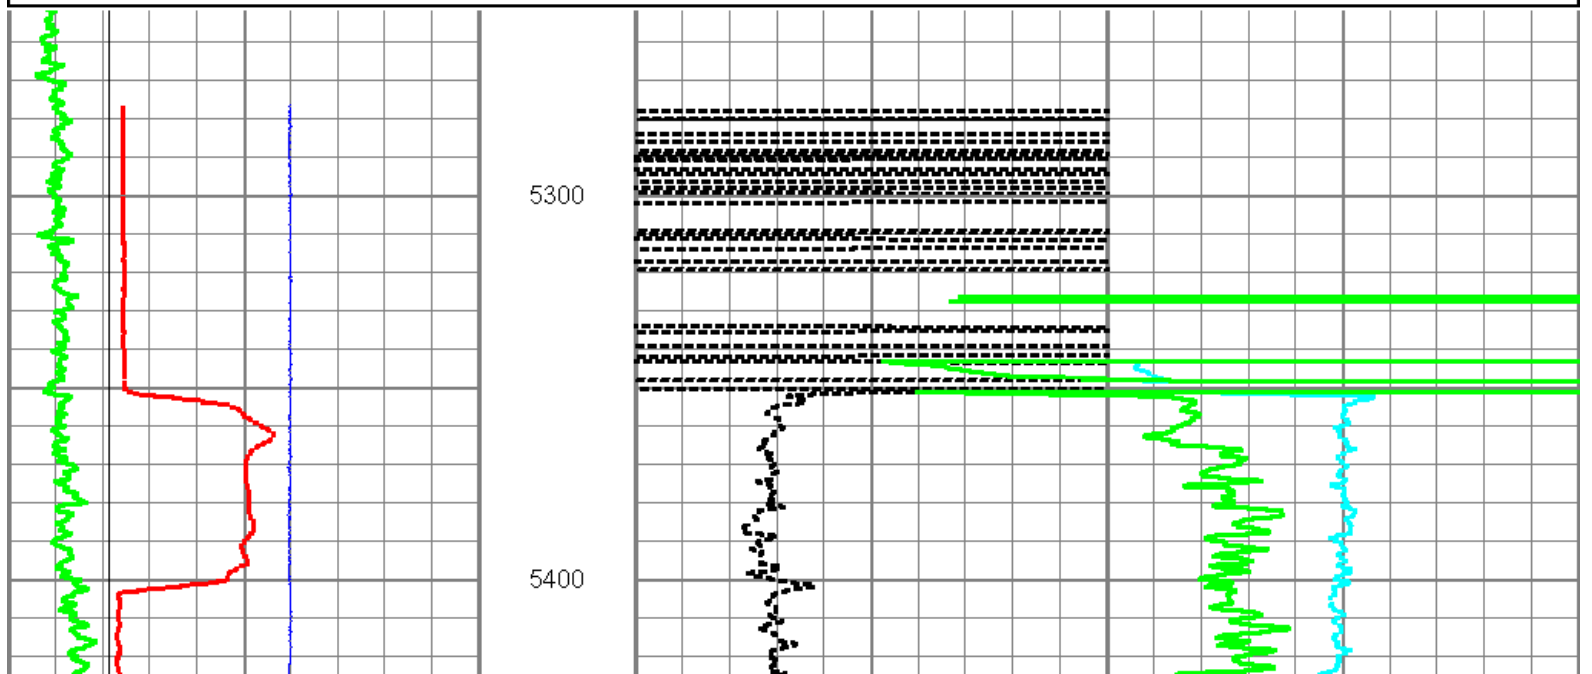

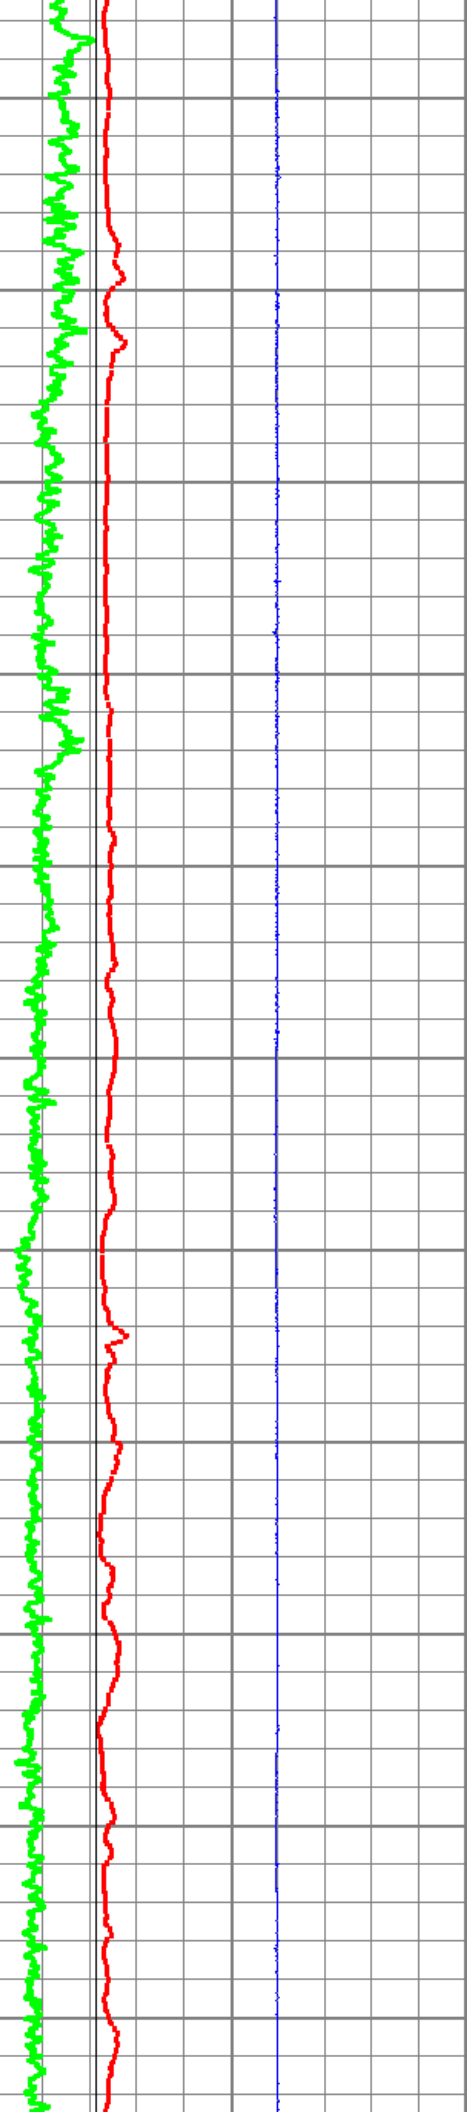


5500


5600

5700

5800

5900

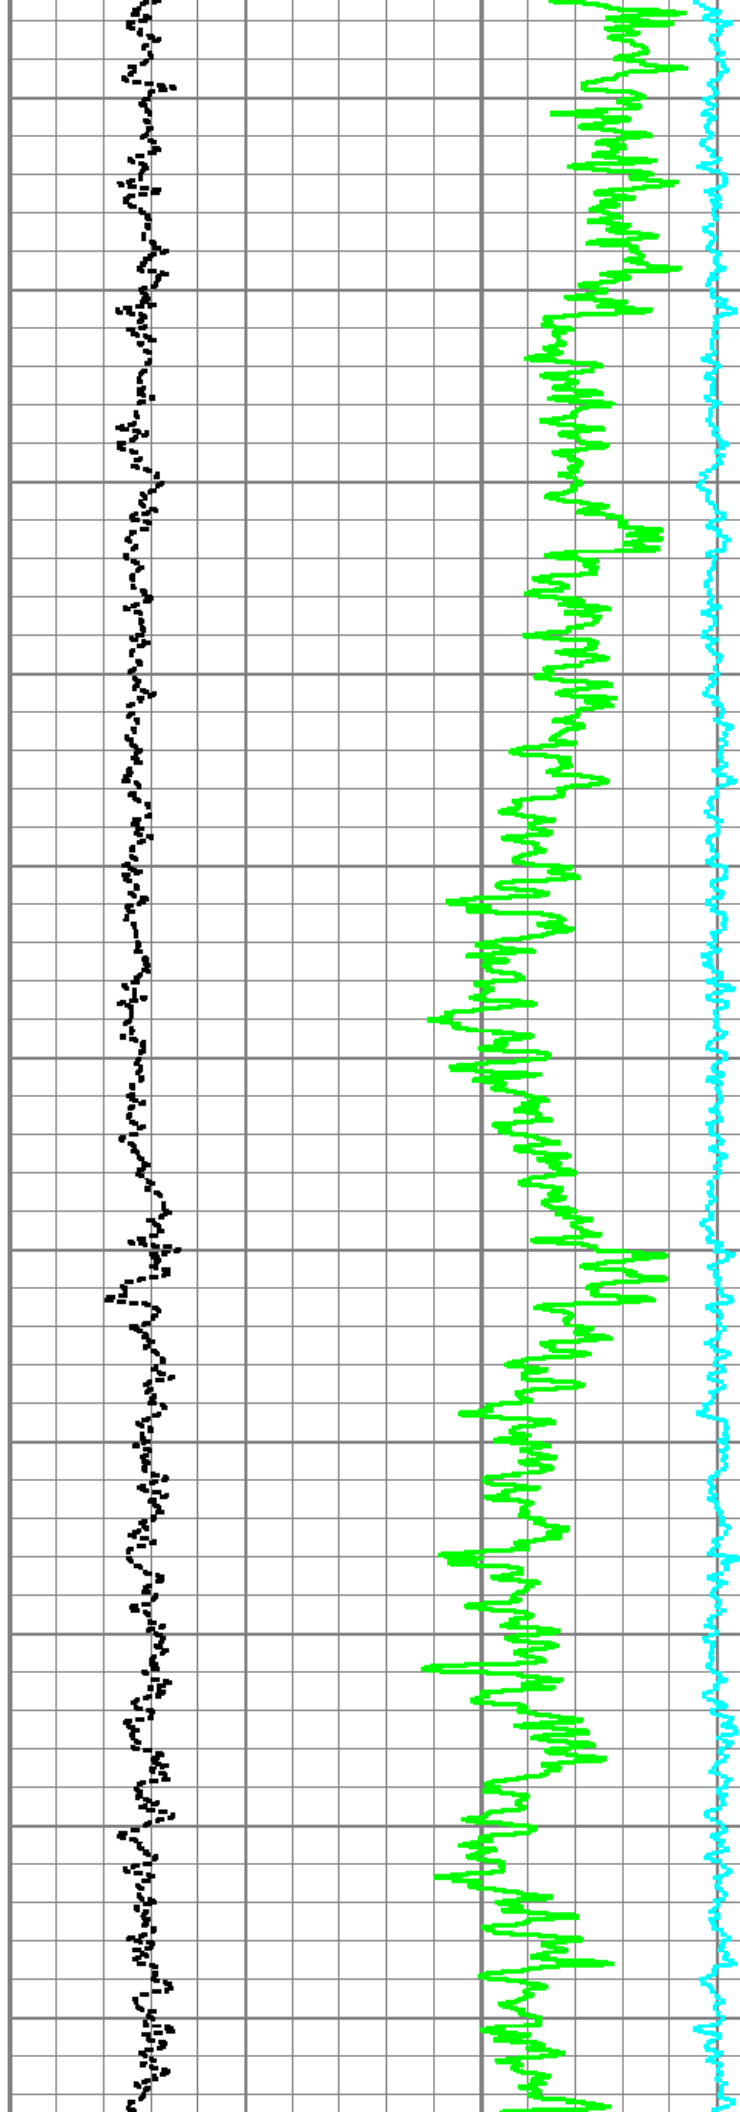

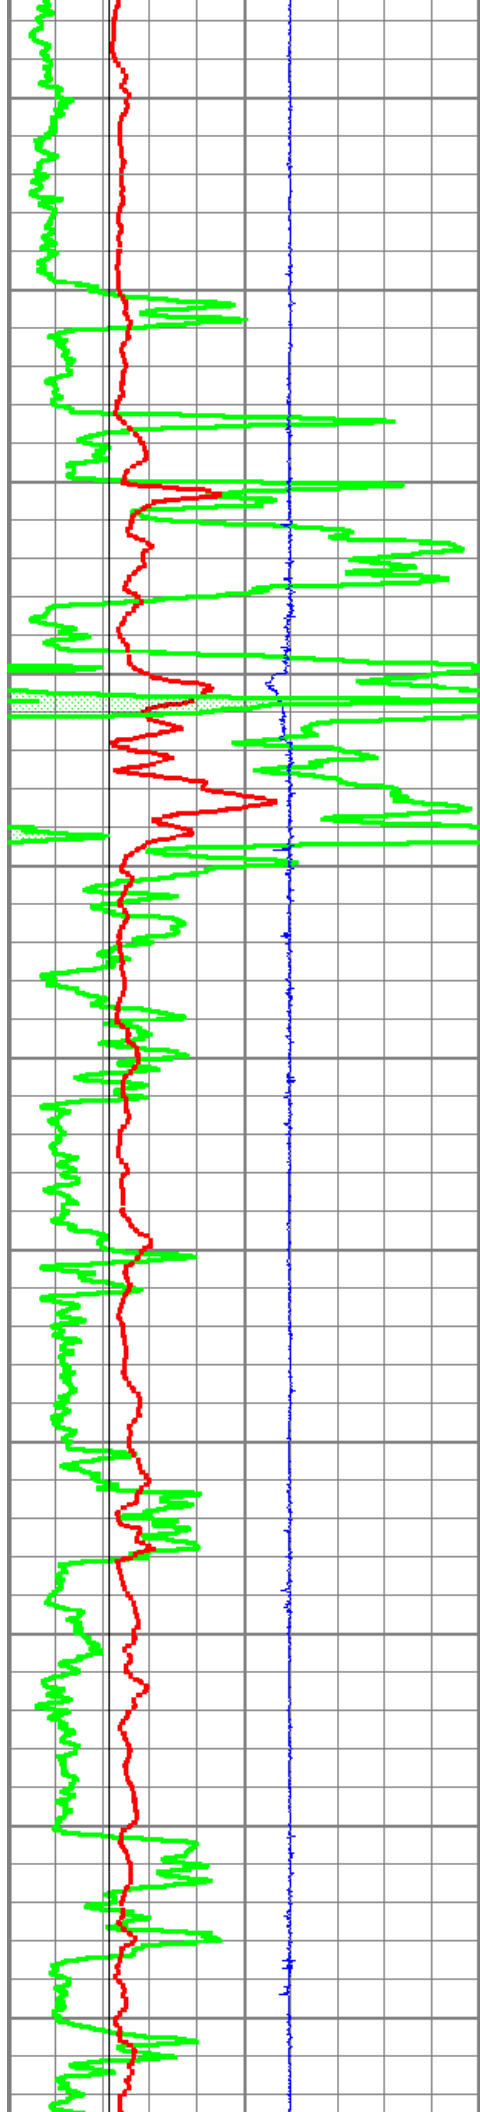

6000


6100


6200

6300

6400

6500

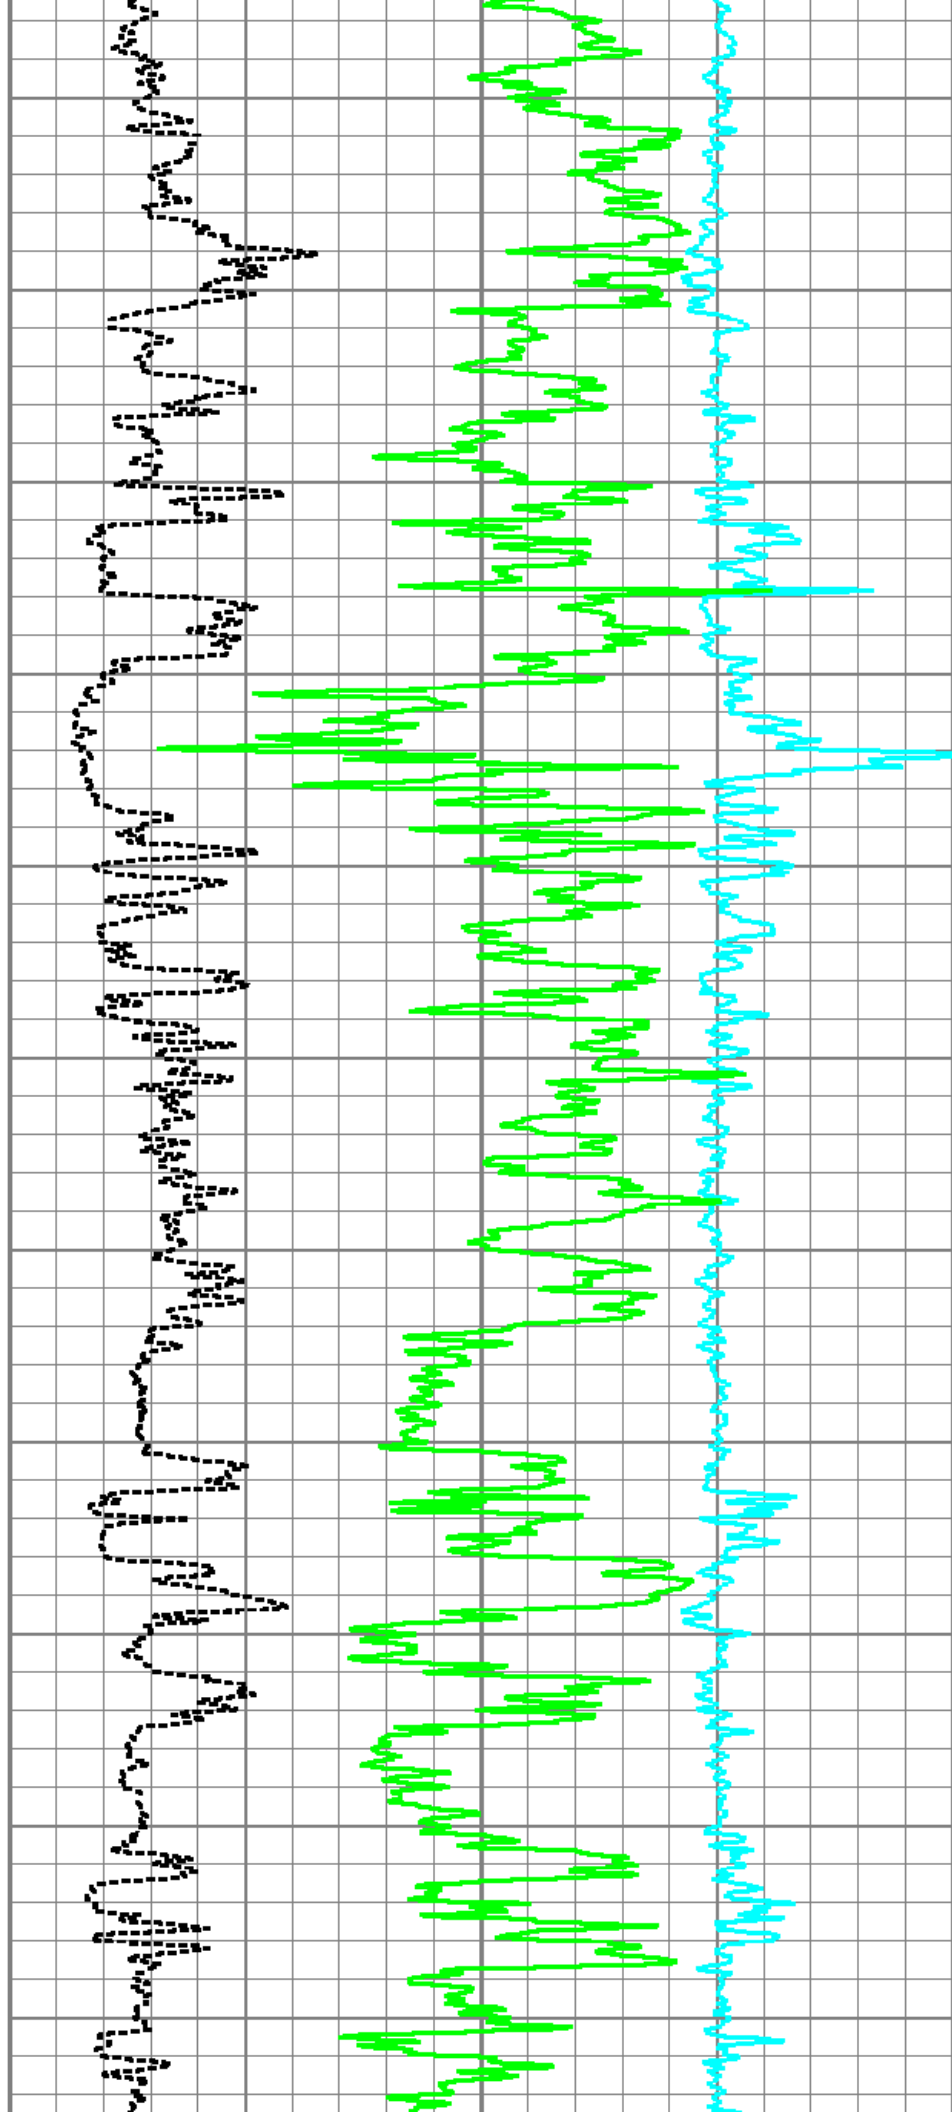

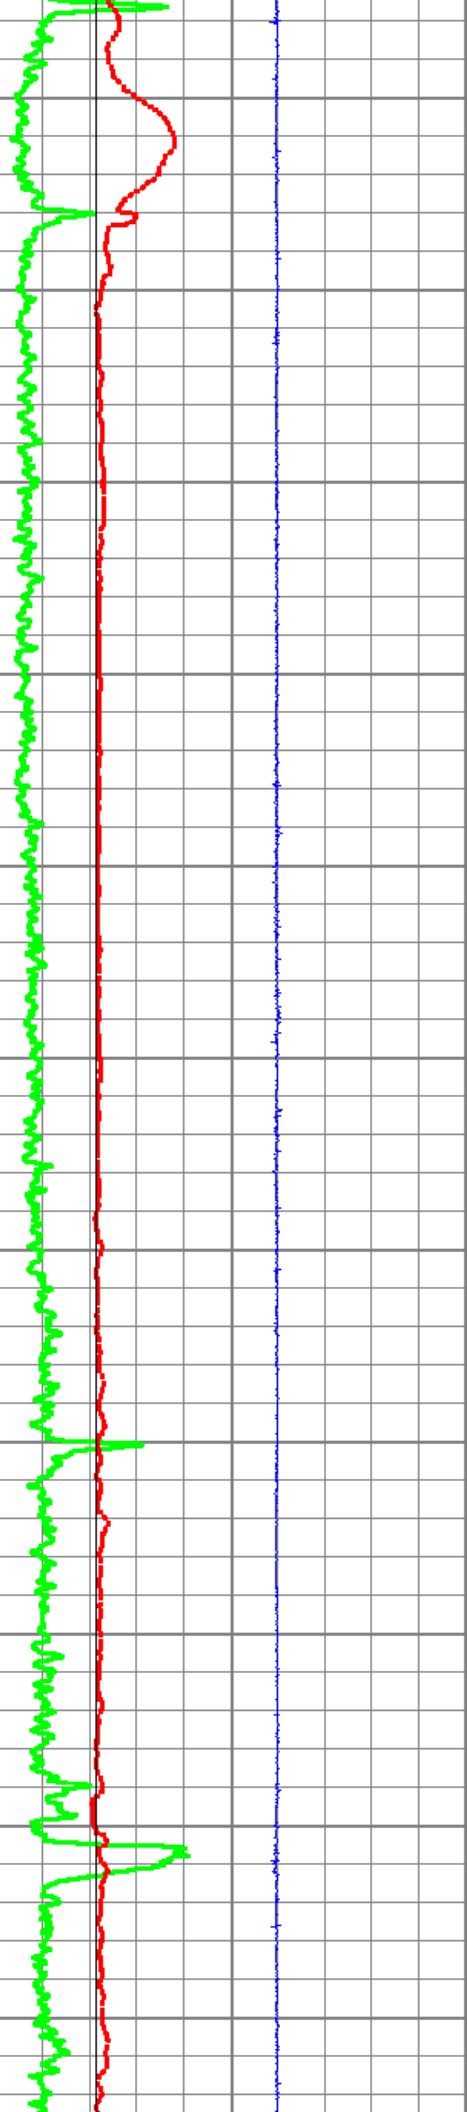


6600


6700

6800

6900

7000

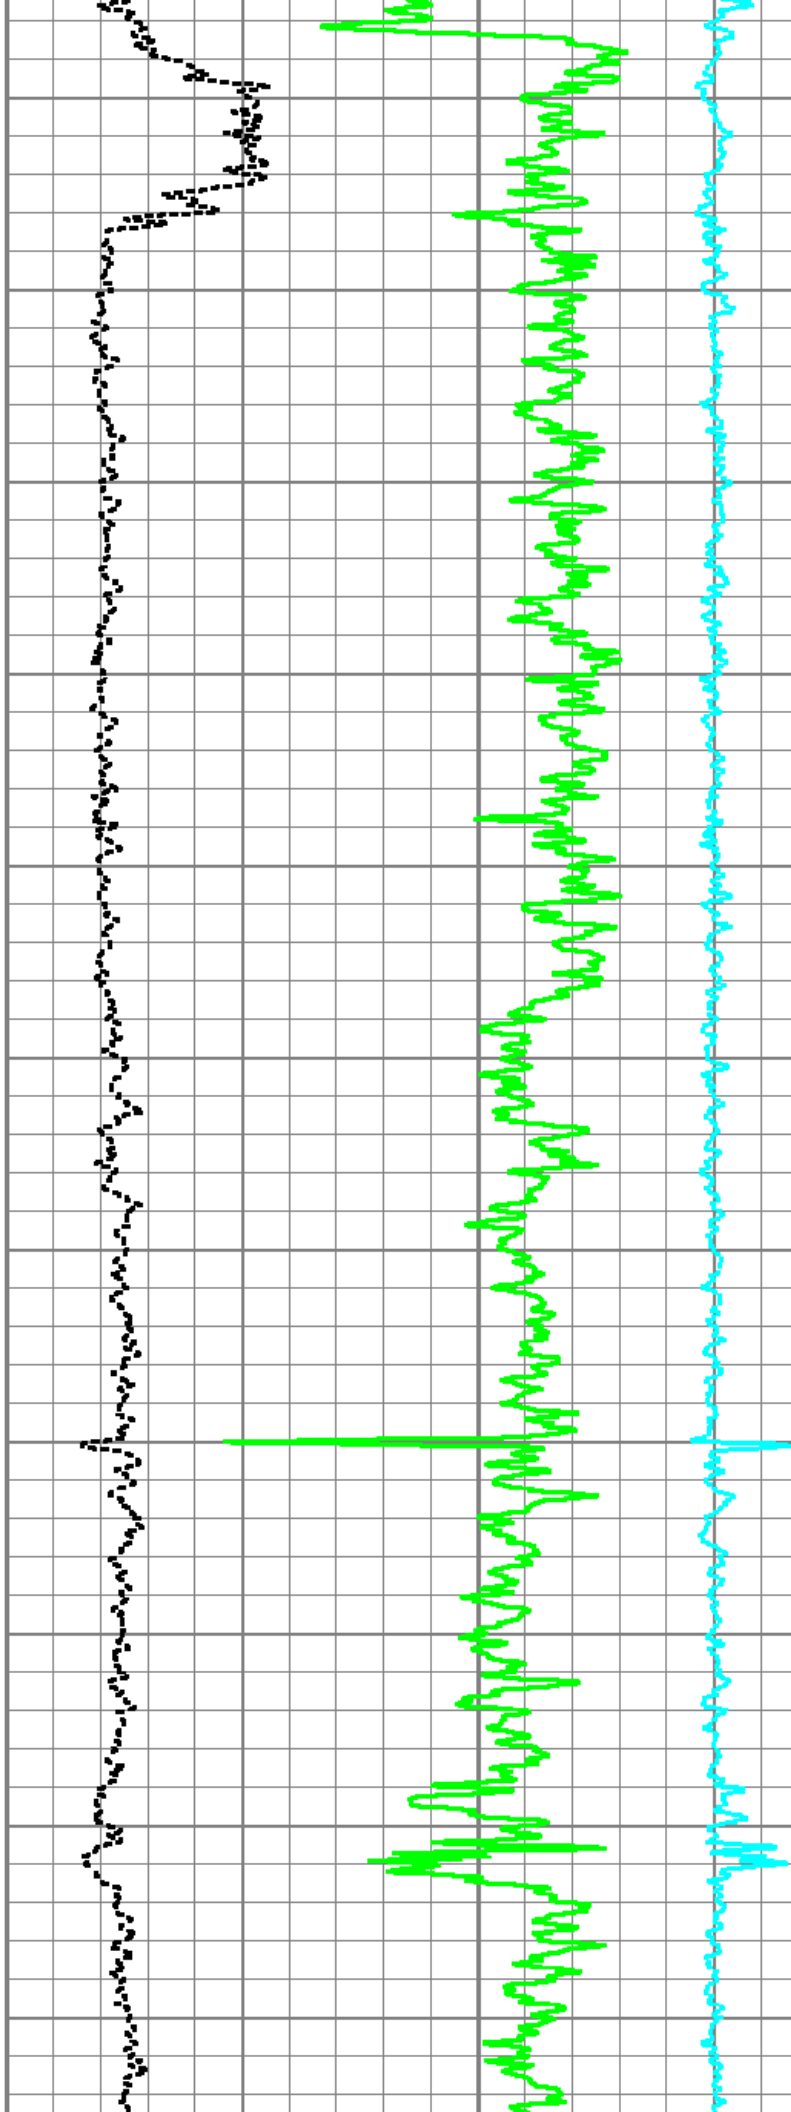

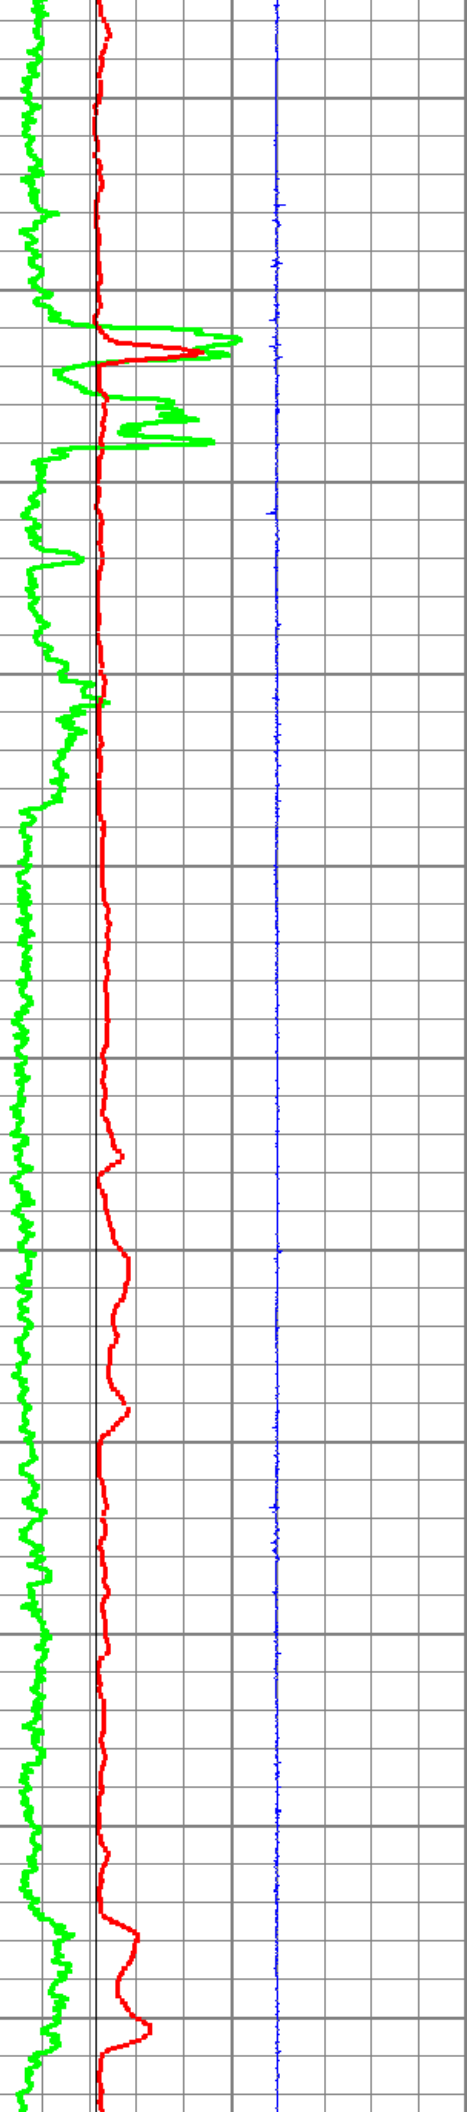

7100


7200


7300

7400

7500

7600

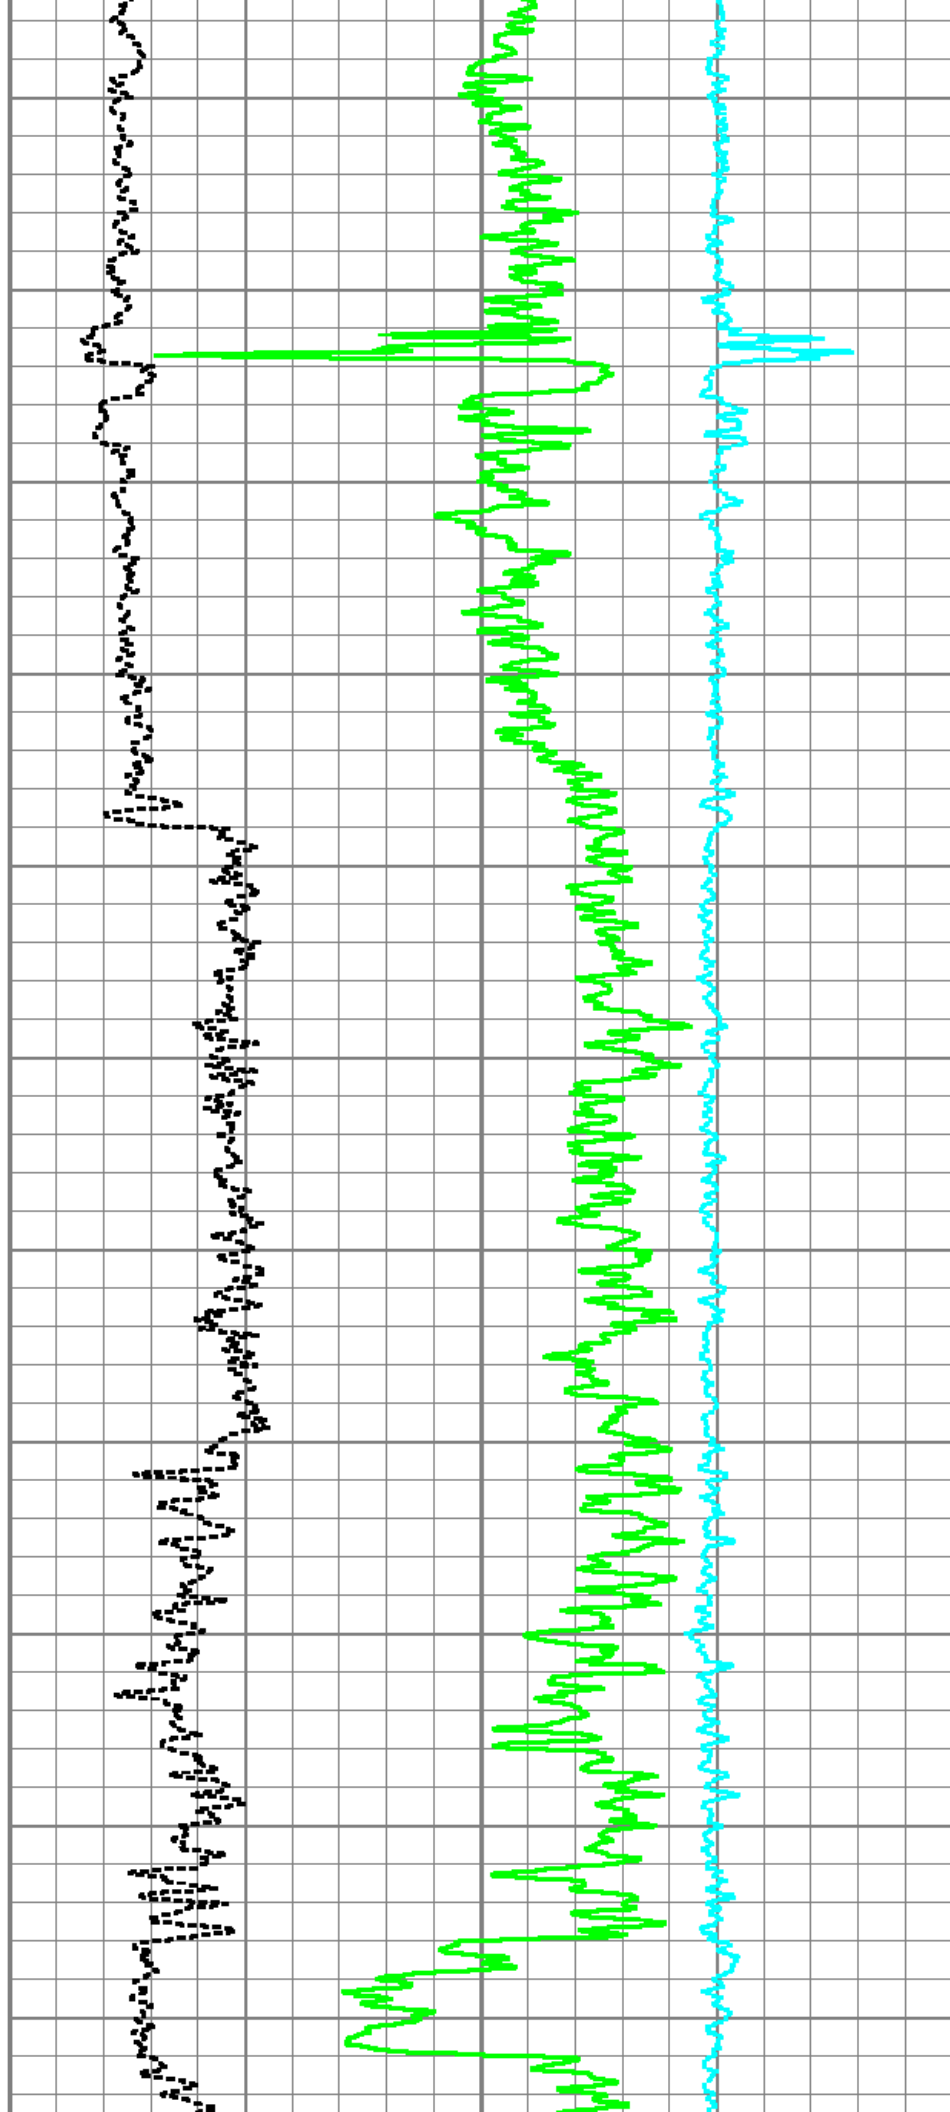

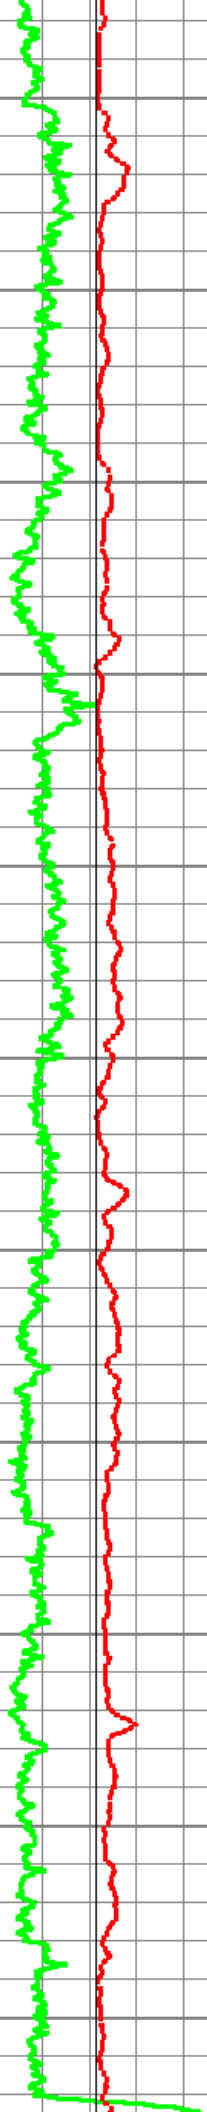



7700

7800

7900

8000

8100

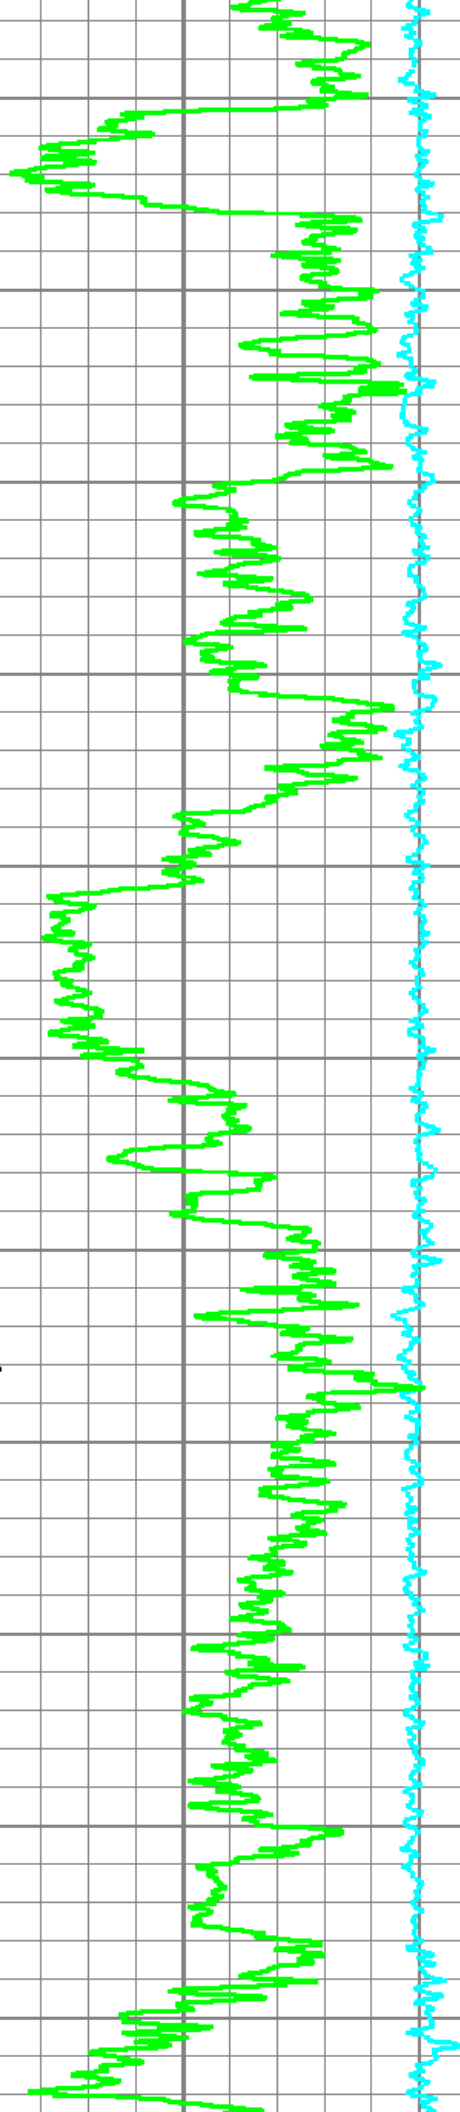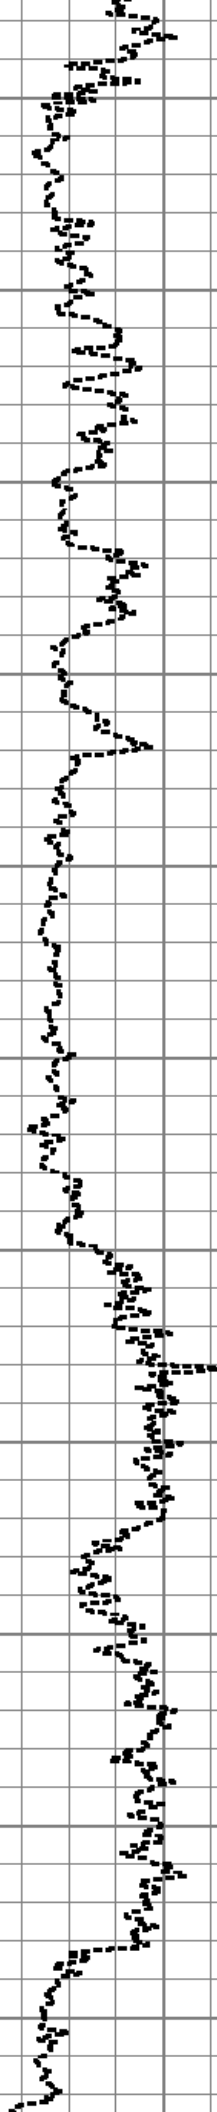

8200



8300

8400

8500

8600

8700

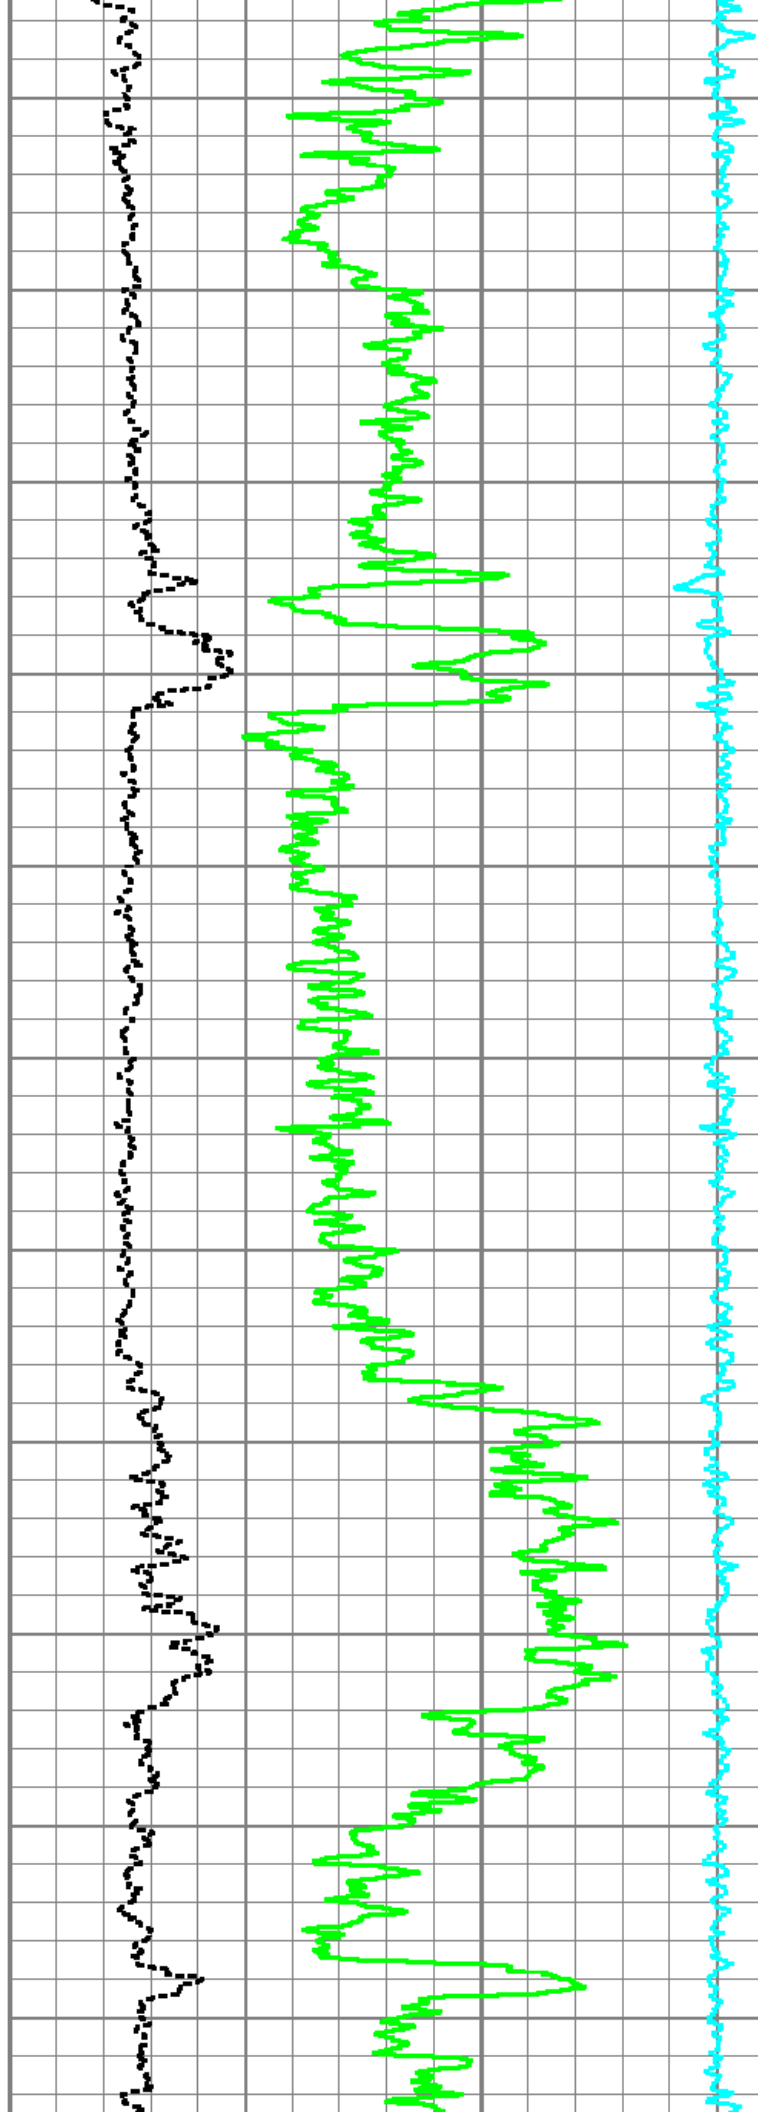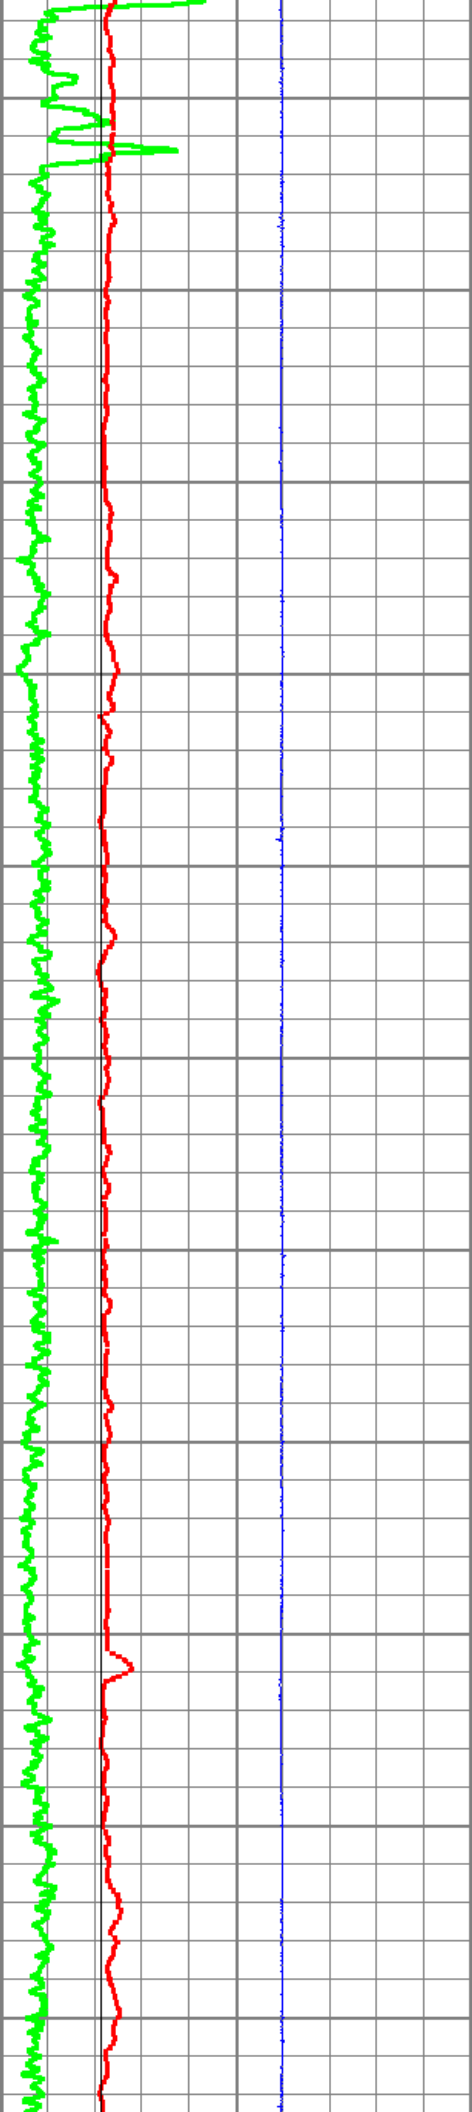





8800


8900

9000

9100

9200

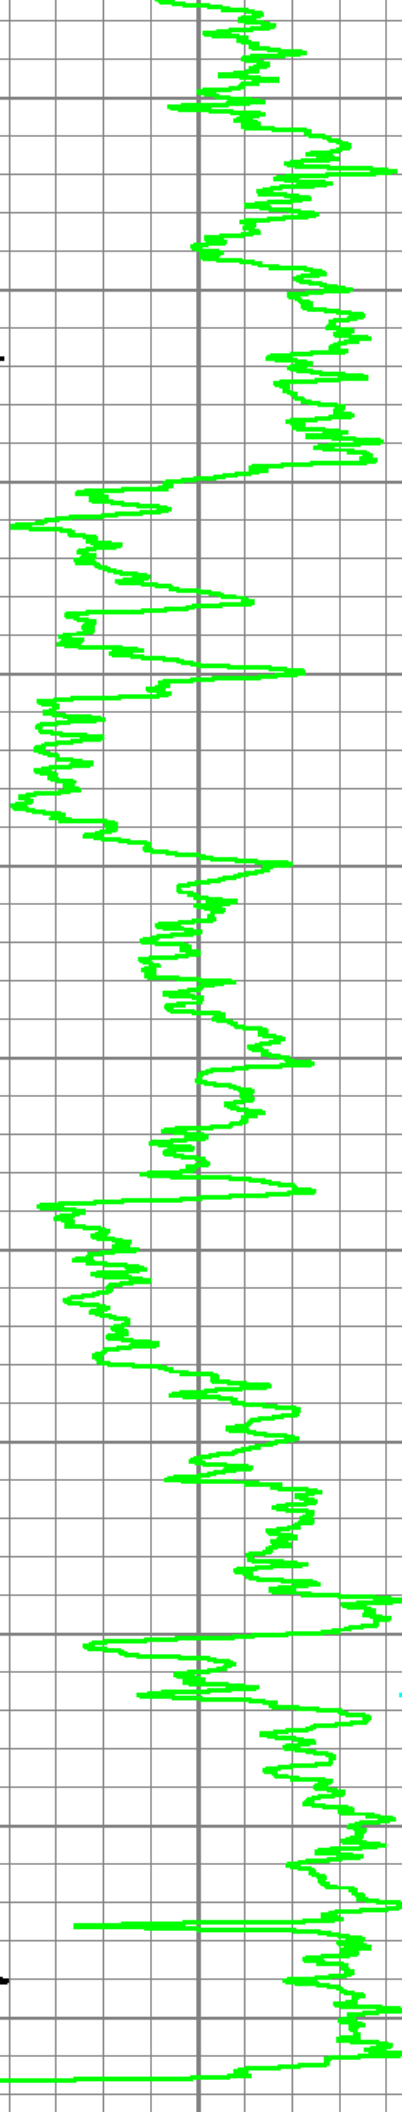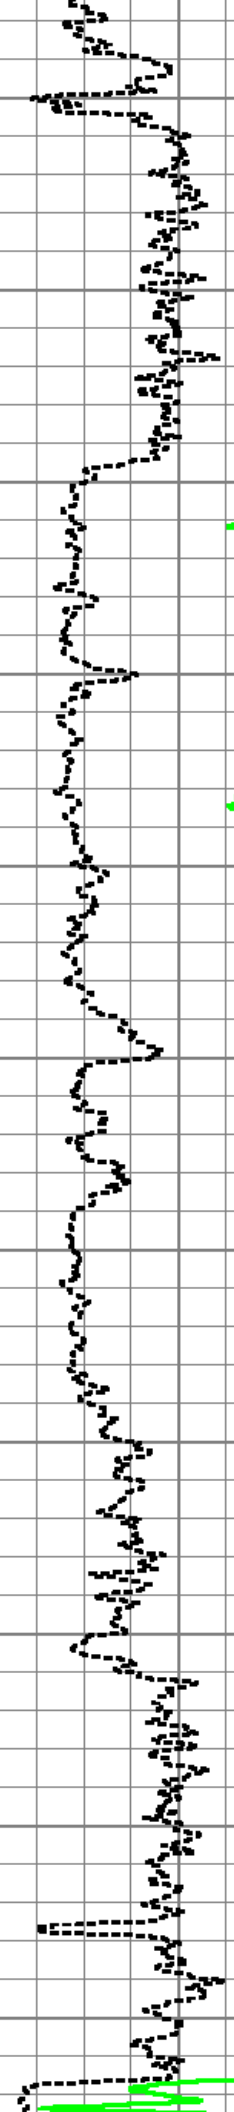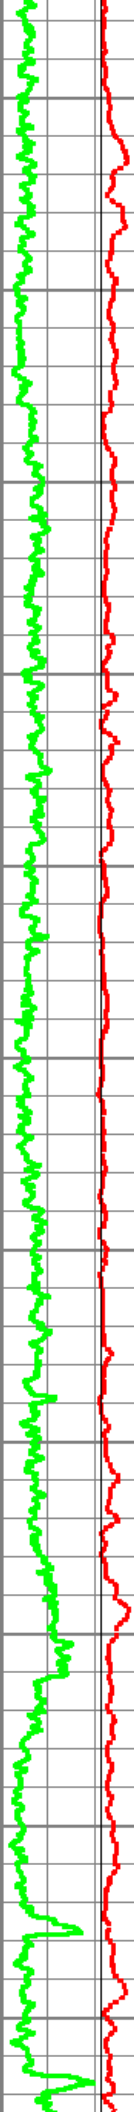


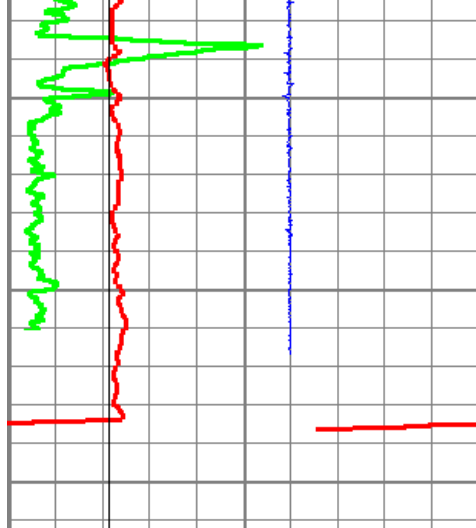

9300

9400

0	GR (GAPI)	150
4	DCAL (in)	14
4	BOREID (in)	14
-5	ACCY	5

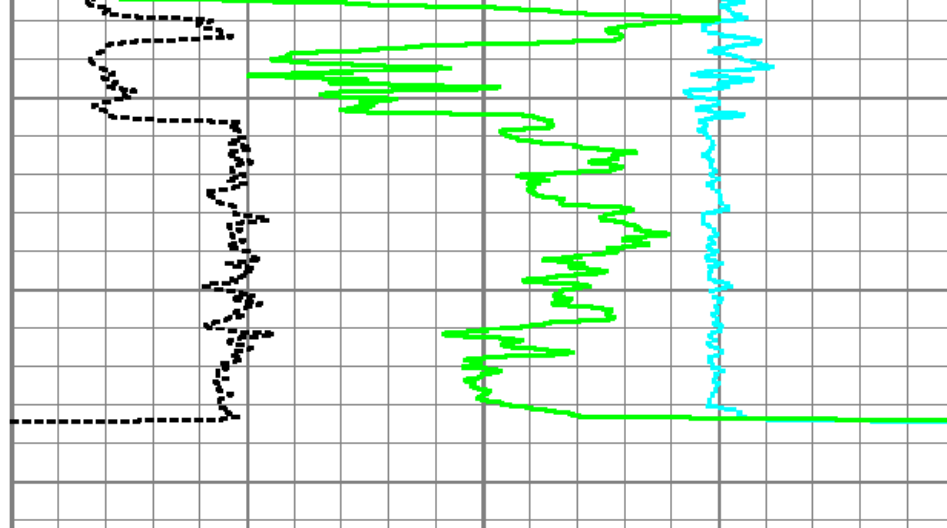

0	PEF (barn)	10	-0.5	DRHO (g/cc)	0.5
2	RHOB (g/cc)				3



ThruBit


A Schlumberger Company

MAIN PASS

Database File: britt_3406_mem.db
 Dataset Pathname: proc1/pass1.2
 Presentation Format: 6_5n_chk
 Dataset Creation: Sat May 11 09:05:48 2013
 Charted by: Depth in Feet scaled 1:240


4	DCAL (in)	14
4	BOREID (in)	14
0	GR (GAPI)	150
-5	ACCY	5
	TBHV (ft3)	


30	CNPOR (pu)				-10
30	DPHI (pu)				-10
0	PEF (barn)	10	-0.5	DRHO (g/cc)	0.5
ABHV (ft3)					

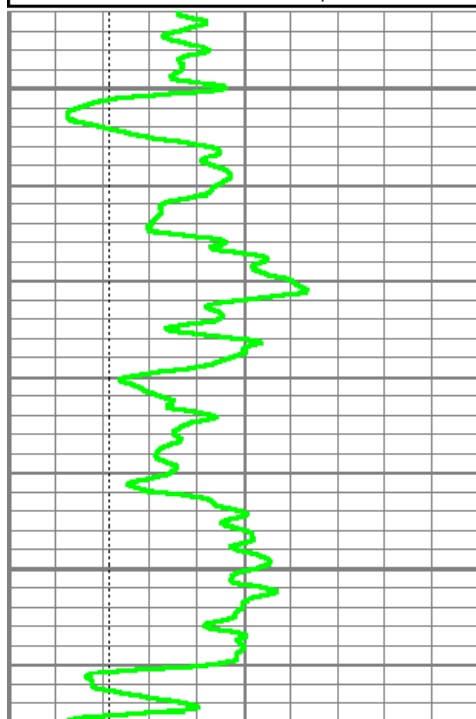

2450

2500

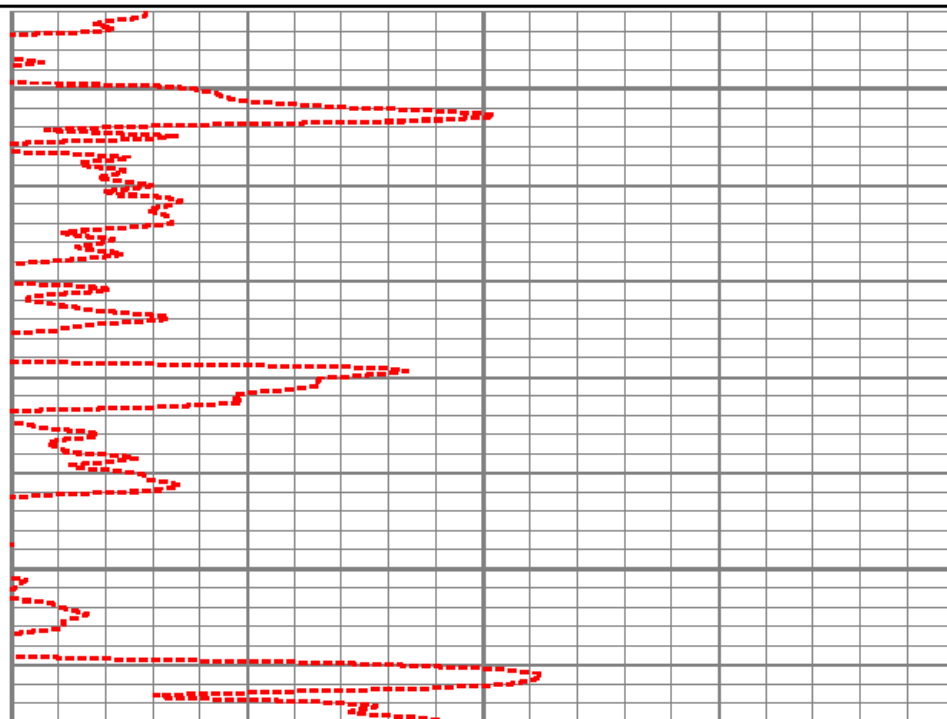

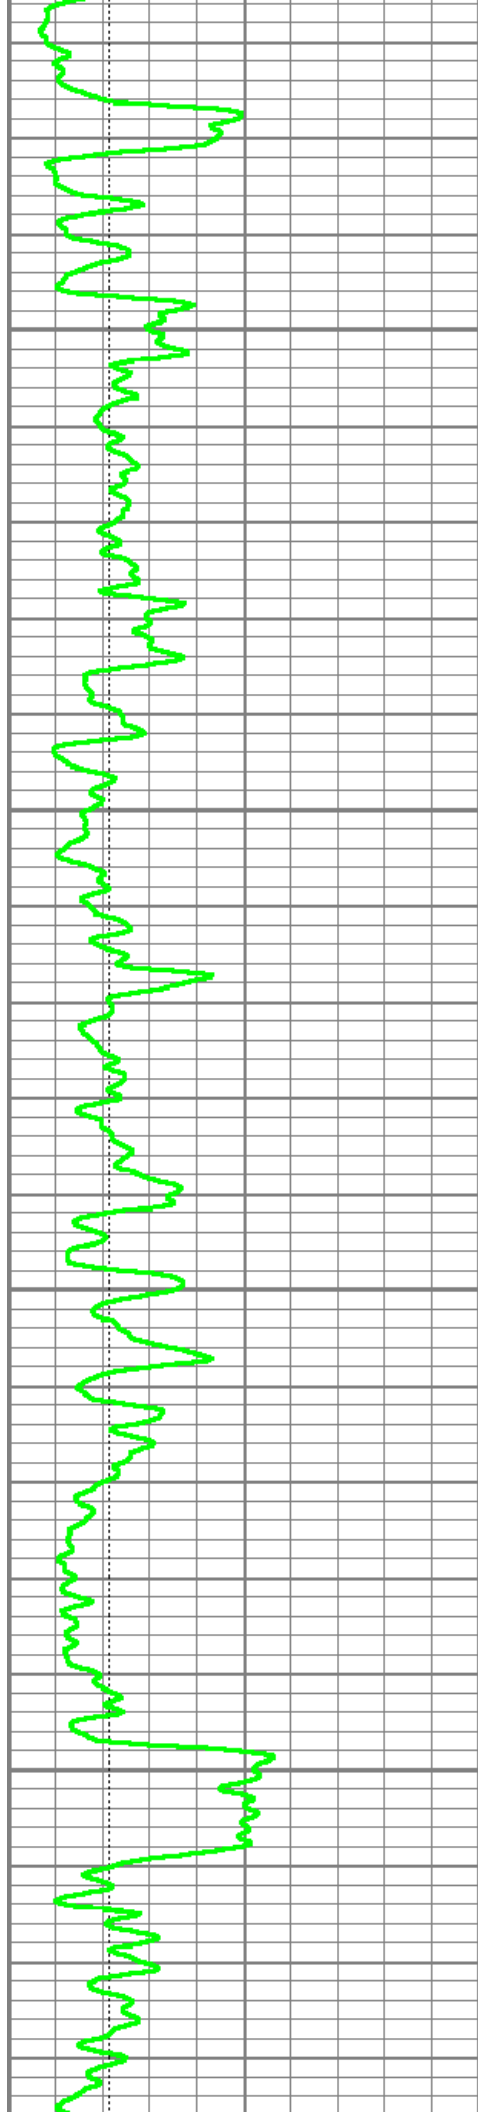



2550

2600

2650

2700

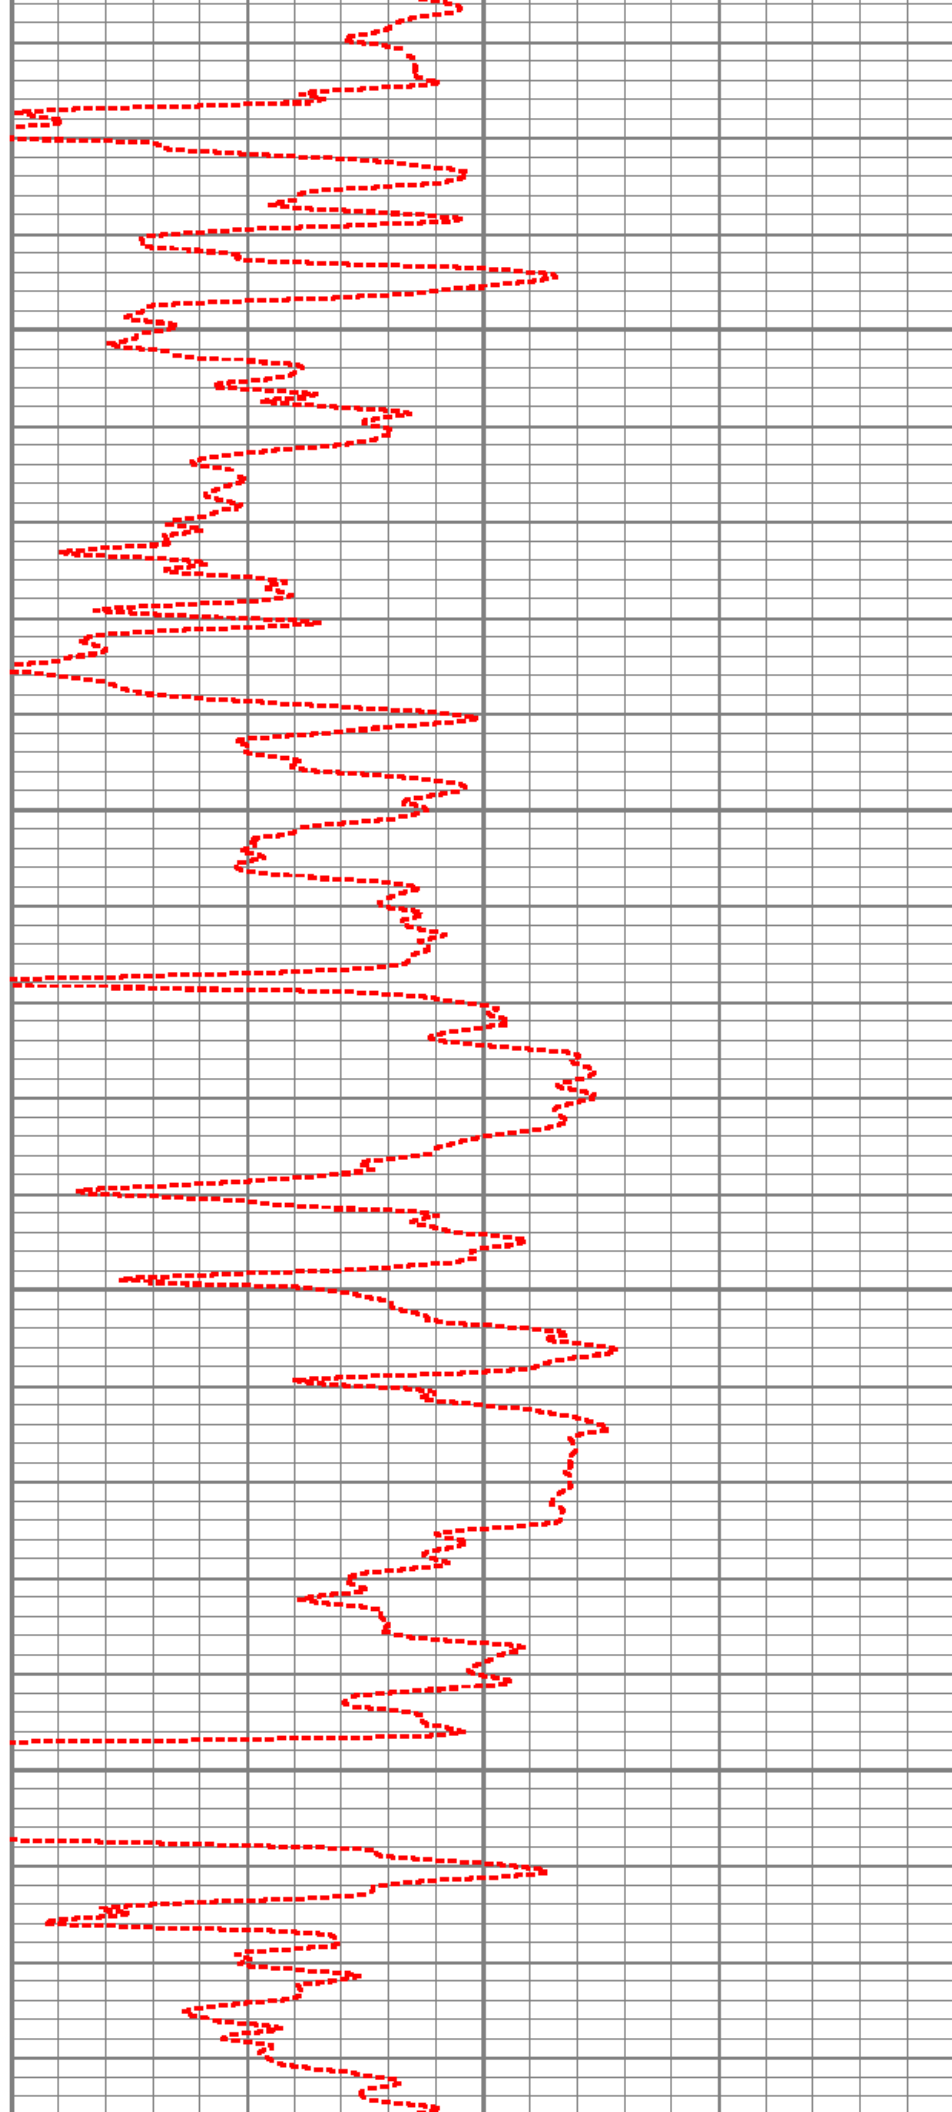

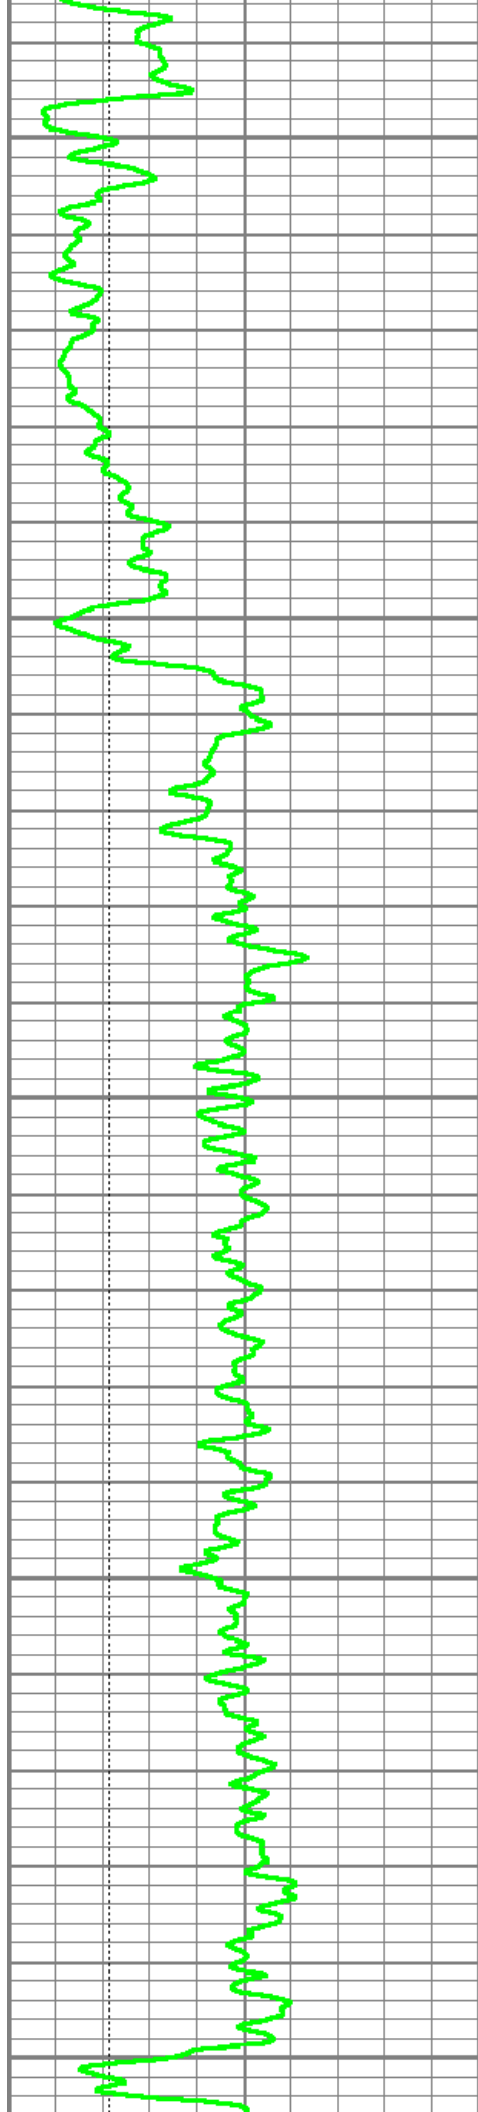


2750


2800

2850

2900

2950

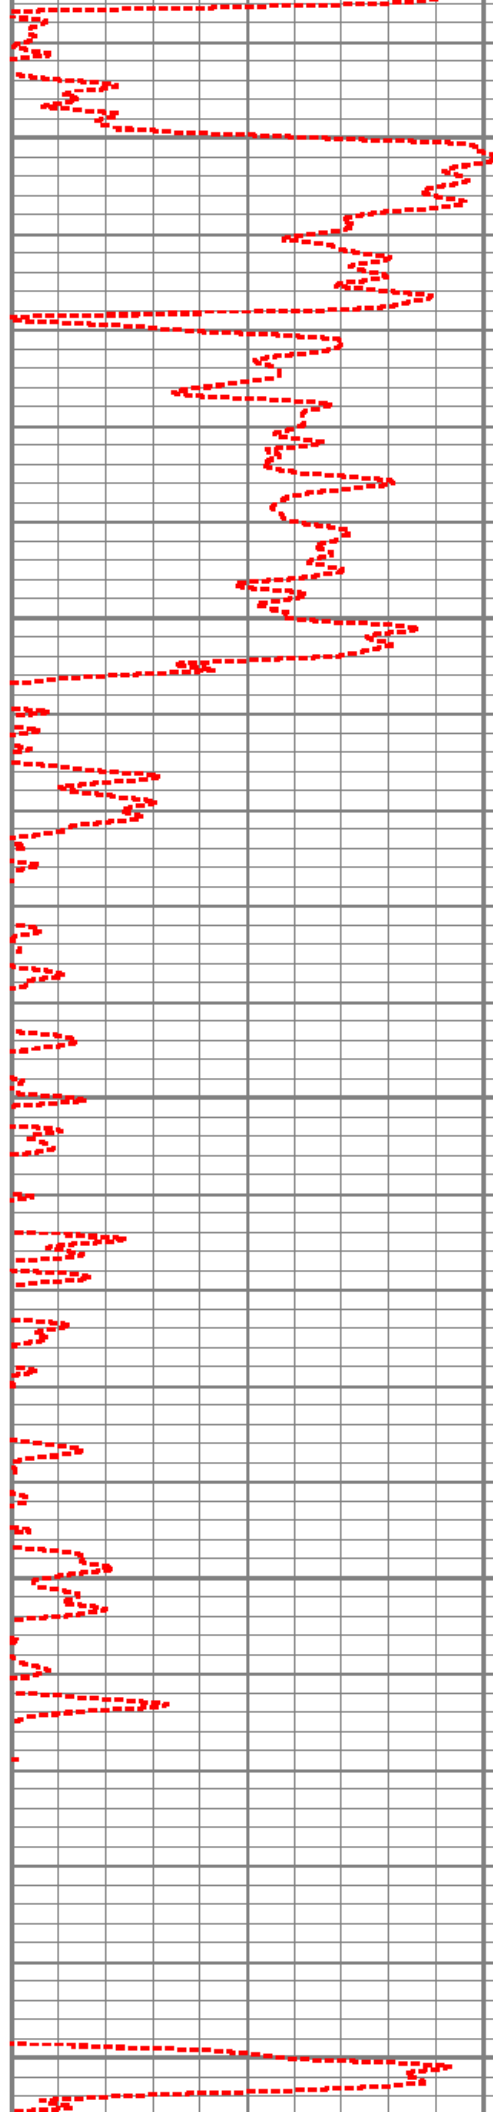

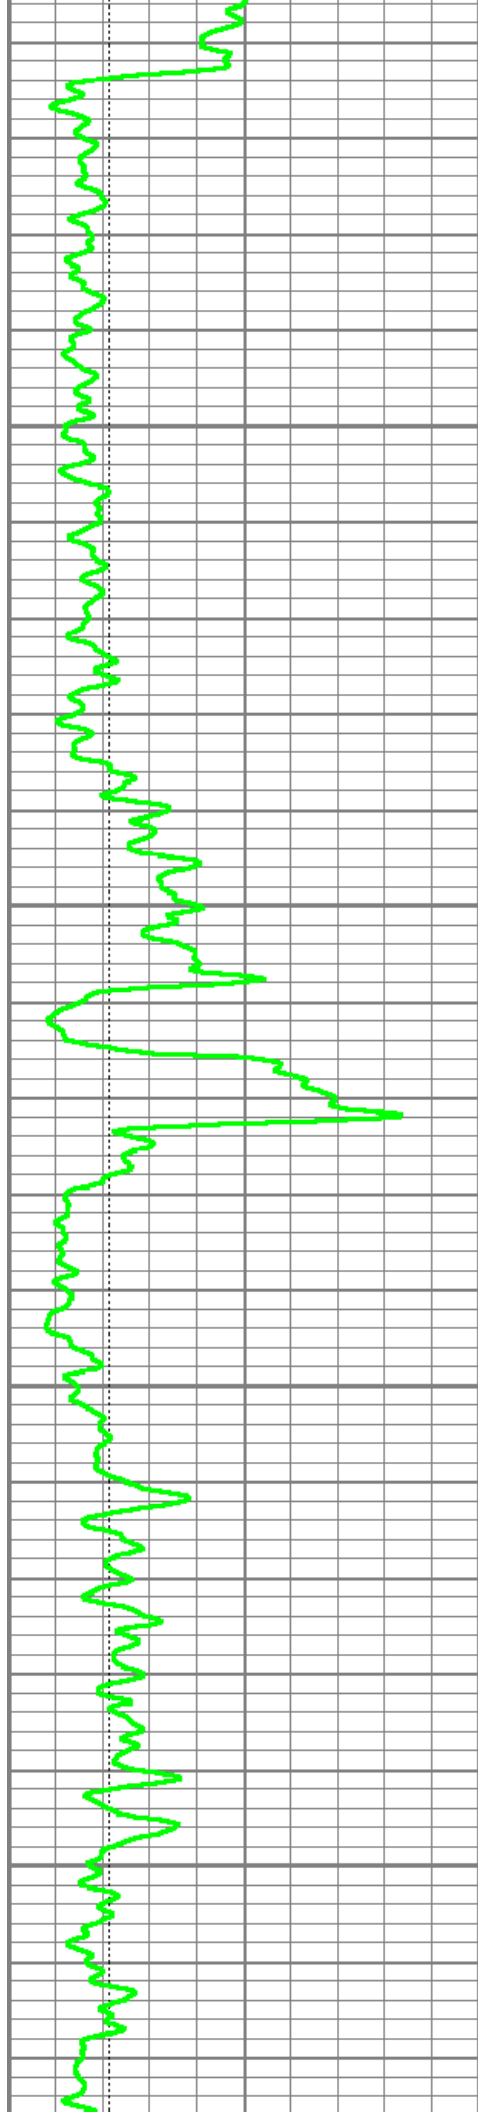




3000



3050



3100



3150

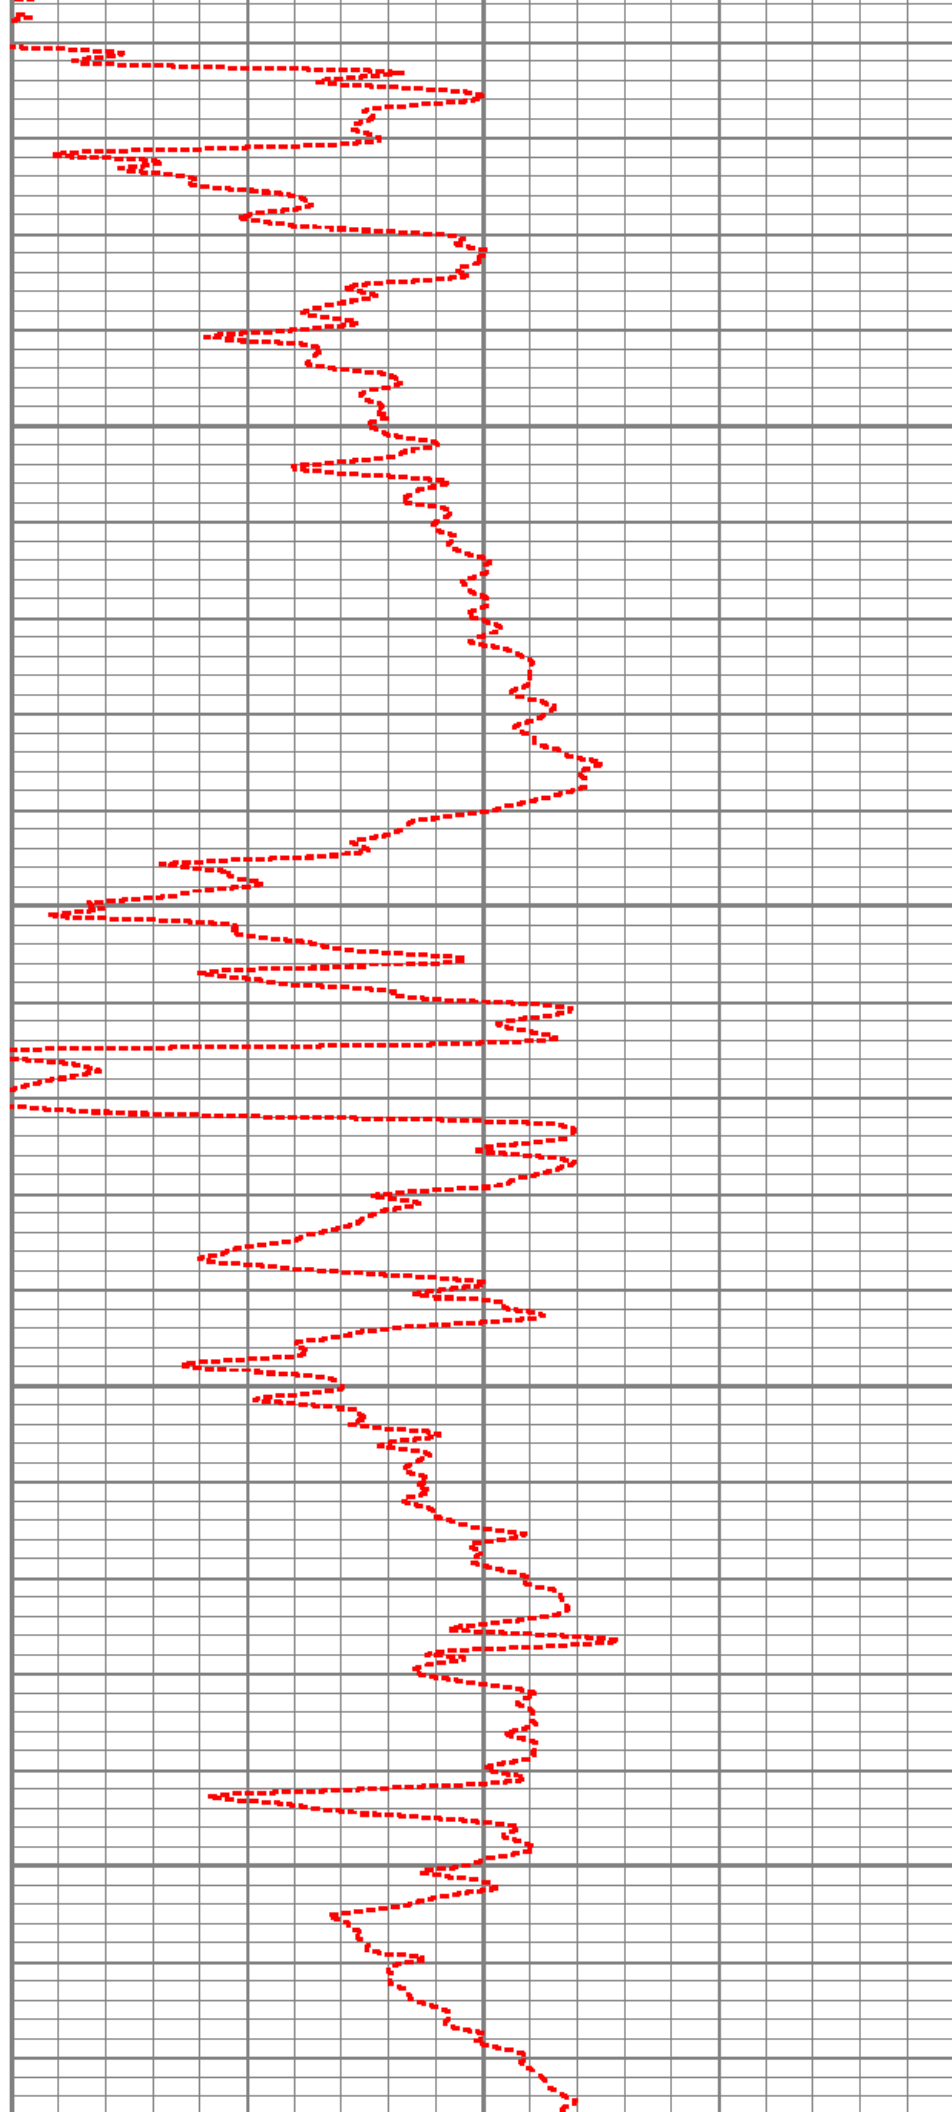


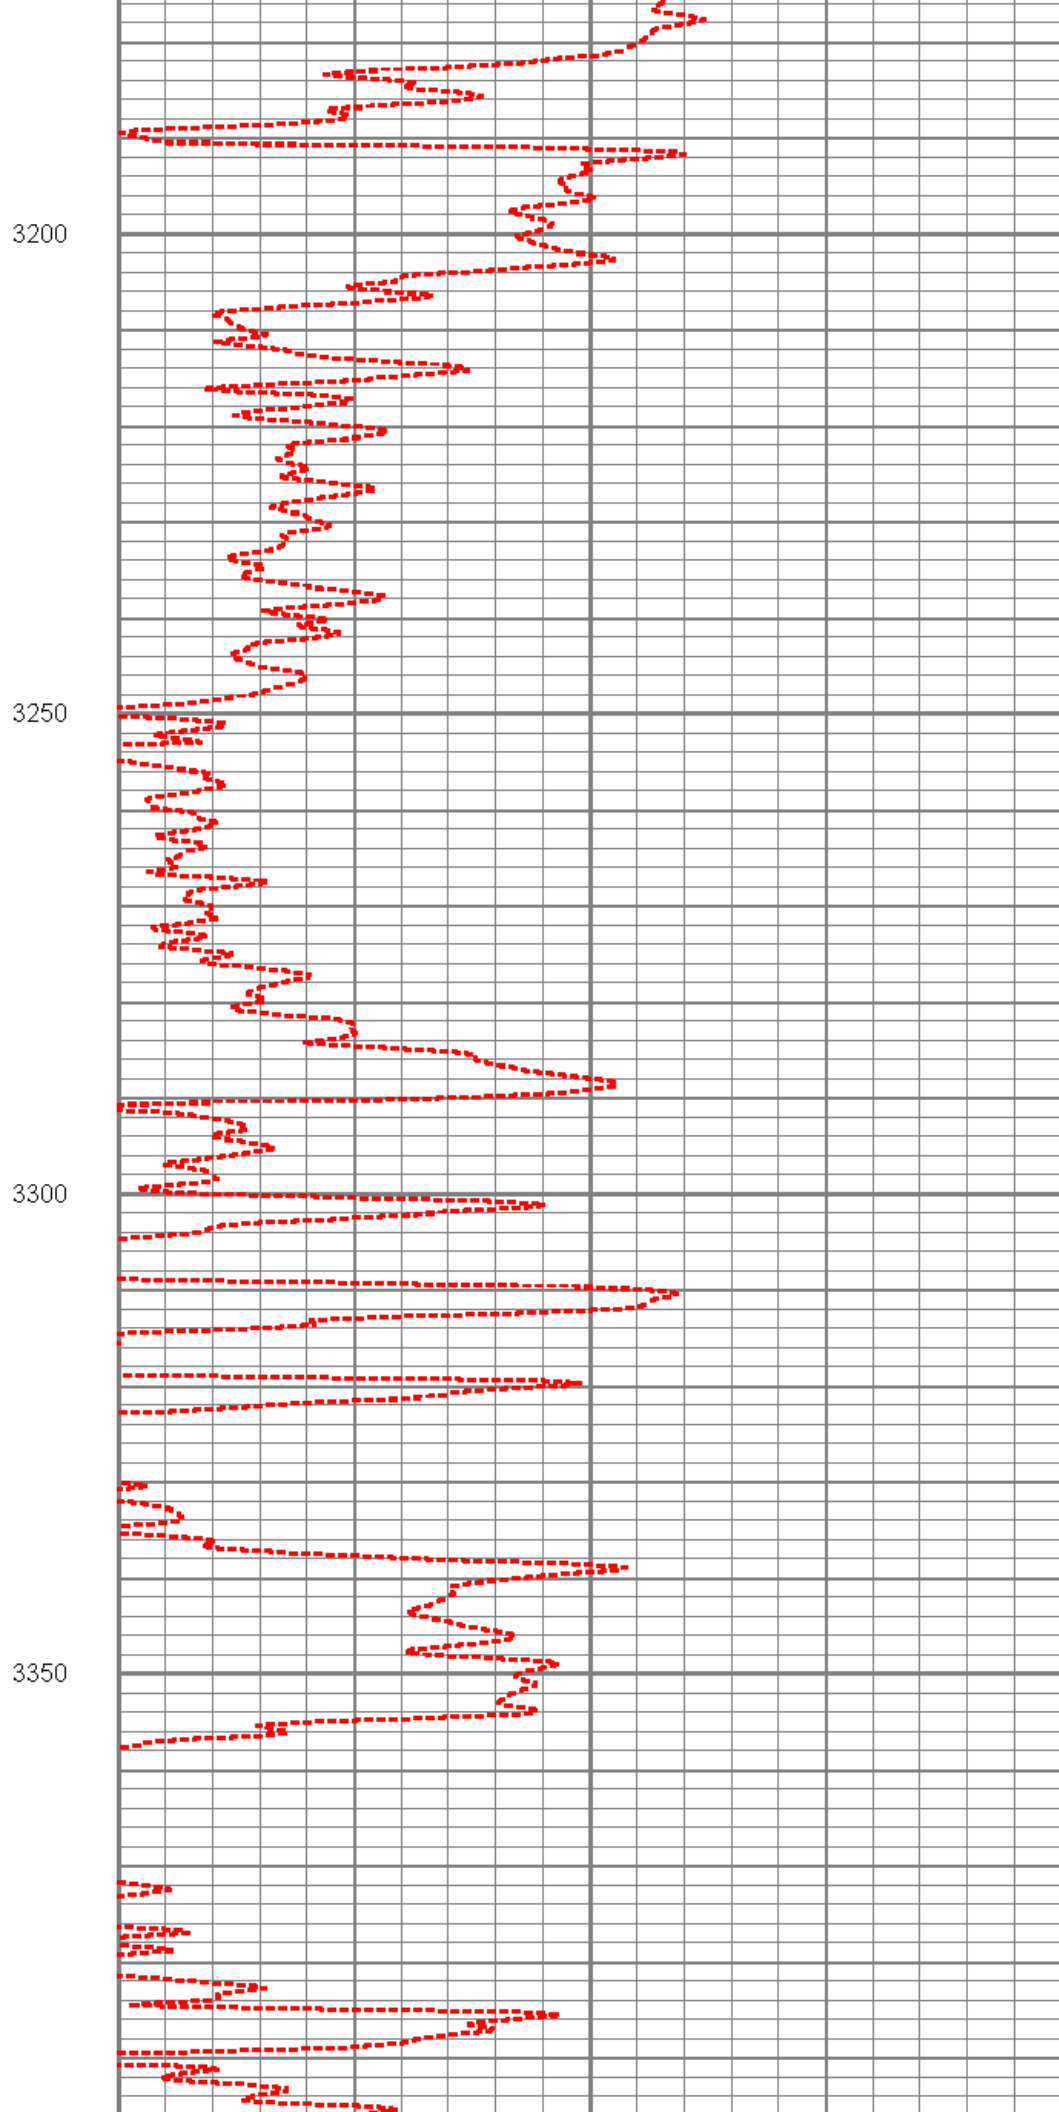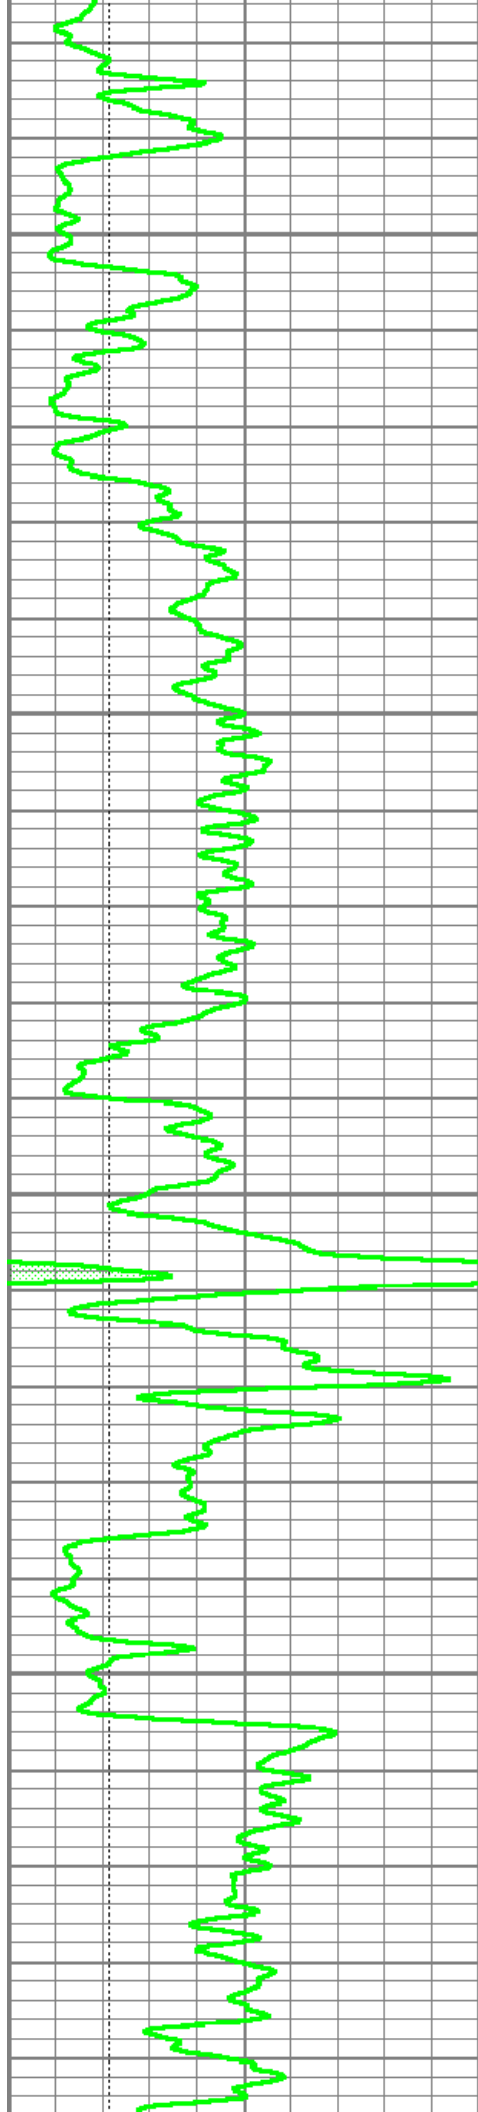

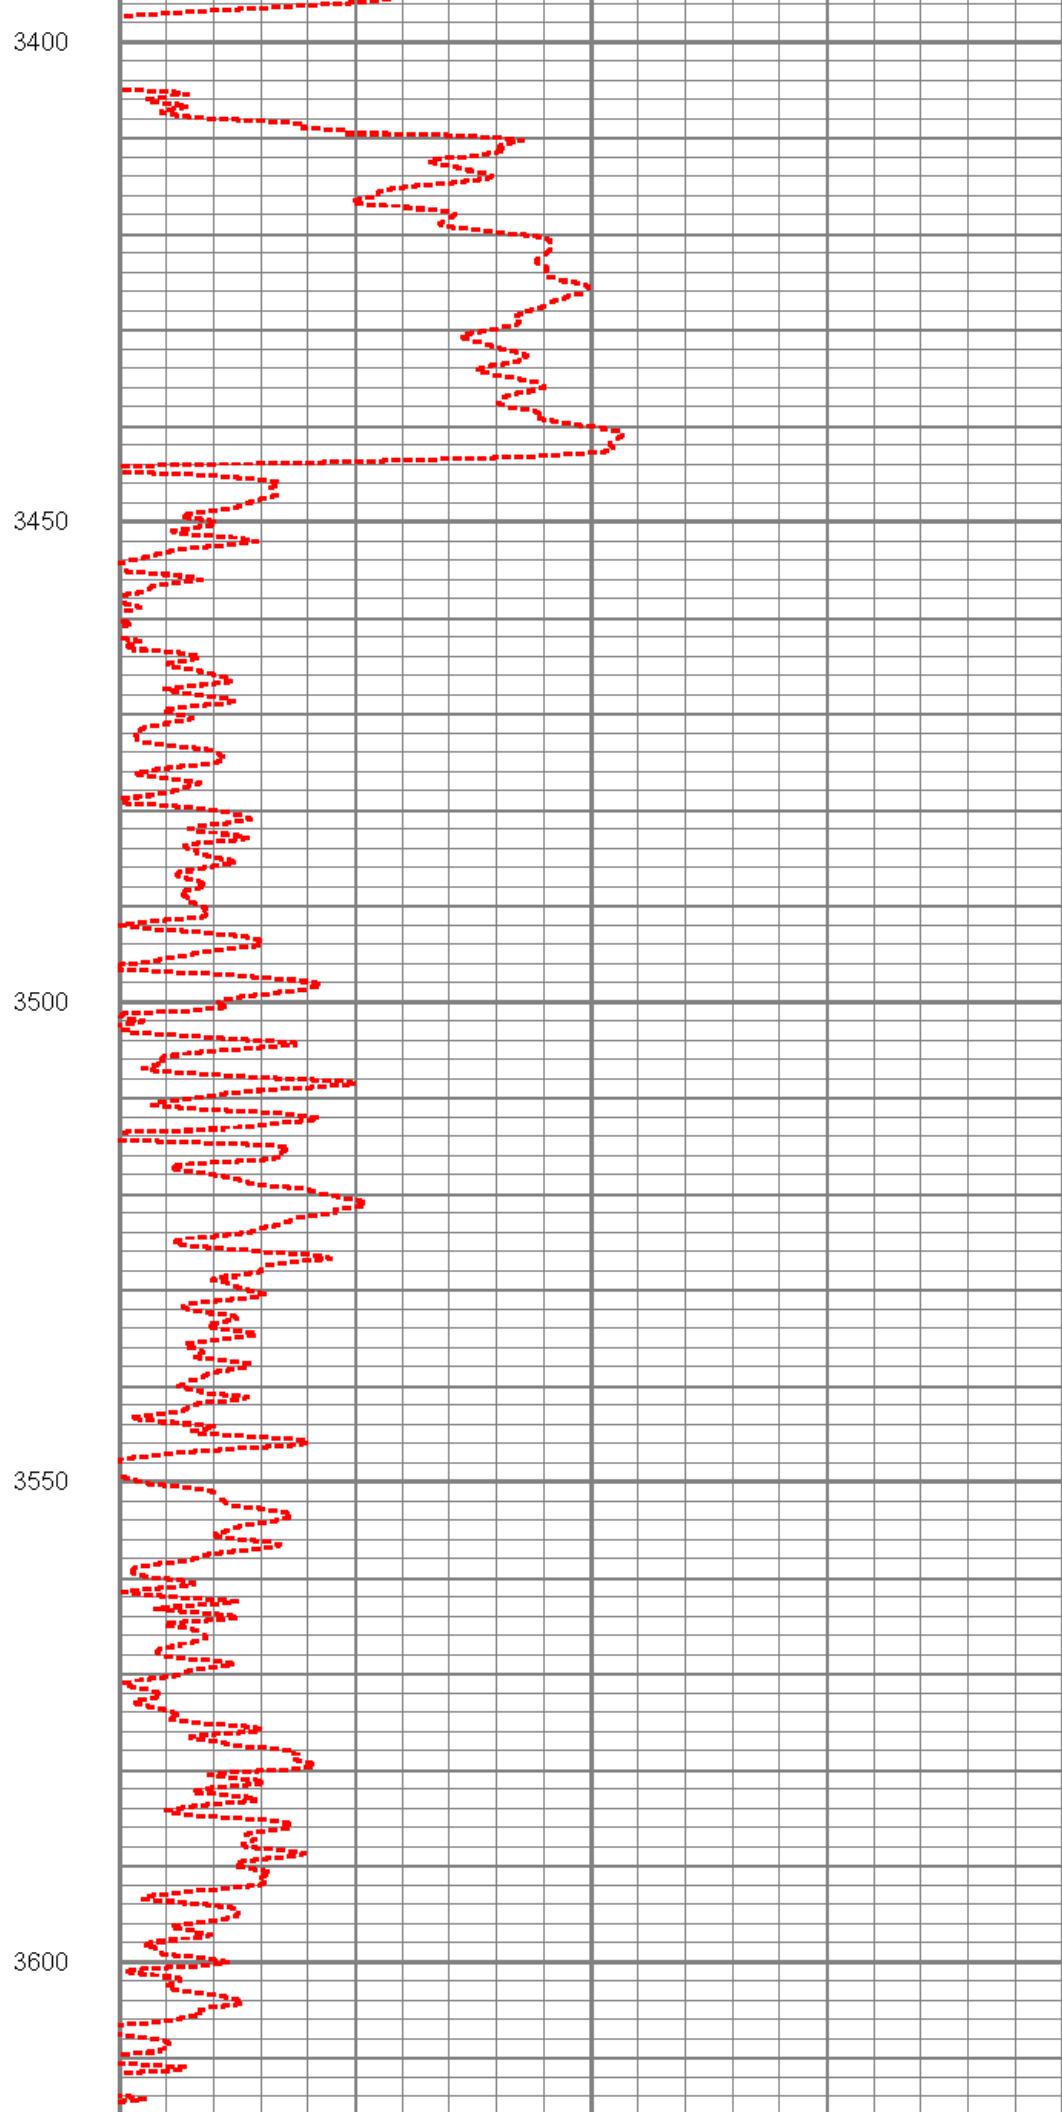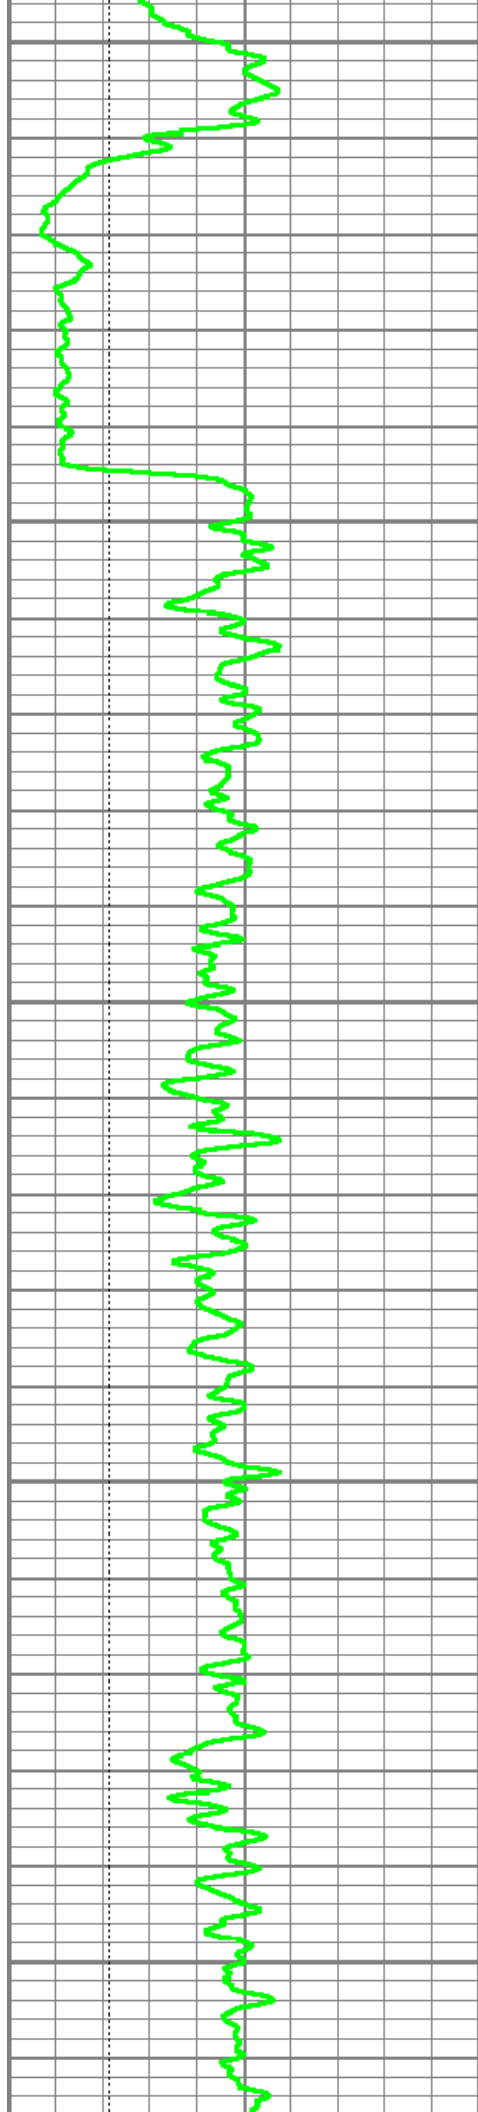

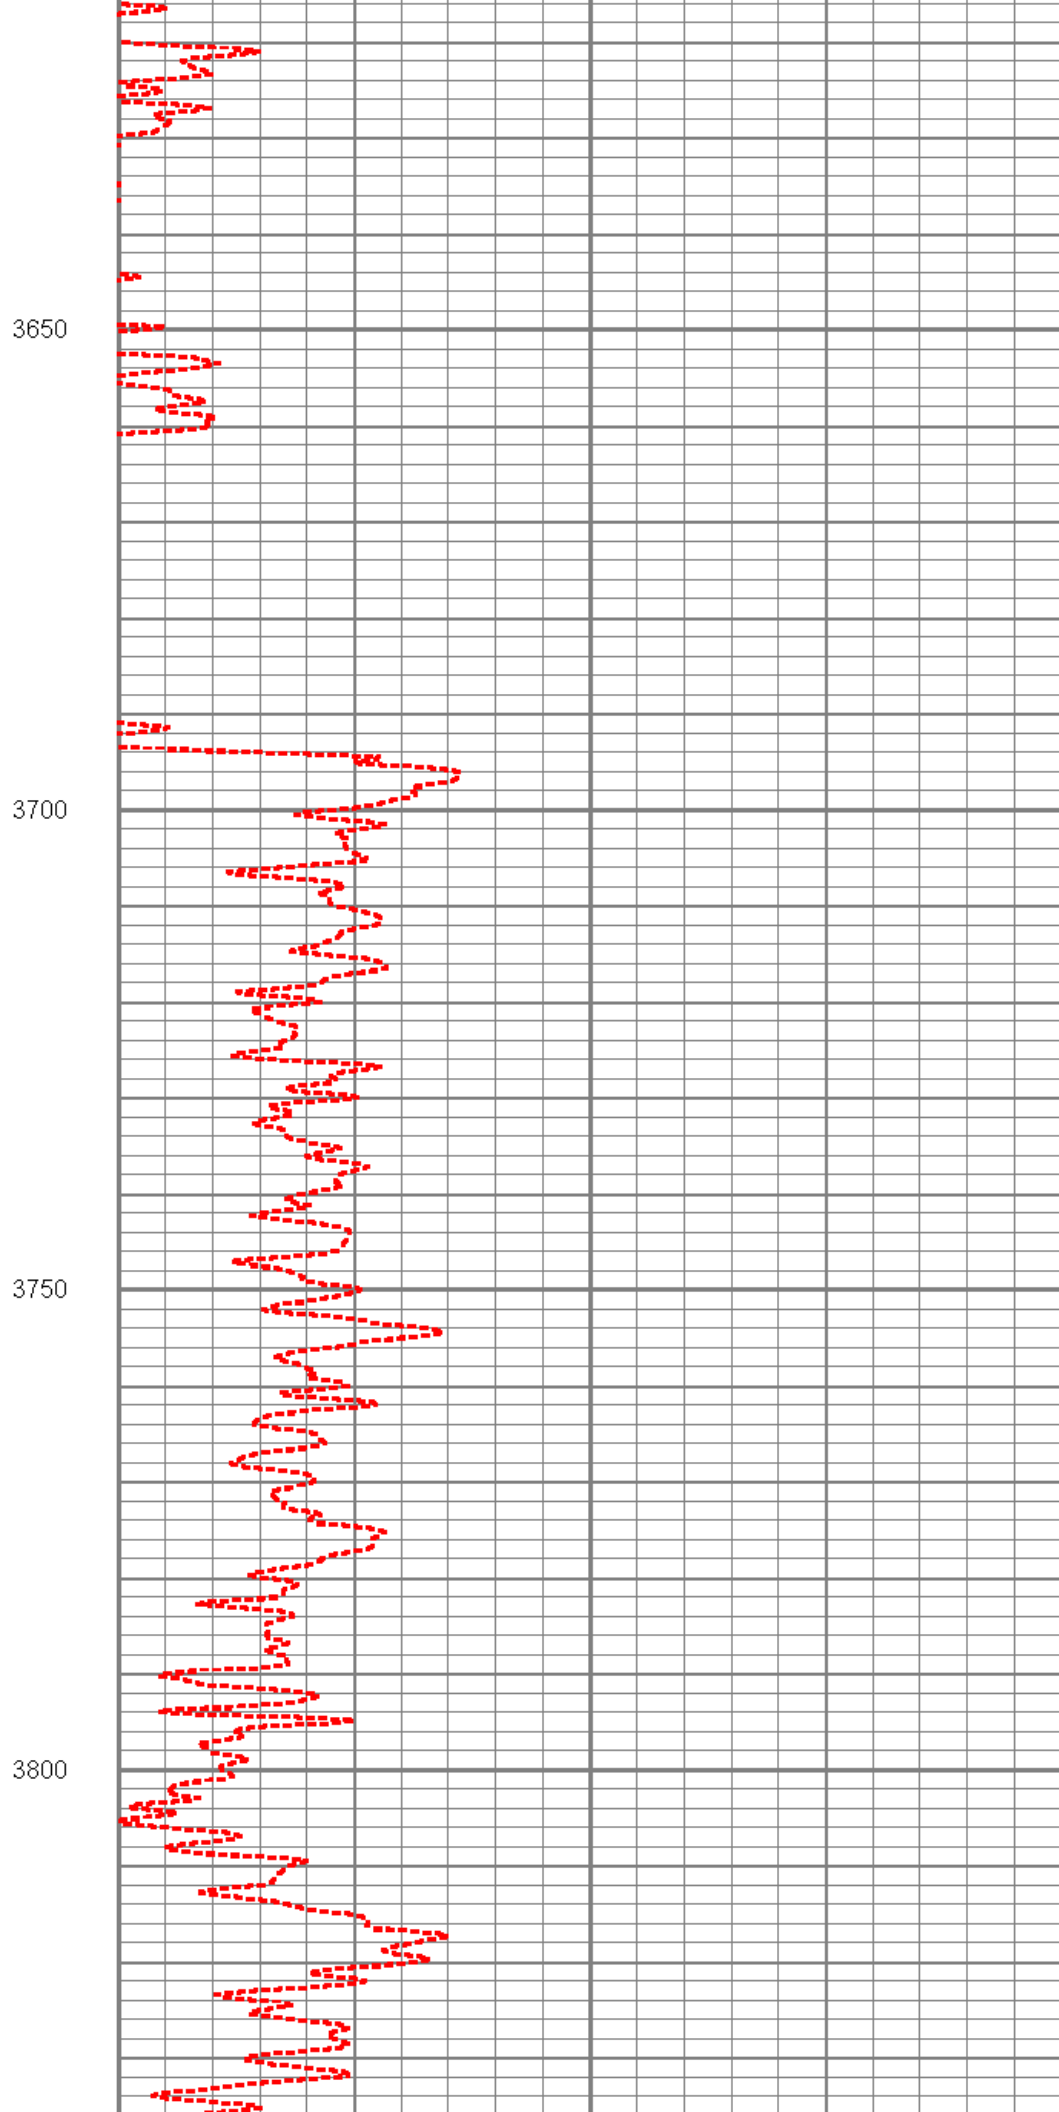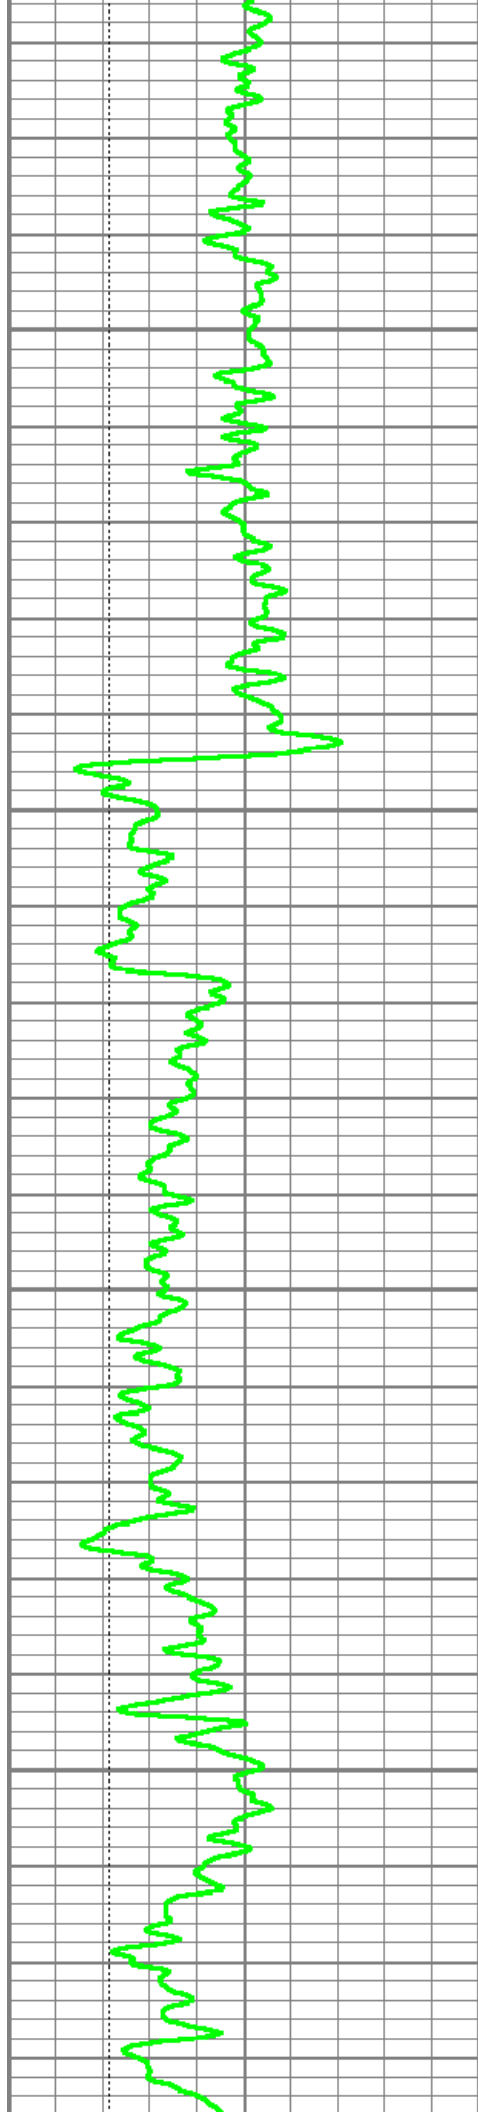

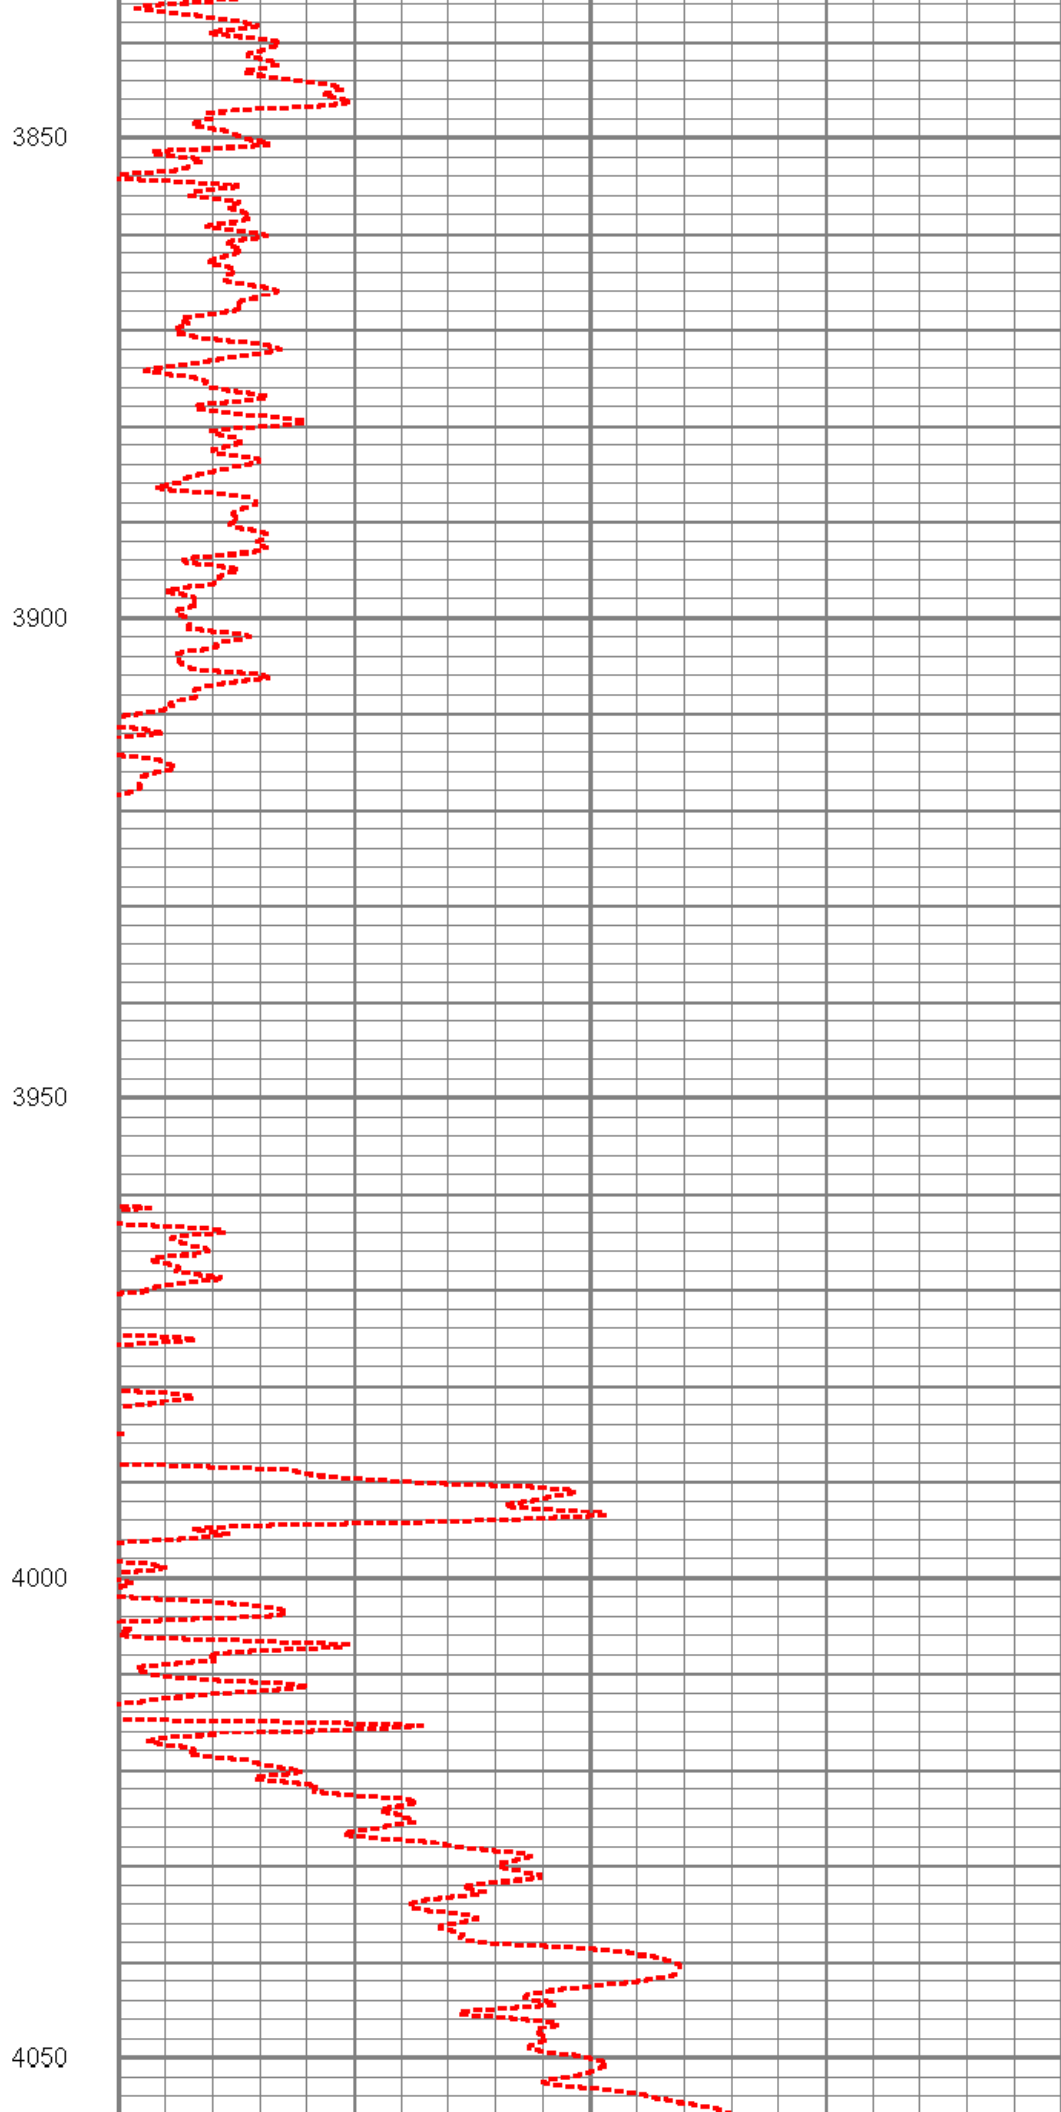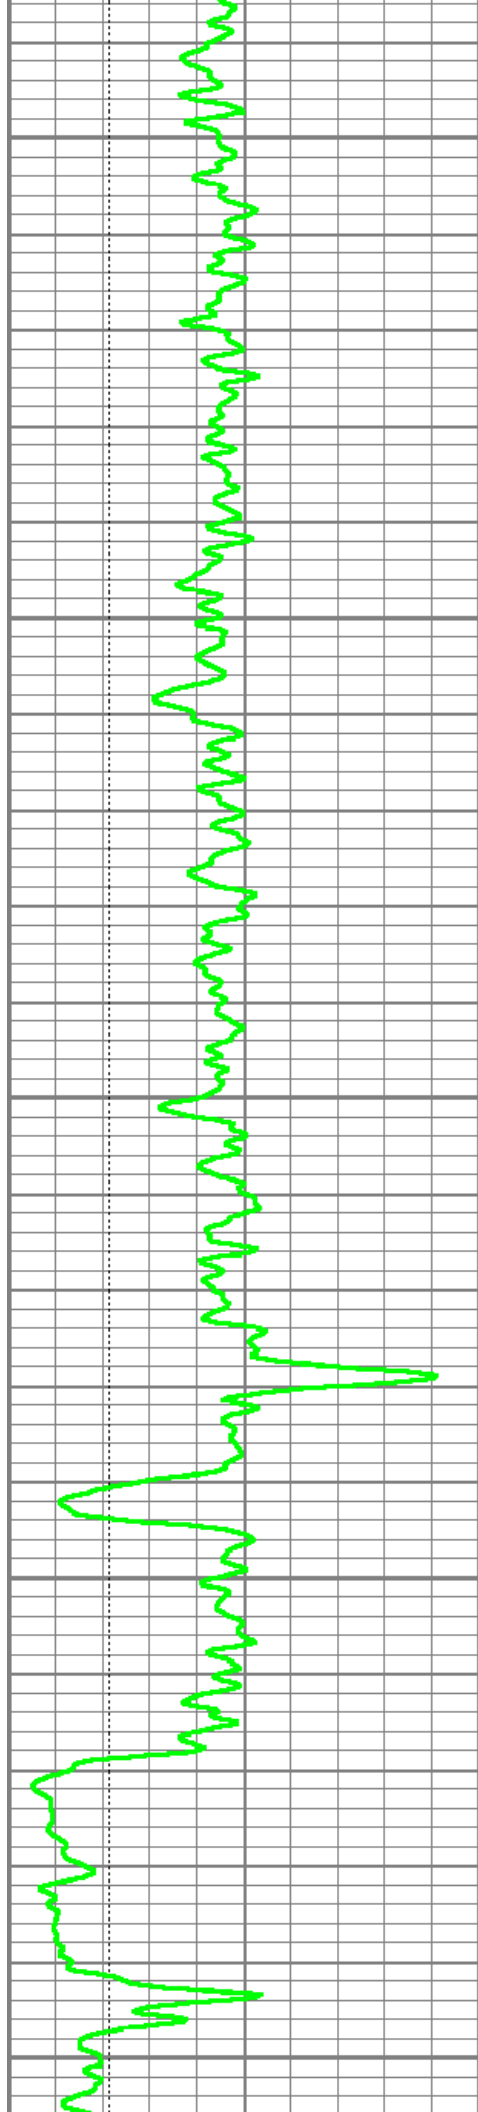

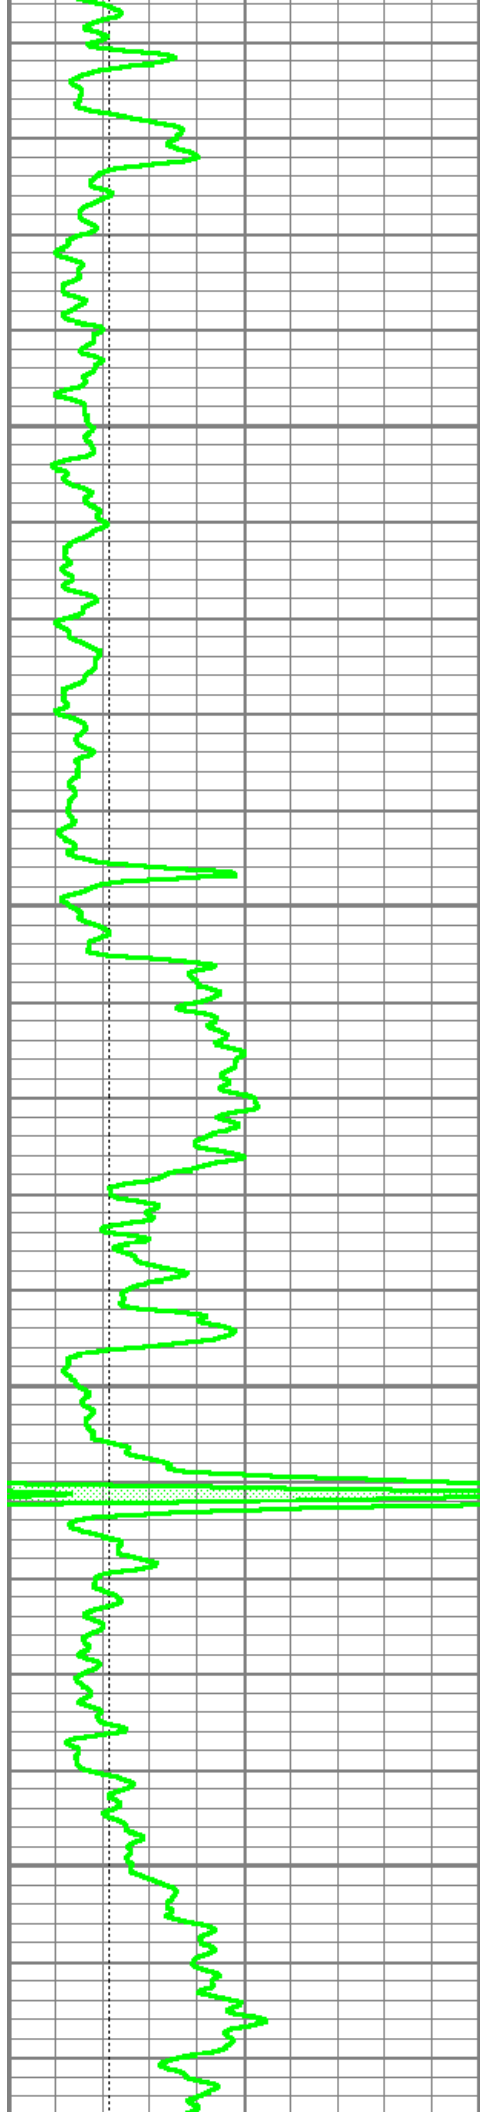




4100


4150

4200

4250

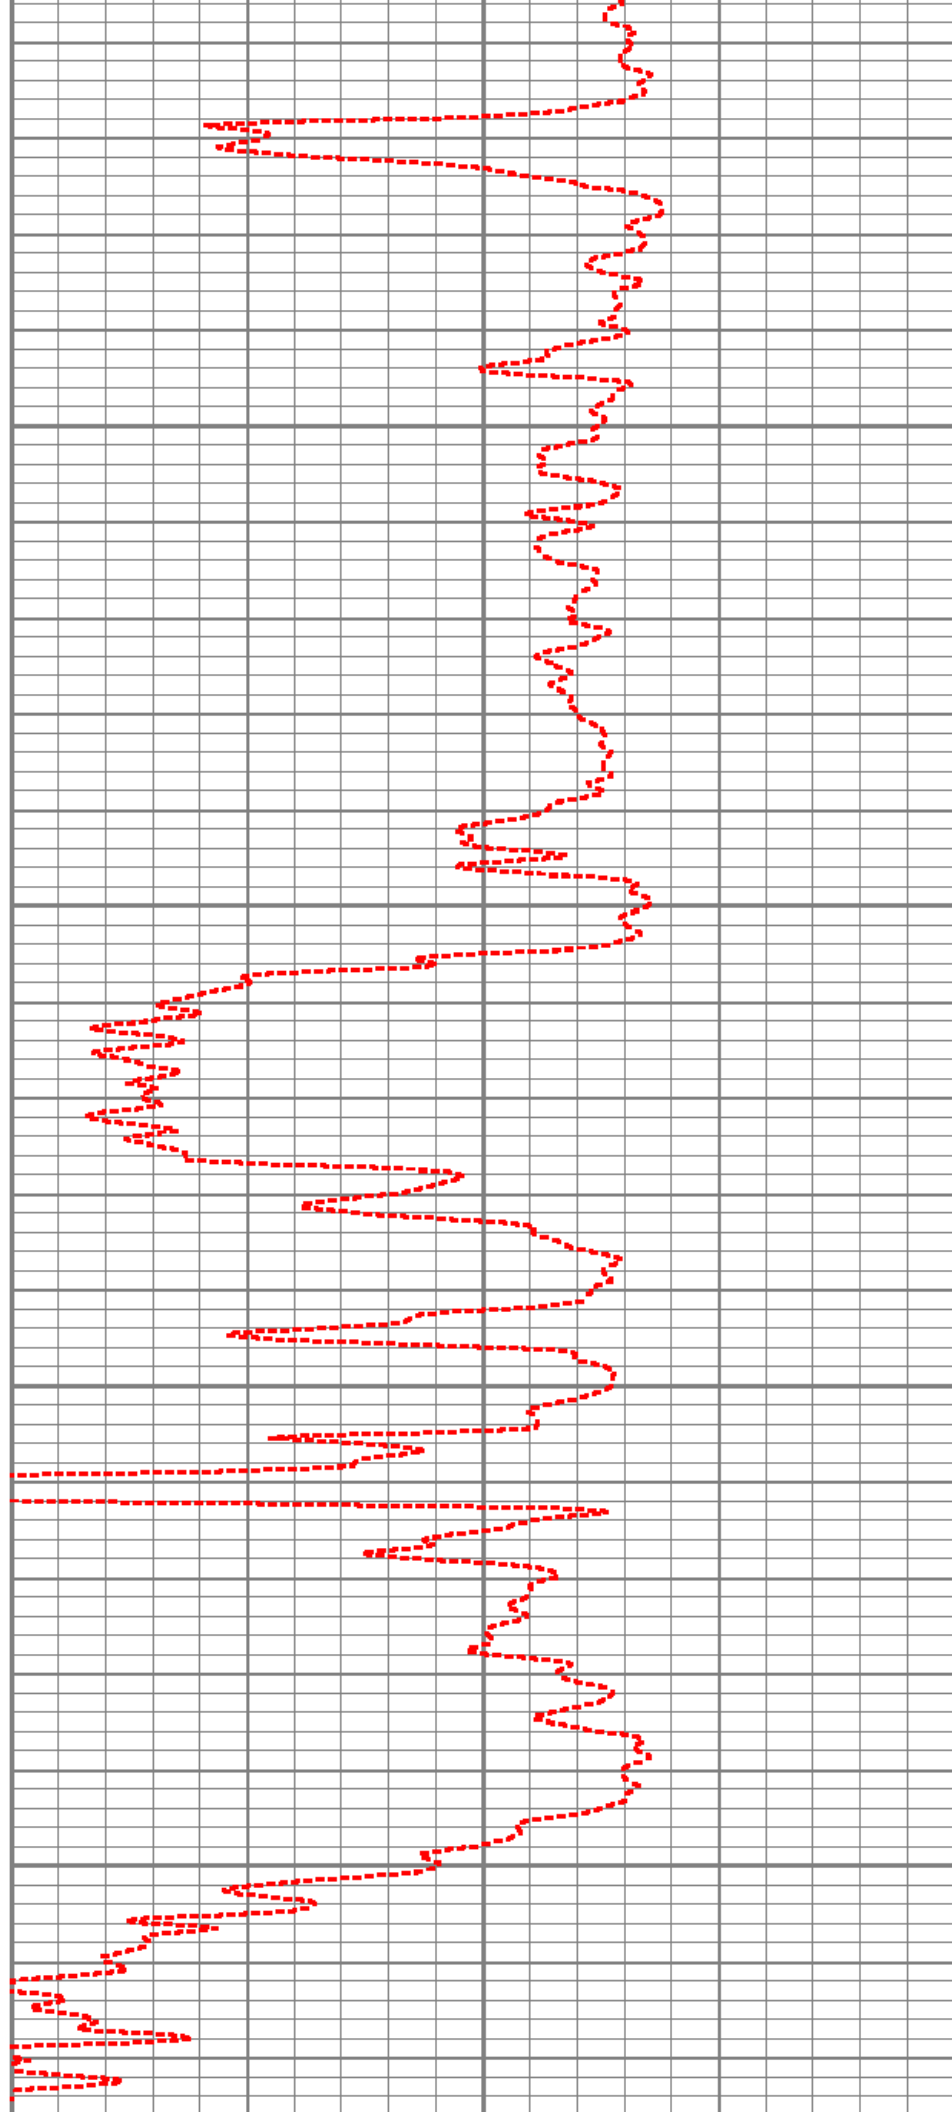

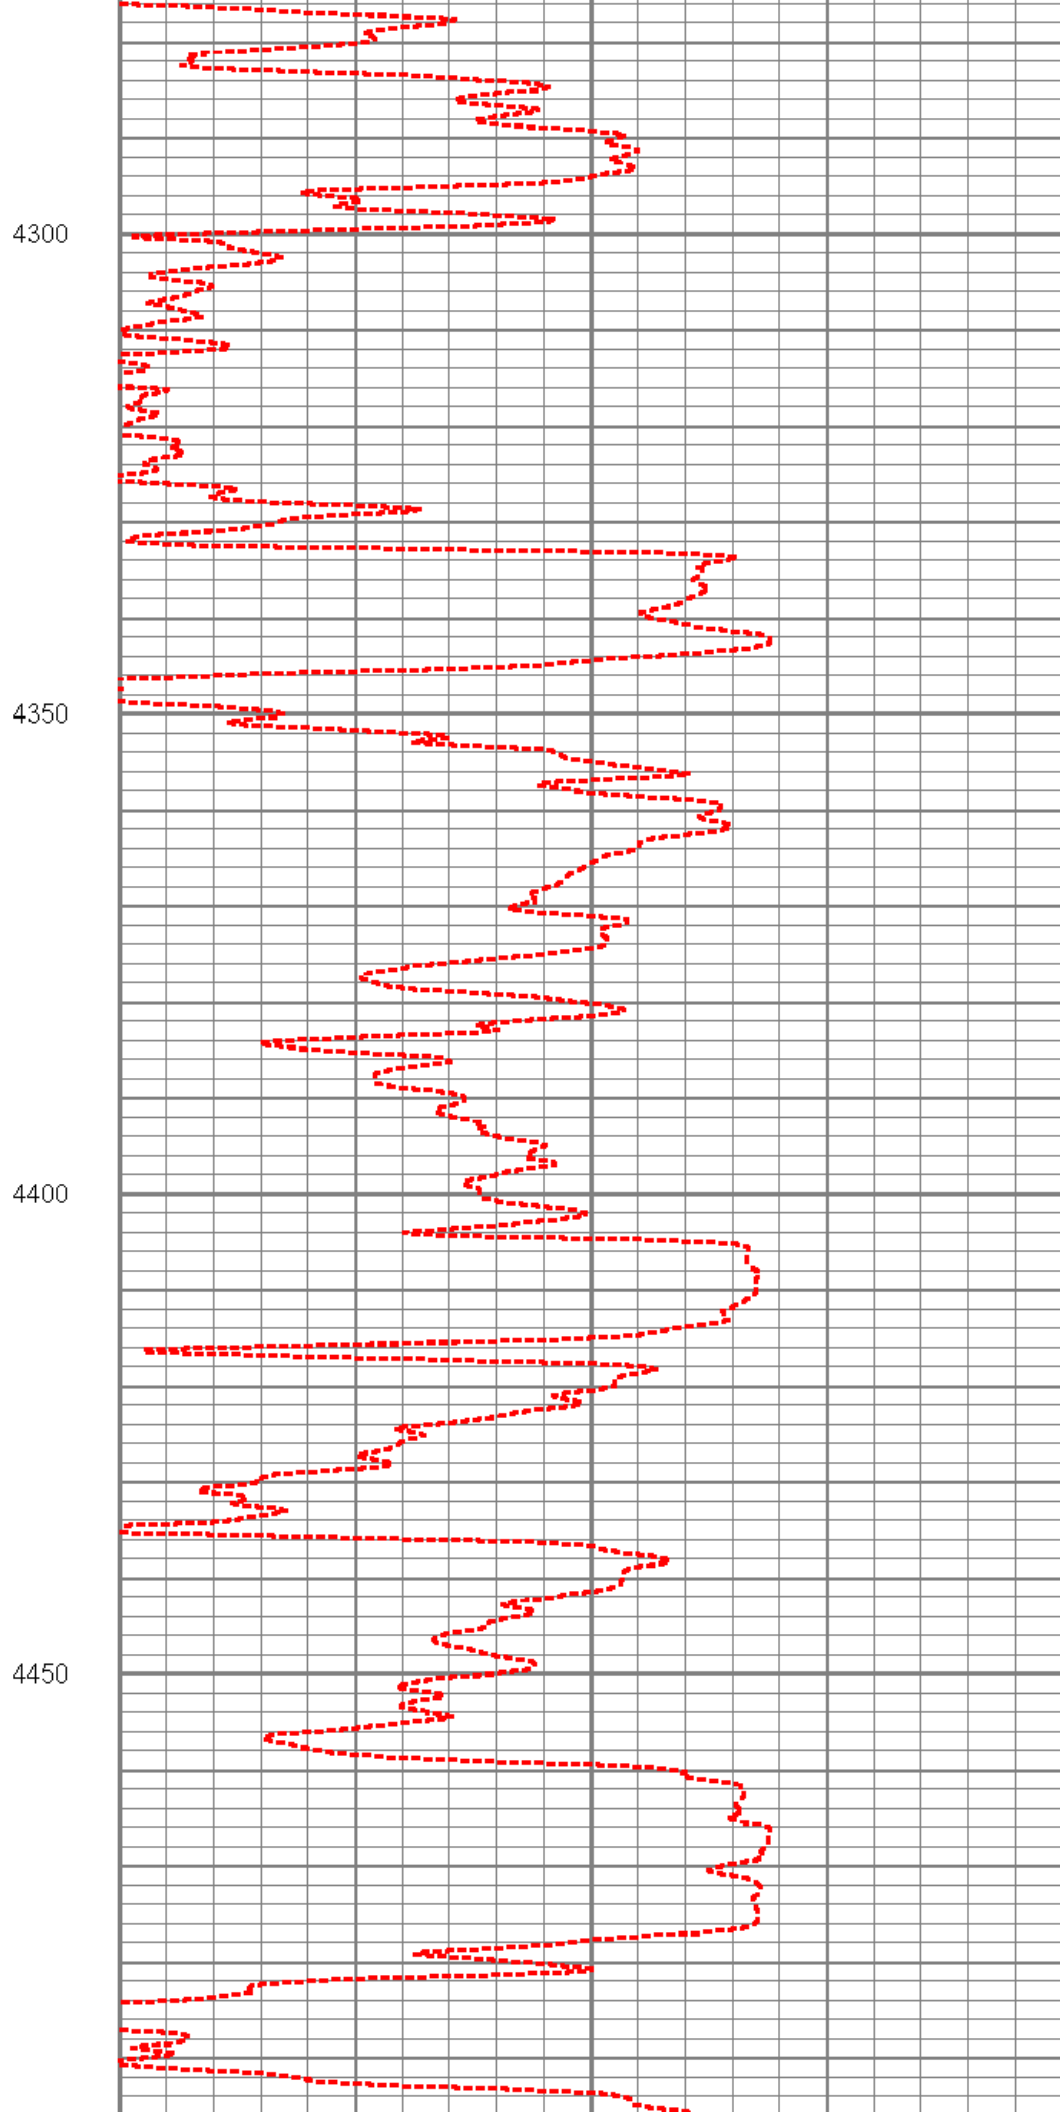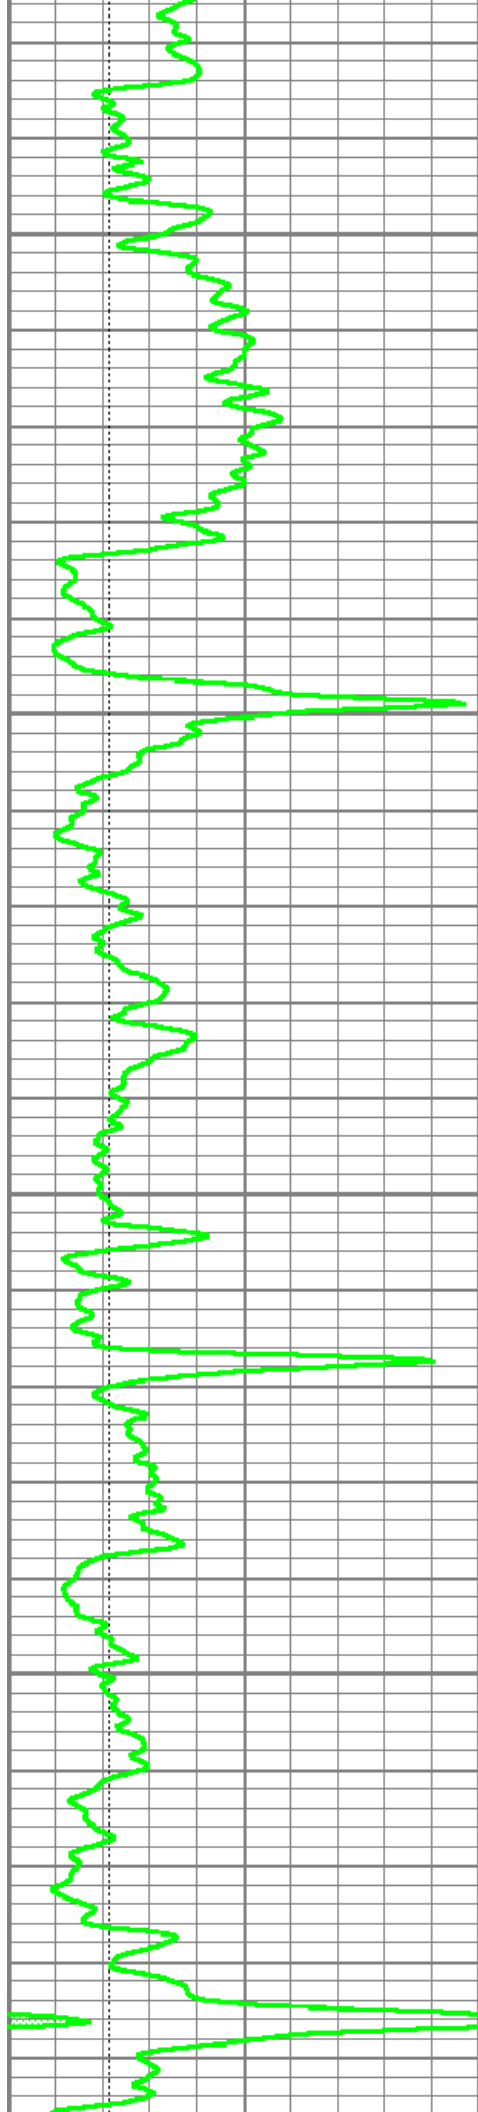

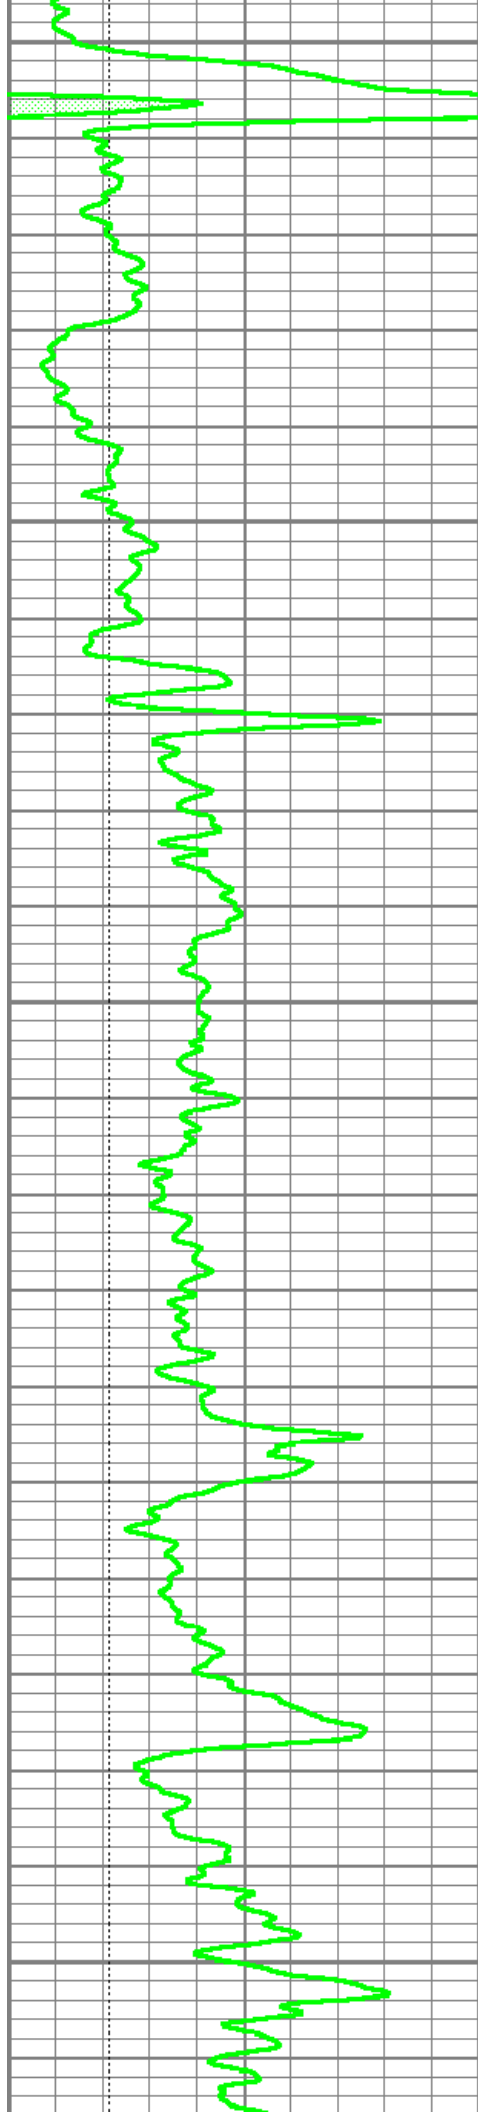


4500


4550

4600

4650

4700

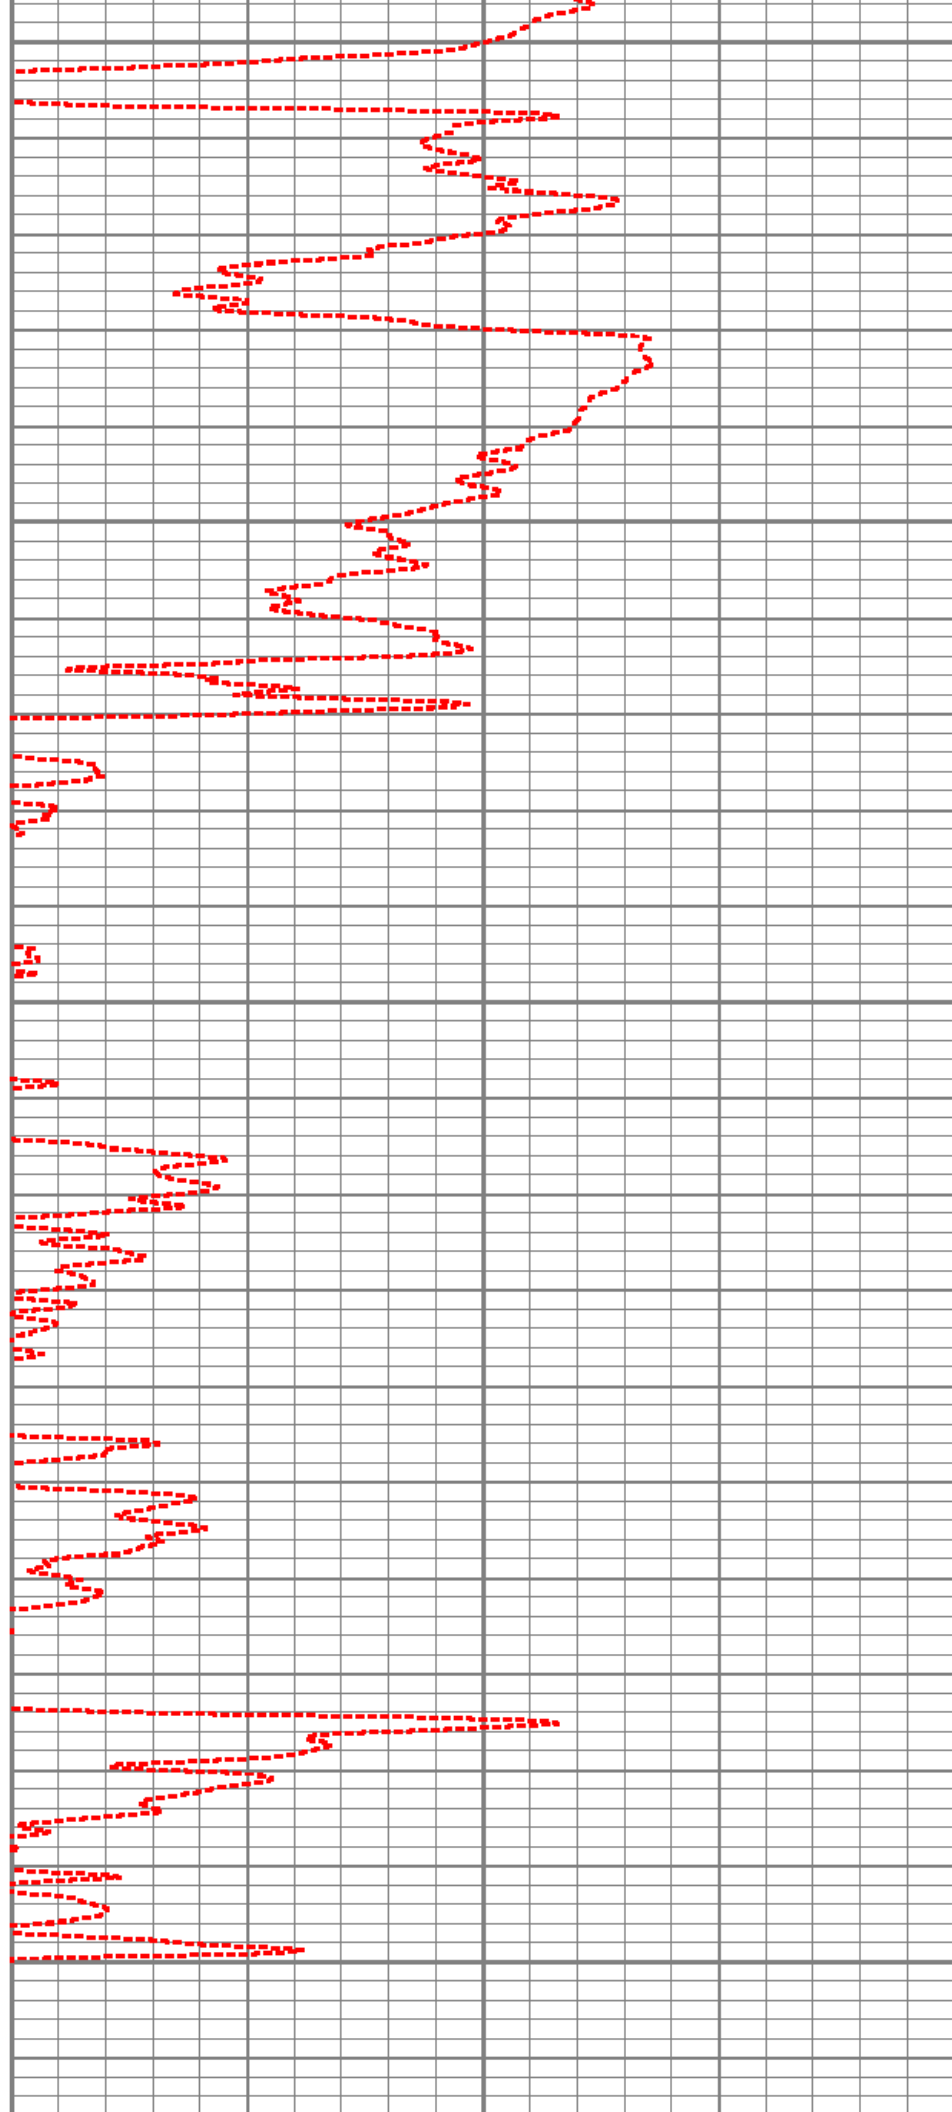

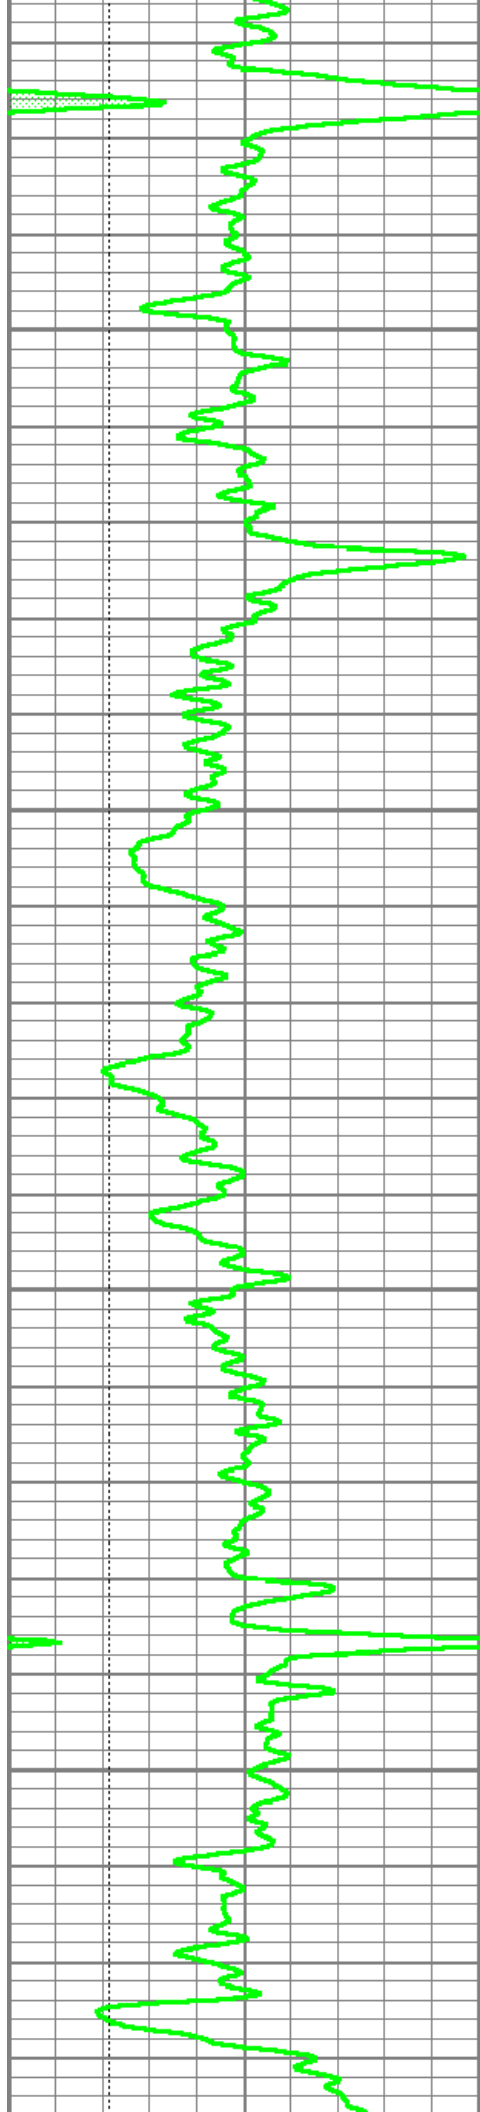



4750

4800

4850

4900

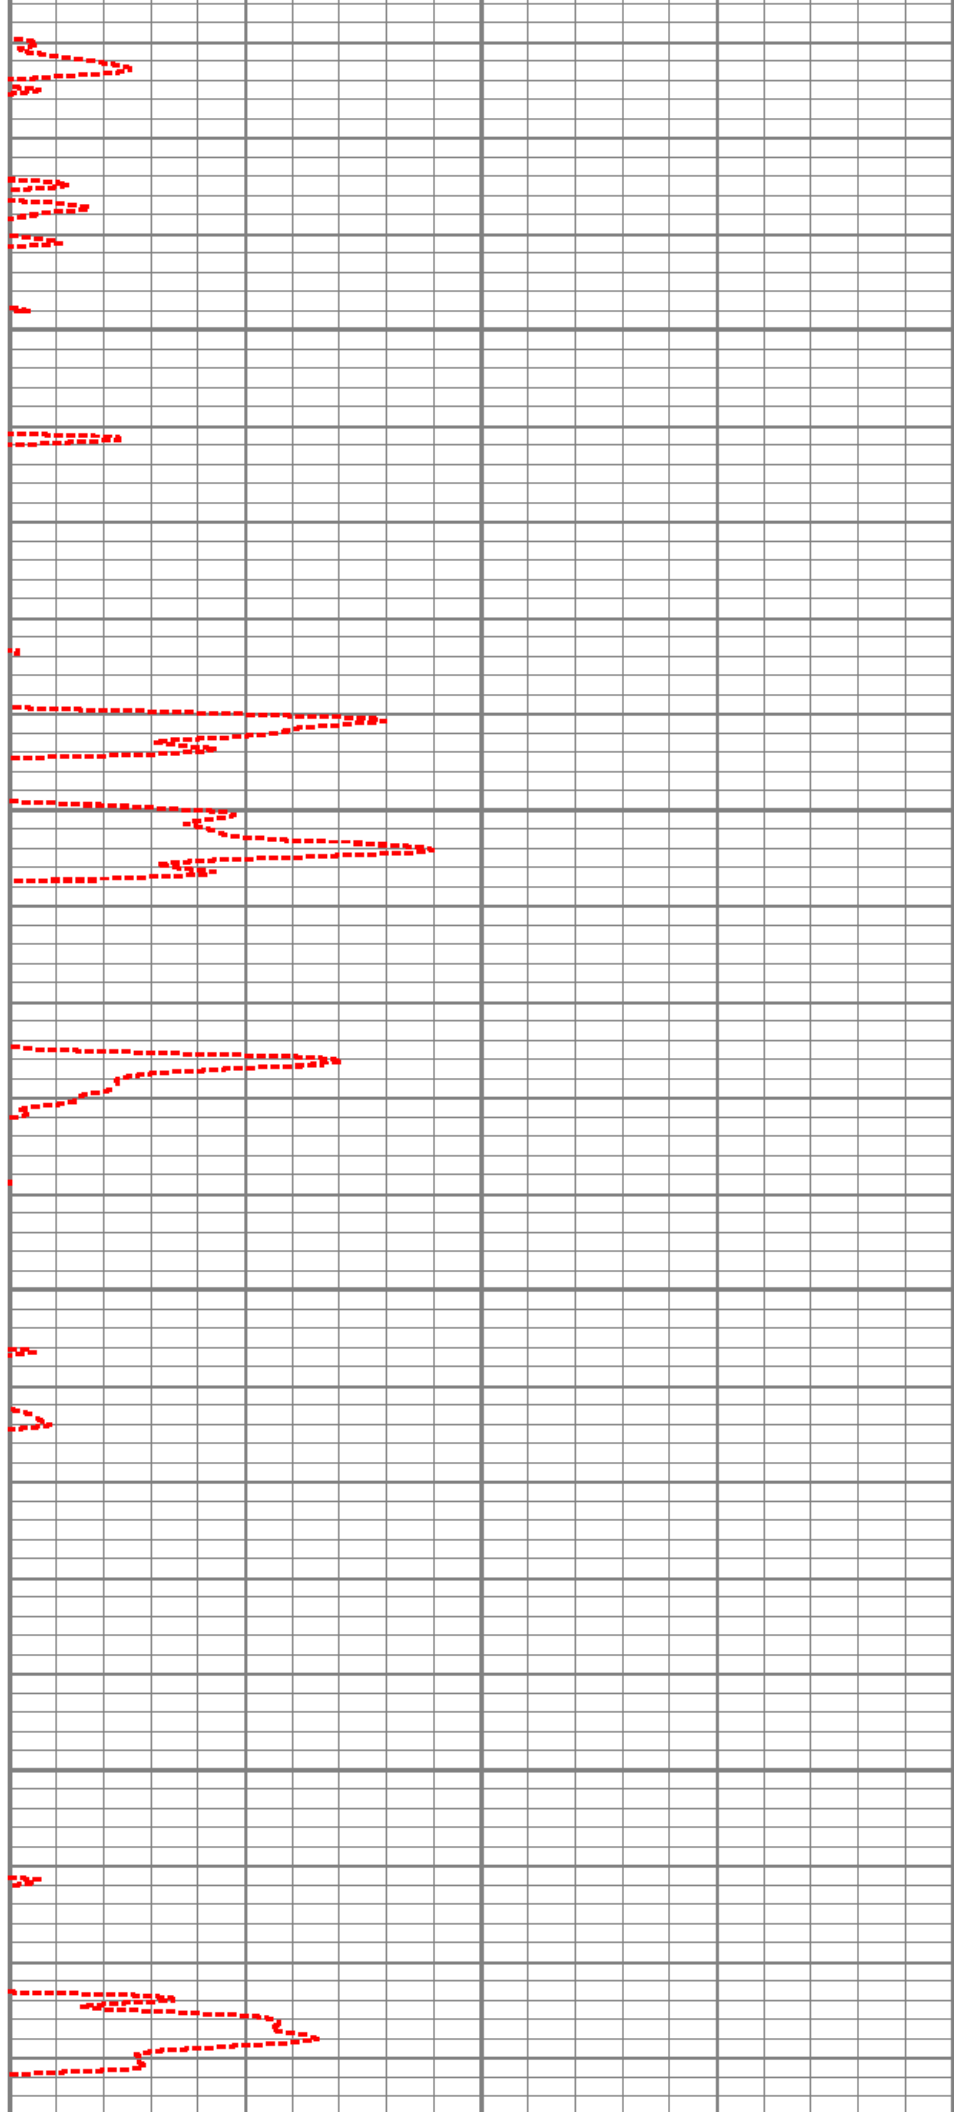

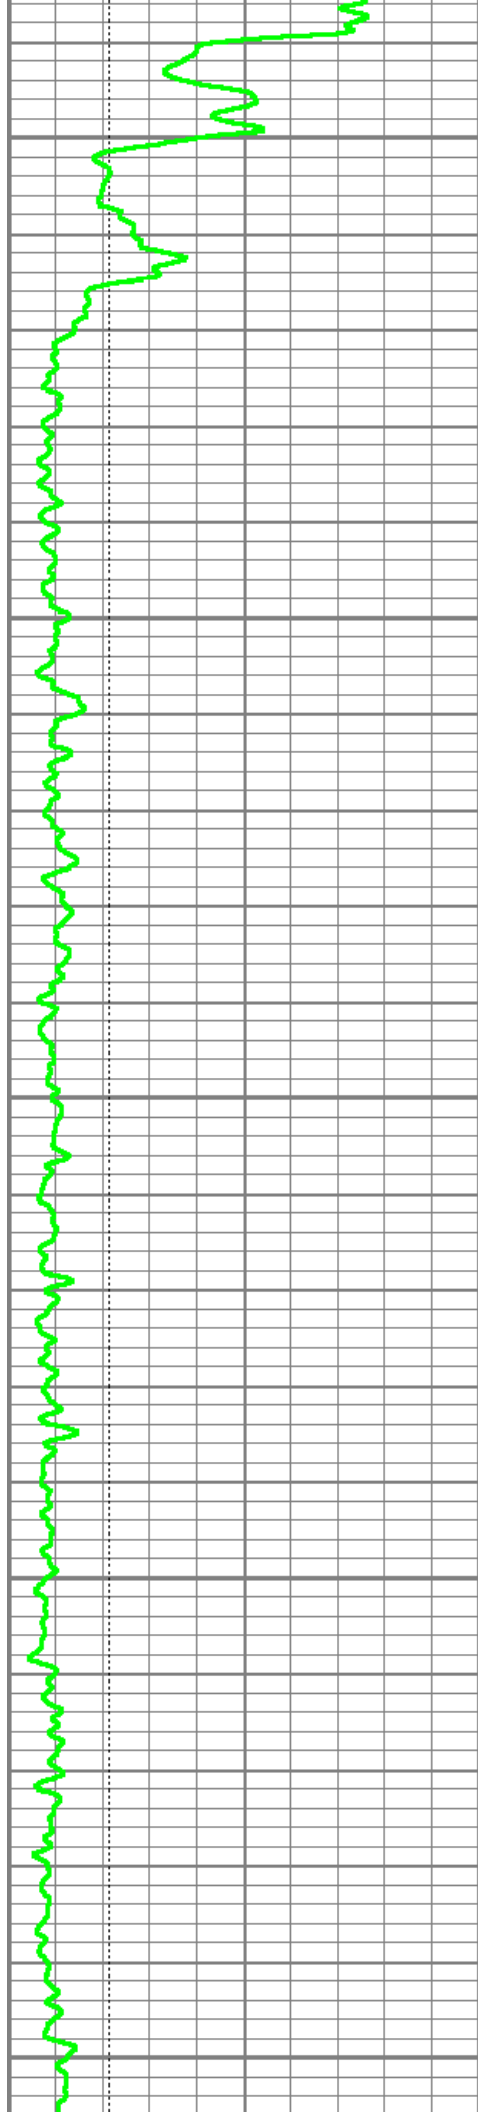


4950


5000

5050

5100

5150

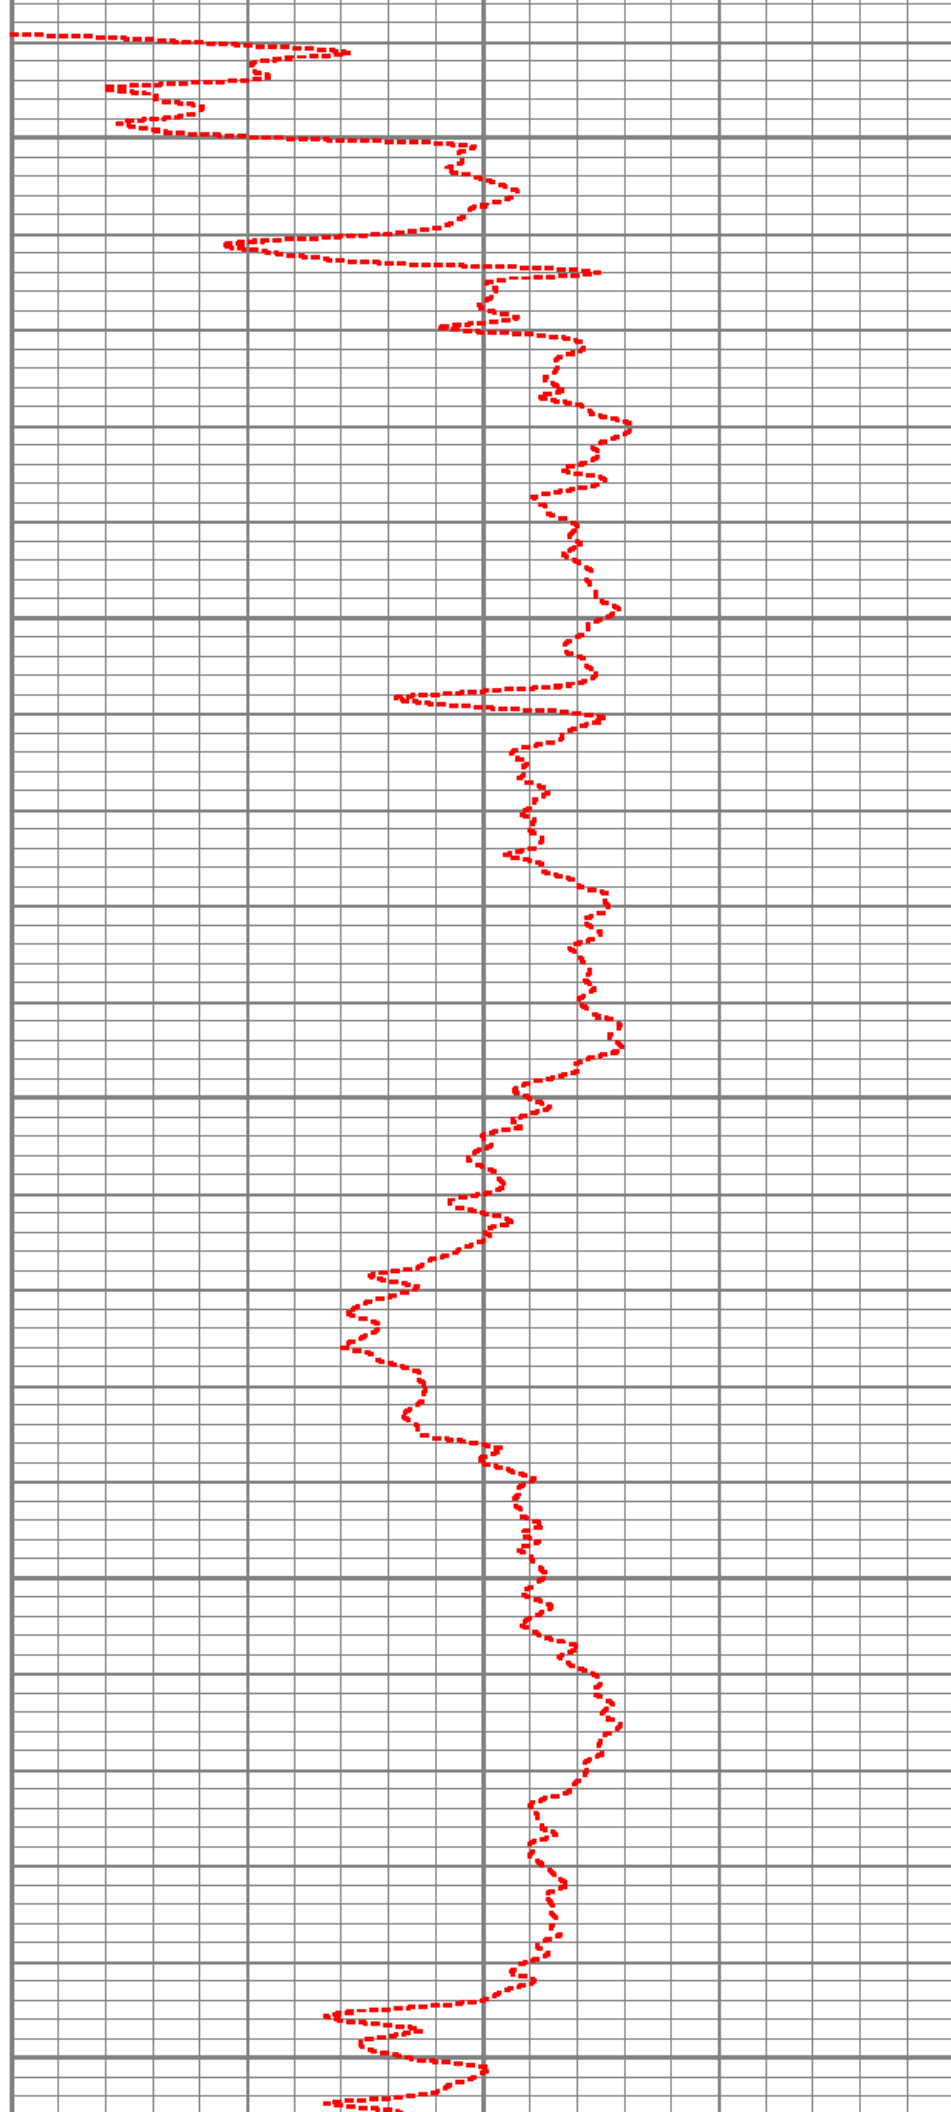

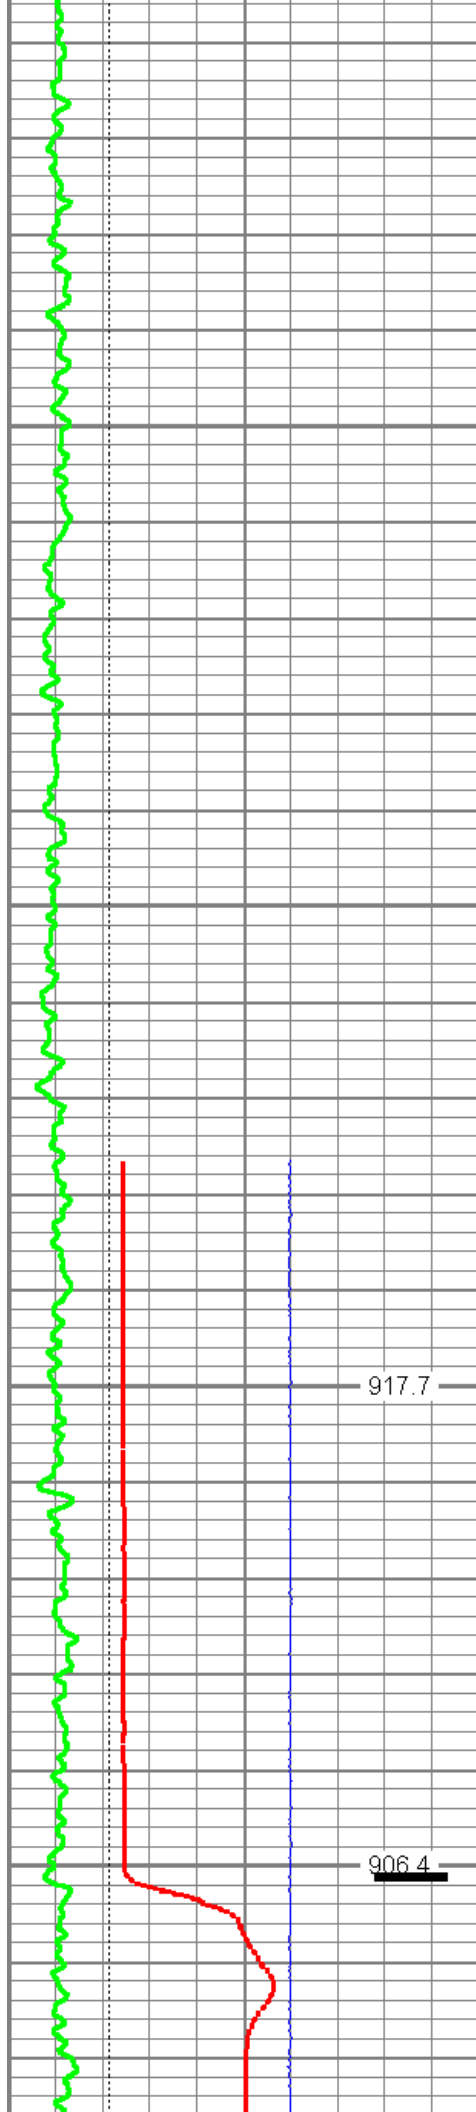

5200

5250


917.7


5300

906.4

5350

CASING

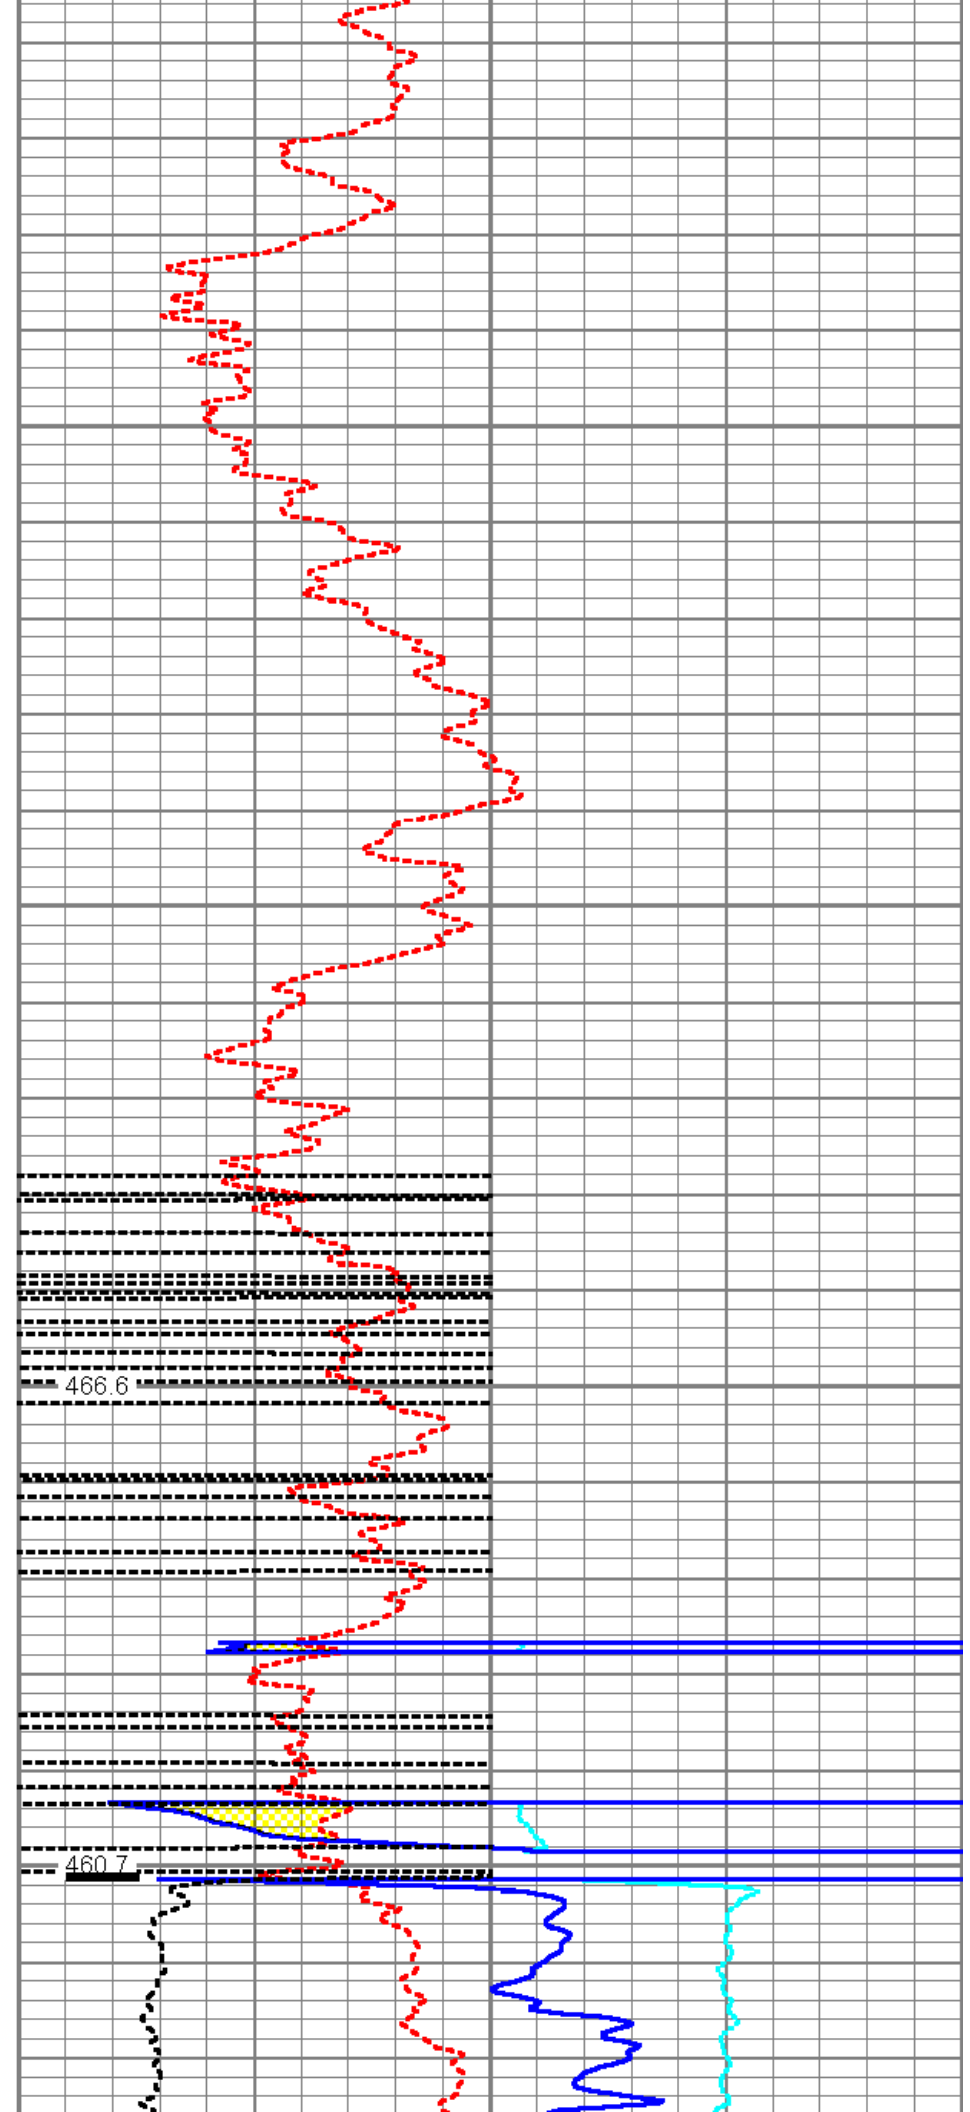

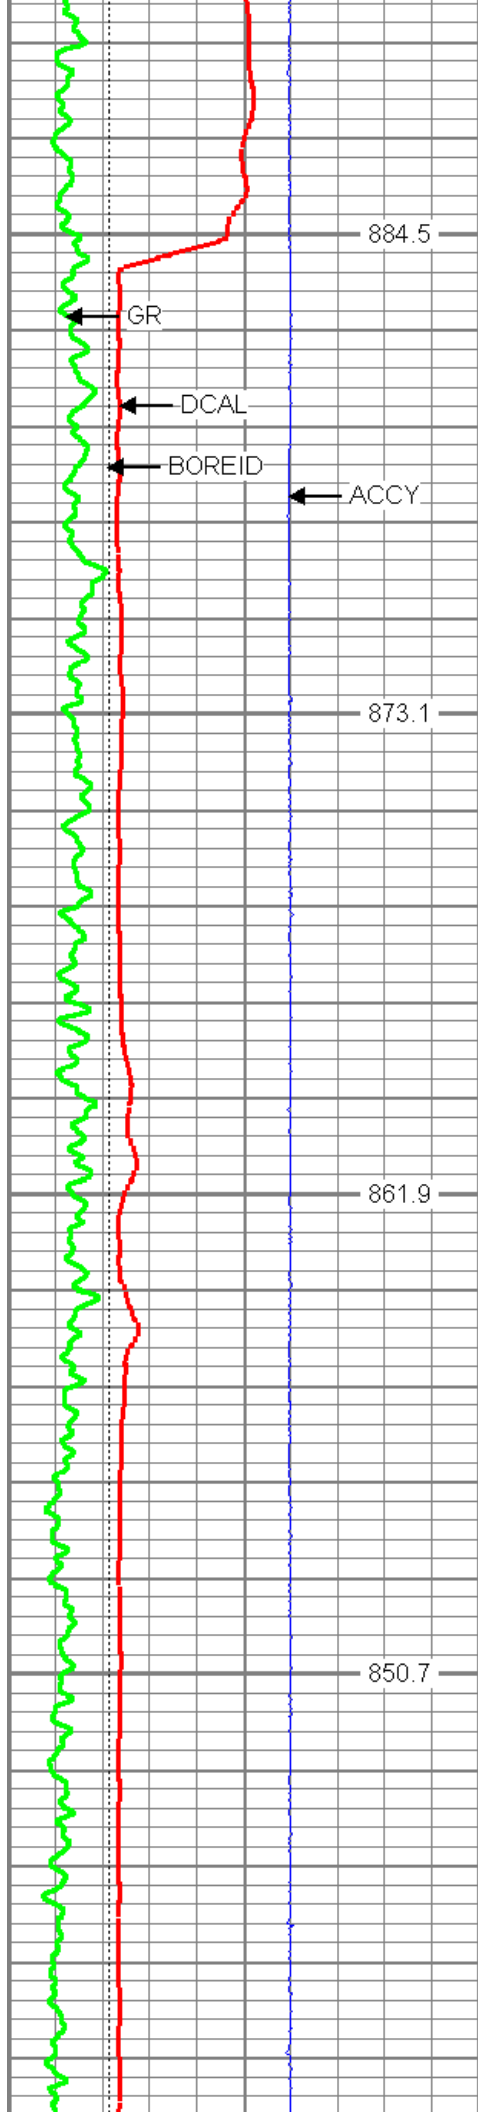




5400


5450

5500

5550

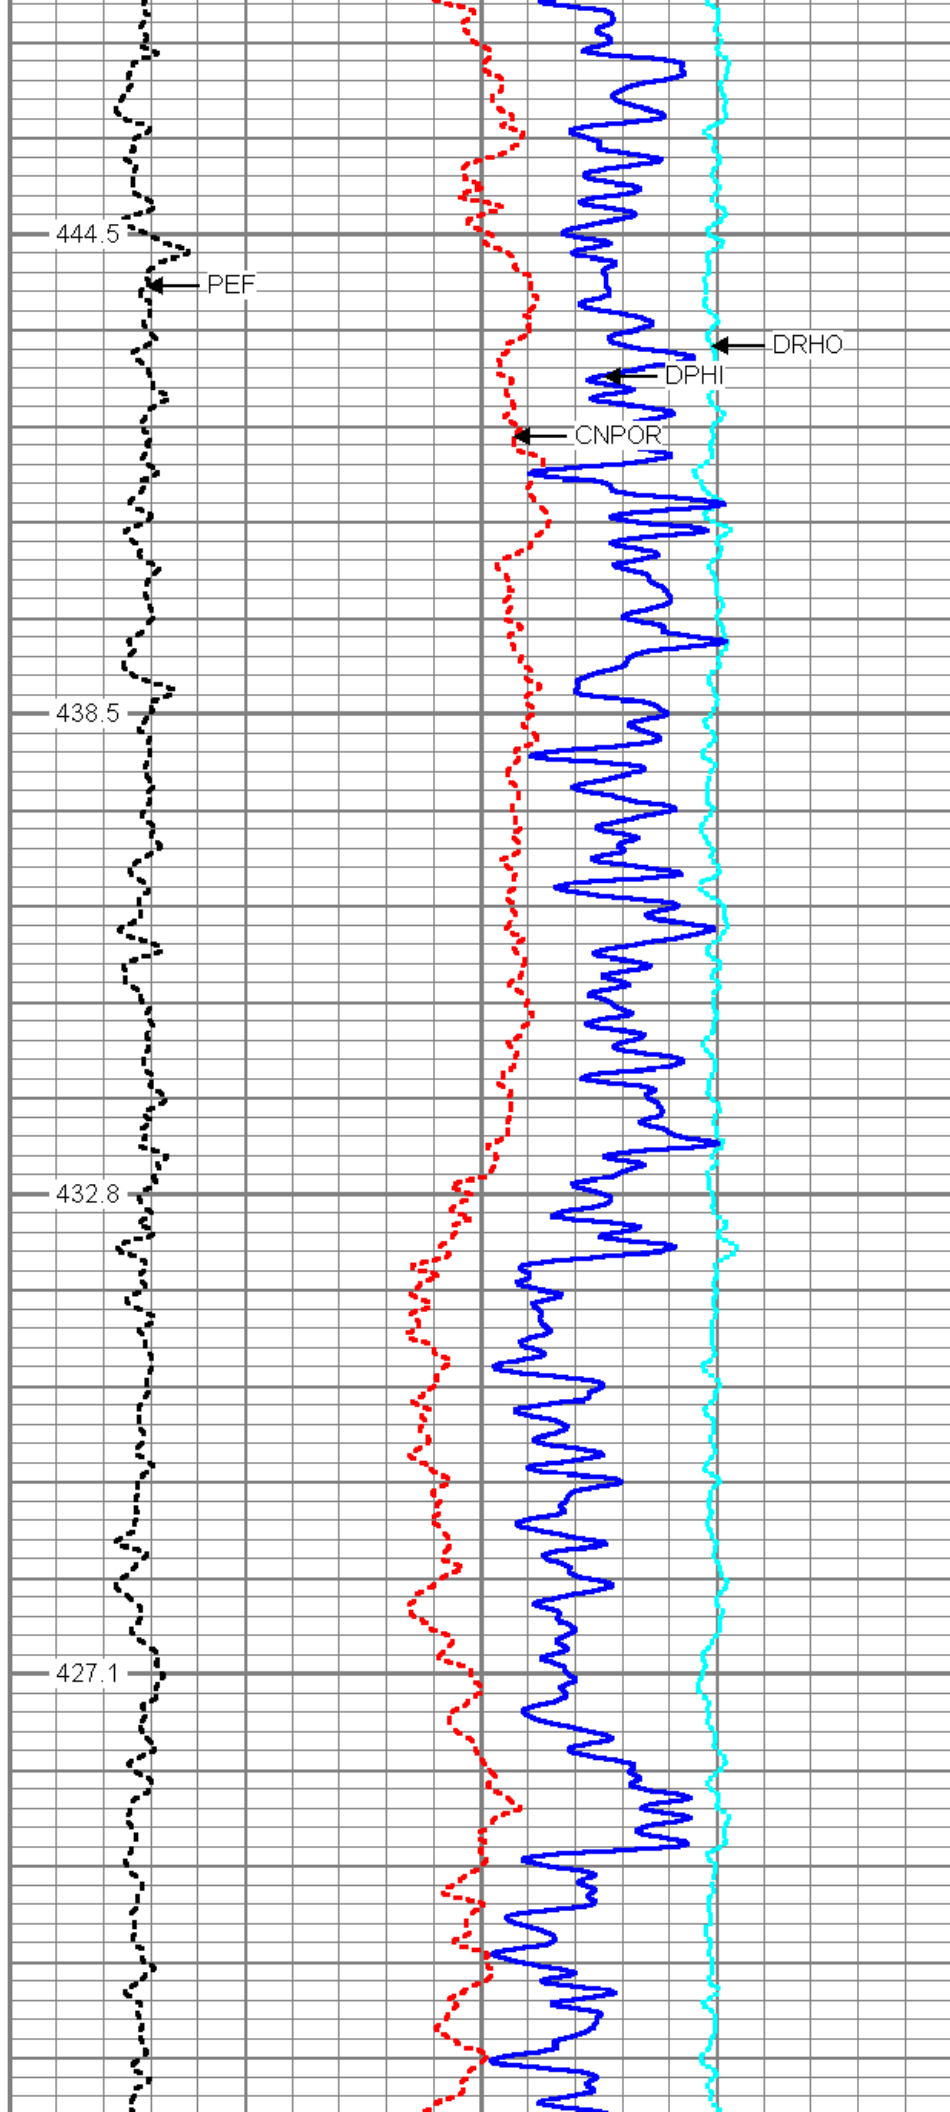

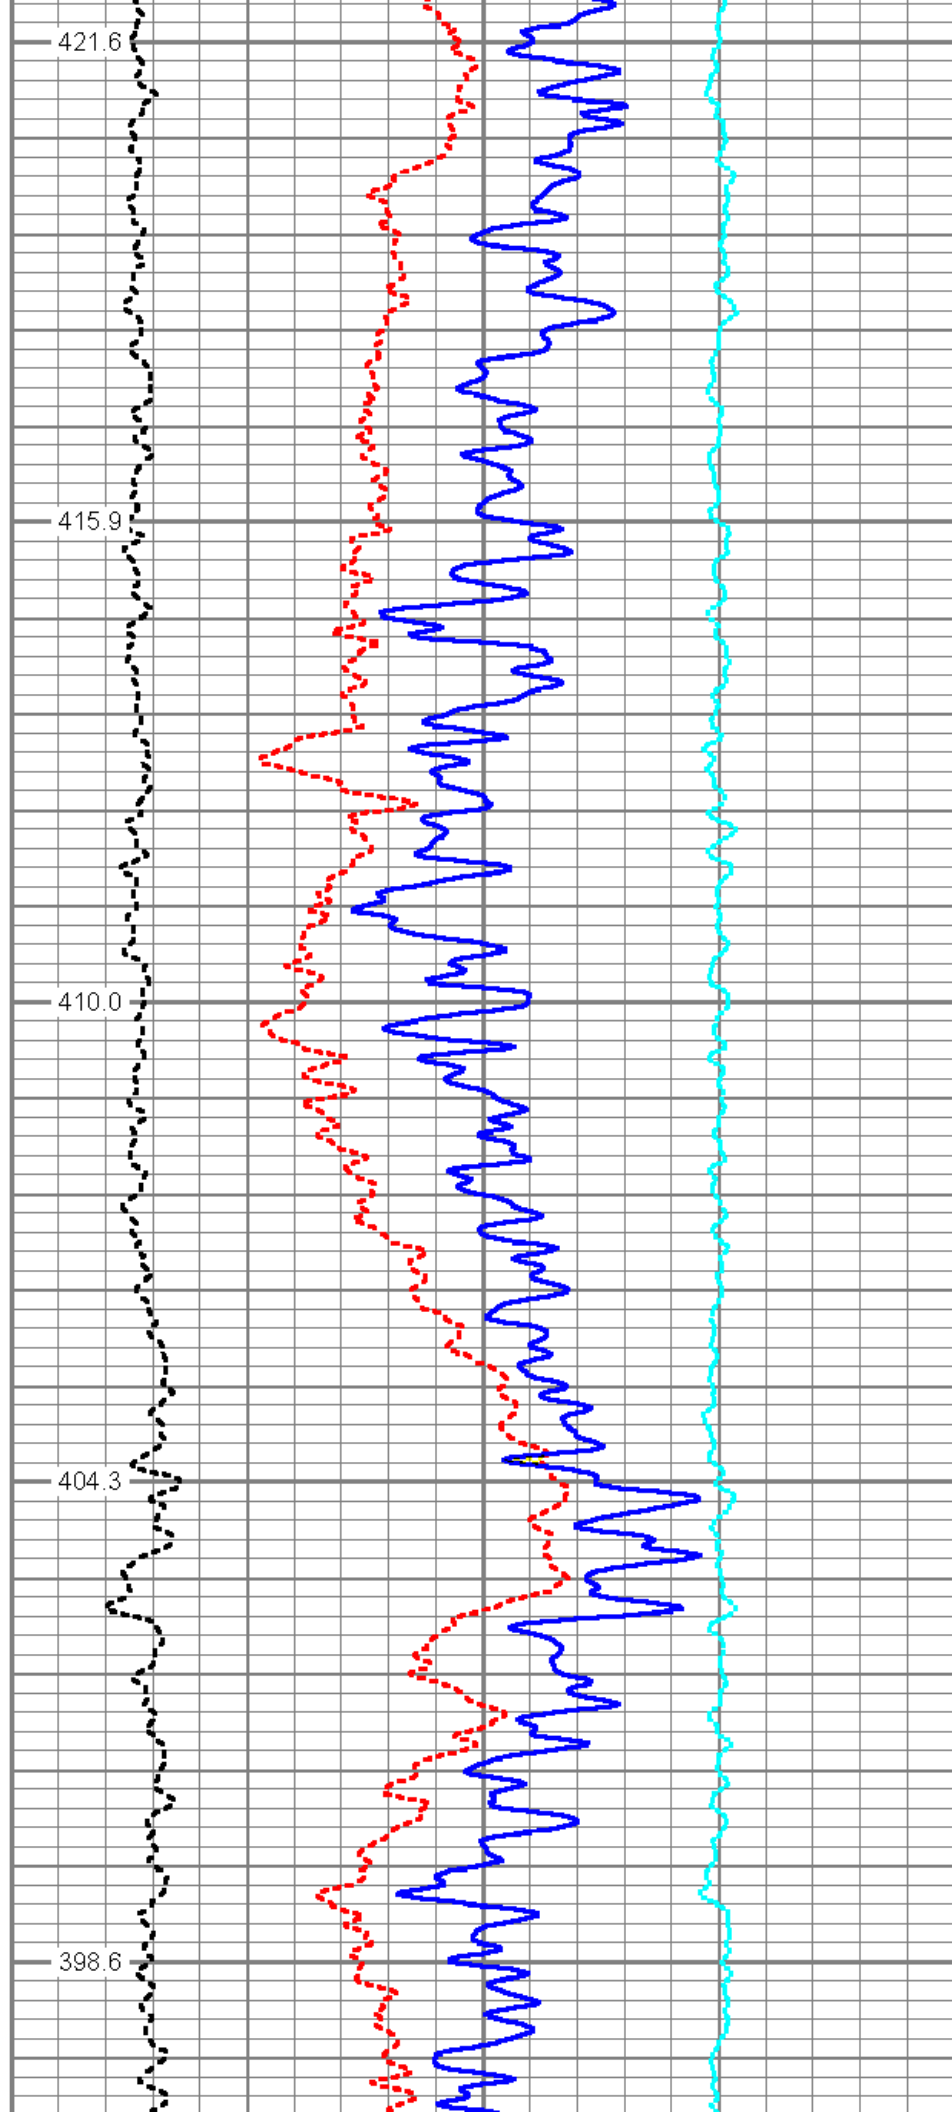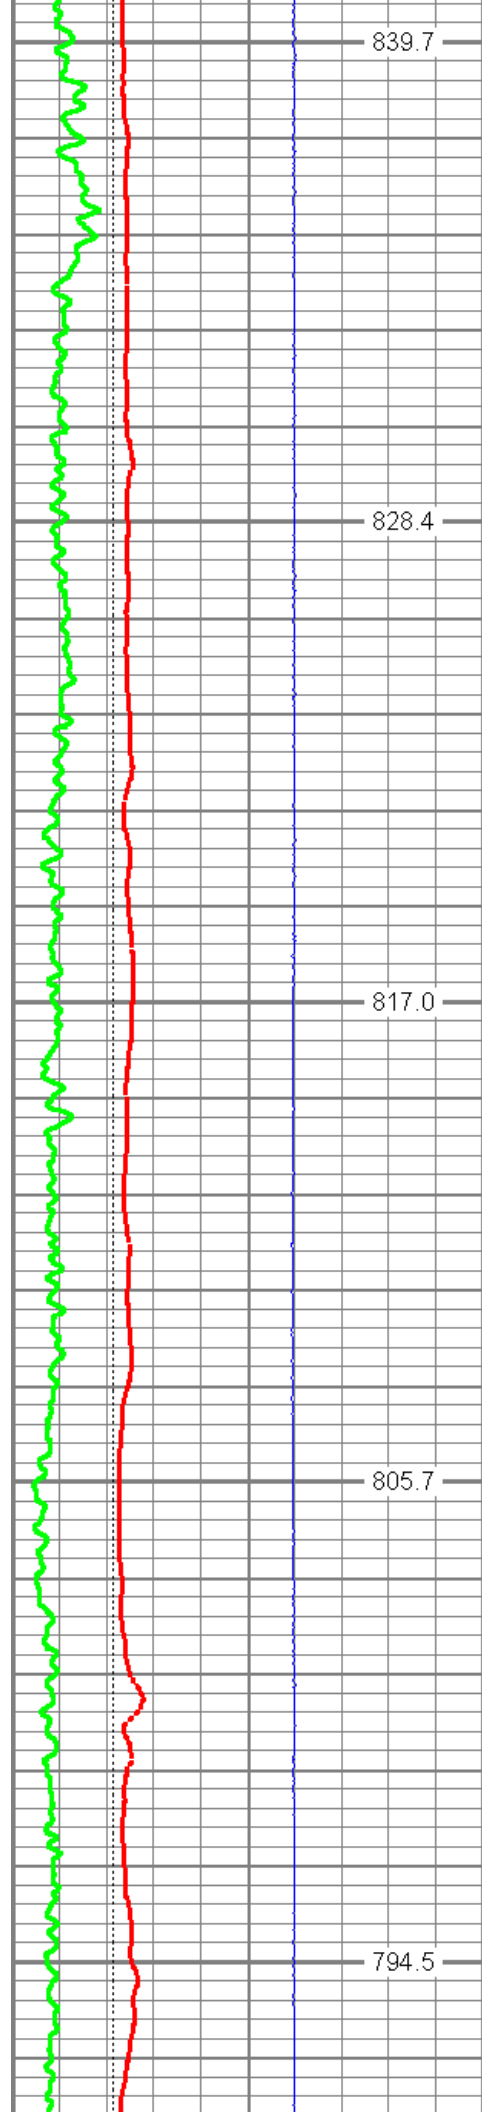

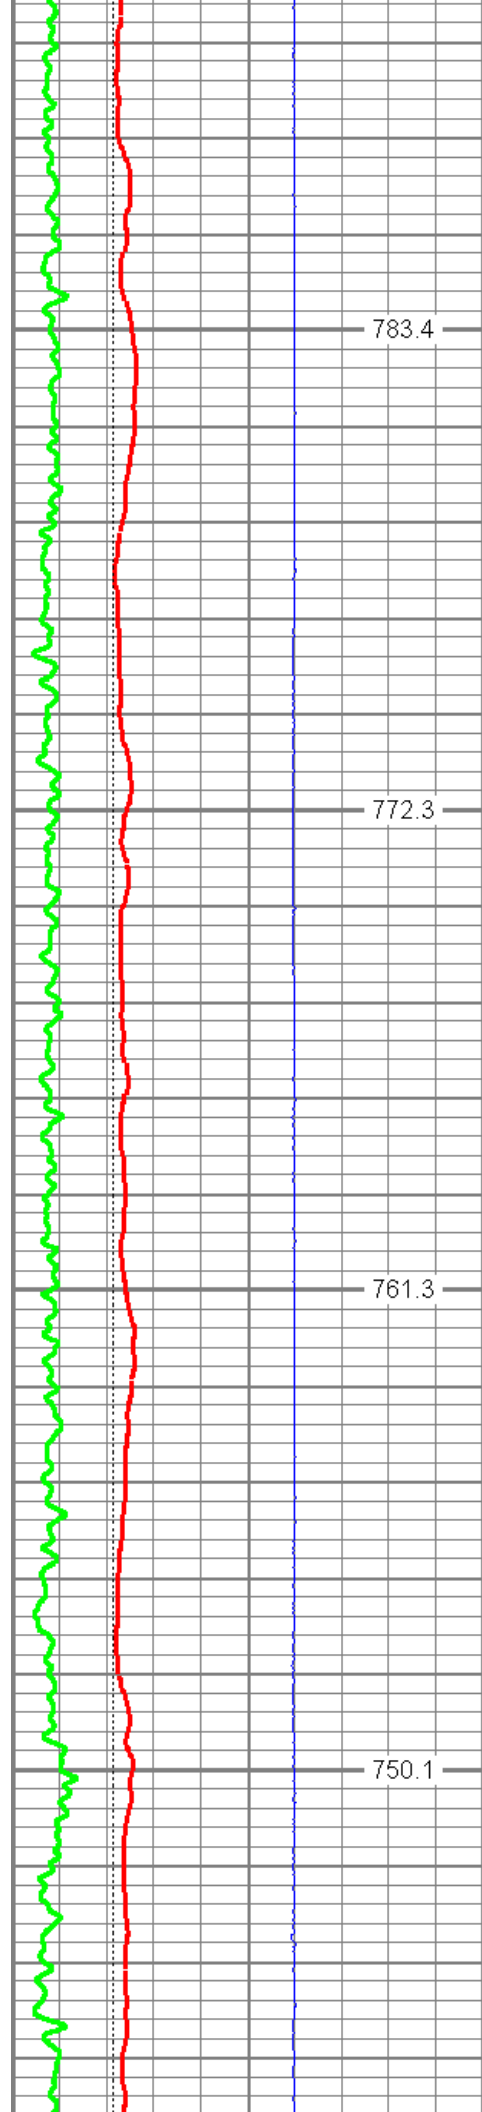




5850


5900

5950

6000

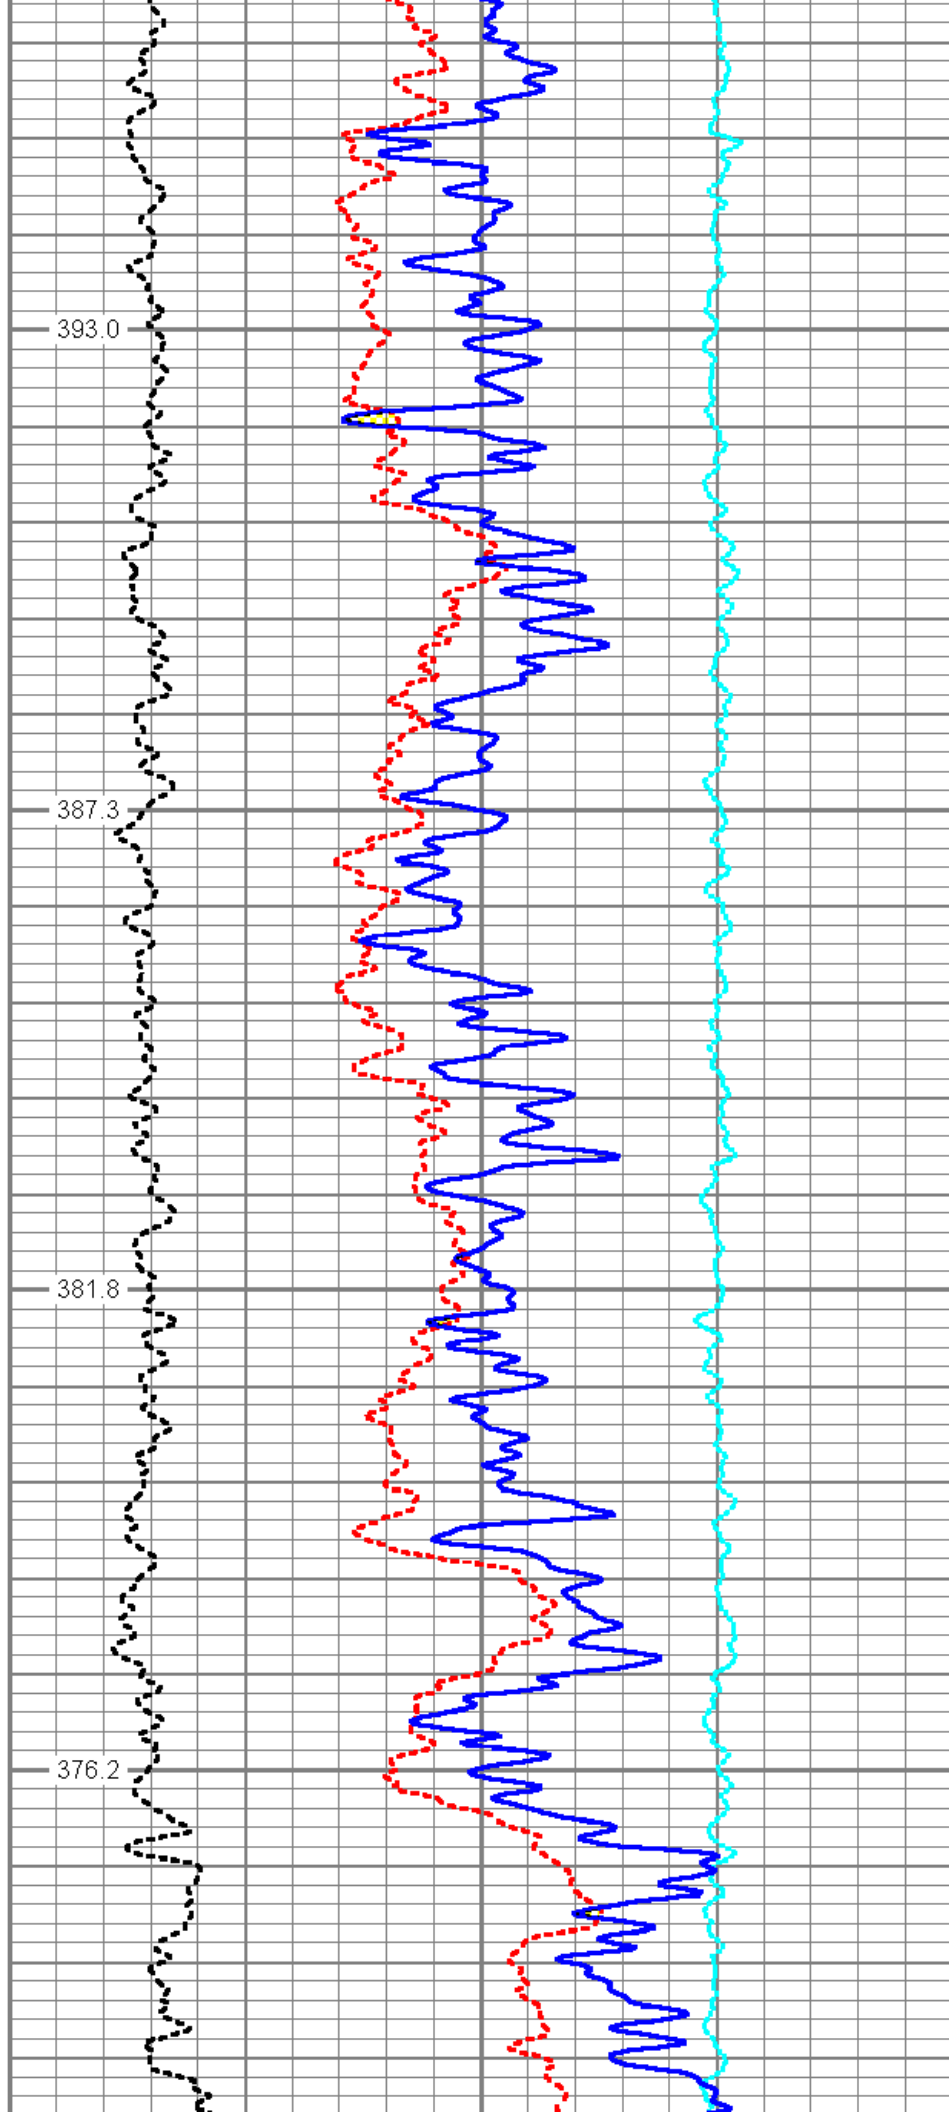

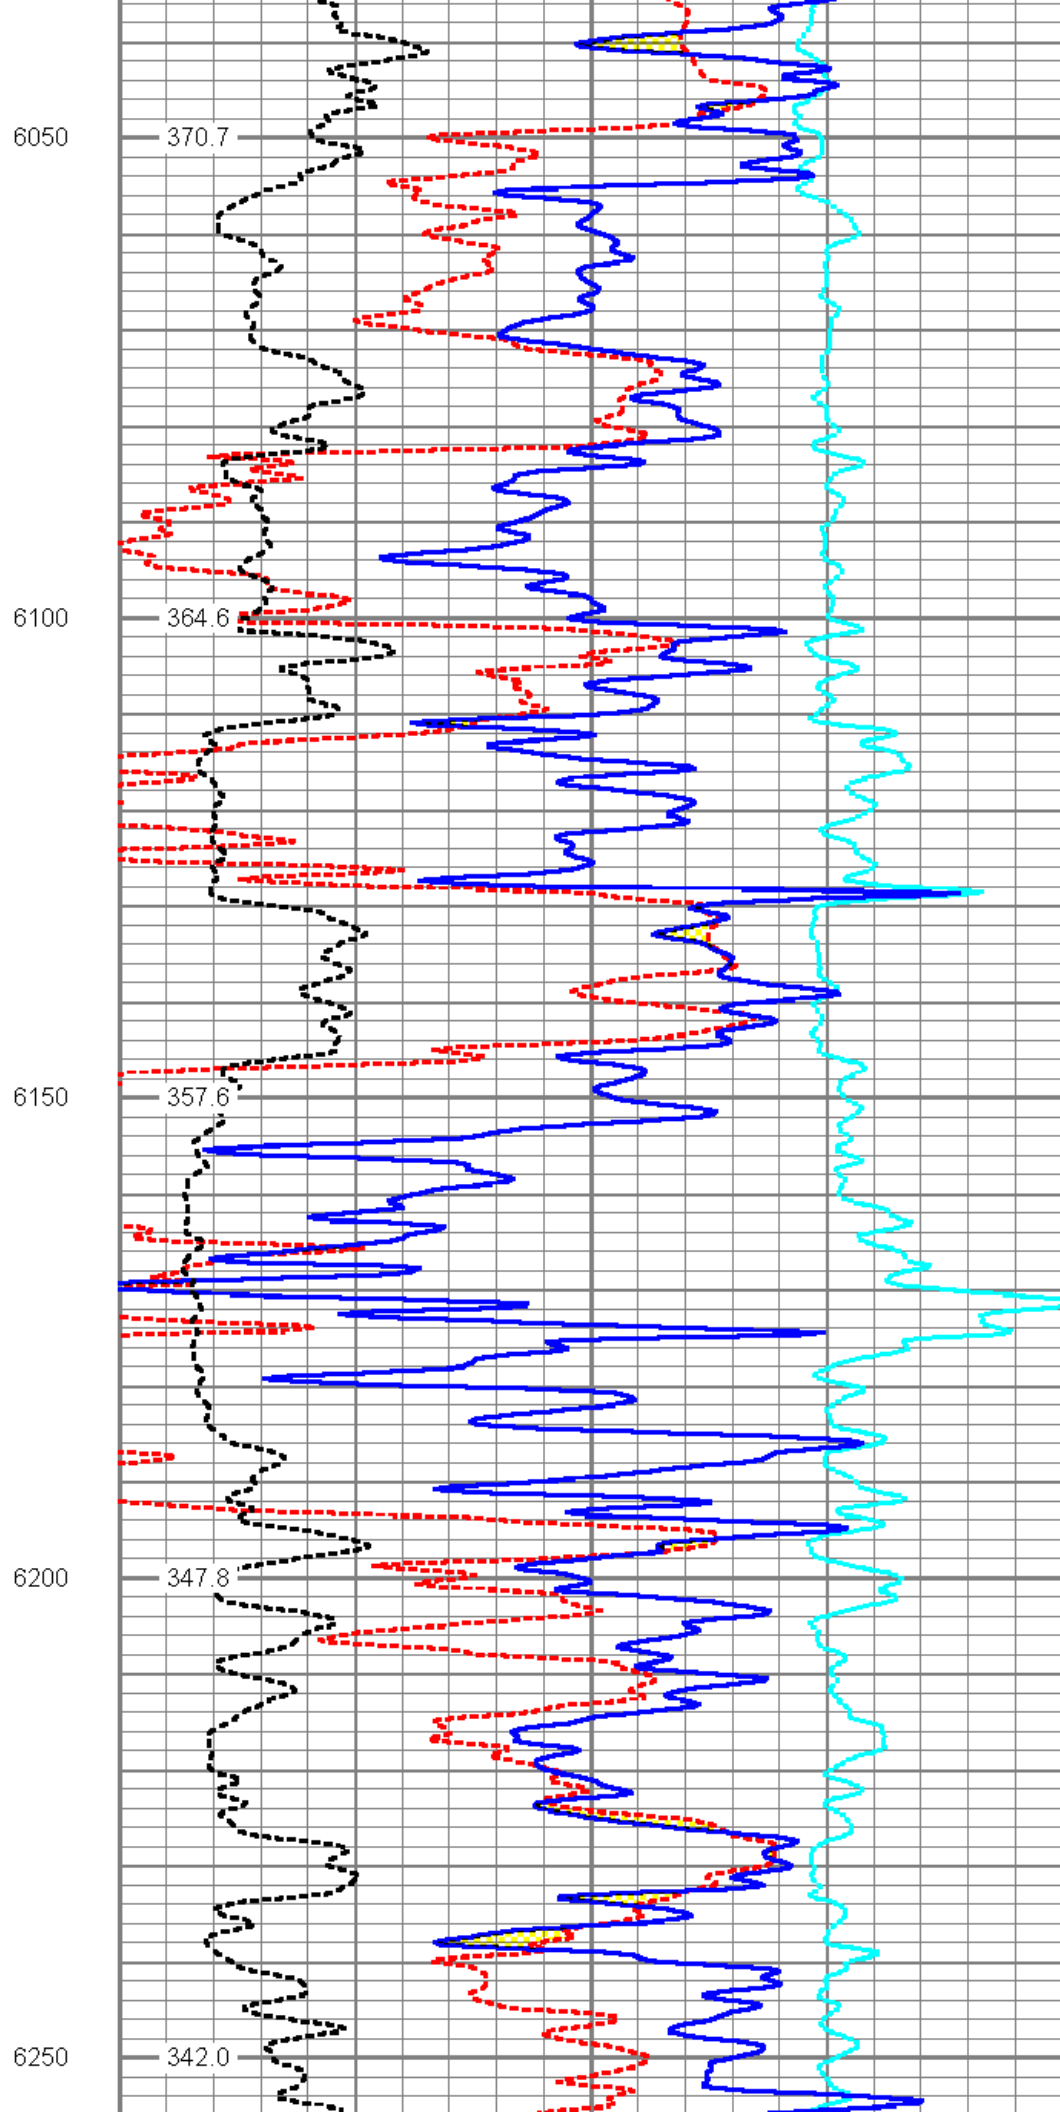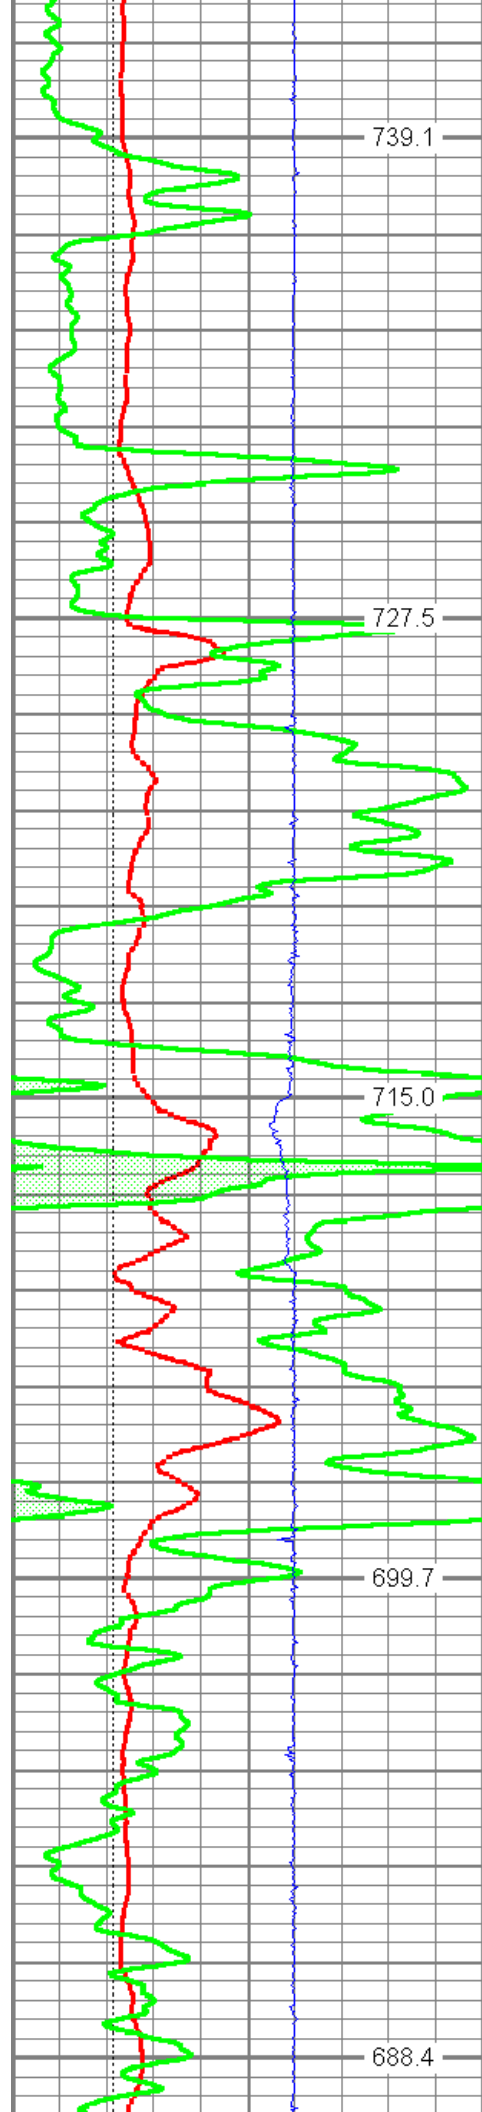

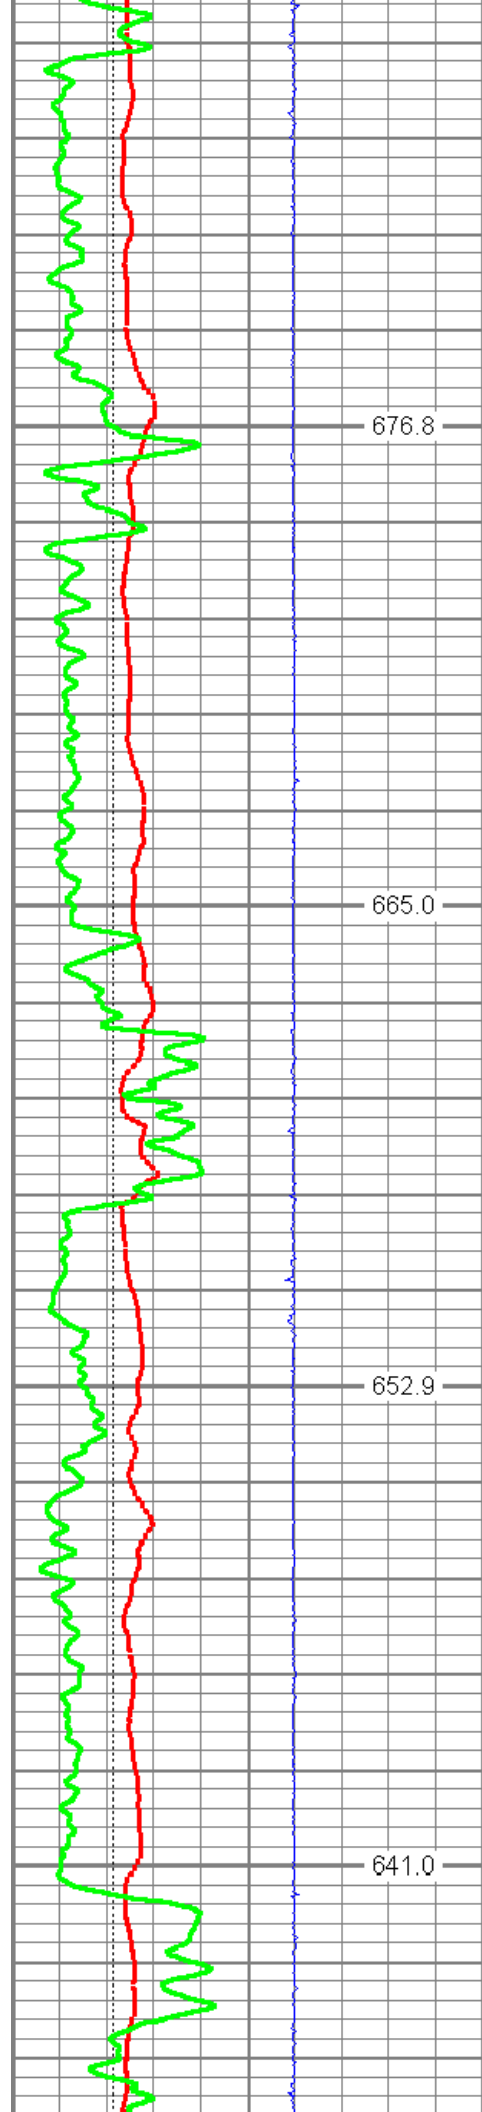

6300

676.8

6350


665.0



6400



652.9



6450


641.0

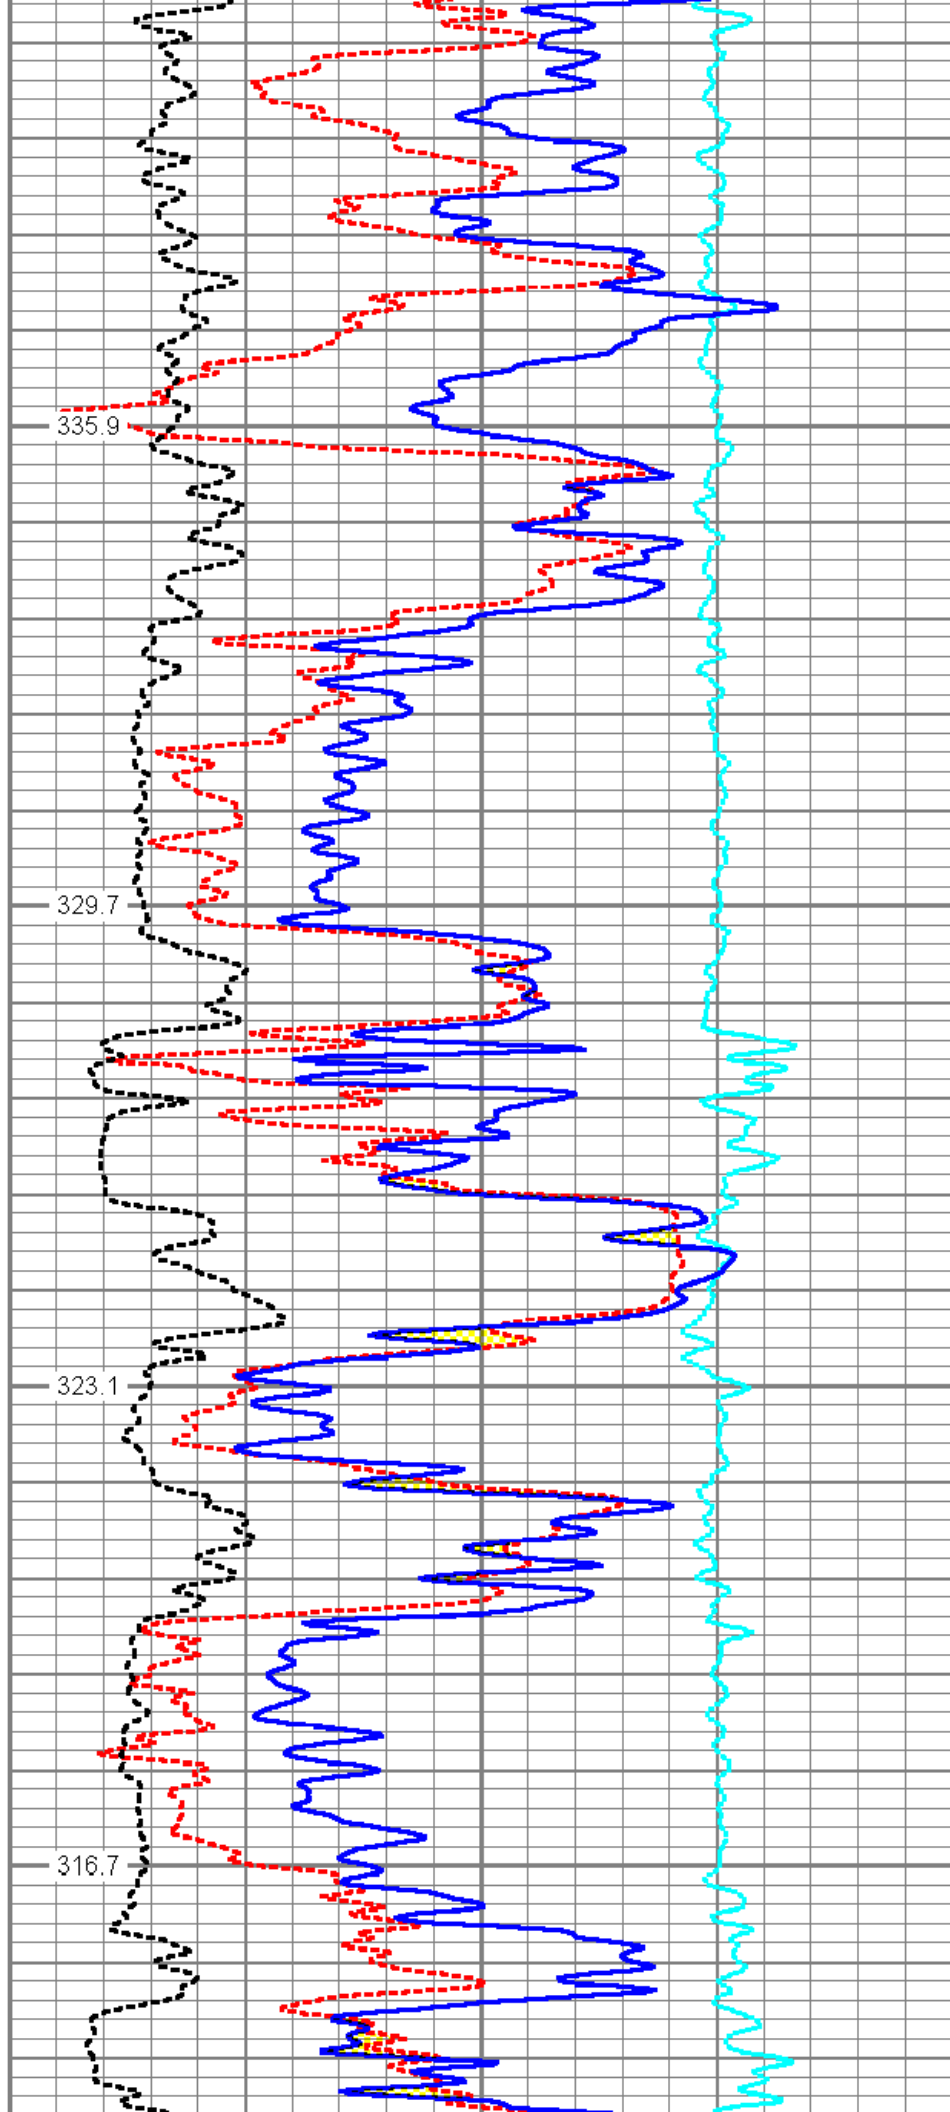

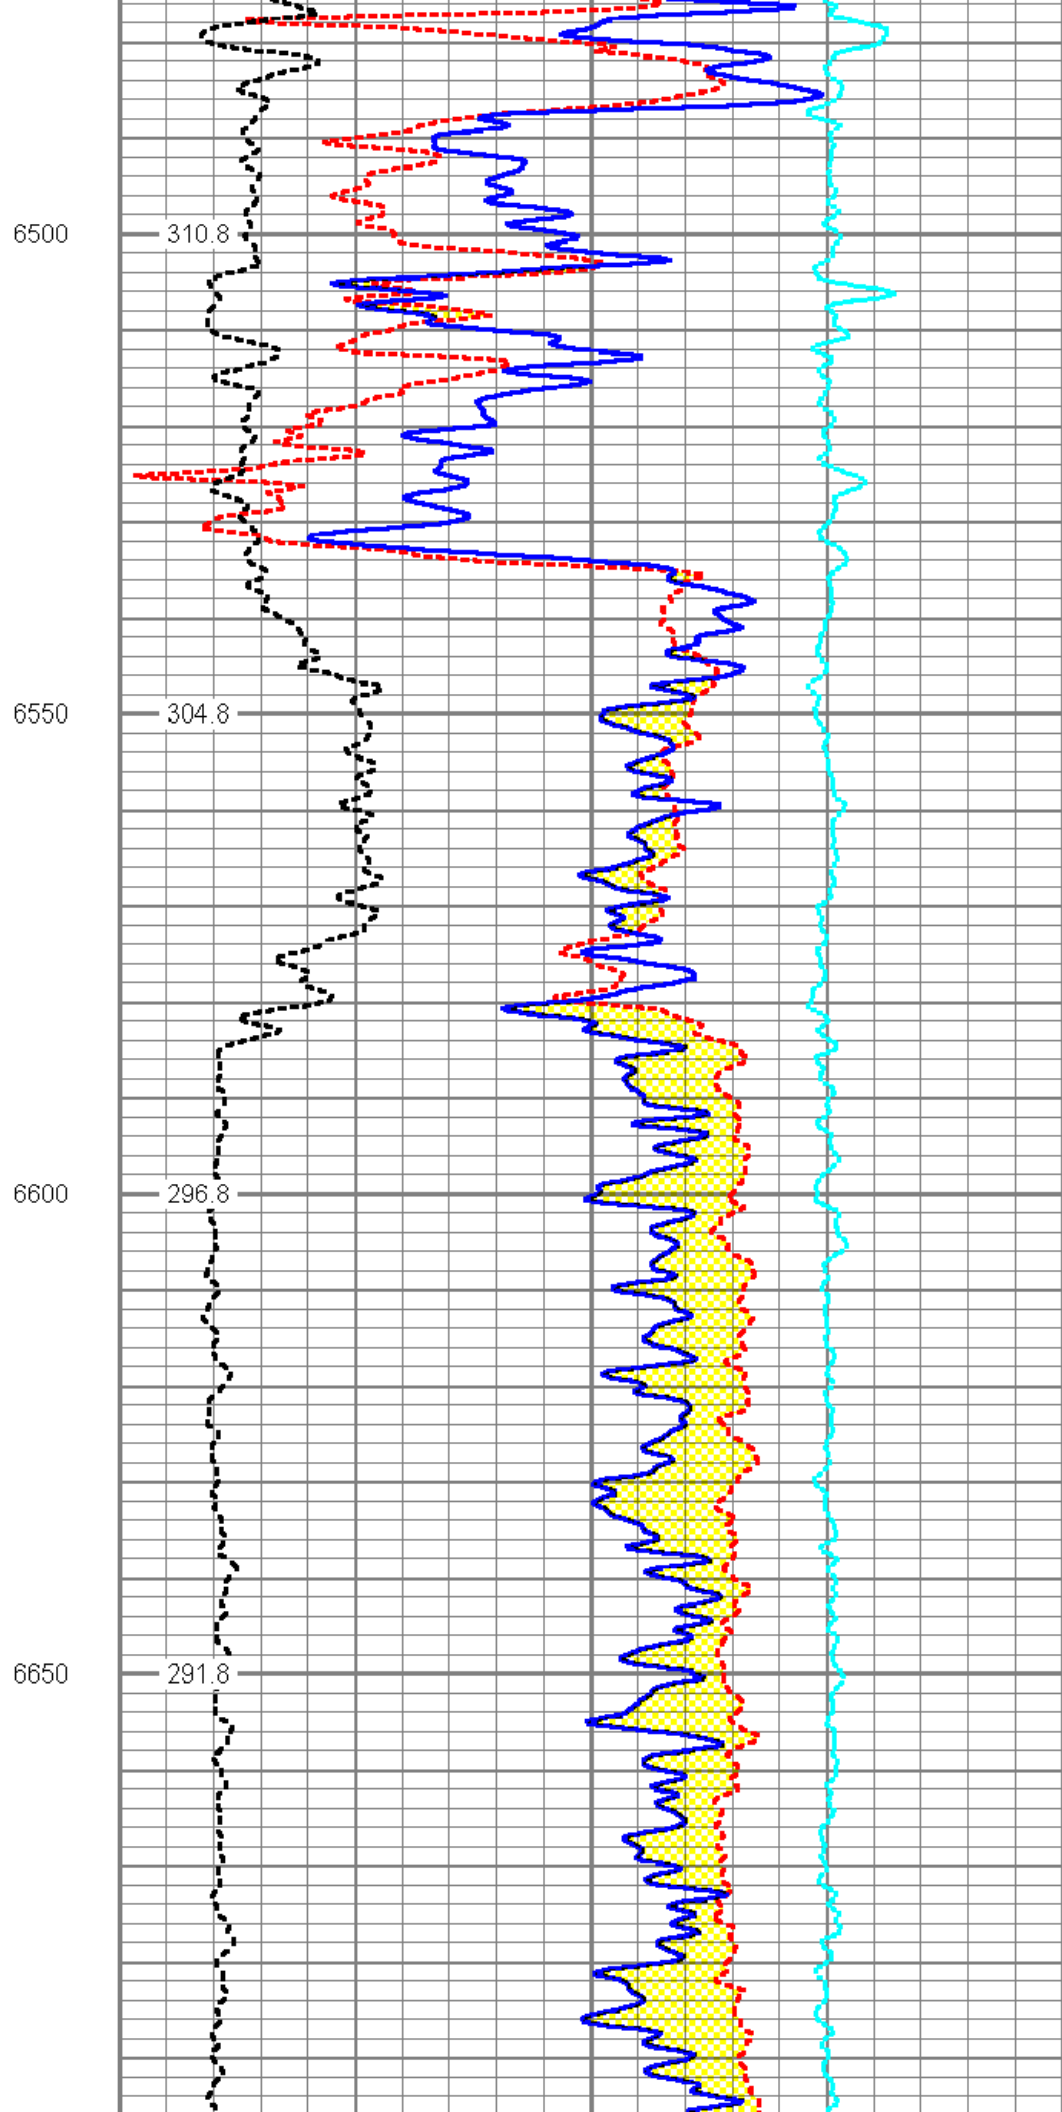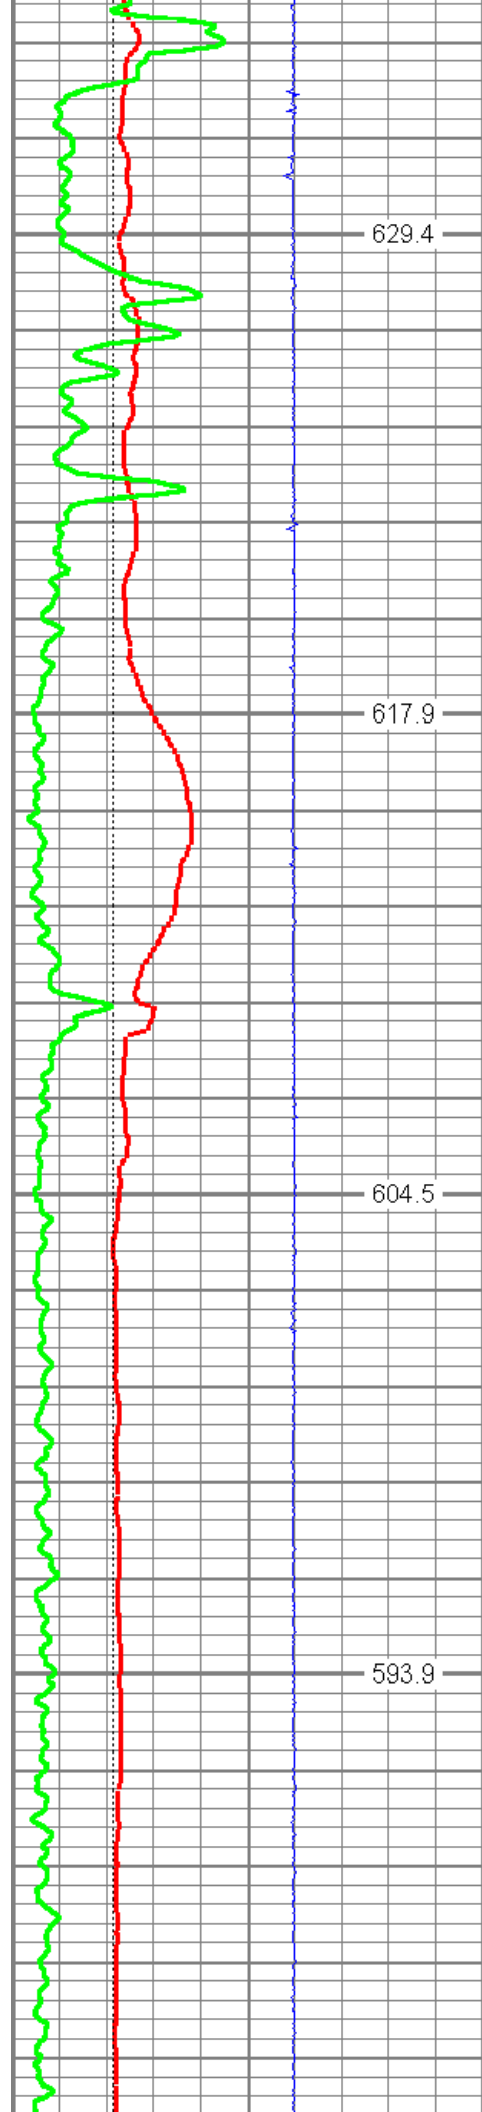

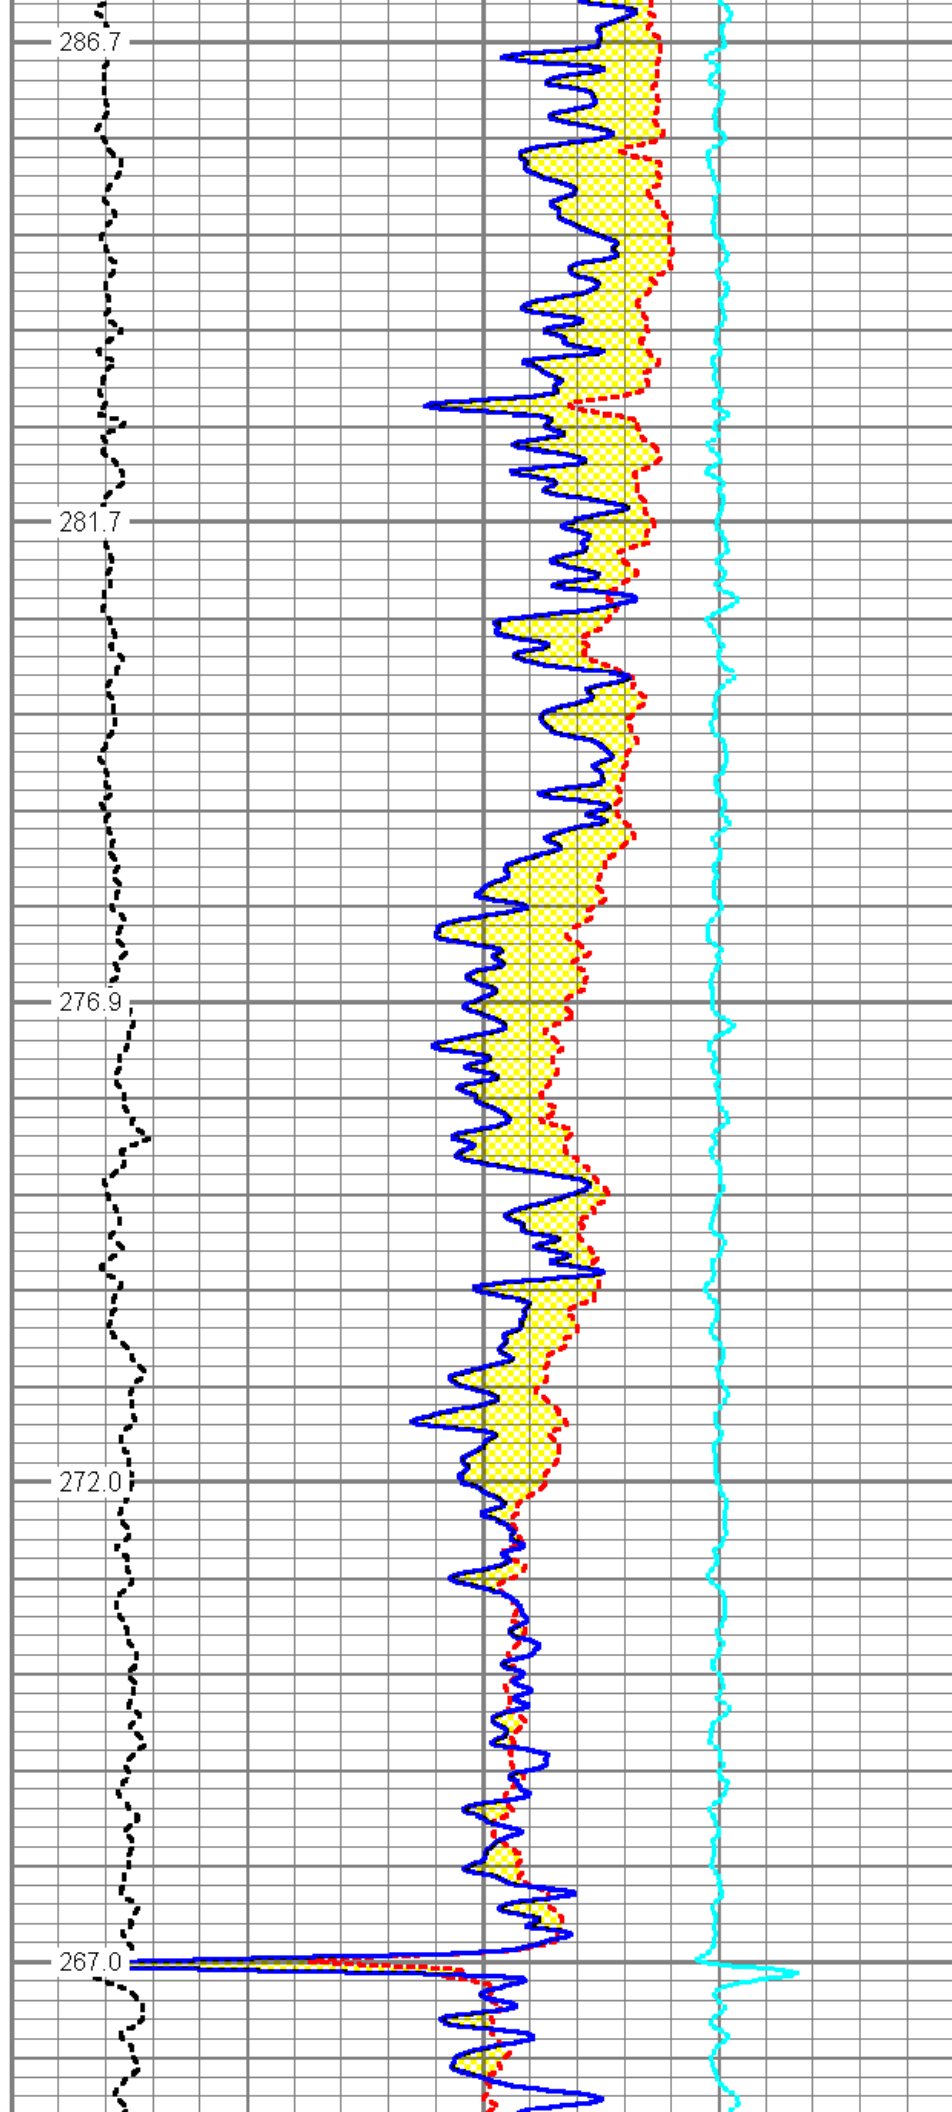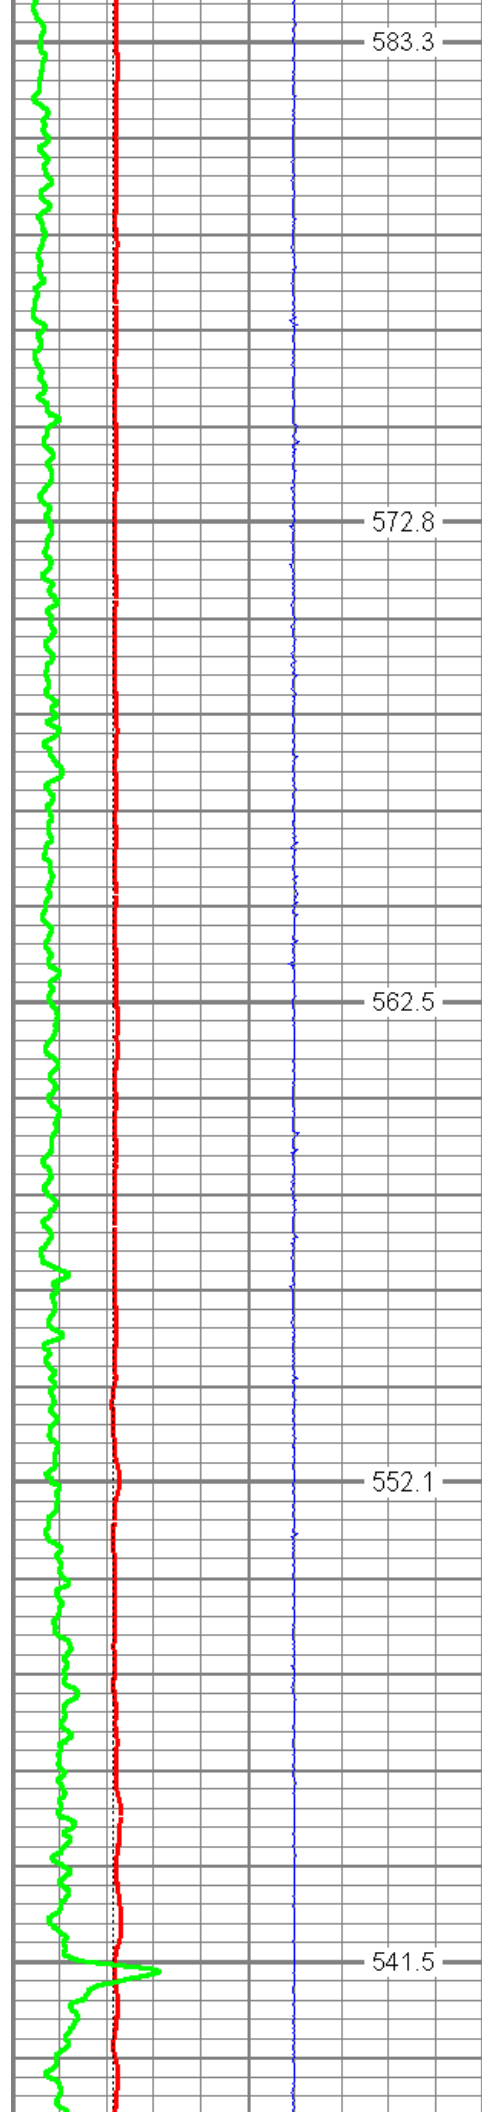

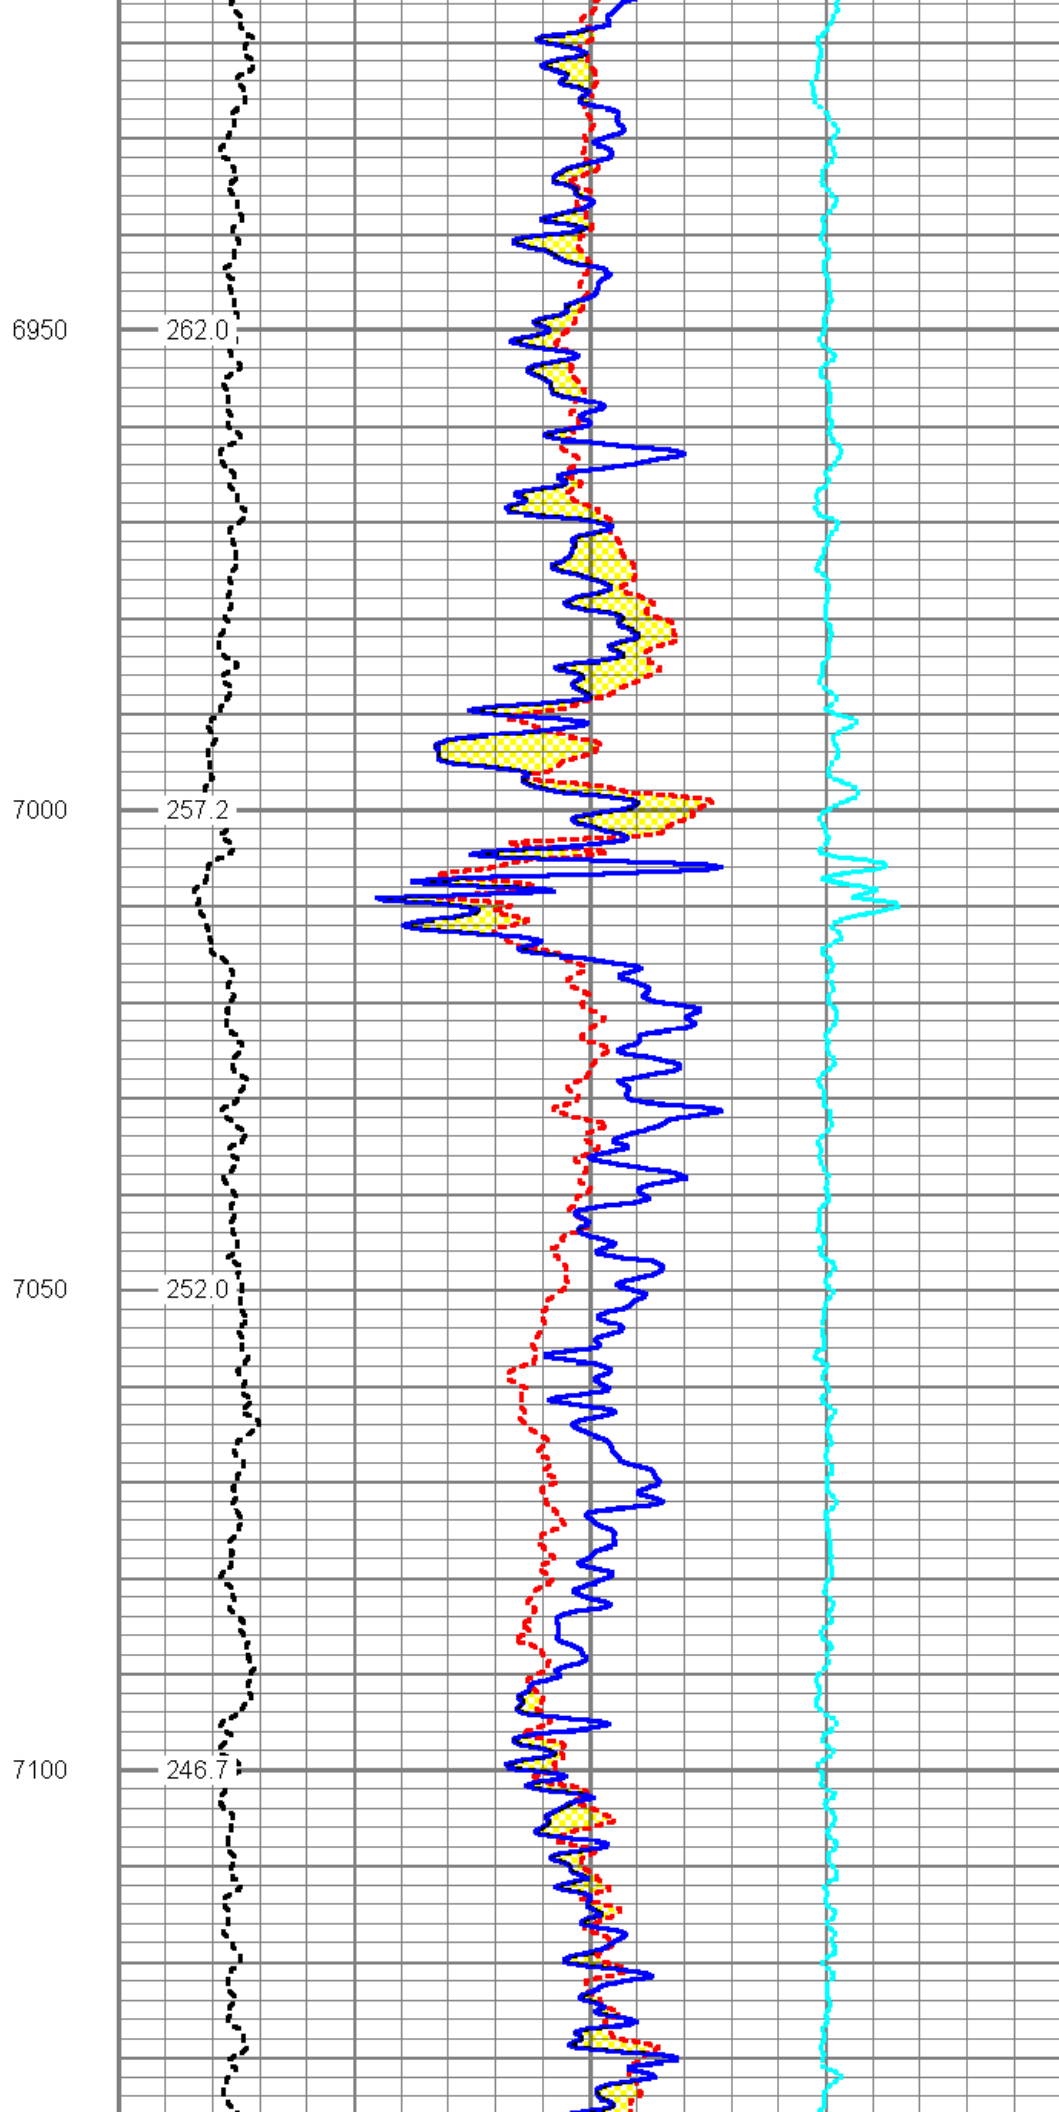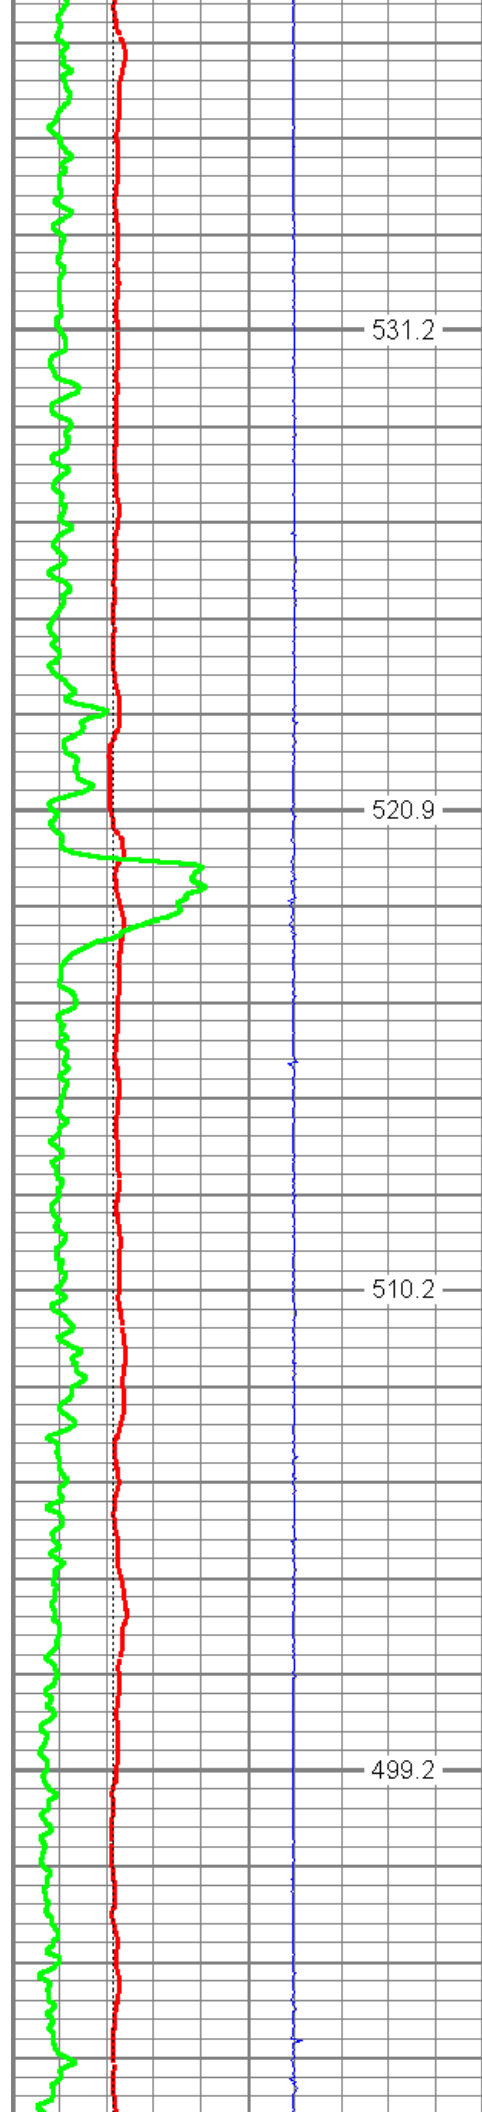

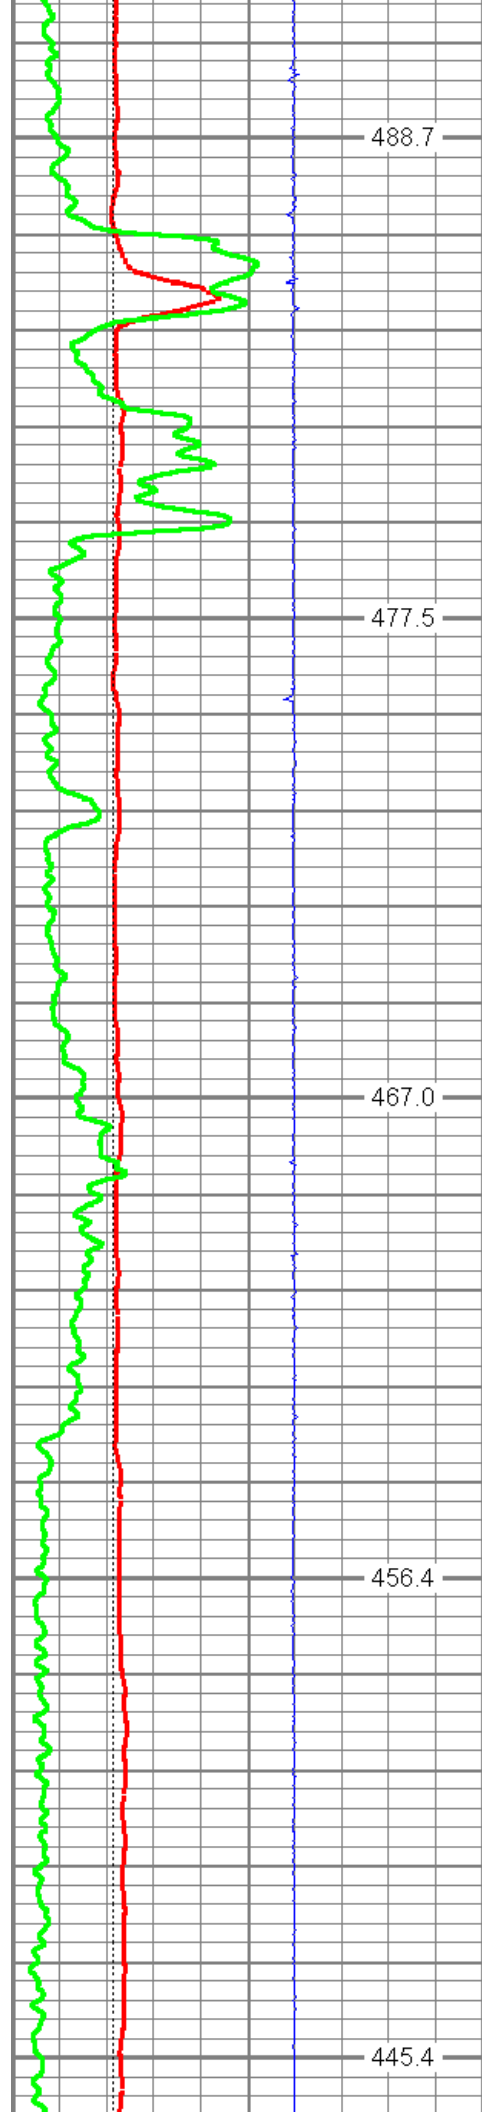


7150


7200

7250

7300

7350

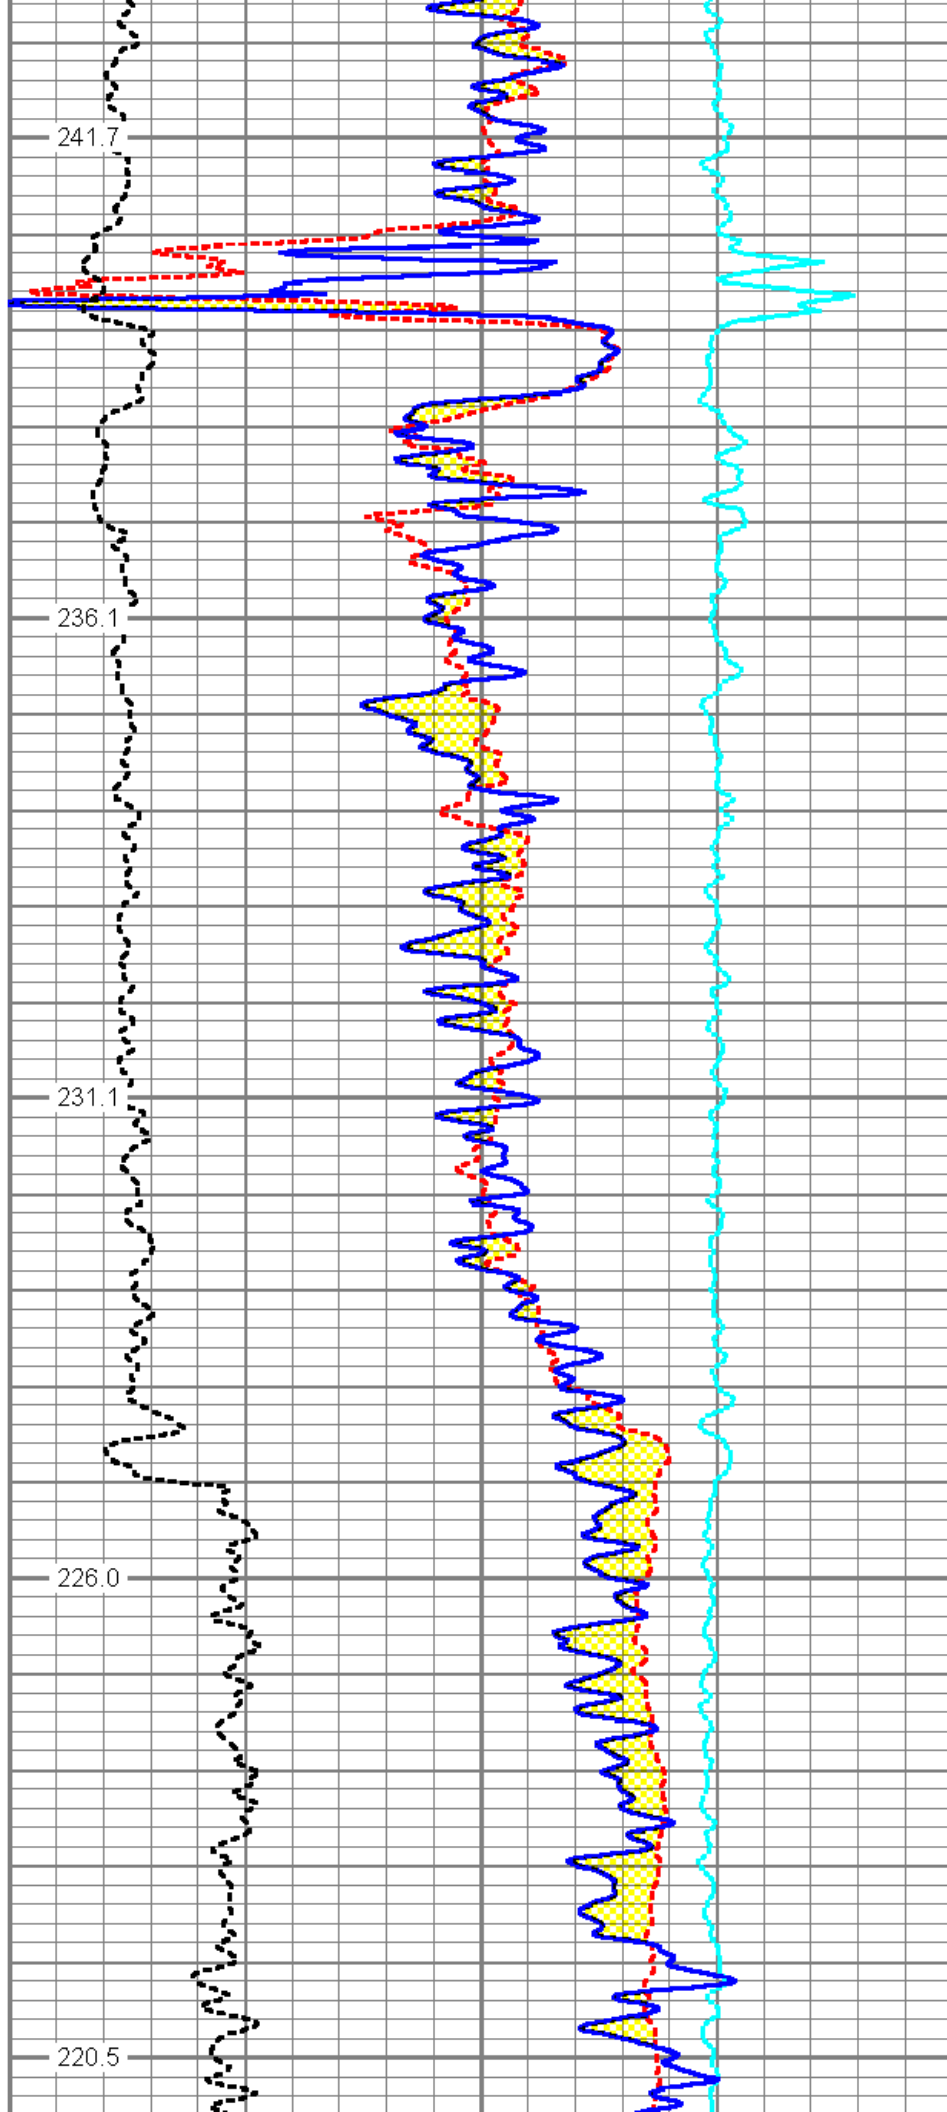

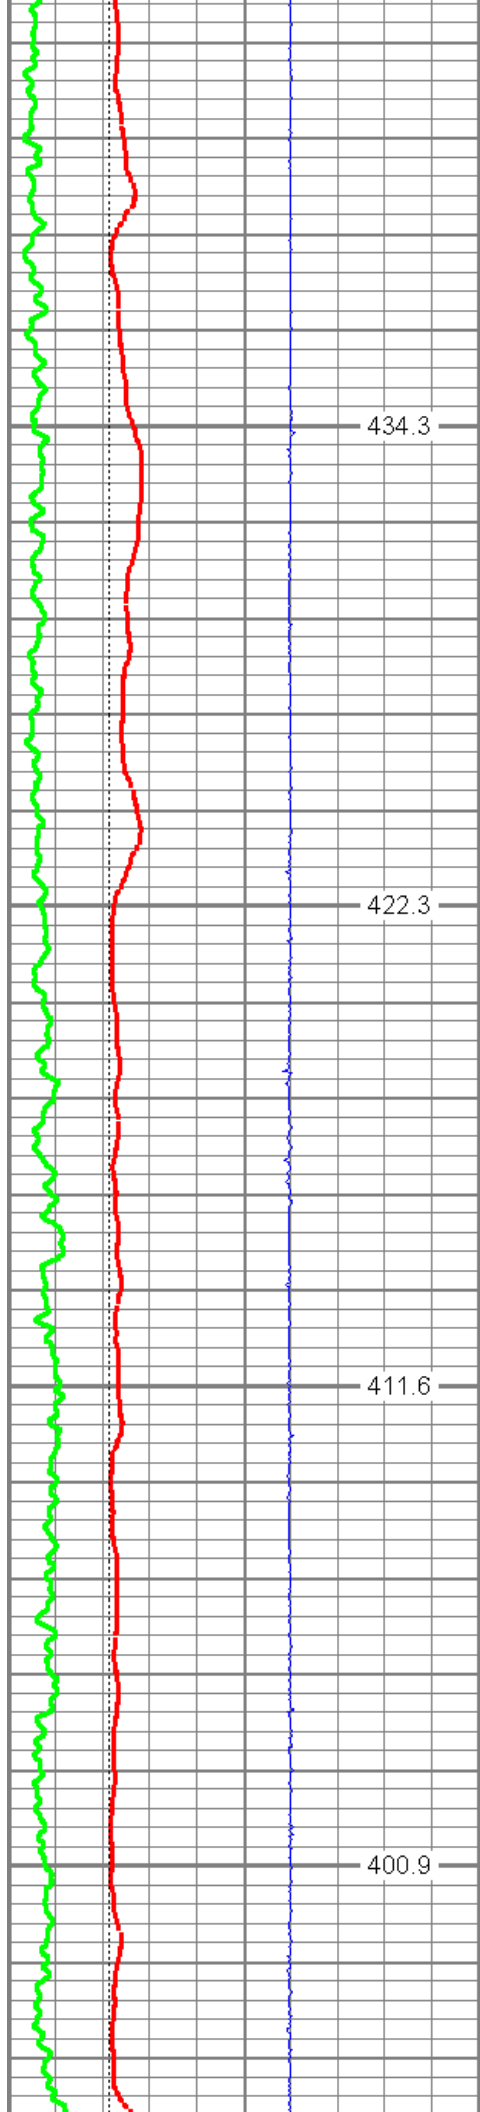


7400

7450

7500

7550

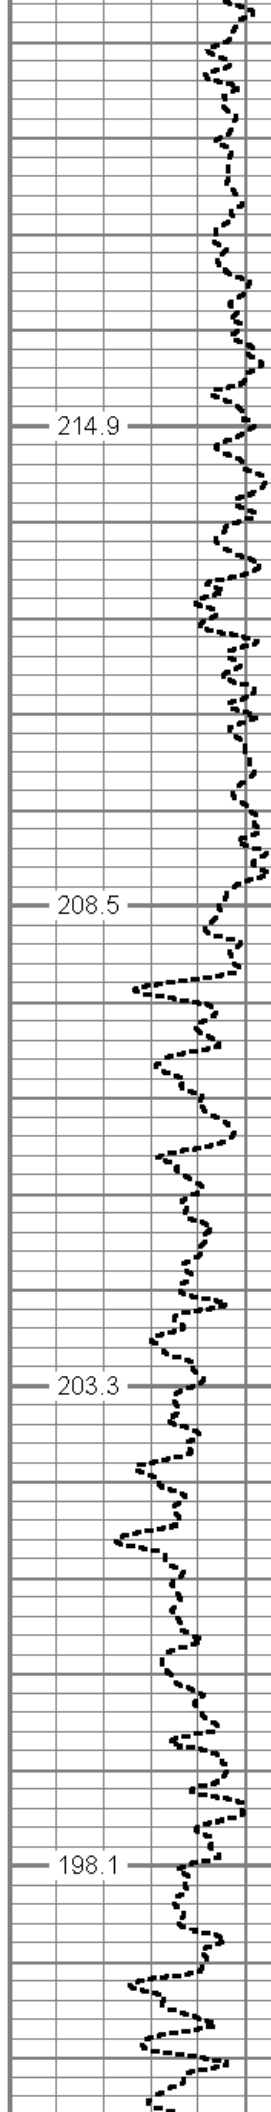




214.9


208.5

203.3


198.1

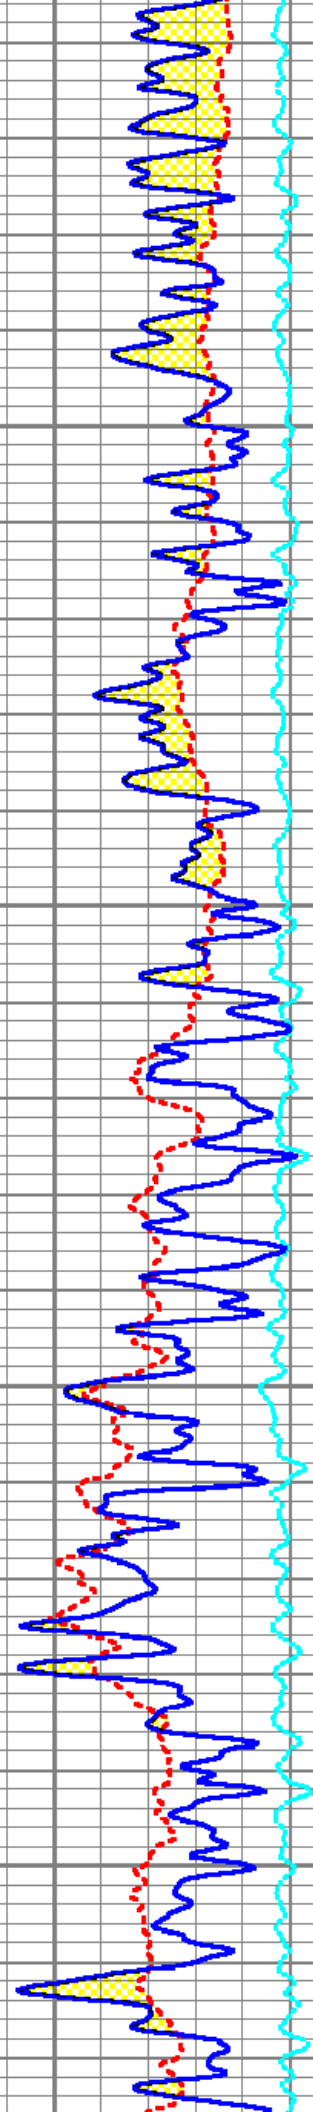


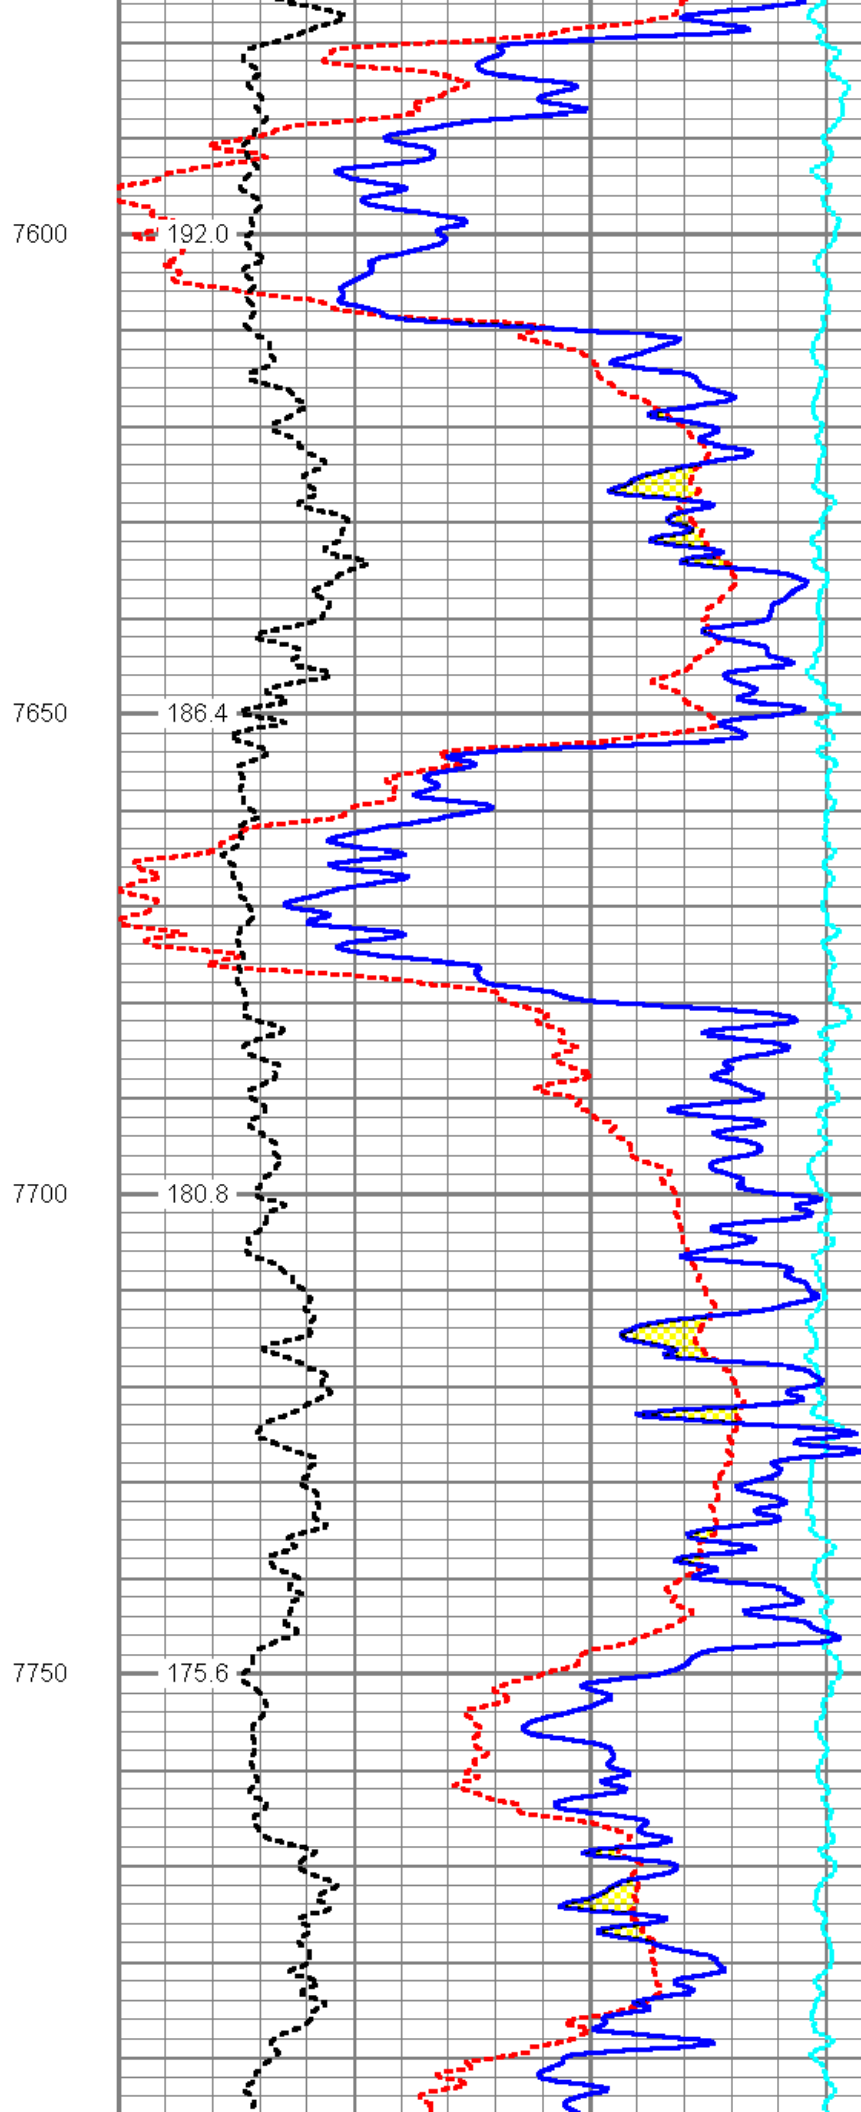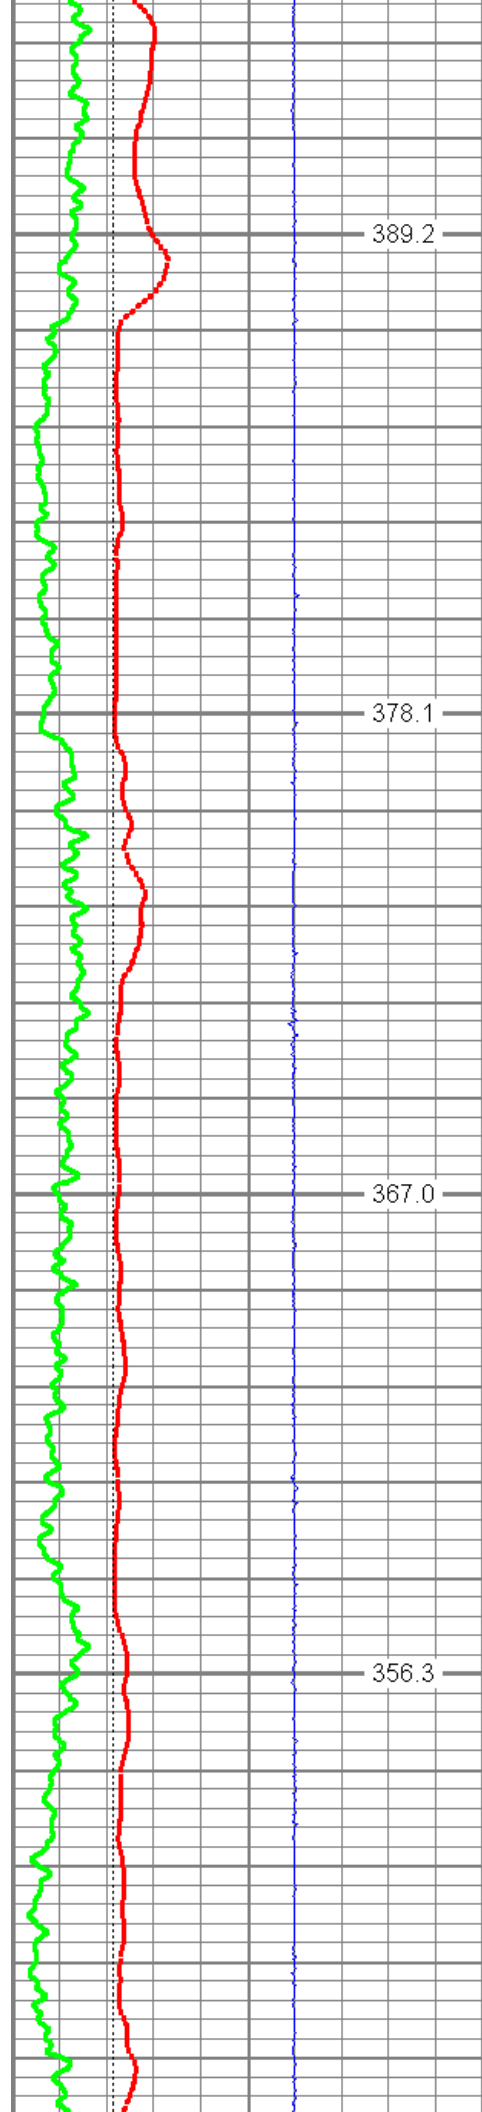



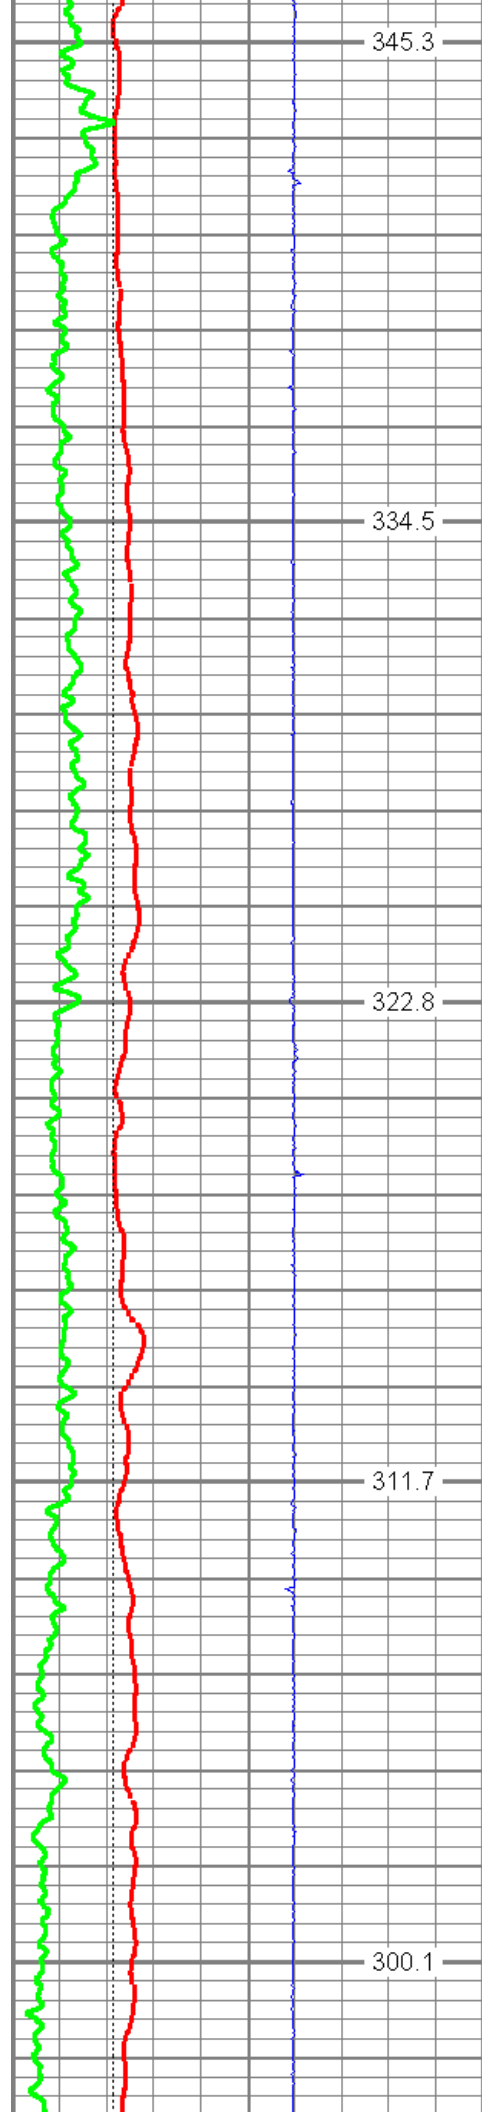



7800
7850
7900
7950
8000

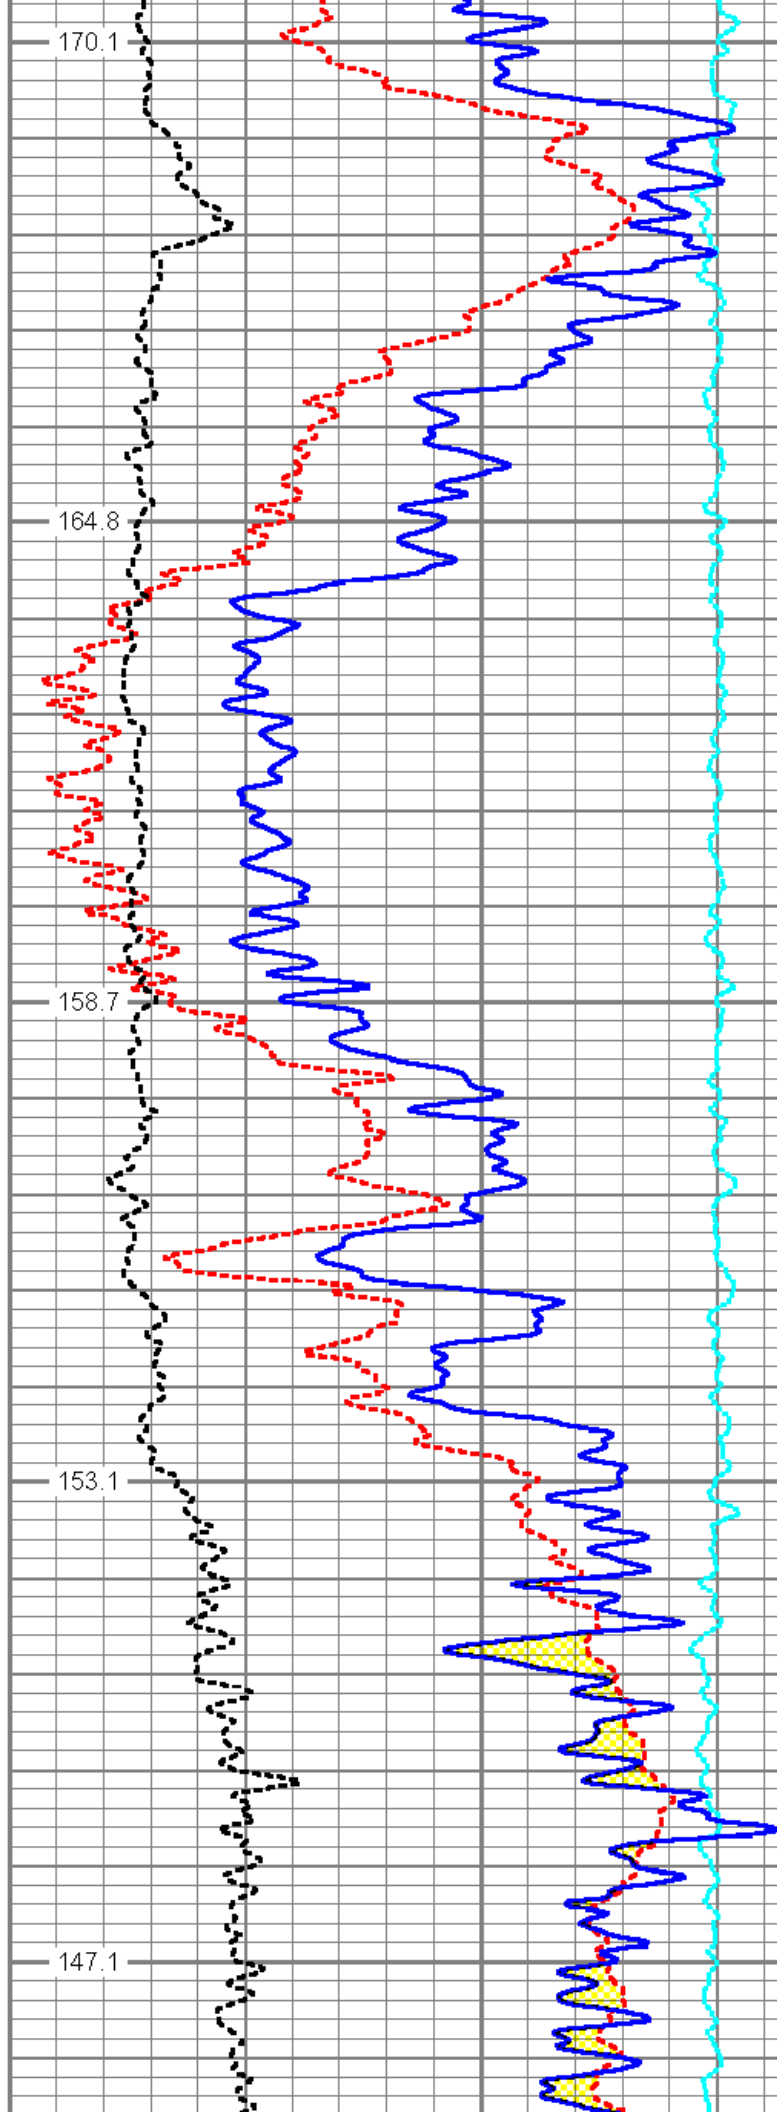

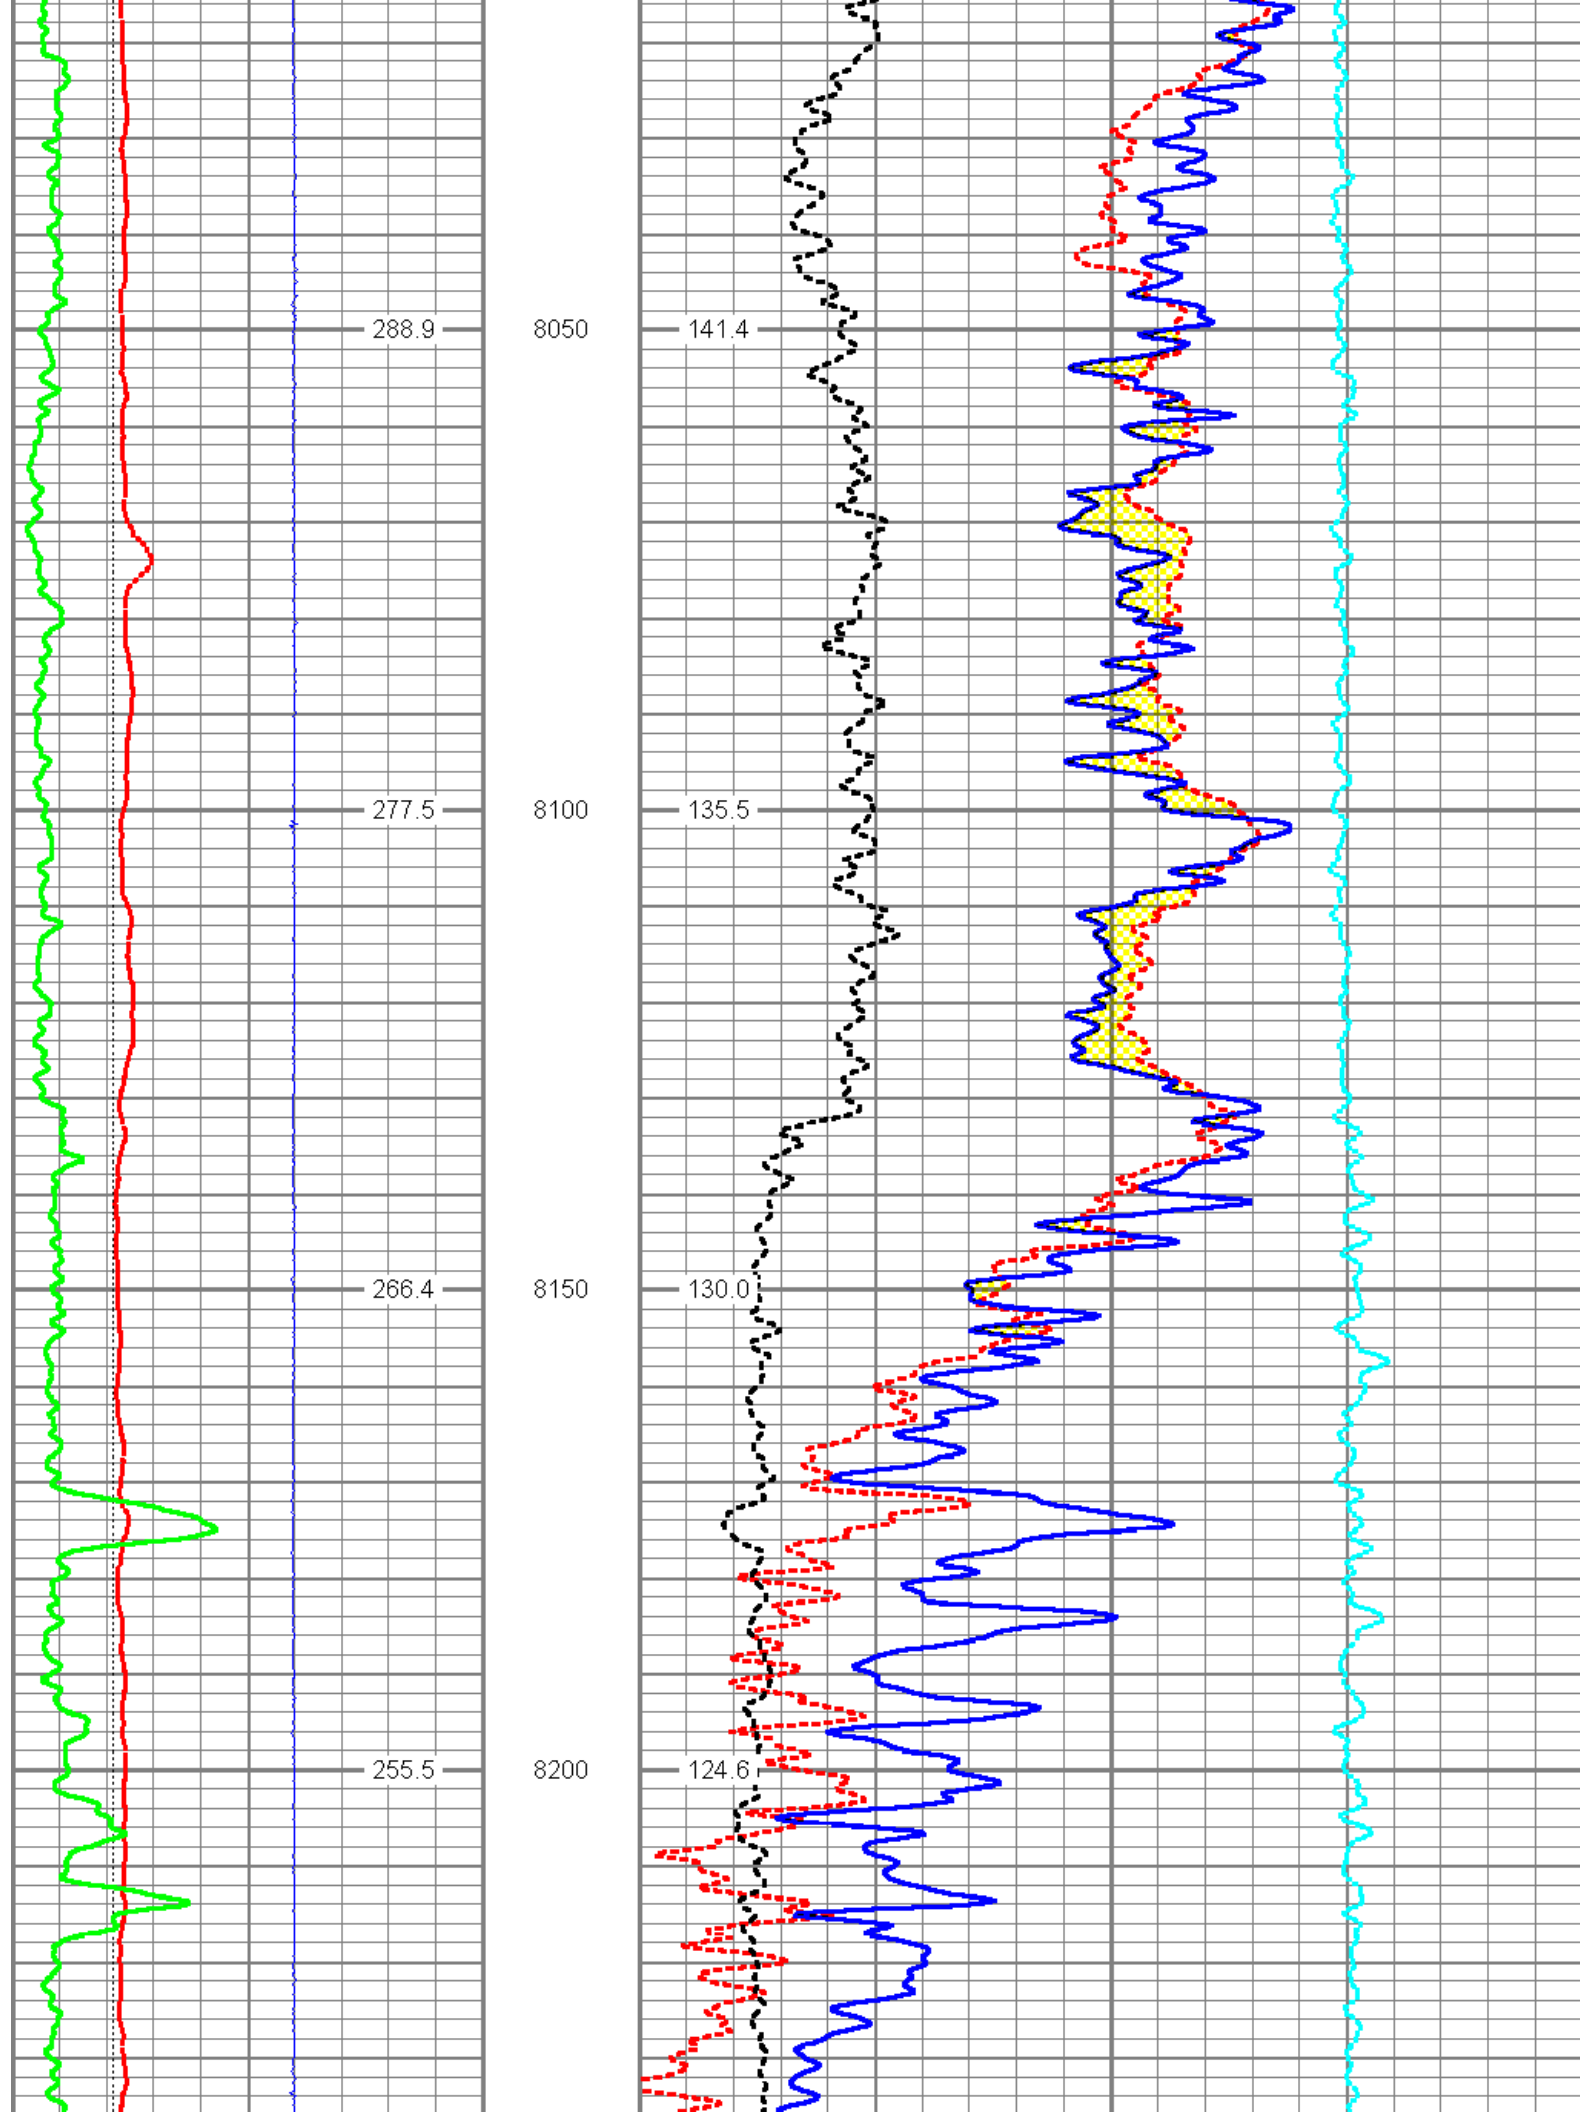

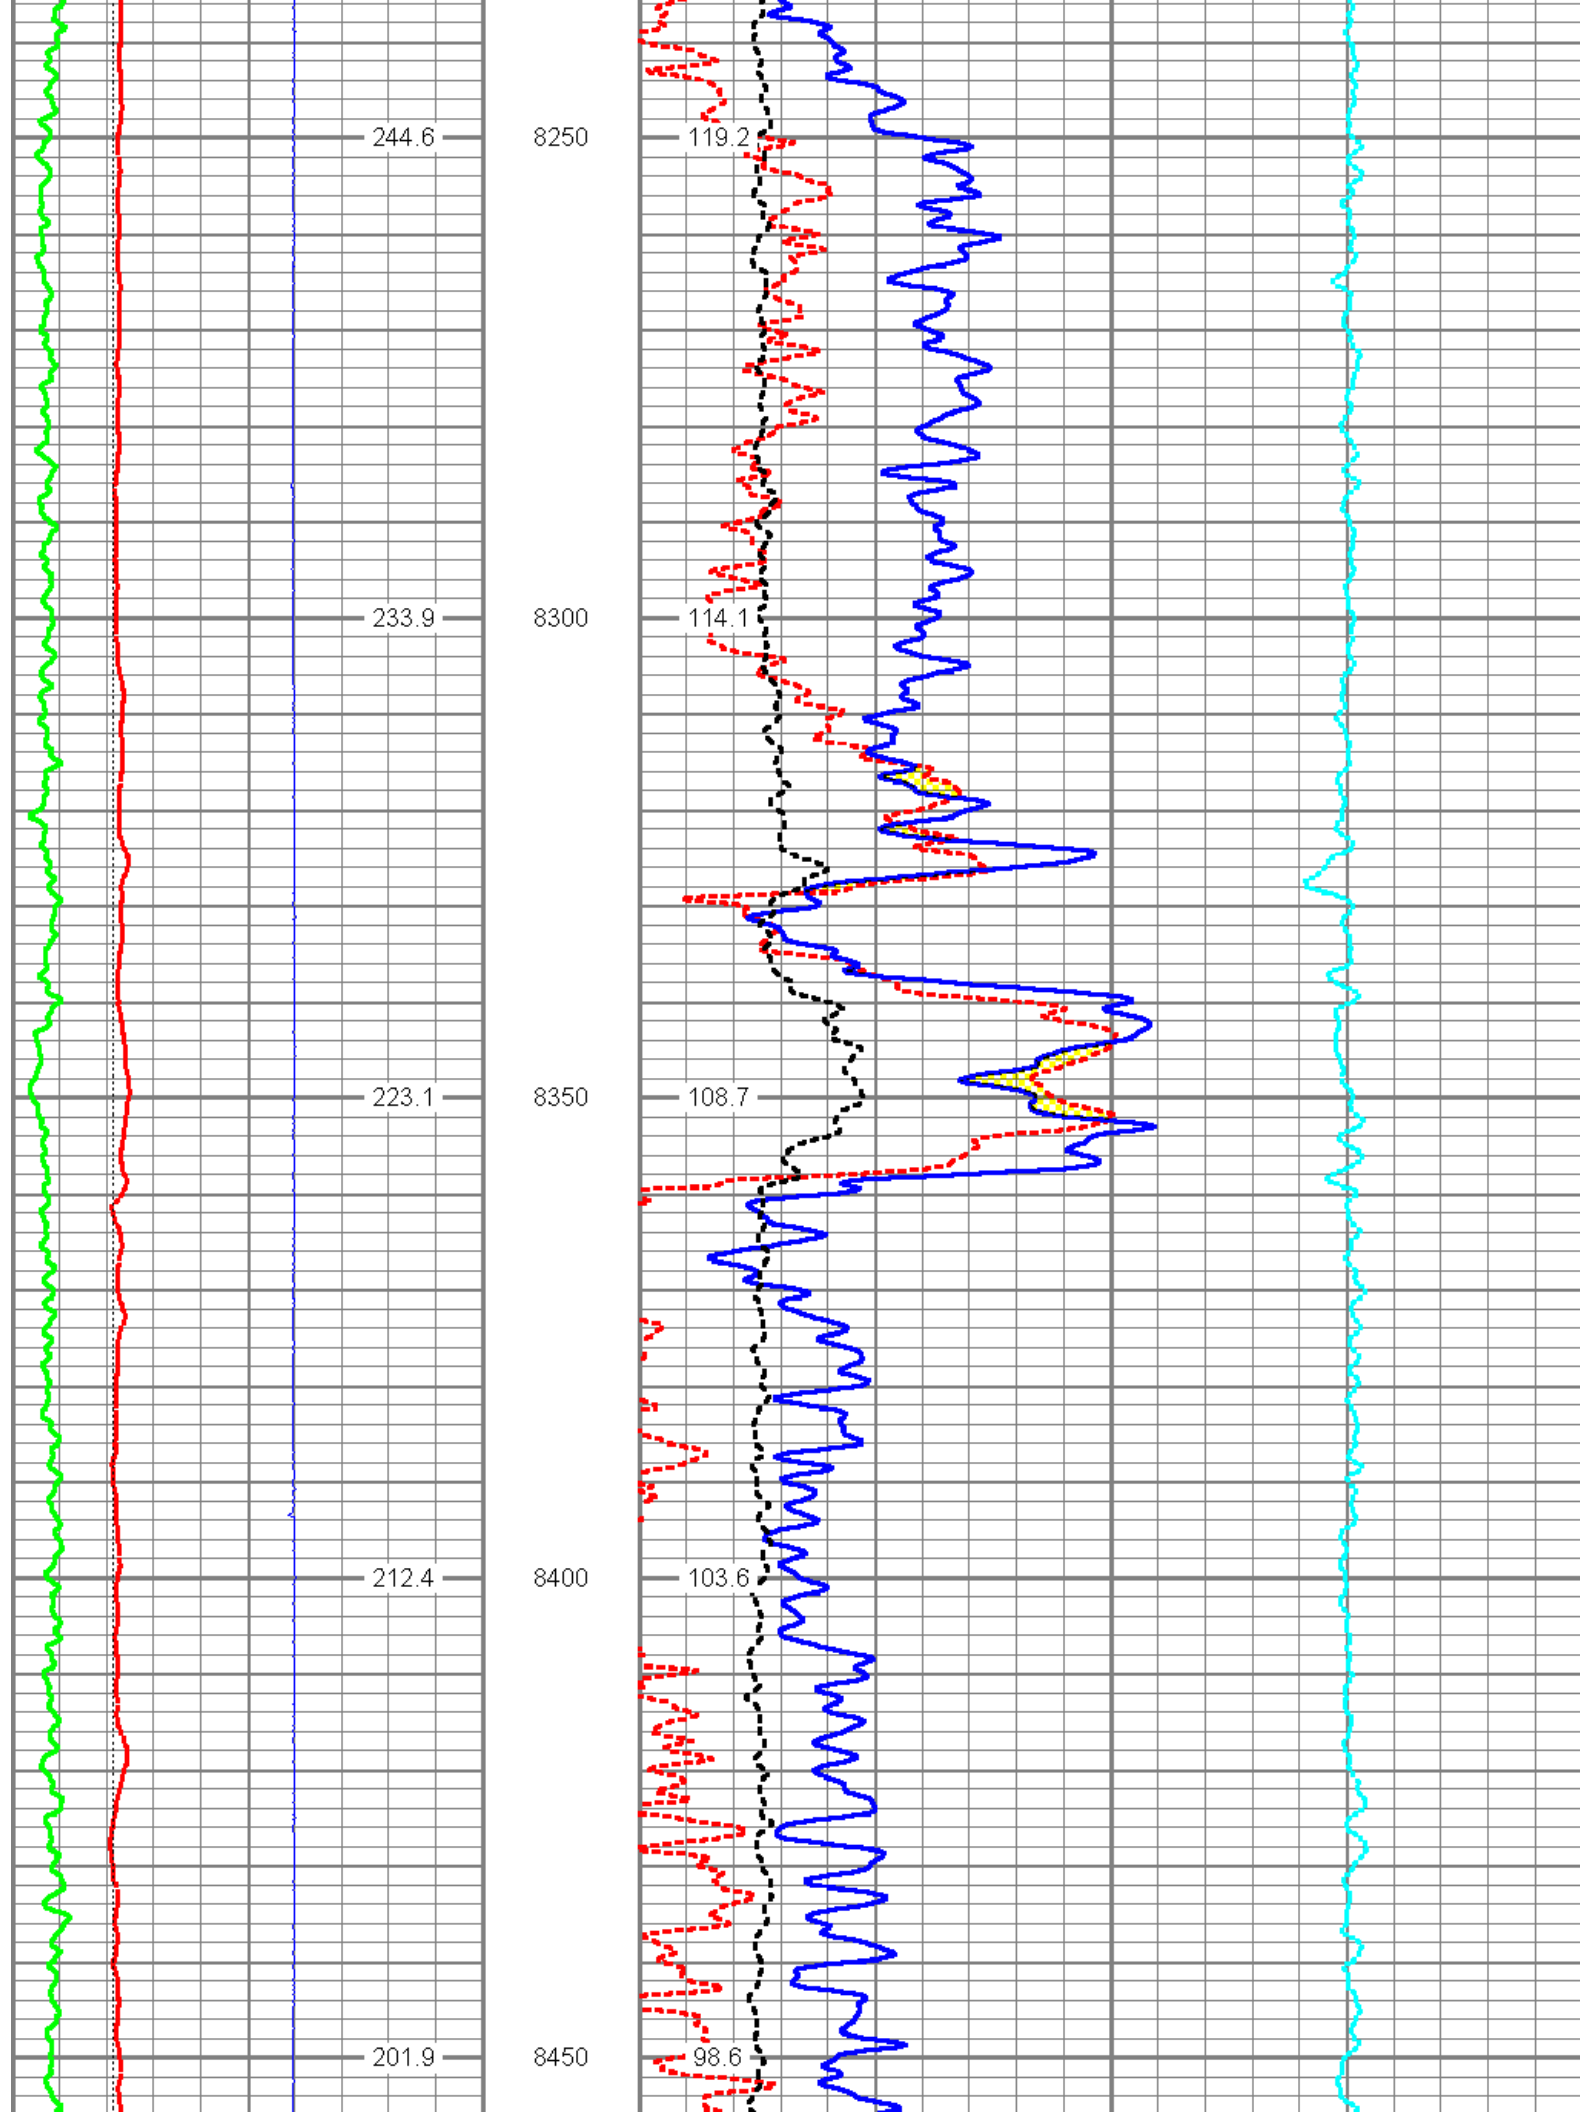

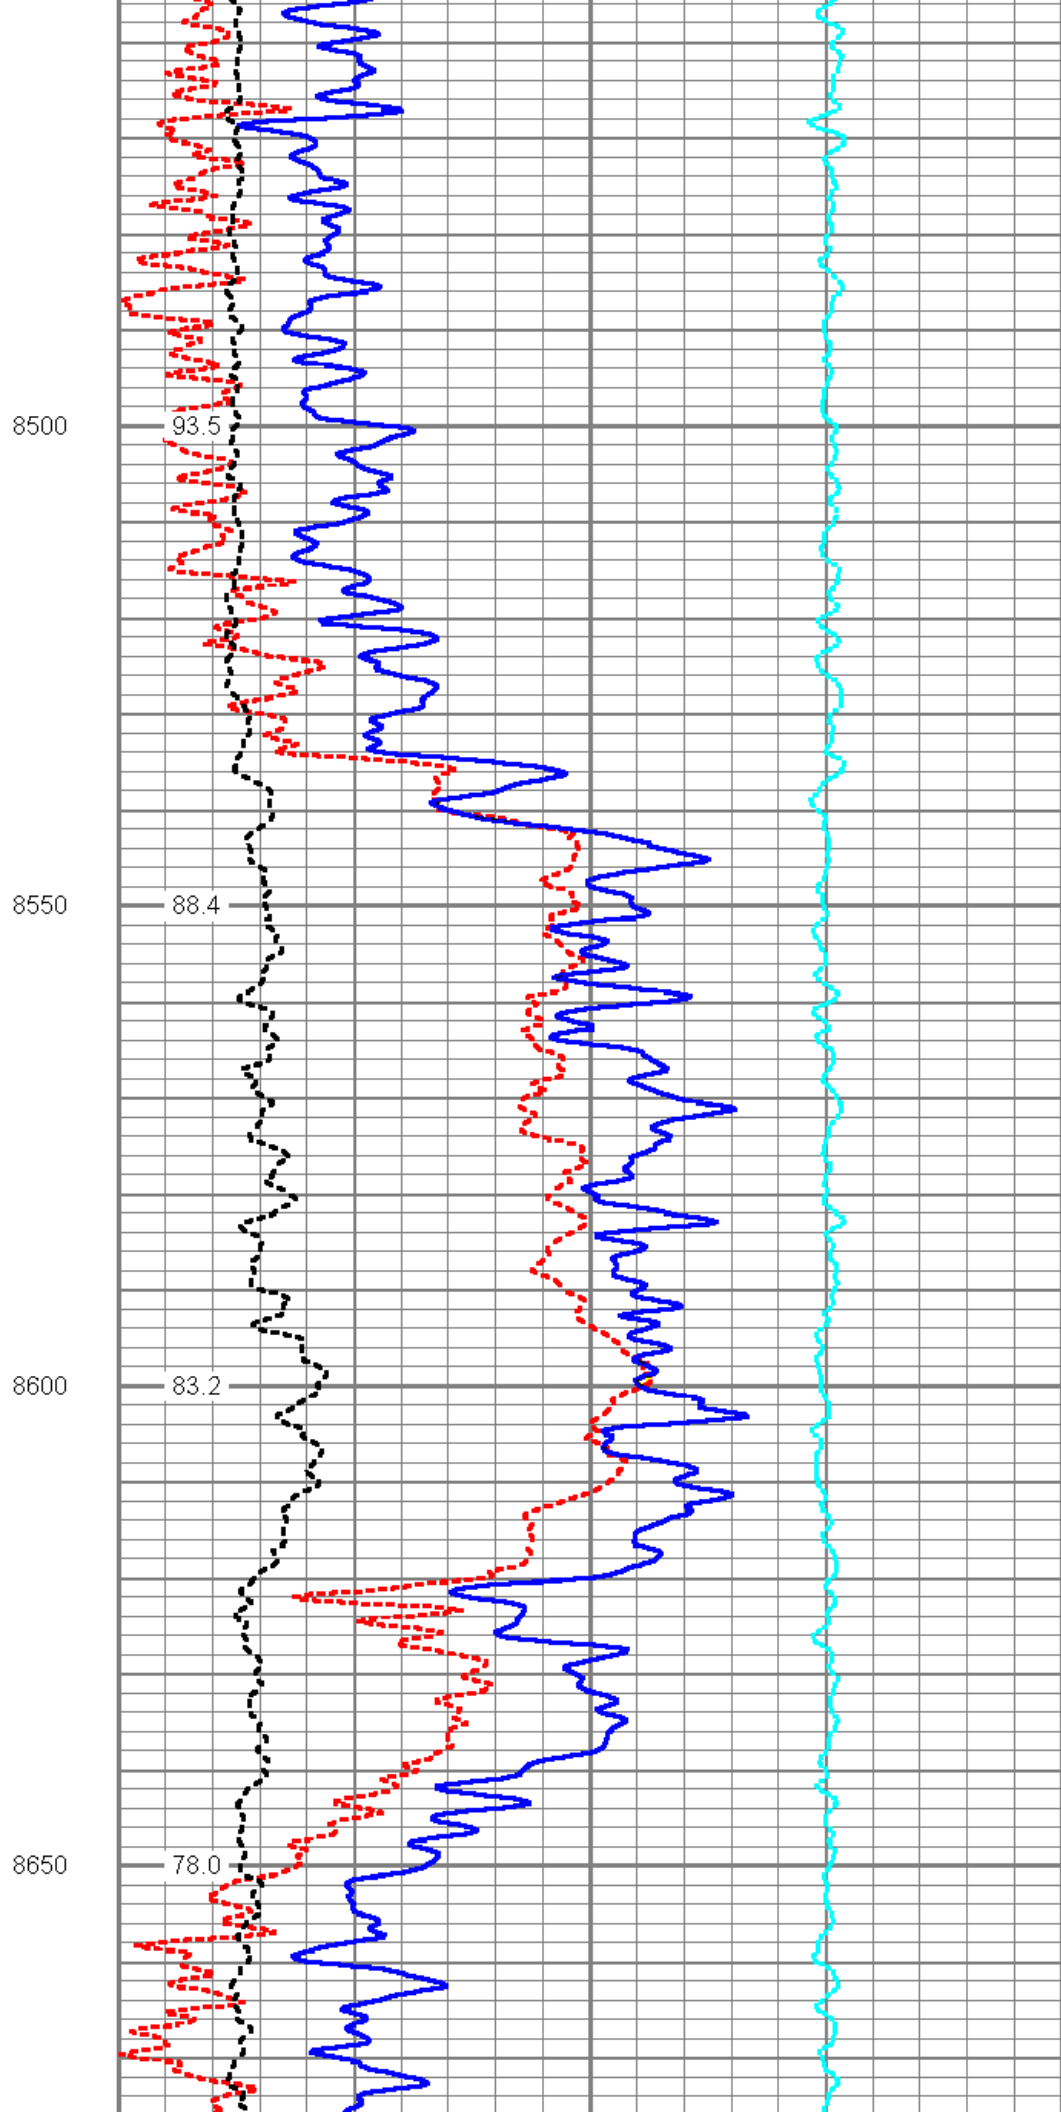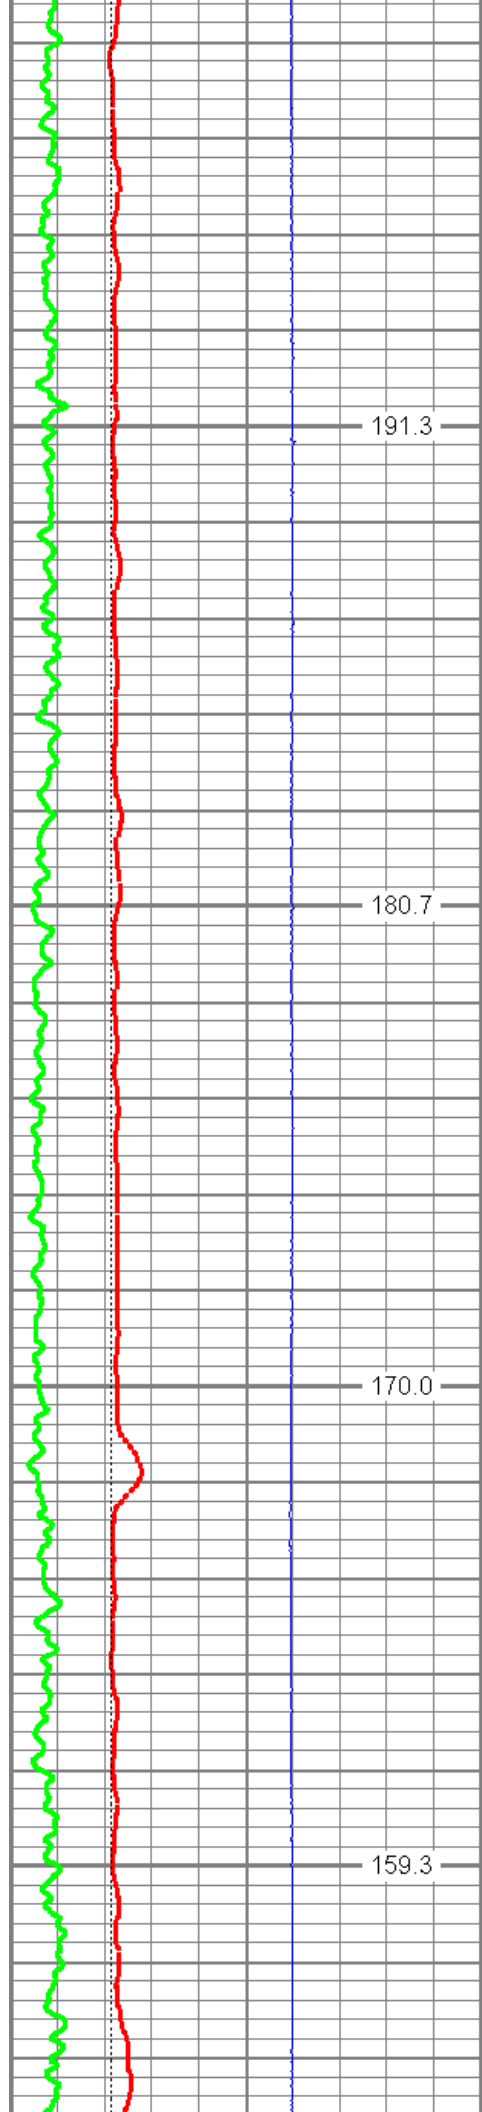

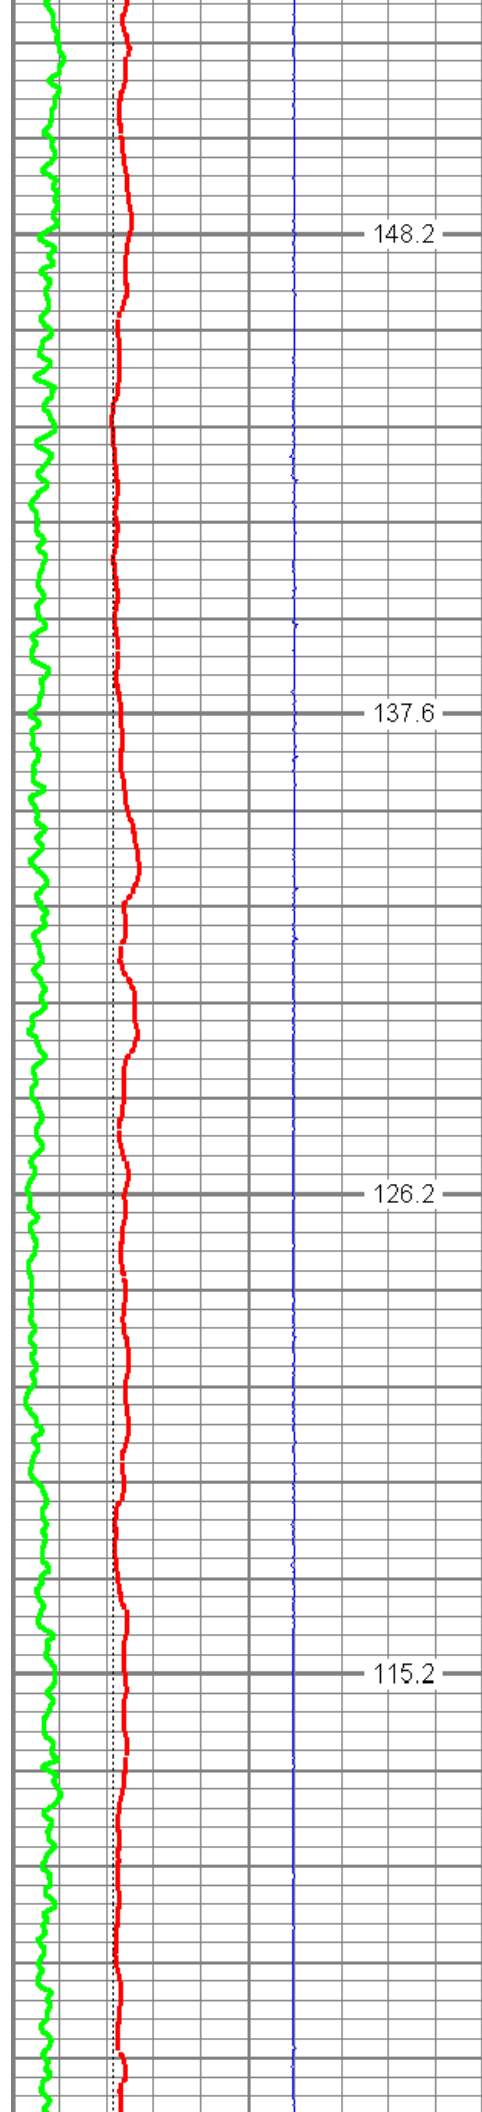



8700



8750


8800

8850

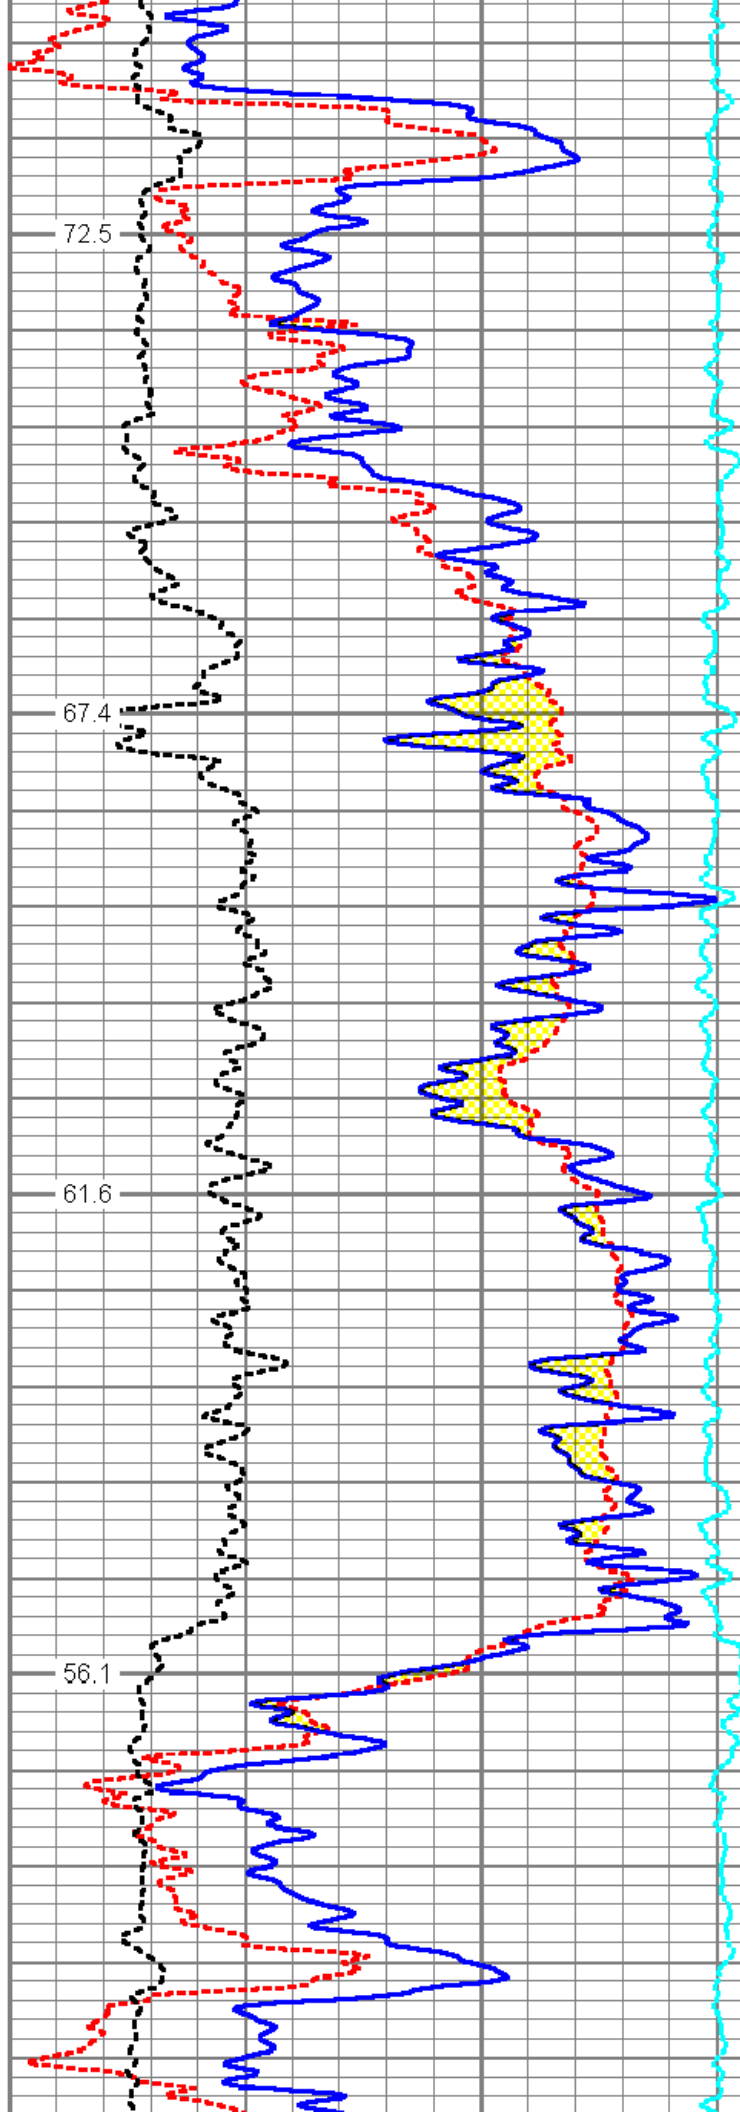

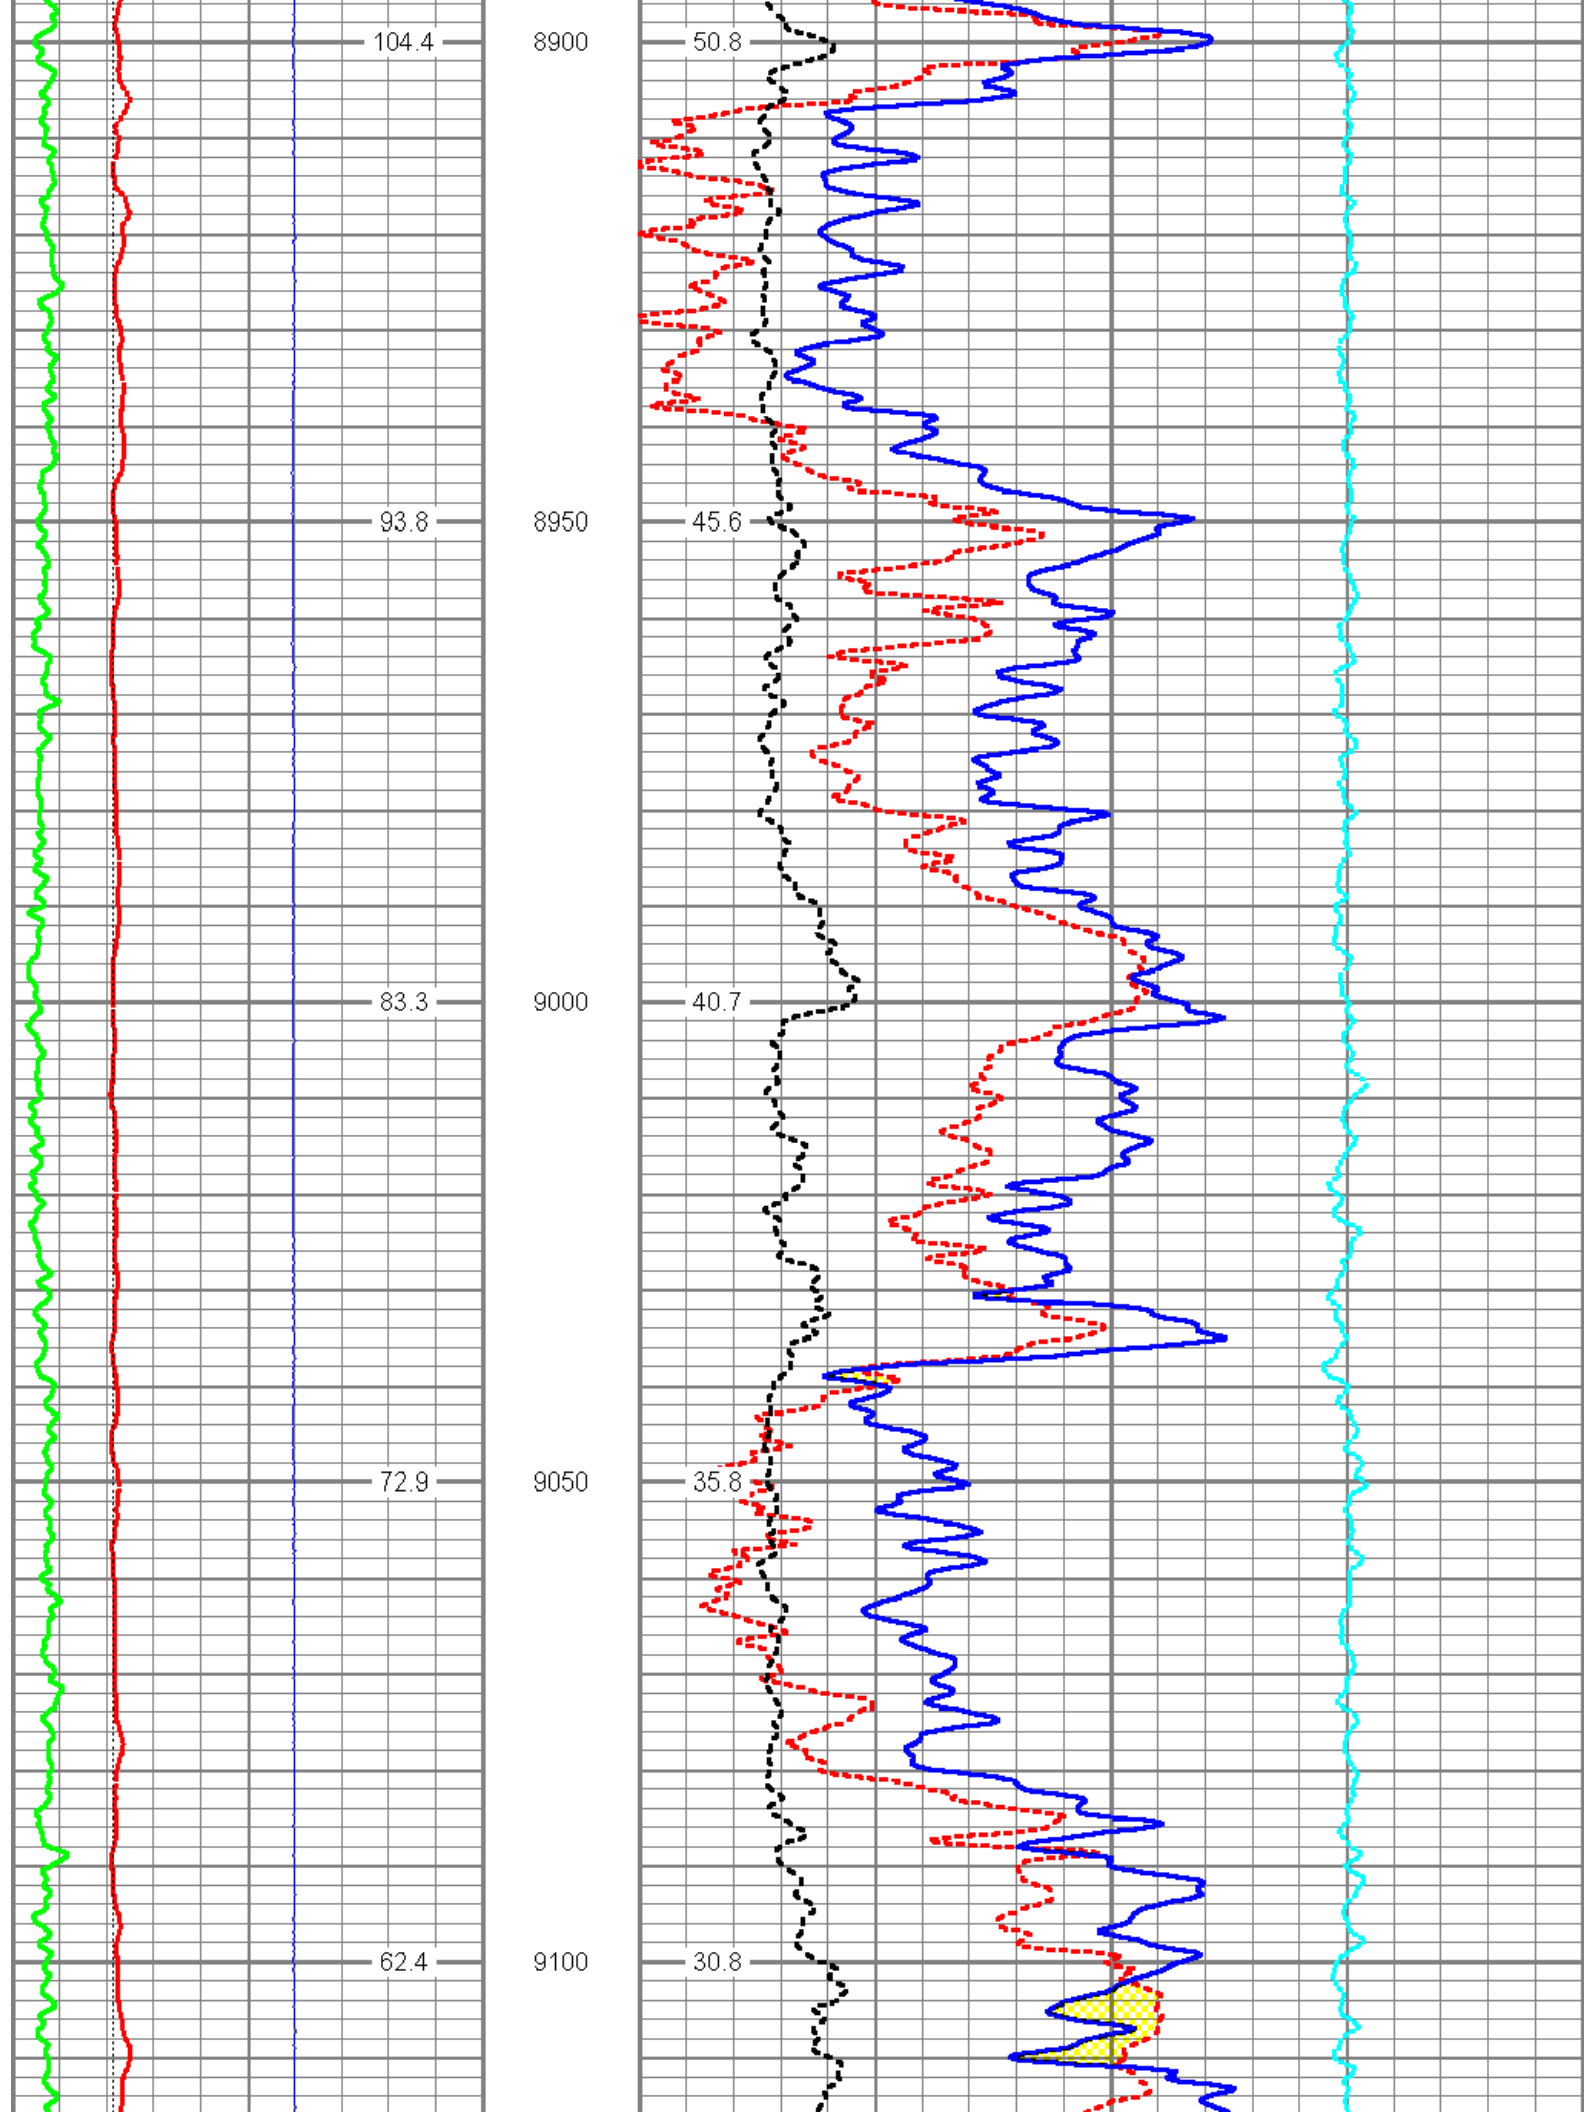

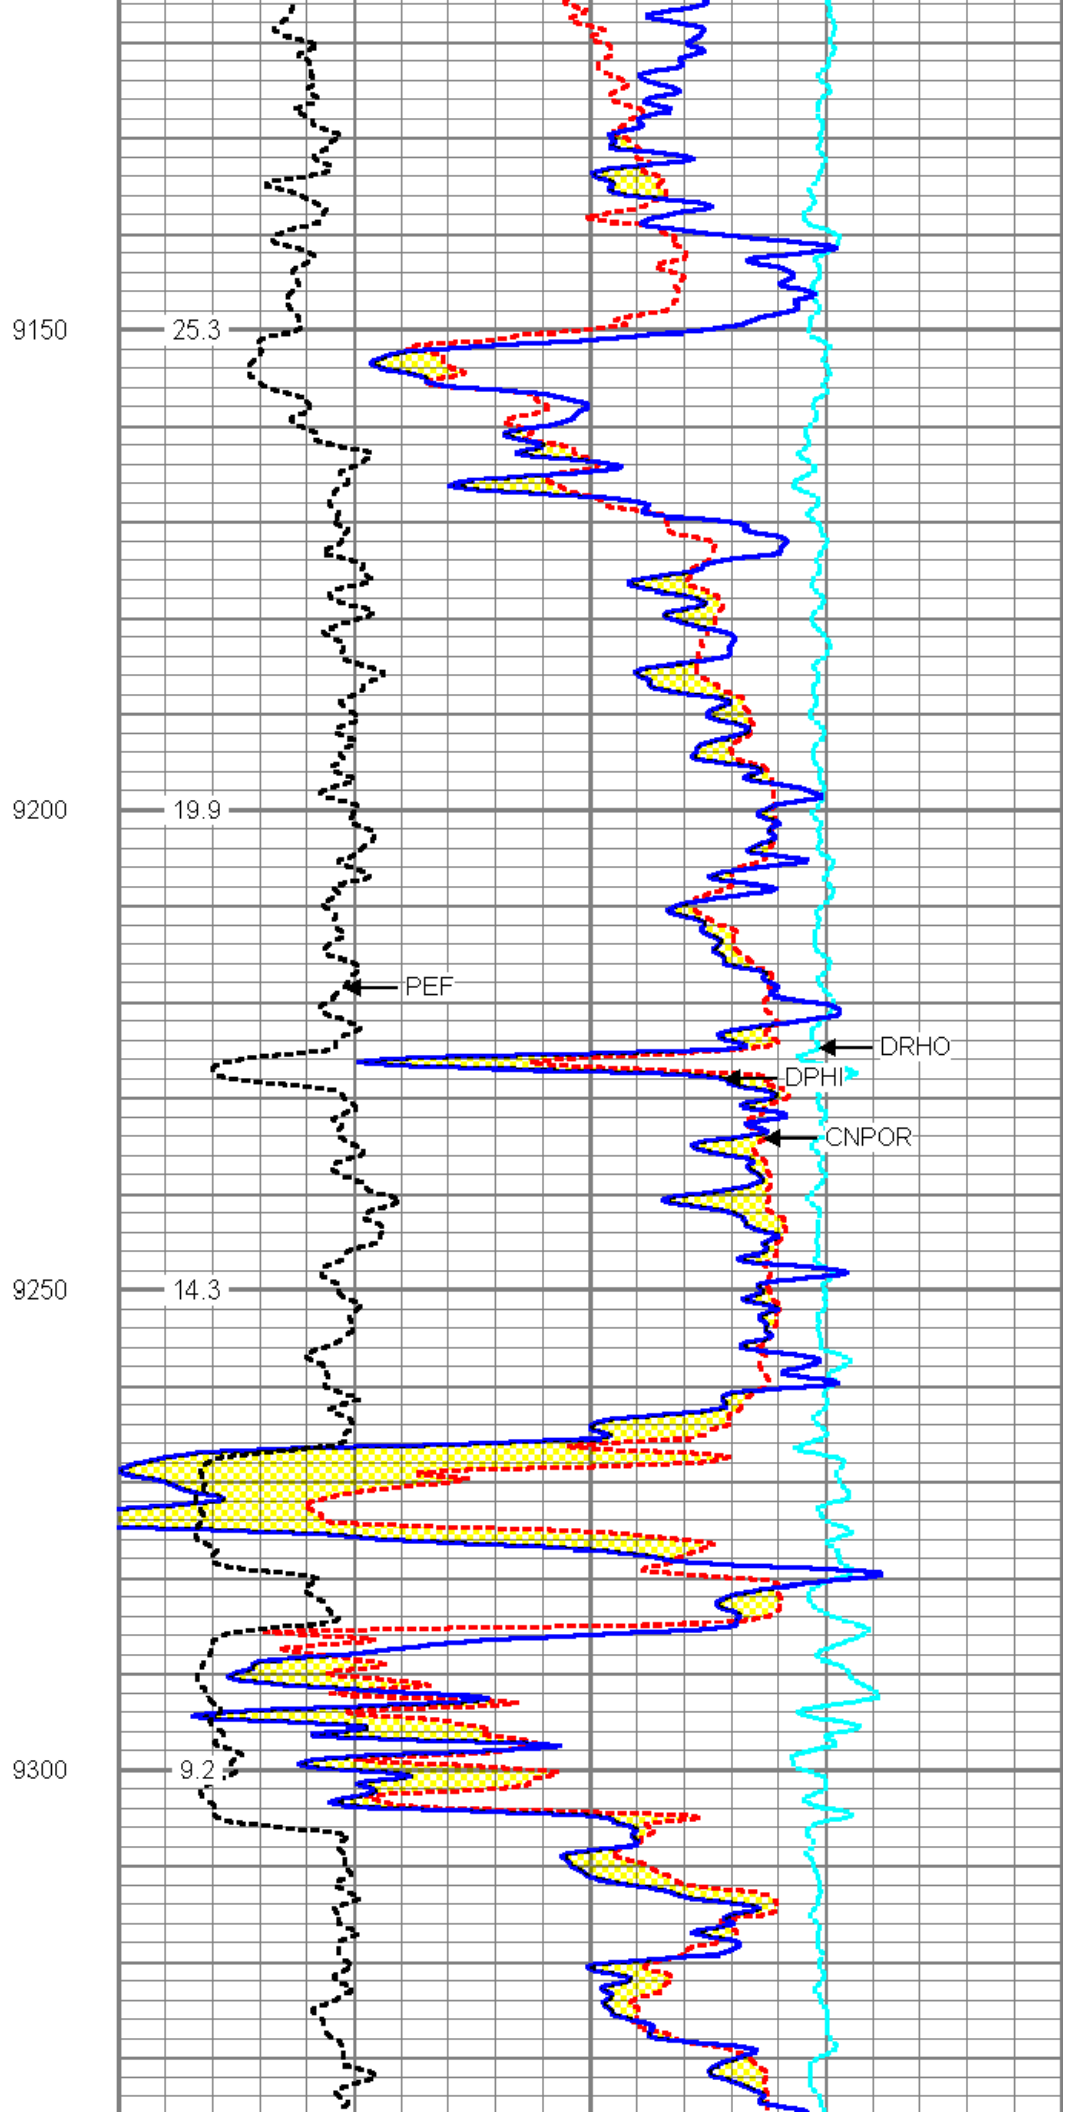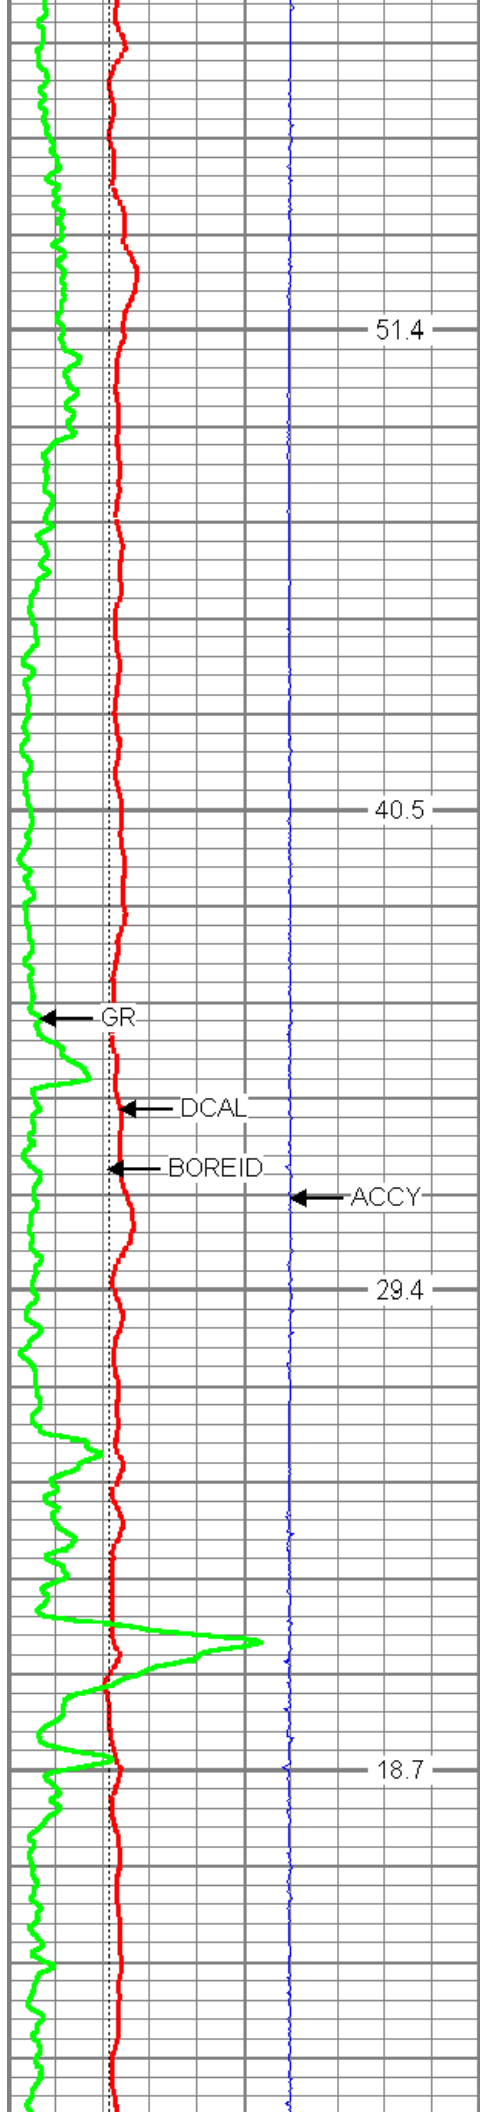

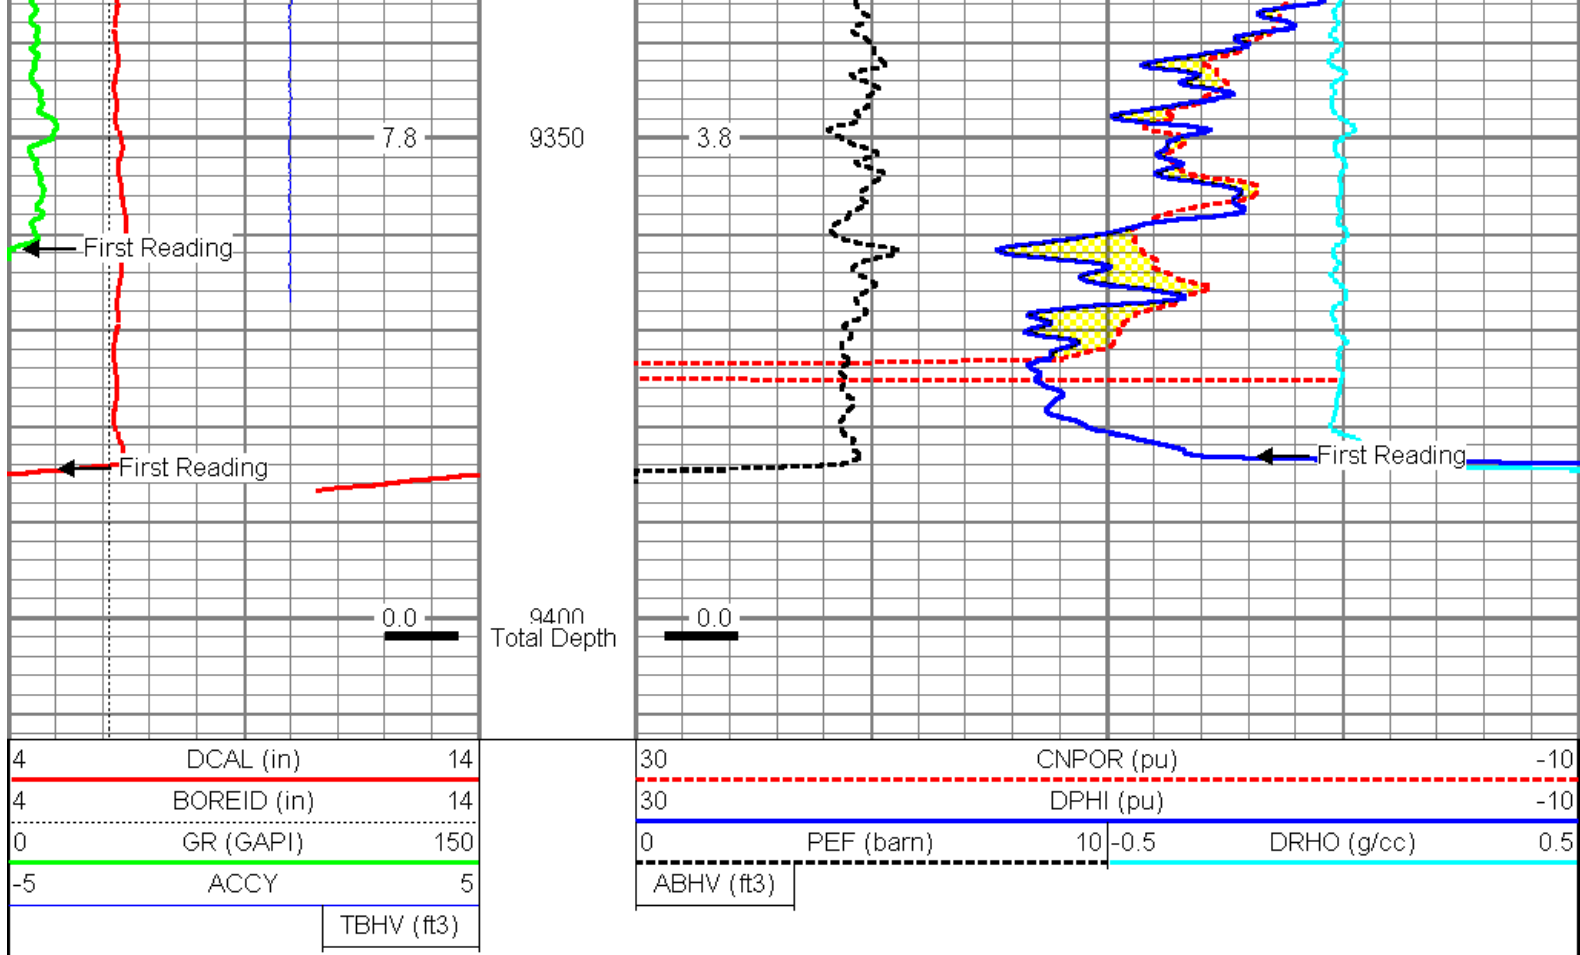

Log Variables

Database: C:\Warrior\Data\britt_3406_mem.db
Dataset: field/well/proc1/pass1.2

Top - Bottom

A	BHCOR	BHFL_TYPE	BHFLRES Ohm-m	BHFLRESSRC	BHIDSRC	BOREID in
1	On	WBM	1	MUDCELL	CURVE	6.125
BOTTEMP degF	CASED?	CASEOD in	CASETHCK in	CEMWATERSA kppm	CMNTTHCK in	DNBHC?
146	No	4.5	0	0	0	NO
DPORSEL	FLUIDDEN g/cc	FRMSALIN kppm	LATNOR	M	MATRXDEN g/cc	MUDSALIN kppm
RHOB	1	0	Off	2	2.71	0.7
MudWgt lb/gal	NPORSEL	PEBHC?	PERFS	RESTMPsrc	SO in	SRFTEMP degF
8.4	Limestone	YES	0	INTERNAL	0.5	65
SZCOR	TDEPTH ft	TMPCOR	TOOLPOS			
On	9854	On	Ec-centered			

Calibration Report

Database File: britt_3406_mem.db
Dataset Pathname: proc1/pass1.2
Dataset Creation: Sat May 11 09:05:48 2013

ThruBit Induction Calibration Report

Tool Model-Serial Number:

PS-PS37R

Shop Calibration Performed:

Sat Feb 23 12:25:05 2013

BASELINE

	R	Expected	X	Expected
Freq 1				
A1	-478.2170	[-500.00, -400.00]	53.1167	[-500.00, 500.00]
A2	-140.7820	[-180.00, -100.00]	263.3160	[-500.00, 500.00]
A3	-25.2355	[-50.00, -10.00]	3.3103	[-500.00, 500.00]
A4	-16.0787	[-30.00, -10.00]	240.7340	[-500.00, 500.00]
A5	-14.0904	[-30.00, -10.00]	104.5580	[-500.00, 500.00]
Freq 2				
A1	-253.2780	[-280.00, -180.00]	8.1059	[-500.00, 500.00]
A2	-92.0251	[-130.00, -50.00]	144.8910	[-500.00, 500.00]
A3	-19.0677	[-50.00, -10.00]	-47.9515	[-500.00, 500.00]
A4	-19.3550	[-30.00, -10.00]	72.6618	[-500.00, 500.00]
A5	-19.0670	[-30.00, -10.00]	-27.1174	[-500.00, 500.00]
Freq 3				
A1	-162.6440	[-180.00, -80.00]	-61.6214	[-500.00, 500.00]
A2	-70.7103	[-130.00, -30.00]	66.5266	[-500.00, 500.00]
A3	-16.1486	[-50.00, -10.00]	-91.5960	[-500.00, 500.00]
A4	-21.1889	[-30.00, -10.00]	-39.3850	[-500.00, 500.00]
A5	-21.8800	[-30.00, -10.00]	-125.6060	[-500.00, 500.00]
Freq 4				
A1	-89.7805	[-120.00, -40.00]	-191.1890	[-500.00, 500.00]
A2	-51.8709	[-110.00, -10.00]	-40.1440	[-500.00, 500.00]
A3	-13.1275	[-50.00, -10.00]	-165.4590	[-500.00, 500.00]
A4	-24.6670	[-30.00, -10.00]	-205.4510	[-500.00, 500.00]
A5	-27.9730	[-30.00, -10.00]	-293.1350	[-500.00, 500.00]

CALIBRATION COEFFICIENTS

	R	Expected	X	Expected
Freq 1				
A1	0.9990	[0.95, 1.05]	0.0023	[-0.05, 0.05]
A2	0.9942	[0.95, 1.05]	0.0025	[-0.05, 0.05]
A3	1.0032	[0.95, 1.05]	-0.0051	[-0.05, 0.05]
A4	0.9917	[0.95, 1.05]	0.0050	[-0.05, 0.05]
A5	0.9990	[0.95, 1.05]	0.0011	[-0.05, 0.05]
Freq 2				
A1	0.9934	[0.95, 1.05]	-0.0070	[-0.05, 0.05]
A2	0.9883	[0.95, 1.05]	-0.0062	[-0.05, 0.05]
A3	0.9911	[0.95, 1.05]	-0.0066	[-0.05, 0.05]
A4	0.9858	[0.95, 1.05]	-0.0035	[-0.05, 0.05]
A5	0.9928	[0.95, 1.05]	-0.0083	[-0.05, 0.05]
Freq 3				
A1	1.0024	[0.95, 1.05]	-0.0036	[-0.05, 0.05]
A2	0.9976	[0.95, 1.05]	-0.0028	[-0.05, 0.05]
A3	1.0007	[0.95, 1.05]	-0.0036	[-0.05, 0.05]
A4	0.9930	[0.95, 1.05]	-0.0001	[-0.05, 0.05]
A5	1.0065	[0.95, 1.05]	-0.0053	[-0.05, 0.05]
Freq 4				
A1	0.9939	[0.95, 1.05]	0.0150	[-0.05, 0.05]
A2	0.9882	[0.95, 1.05]	0.0160	[-0.05, 0.05]
A3	0.9941	[0.95, 1.05]	0.0131	[-0.05, 0.05]
A4	0.9809	[0.95, 1.05]	0.0190	[-0.05, 0.05]
A5	1.0082	[0.95, 1.05]	0.0106	[-0.05, 0.05]



Temperature 35.0032 degC

ThruBit Density Calibration Report			
Tool Model-Serial Number:		PS-PS36D	
Source Number:			
Shop Calibration Performed:		Mon Apr 22 12:49:09 2013	
REFERENCE			
	Density	Units	
Aluminium	2.607	g/cc	
Magnesium	1.752	g/cc	
READINGS			
Outputs	Counts	Units	Expected
SS1 Background	131.35	cps	[130.00, 170.00]
LS1 Background	130.18	cps	[130.00, 170.00]
LS4 Background	28.18	cps	[27.00, 35.00]
SS1 Aluminium	4710.41	cps	[4500.00, 5500.00]
LS1 Aluminium	789.06	cps	[750.00, 950.00]
LS4 Aluminium	926.00	cps	[843.00, 1068.00]
SS1 Magnesium	7842.95	cps	[7000.00, 9000.00]
LS1 Magnesium	5297.41	cps	[5250.00, 6250.00]
LS1 Al + Fe	648.43	cps	[650.00, 800.00]
LS4 Al + Fe	401.80	cps	[382.00, 471.00]
RESULTS			
SS Slope	1.64		[1.52, 1.77]
LS Slope	0.42		[0.38, 0.45]
PEF K Factor	5.148		[3.510, 6.170]
PEF B Factor	-0.579		[-0.700, -0.410]
RESULTS			
Caliper Shop Calibration performed:		Mon Apr 22 12:49:09 2013	
Reference	Reading	Units	
12.00	1861.49	in	
9.00	2021.15	in	
6.00	2189.87	in	
DENSITY PRE-SURVEY CHECK Performed:			
		Mon Apr 29 09:24:45 2013	
Outputs	Counts	Units	Expected
SS1 Background	132.71	cps	[127.41, 135.29]
LS1 Background	128.81	cps	[126.28, 134.09]
LS4 Background	26.57	cps	[26.49, 29.87]
CALIPER PRE-SURVEY CHECK Performed:			
		Mon Apr 29 09:22:26 2013	
Reference	Readings	Units	Expected
6.00	6.05	in	[5.80, 6.20]

Compensated Neutron Calibration Report				
Tool Model-Serial Number:		PS-PS01N		
Source Number:				
Calibration Tank Temperature:		68.9 degF		
Shop Calibration Performed:		Wed Apr 10 16:24:15 2013		
BACKGROUND MEASUREMENT				
Outputs	Measured	Units	Expected	
SS Counts	0.0	cps	<10	
LS Counts	0.0	cps	<4	
WATER TANK REFERENCE				
Outputs	Measured	Units	Expected	
SS Counts	3909.6	cps		
LS Counts	129.6	cps		
Tank Ratio Ref	30.9580	SS/LS		
Tank Ratio	30.1708	SS/LS		
Tank Ratio Gain	1.0261		[0.85, 1.15]	
ALUMINUM SLEEVE REFERENCE				
Outputs	Measured	Units	Expected	
SS Counts	45408.1	cps		
LS Counts	4225.6	cps		
Al Ratio Ref	10.797	SS/LS		
Al Ratio	11.026	SS/LS		
Al Ratio Gain	0.98		[0.90, 1.10]	
Sleeve Porosity	14.46	pu		
PRE-SURVEY BACKGROUND CHECK Performed:				
Mon Apr 29 09:29:12 2013				
Outputs	Measured	Units	Expected	
SS Counts	0.0	cps	<10	
LS Counts	0.1	cps	<4	
Gamma Ray Calibration Report				
Tool Model-Serial Number:		PS-PS30T		
Performed:		Tue Apr 16 11:51:38 2013		
Calibrator Value:		1.0	GAPI	
Background Reading:		0.0	cps	
Calibrator Reading:		1.0	cps	
Sensitivity:		0.3750	GAPI/cps	

Performed:	Sun Jun 13 14:33:21 1993				
	Low Read.	High Read.	Low Ref.	High Ref.	
X Accelerometer	0.00	1.00	0.00	1.00	gee
Y Accelerometer	0.00	1.00	0.00	1.00	gee
Z Accelerometer	0.00	1.00	0.00	1.00	gee

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
Thrubit	65.47		Cablehead-S Solid Weakpoint	2.31	2.13	5.00
Thrubit	63.16		PSBDOT	3.87	2.25	35.00
Thrubit	59.29		HangOff_Tool	5.00	2.38	60.00
Thrubit	54.29		10-1	0.88	2.13	3.95
TBBAT	53.42		TBBAT-A (PS37B) Thrubit Battery	6.13	2.13	38.20
TBBAT2	47.29		TBBAT2-A (PS36B) Thrubit Battery	6.13	2.13	40.00
TMG GR GRTEMP	41.16 41.04 40.20		TMG-PS (PS30T) ThruBit Telemetry Gamma Ray	6.13	2.13	45.00
Thrubit	35.04		Decentralizer Decentralizer (Small)	4.50	2.13	70.00
CNLSC	28.60		TBN-PS (PS01N) ThruBit Neutron	4.77	2.13	63.00
LSW1 DCAL	18.04 17.13		TBD-PS (PS36D) Thrubit Density	10.48	2.13	91.00
A1-D	10.60					

A1_P	10.00			TBI-PS (PS37R) ThruBit Induction	15.29	2.13	94.00
A2_P	10.10						
A3_P	9.35						
A4_P	8.35						
A5_P	6.60						
Dataset:		britt_3406_mem.db: field/well/proc1/pass1.2					
Total Length:		65.47 ft					
Total Weight:		545.15 lb					
O.D.		2.38 in					

	Company	SANDRIDGE ENERGY
	Well	BRITT 3406 4-20H
	Field	EASTHAM
	County	HARPER
	State	KANSAS