



**Weatherford**<sup>®</sup>

**CML MESSENGER SHUTTLE  
CALIPER LOG**

COMPANY **SANDRIDGE ENERGY**  
 WELL **SALLY 3420 2-12H**  
 FIELD **COMANCHE PROSPECT**  
 PROVINCE/COUNTY **COMANCHE**  
 COUNTRY/STATE **USA / KANSAS**  
 LOCATION **200' FNL & 2200' FWL**  
**NW NE NE NW**

SEC 12 TWP 34S RGE 20W Other Services MAI  
 API Number 15-033-21713  
 Permit Number  
 Permanent Datum G.L., Elevation 1791 feet  
 Log Measured From DF  
 Drilling Measured From DF @ 1809 FEET

Elevations:  
 KB 1809.00  
 DF 1809.00  
 GL 1791.00

Date	10-MAY-2013	
Run Number	ONE	
Service Order	3539416	
Depth Driller	9599.00	feet
Depth Logger	9599.00	feet
First Reading	9537.00	feet
Last Reading	5706.00	feet
Casing Driller	5706.00	feet
Casing Logger	5706.00	inches
Bit Size	6.125	
Hole Fluid Type	WATER	lb/USg
Density / Viscosity	9.00 lb/USg	31.00 CP
PH / Fluid Loss	8.50	8.50
Sample Source	FLOWLINE	
Rm @ Measured Temp	1.60 @ 74.0	ohm-m
Rmf @ Measured Temp	1.28 @ 74.0	ohm-m
Rmc @ Measured Temp	1.92 @ 74.0	ohm-m
Source Rmf / Rmc	CALC	CALC
Rm @ BHT	0.925 @128.0	ohm-m
Time Since Circulation	1 HOUR	
Max Recorded Temp	128.00	deg F
Equipment / Base	18006	OKC
Recorded By	B.ALLEN	
Witnessed By	M.RODEN	W. SCOTT
AFE# / S.O.	DC128959	3539416

**BOREHOLE RECORD**

Last Edited: 10-MAY-2013 18:40

Bit Size inches	Depth From feet	Depth To feet
12.250	0.00	326.00
8.750	326.00	5706.00
6.125	5706.00	9599.00

**REMARKS**

LOGGED WITH WLS VER 13.04.8492 SOFTWARE

WELL LOGGED USING MESSENGER METHOD OF DEPLOYMENT, AND MEMORY LOGGING SYSTEM

HARDWARE: MAI: ISA STANDOFF BELOW

MPD: 4"PROFILE PLATE, MIS-A SINGLE SPRING DECENTRALIZER BELOW

MDN: MISD DOUBLE SPRING DECENTRALIZER RAN ABOVE

2.71 G/CC DENSITY MATRIX USED TOCALCULATE POROSITY

ALL INTERVALS LOGGED AND SCALED PER CUSTOMER REQUEST

DRILL PIPE DEPTH DURING DEPLOYMENT - 9487

LOGGING TOOL DEPTH AFTER DEPLOYMENT: 9570

4.5" CASING USED TO CALCULATE AHV


SERVICE ORDER # 3539416


RIG: LARIAT 45


All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

**RUN 1 / DESCENT 1 DSC**

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 11-MAY-2013 02:34  
 Filename: C:\Minimus 13.04.8492\Data\SANDRIDGE (SALLY 34202-12H)\RTAP 28529.dta Recorded on 11-MAY-2013 01:31  
 System Versions: Processed with 13.04.8492 Plotted with 13.04.8492

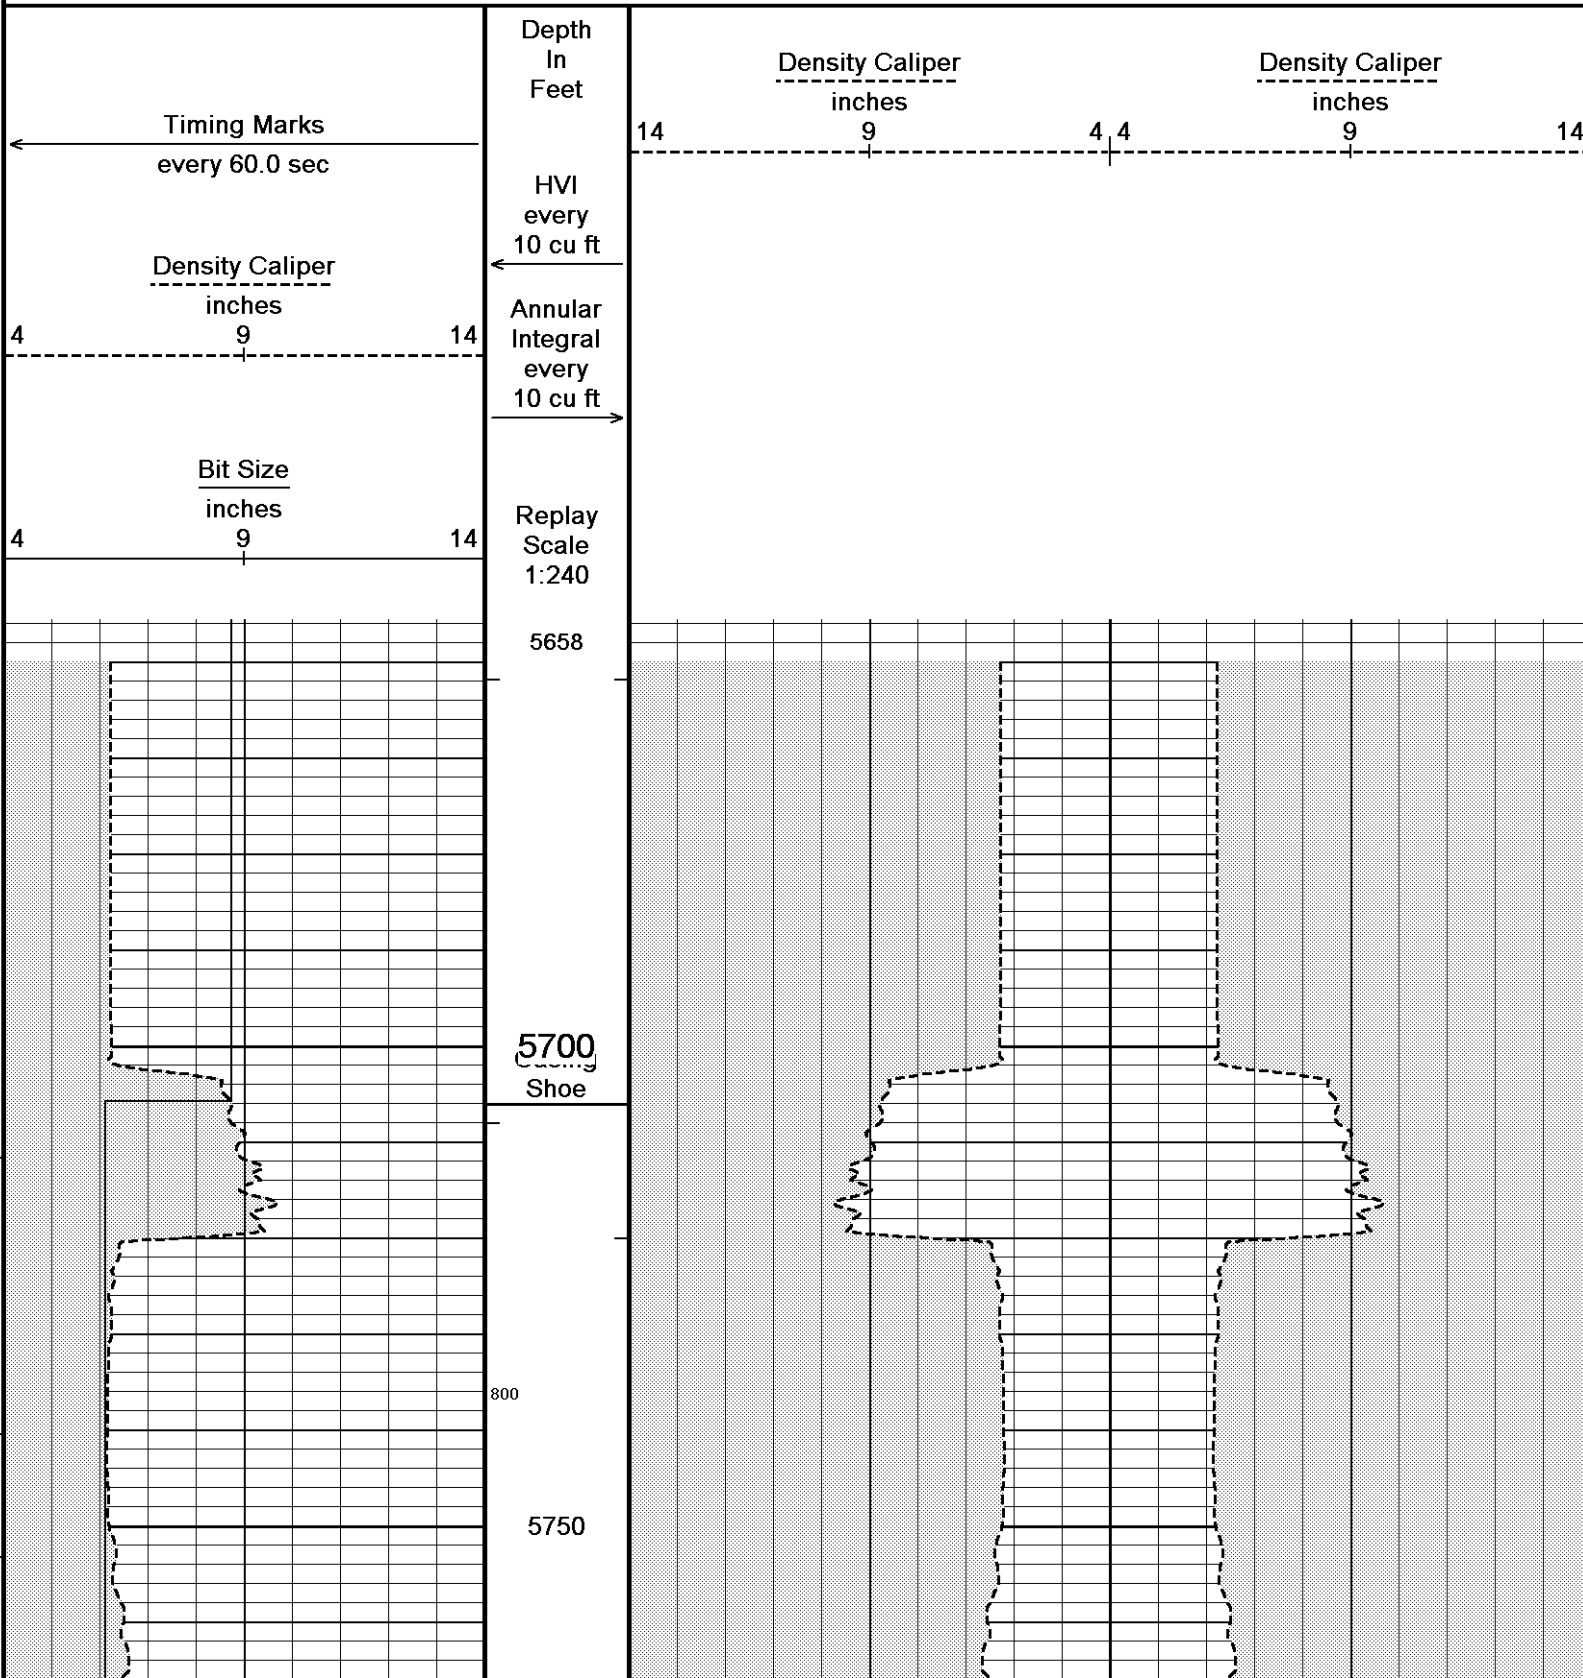

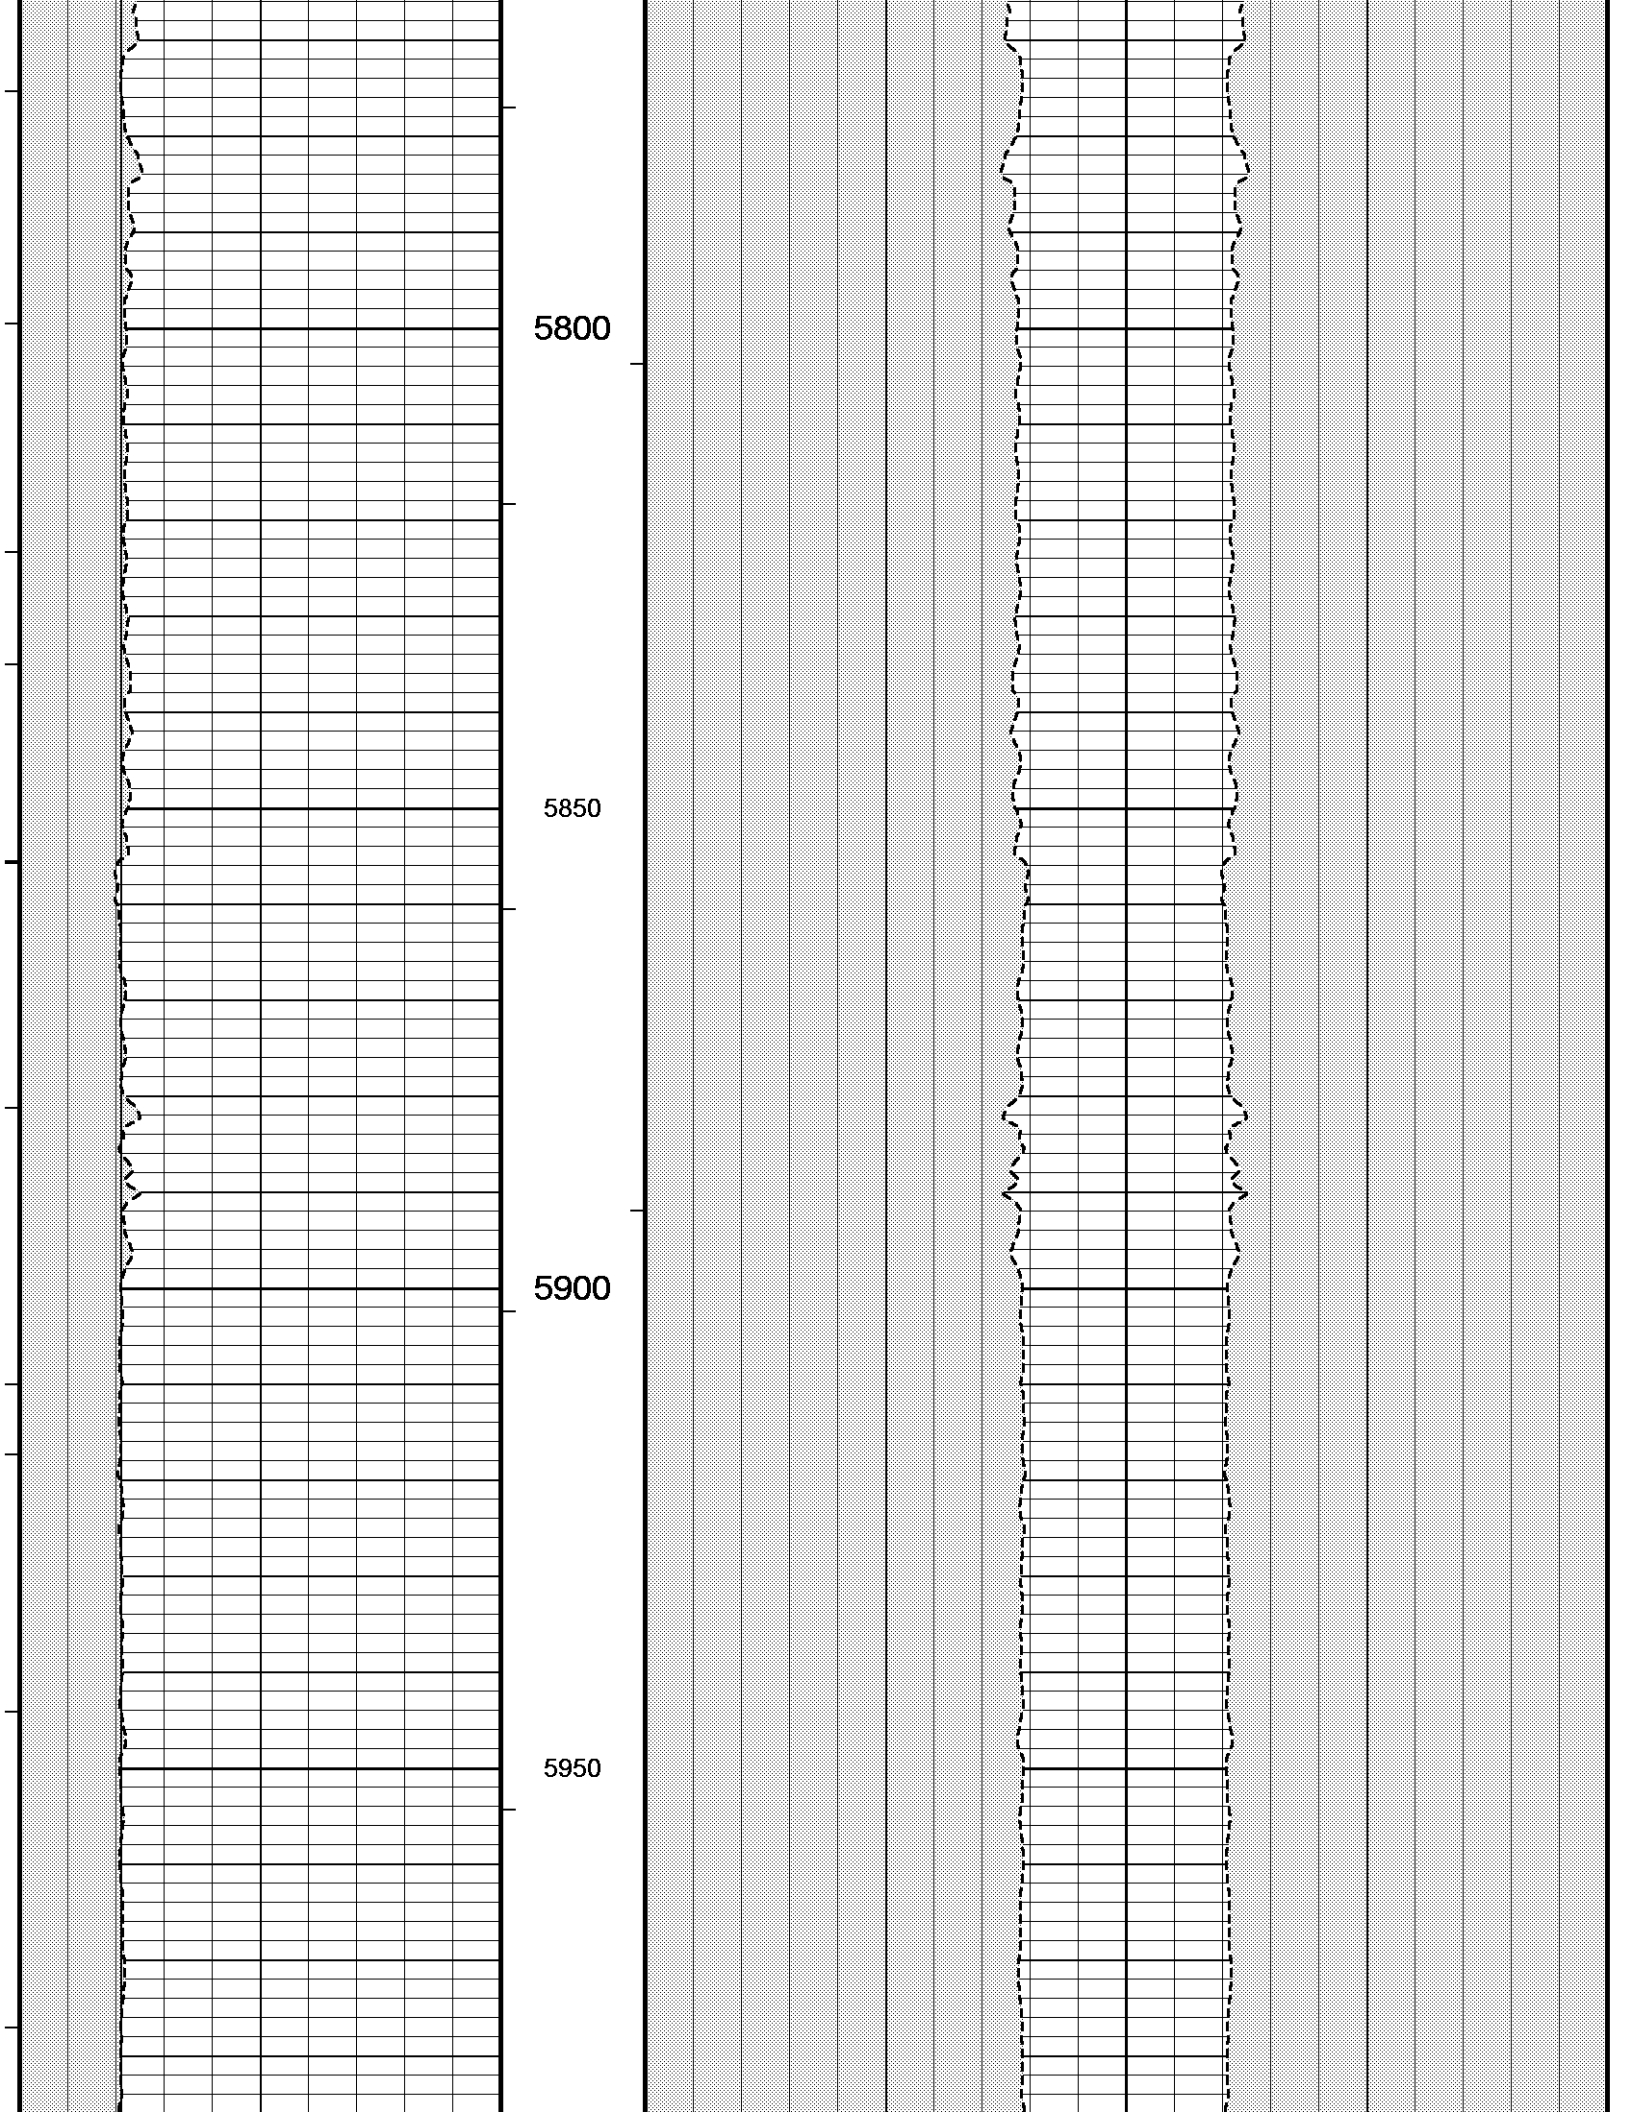

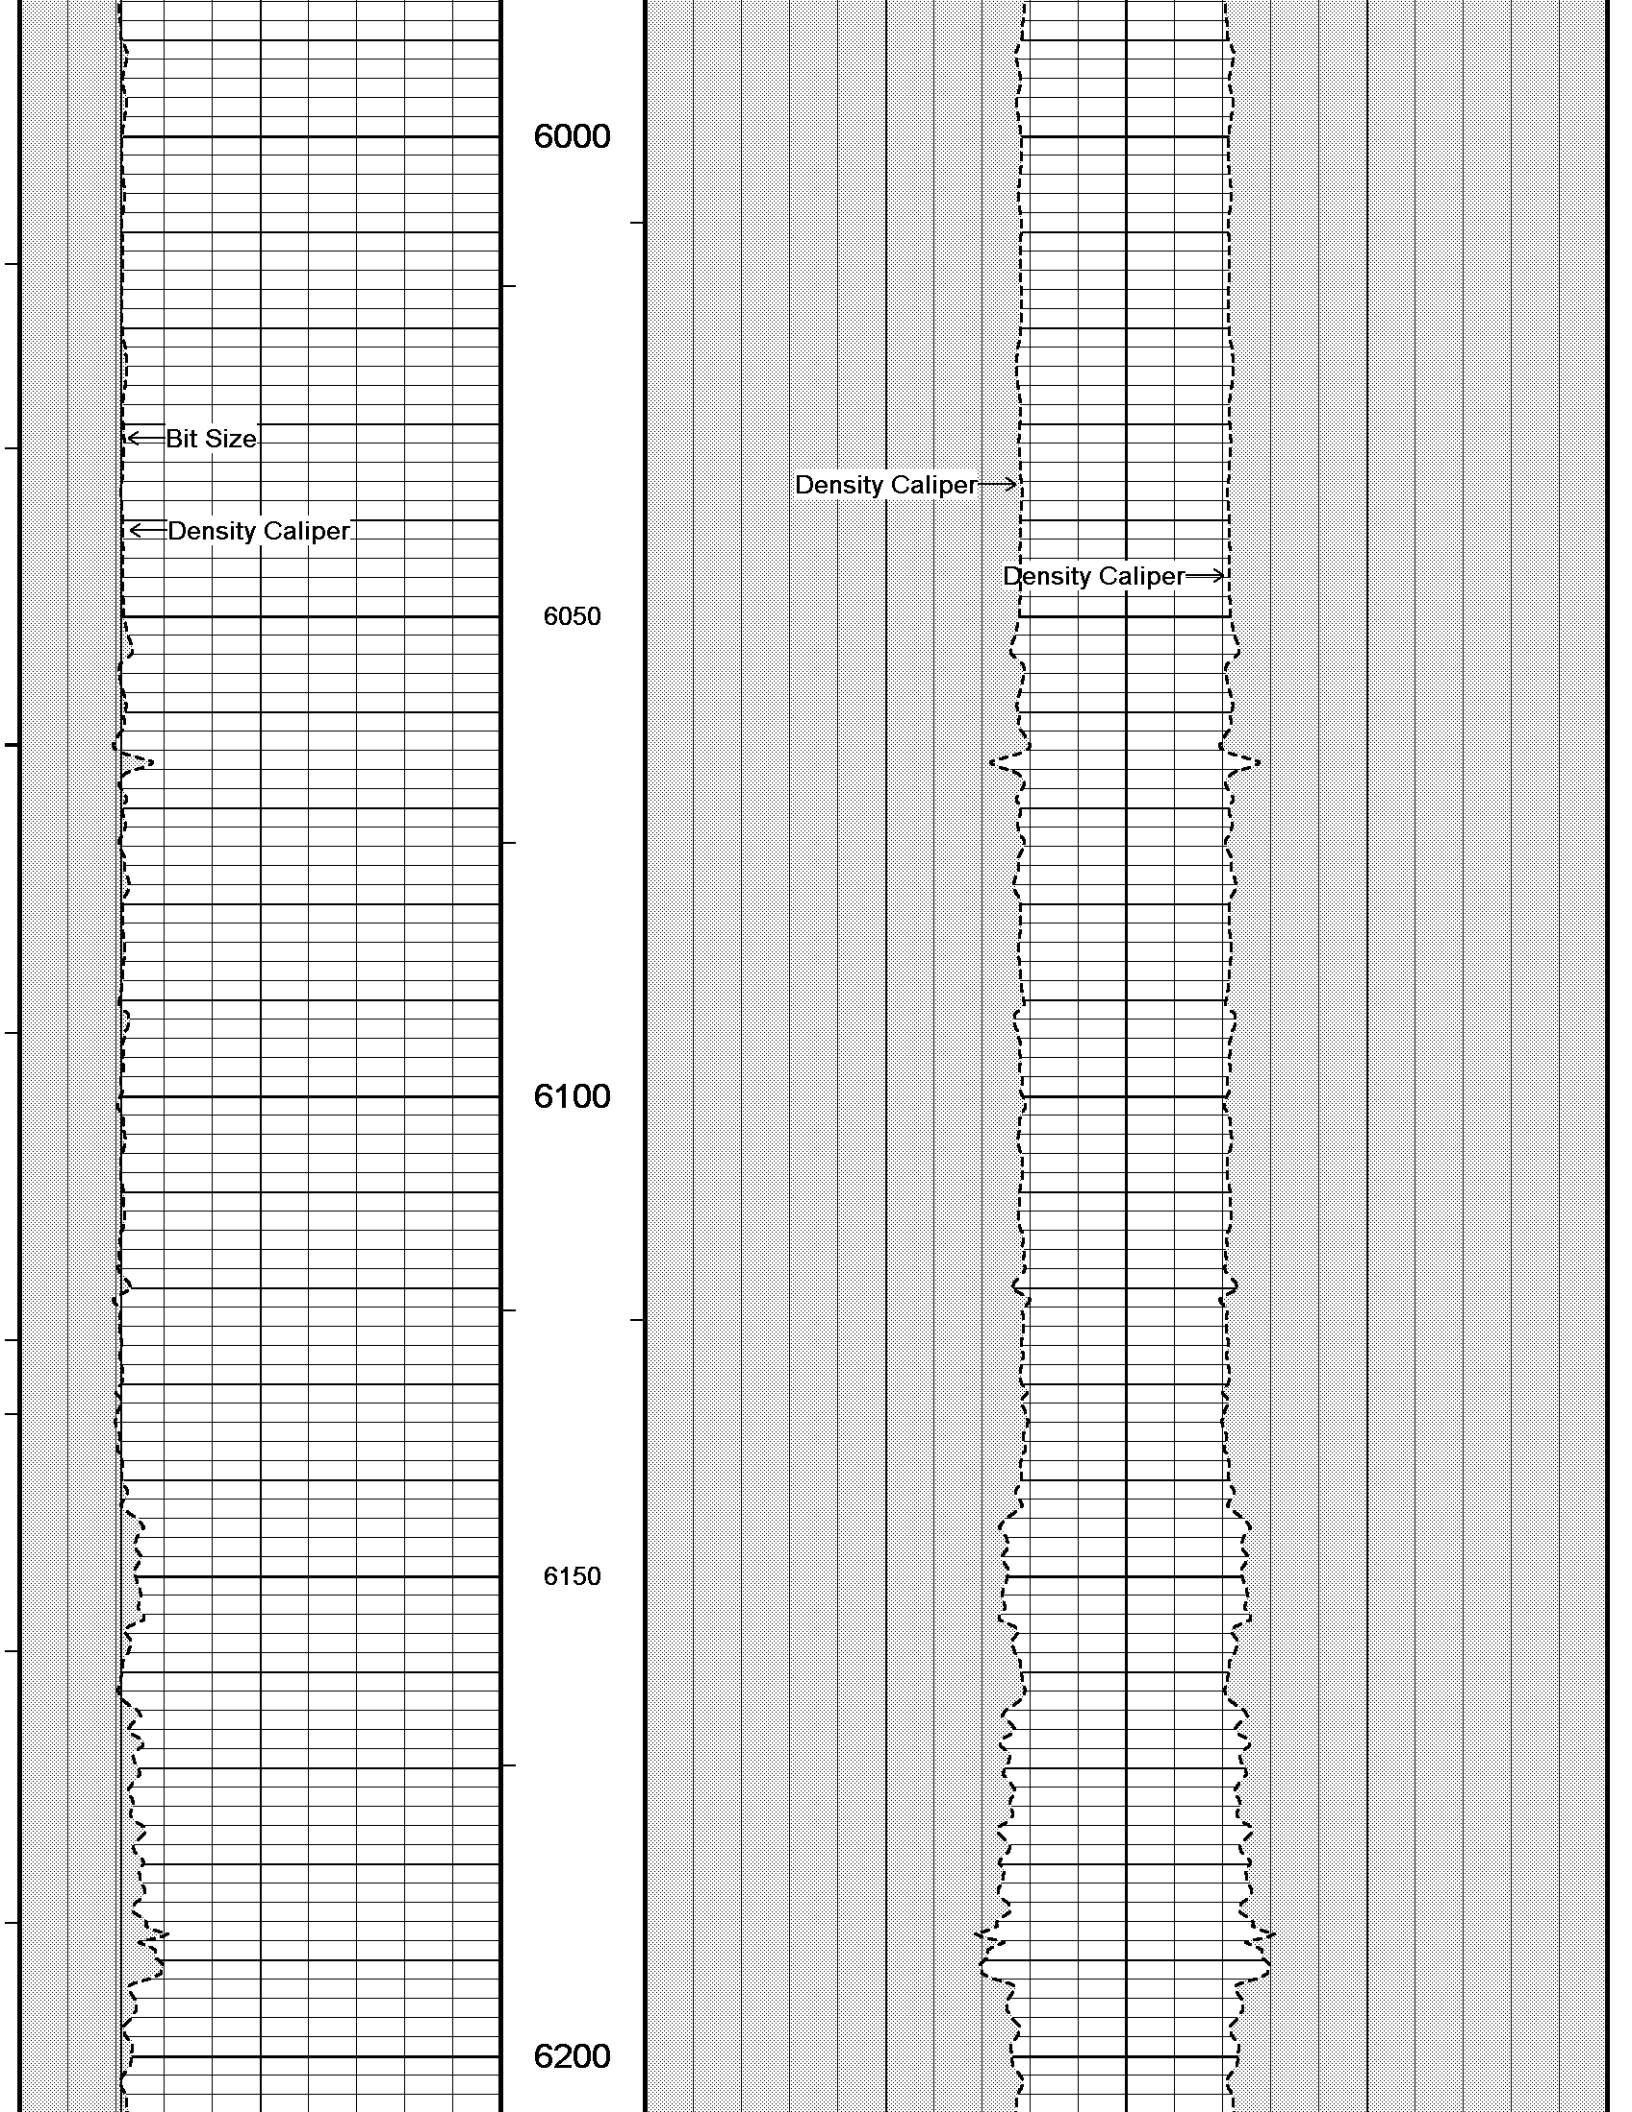

← Bit Size

← Density Caliper

Density Caliper →

Density Caliper →


6000

6050

6100

6150

6200

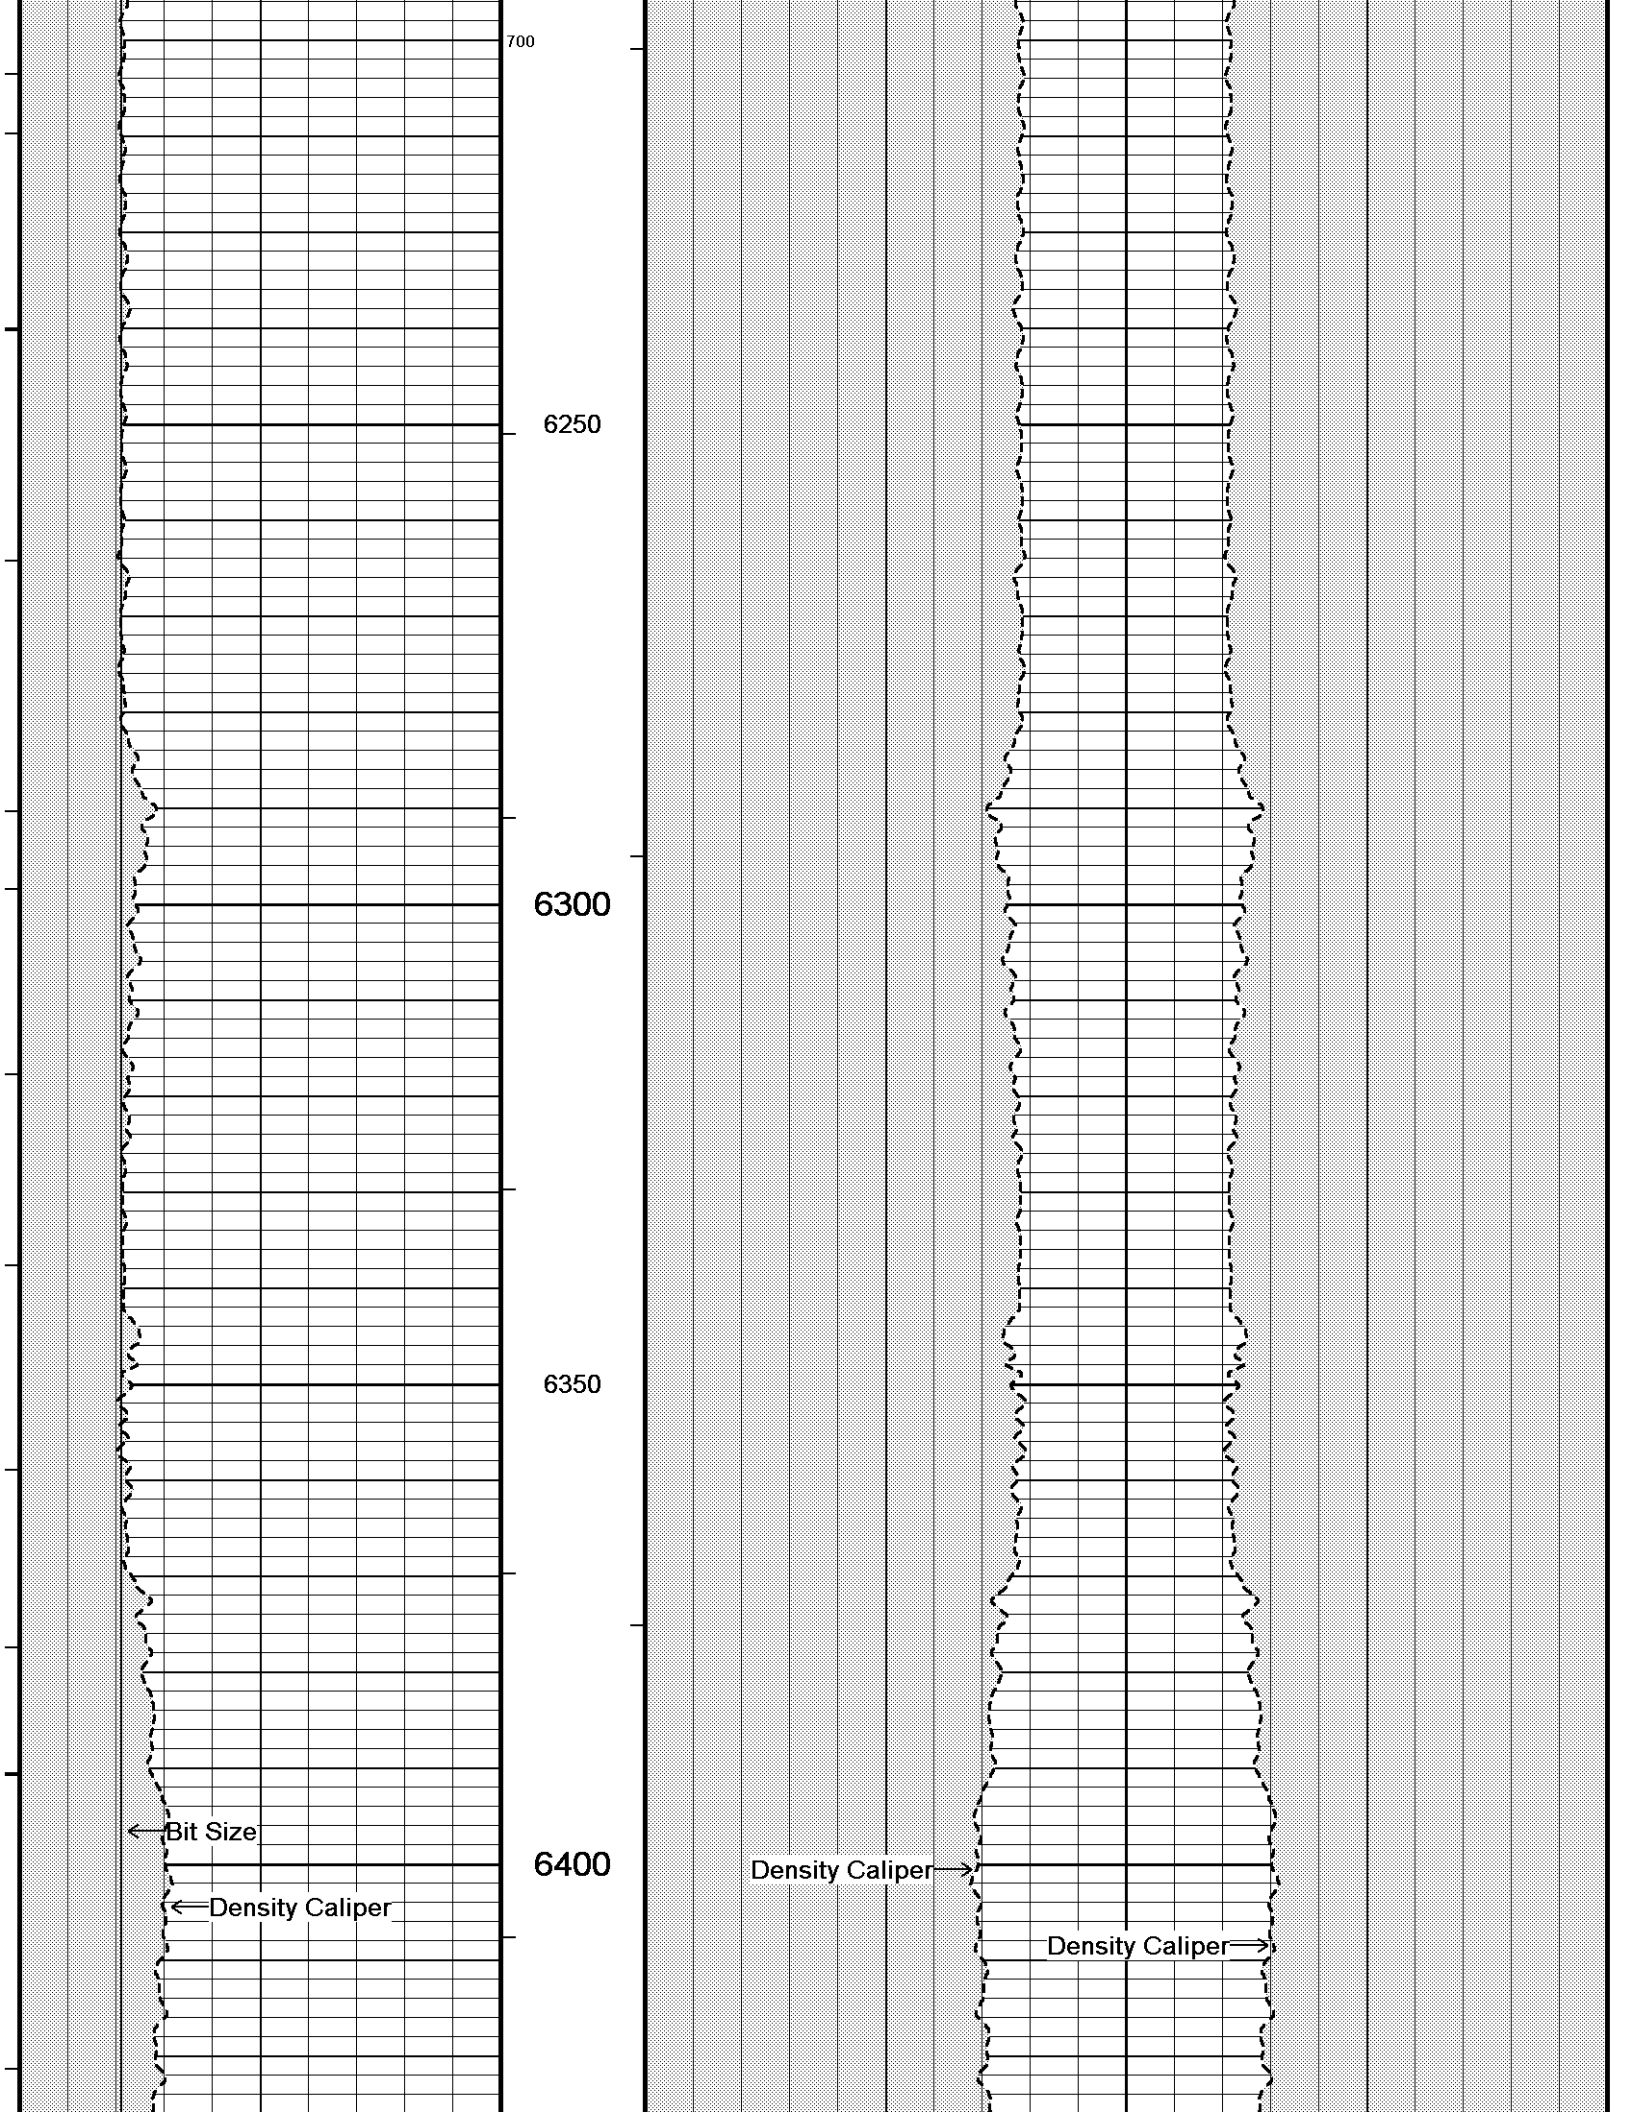

700

6250

6300

6350


6400


← Bit Size

← Density Caliper

Density Caliper →

Density Caliper →

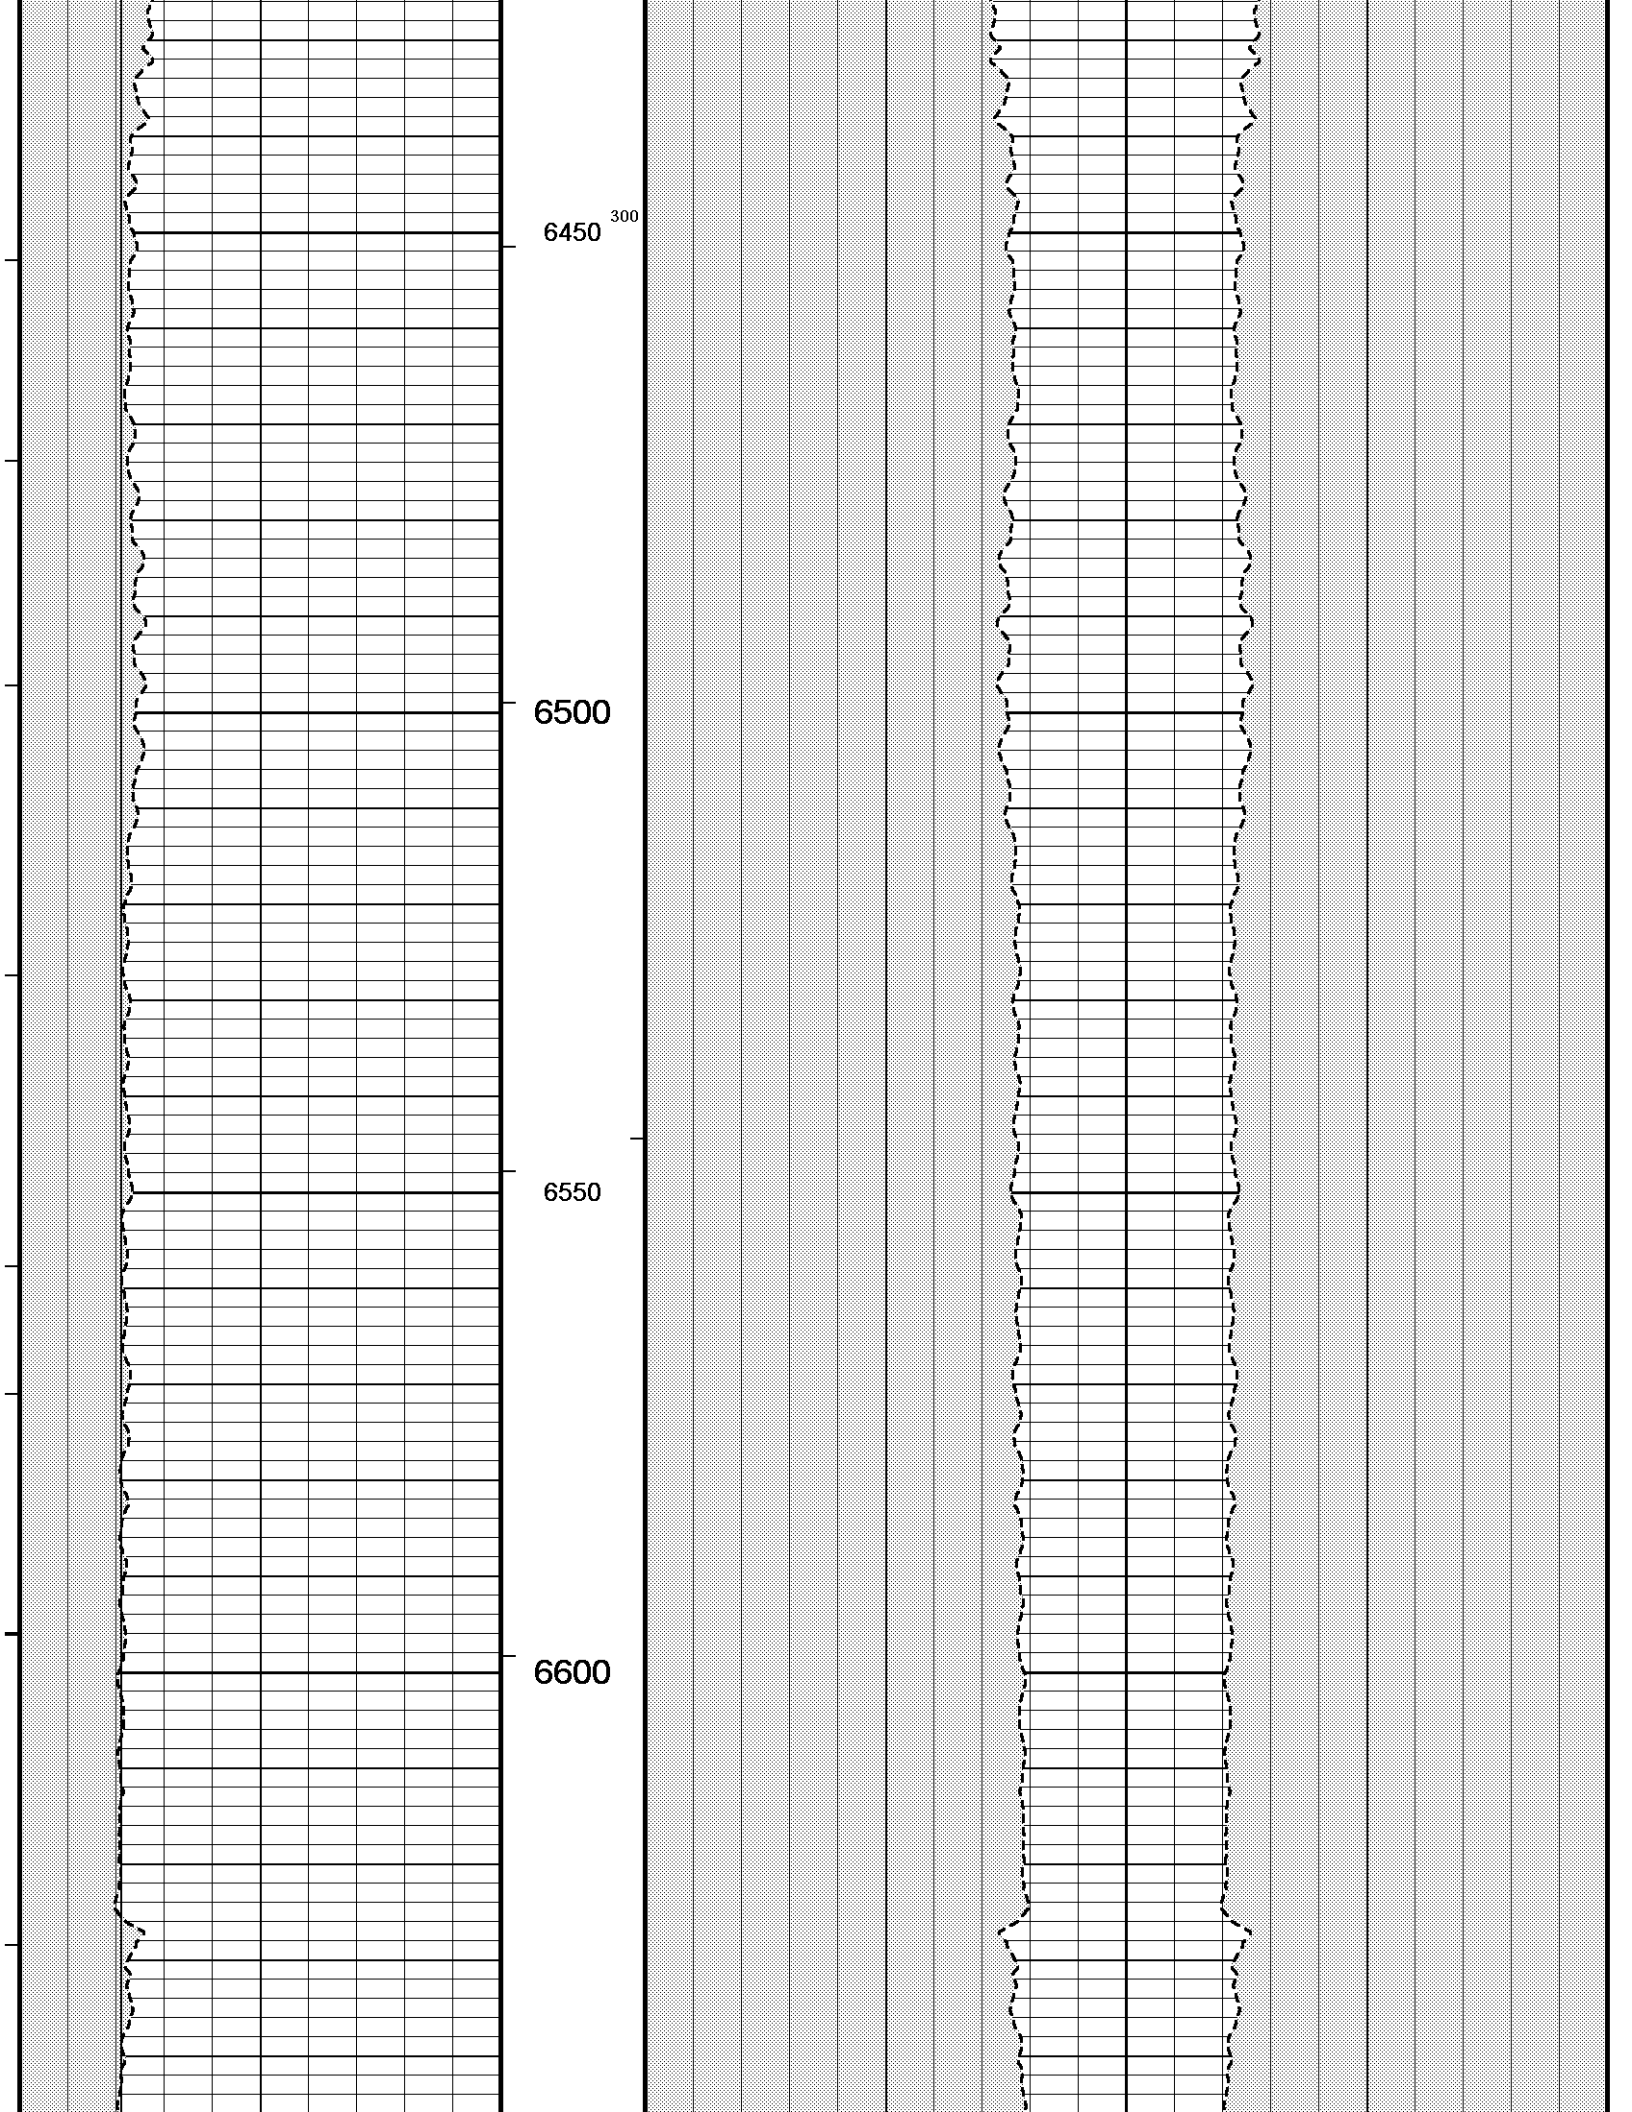

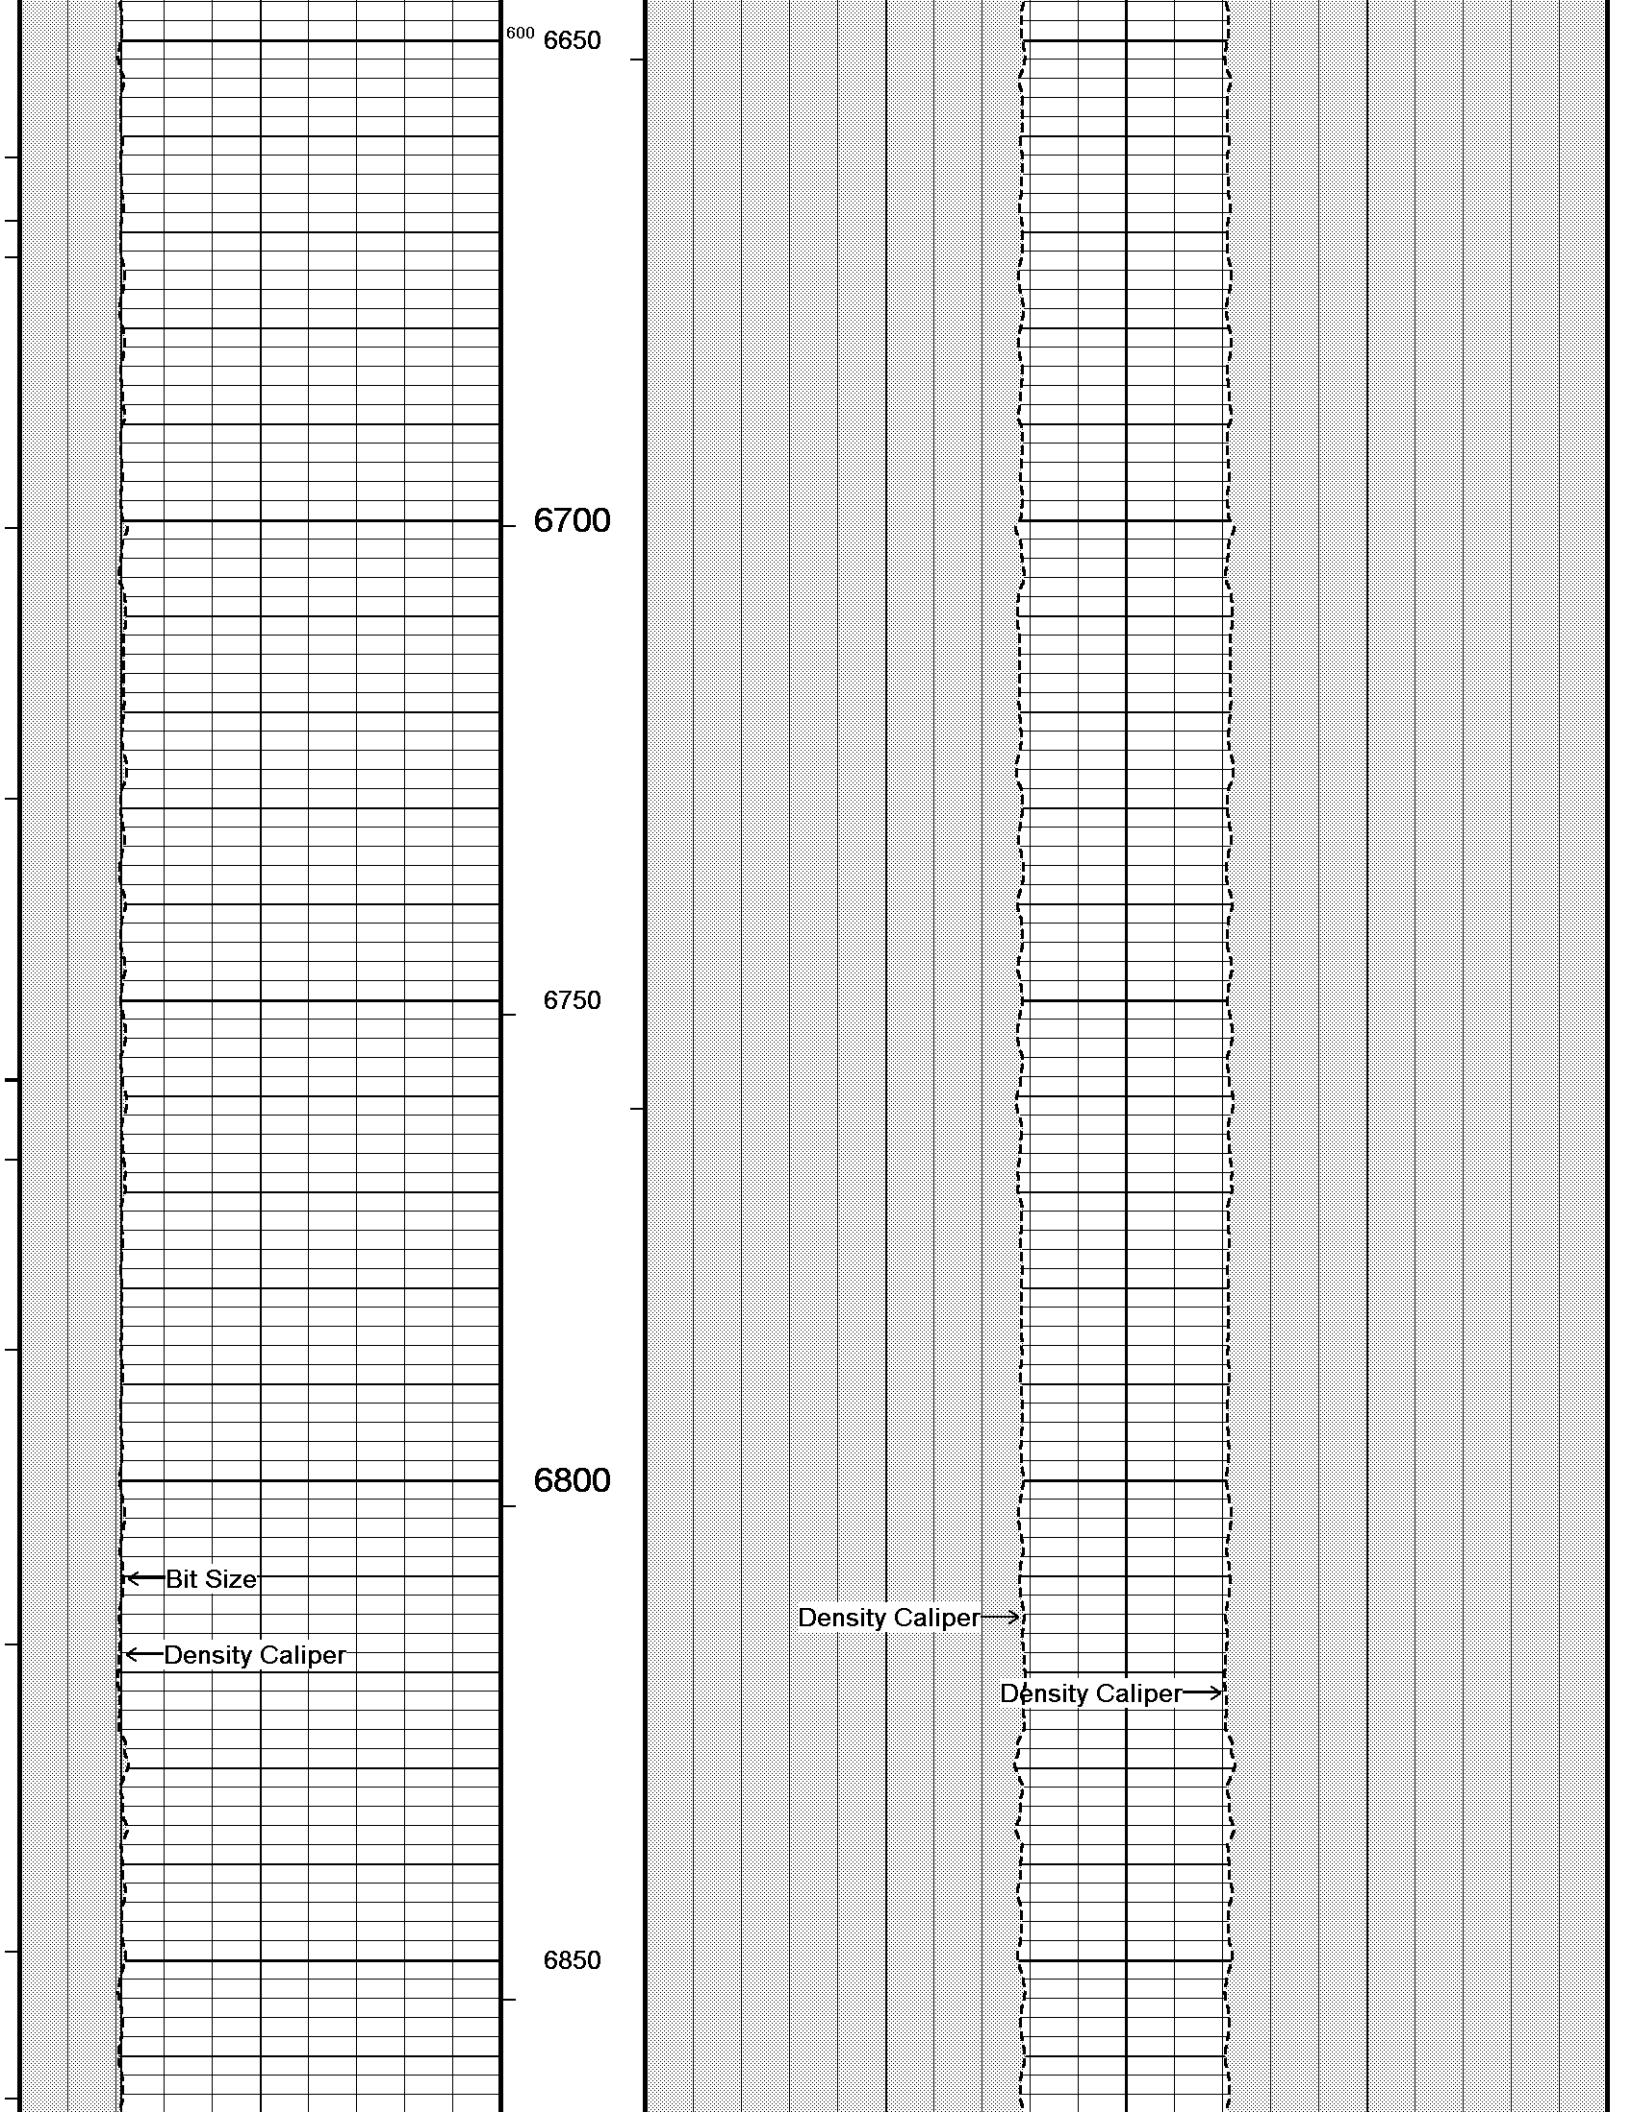

600 6650

6700

6750

6800


6850

← Bit Size

← Density Caliper

Density Caliper →

Density Caliper →

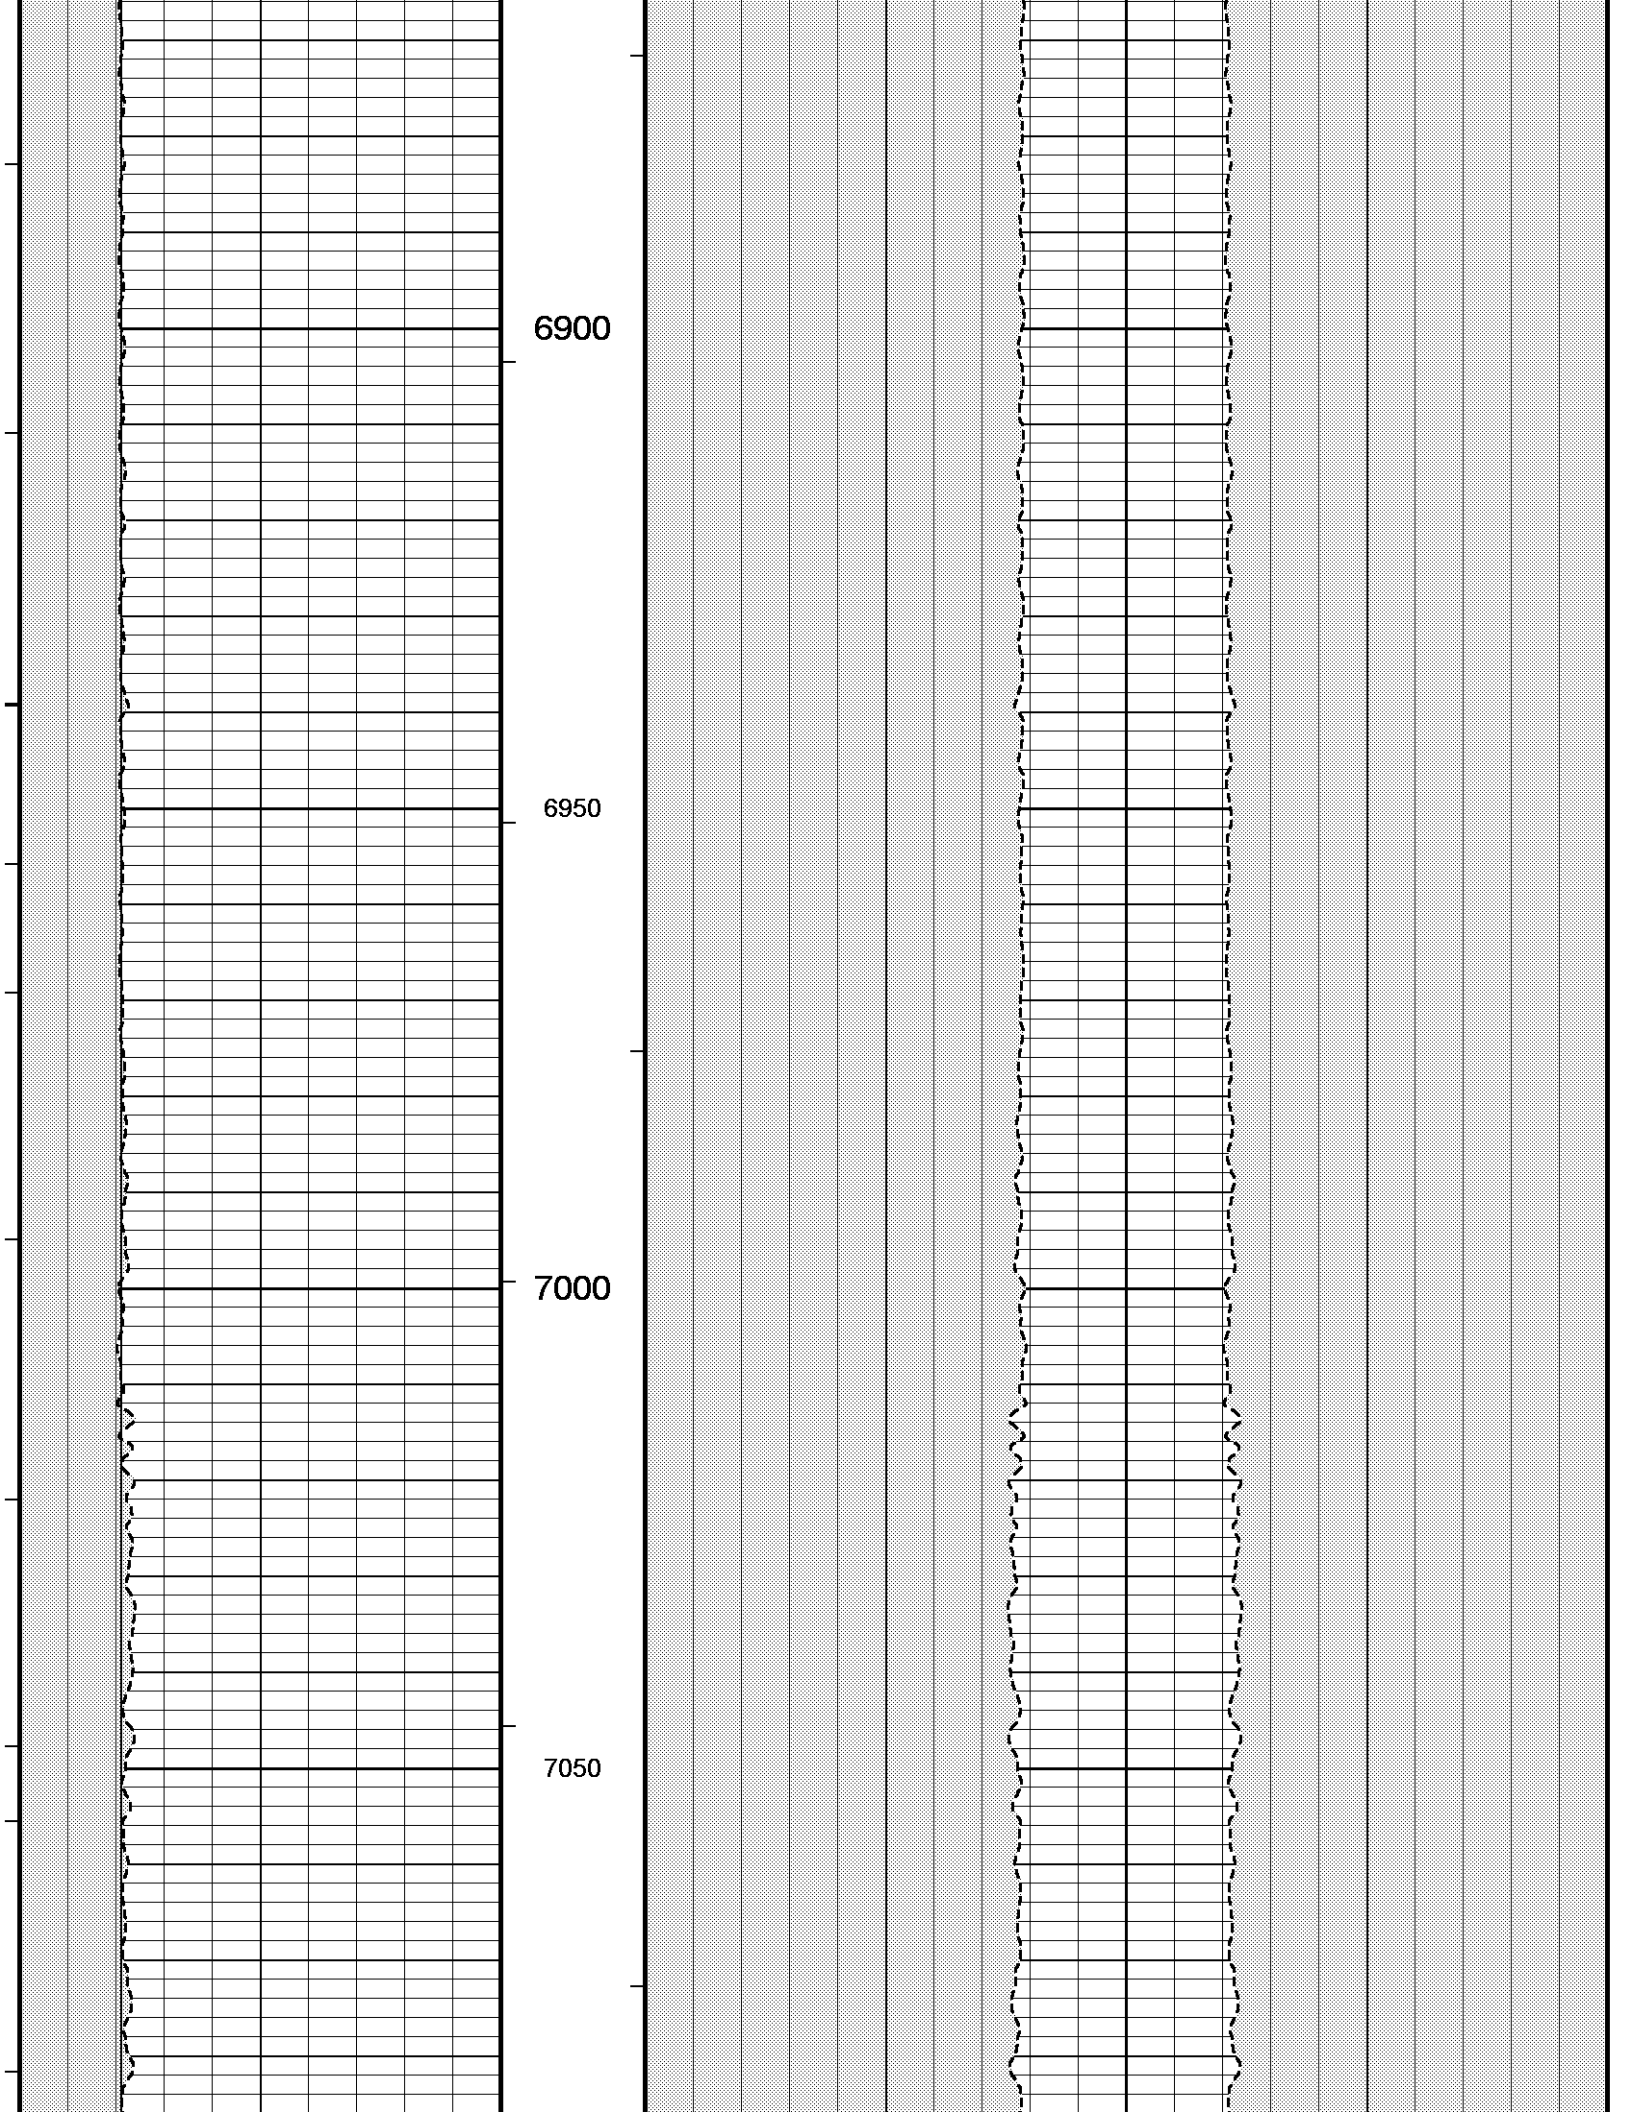

6900

6950

7000

7050

7100

500

7150

7200

Density Caliper

Density Caliper


7250

7300

← Bit Size

← Density Caliper

Density Caliper →

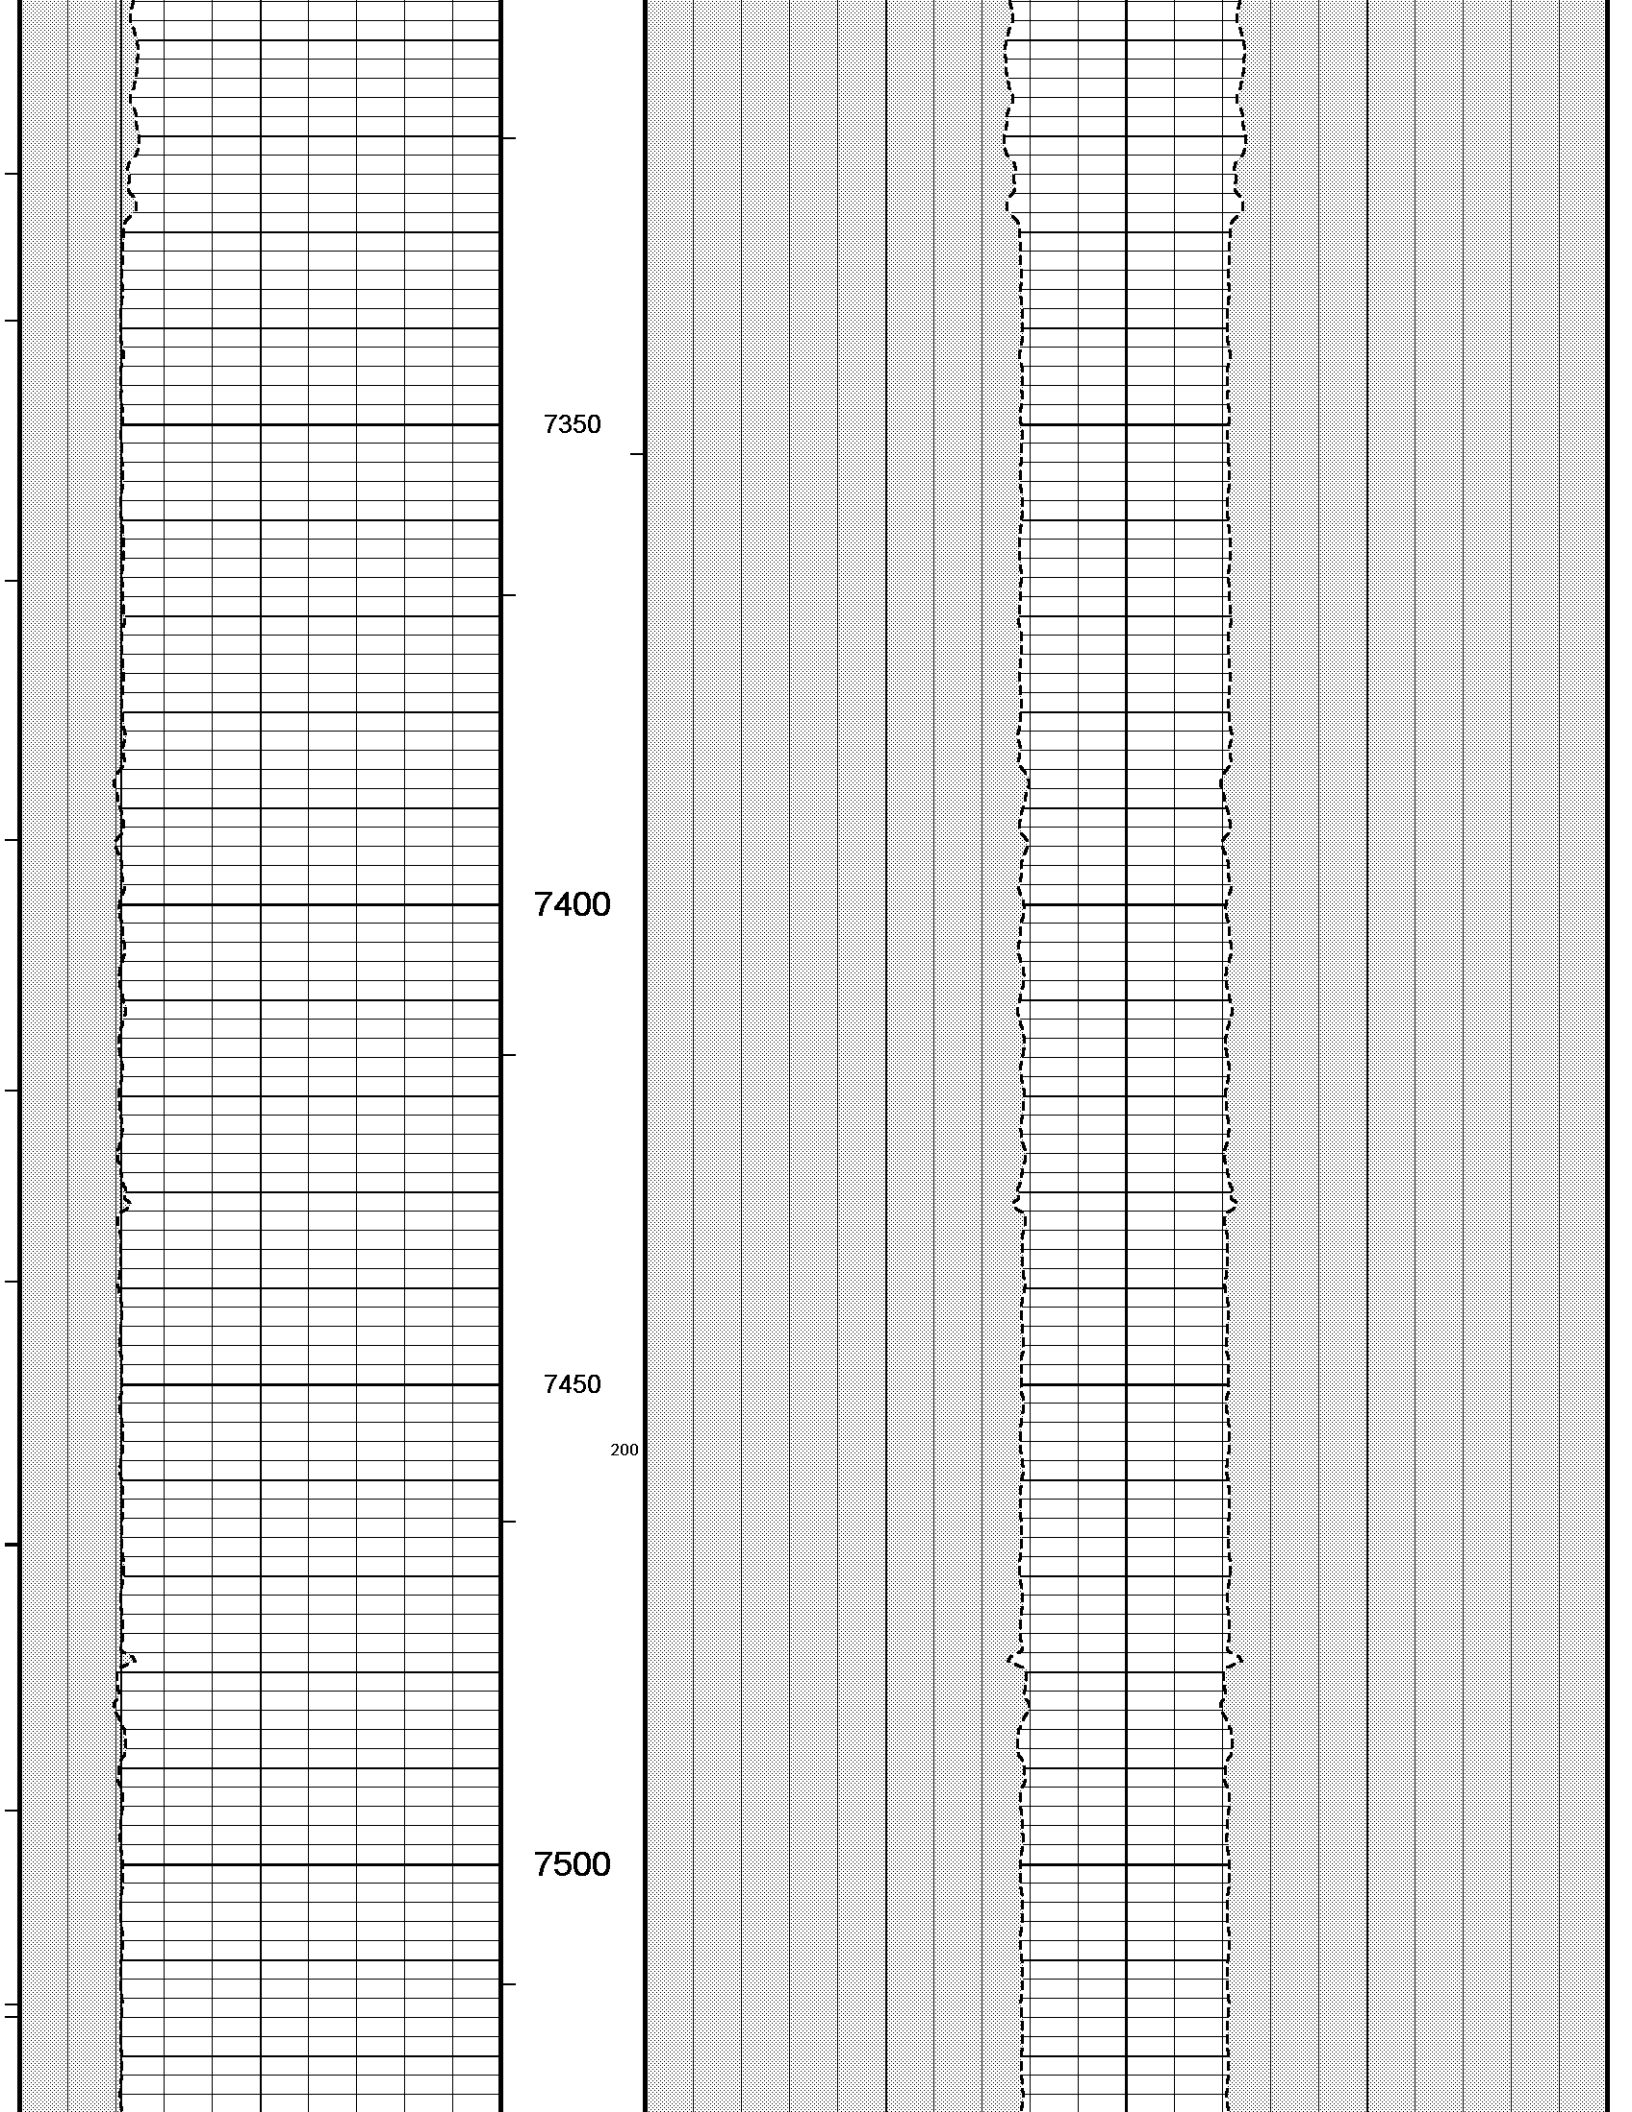

7550

← Bit Size

← Density Caliper

7600


400


Density Caliper →

Density Caliper →

7650

7700

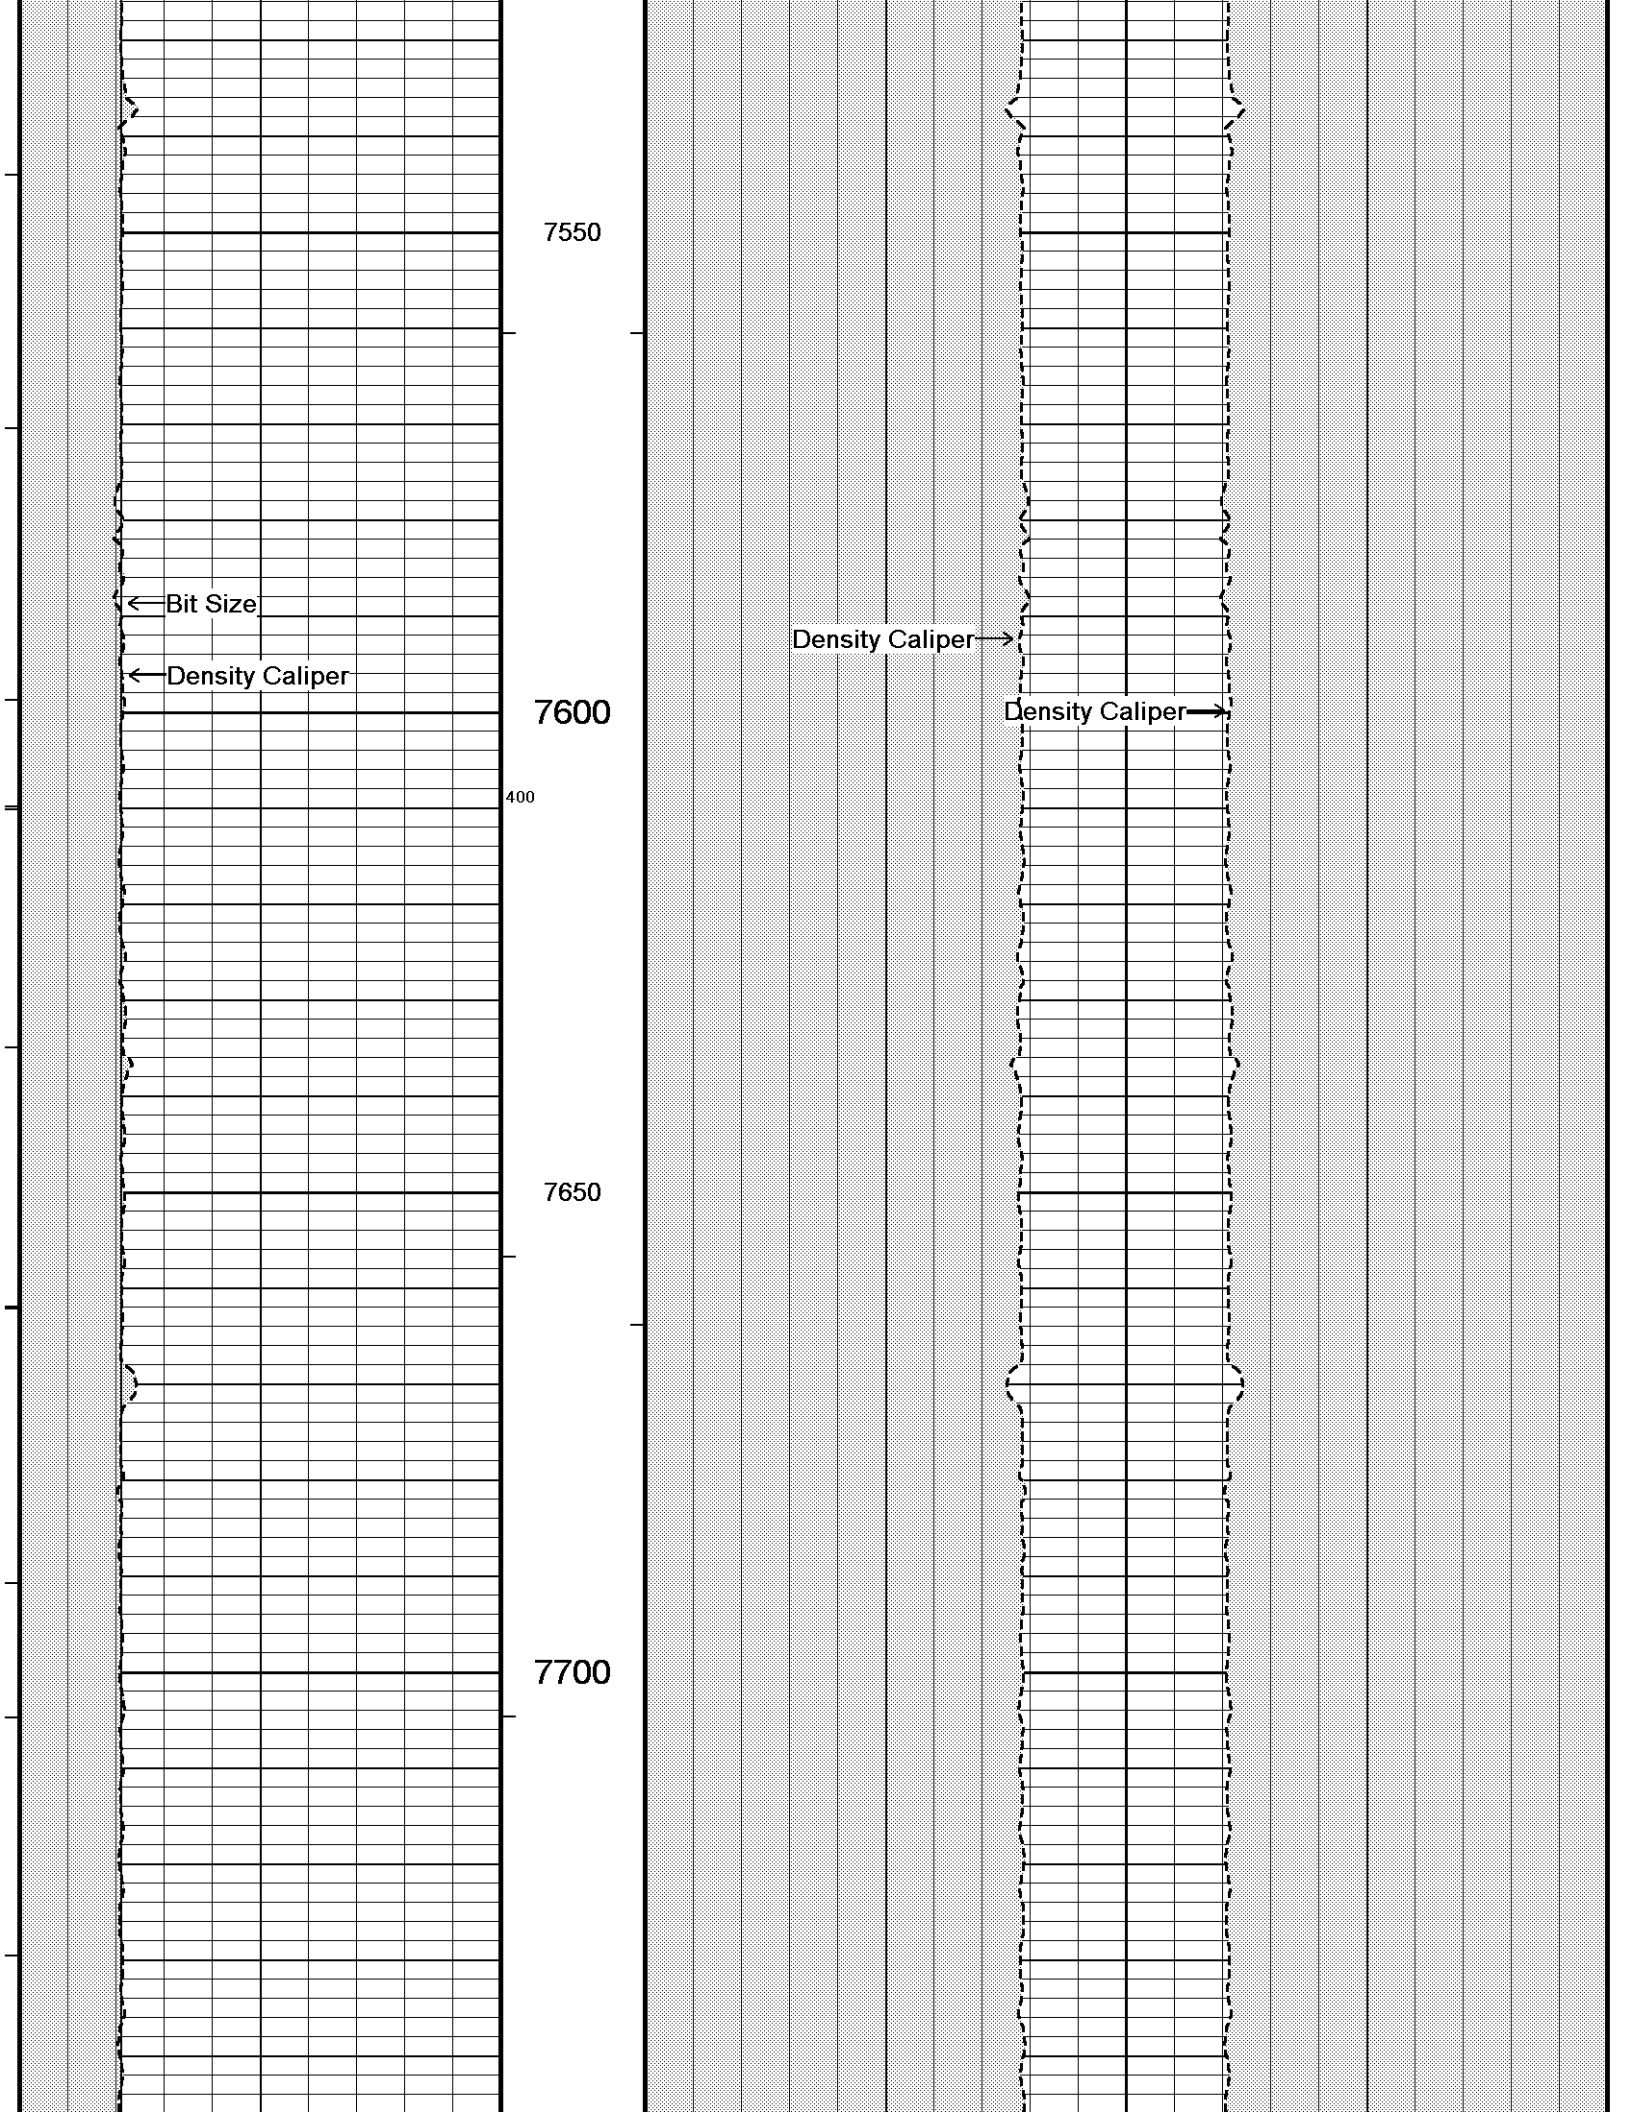

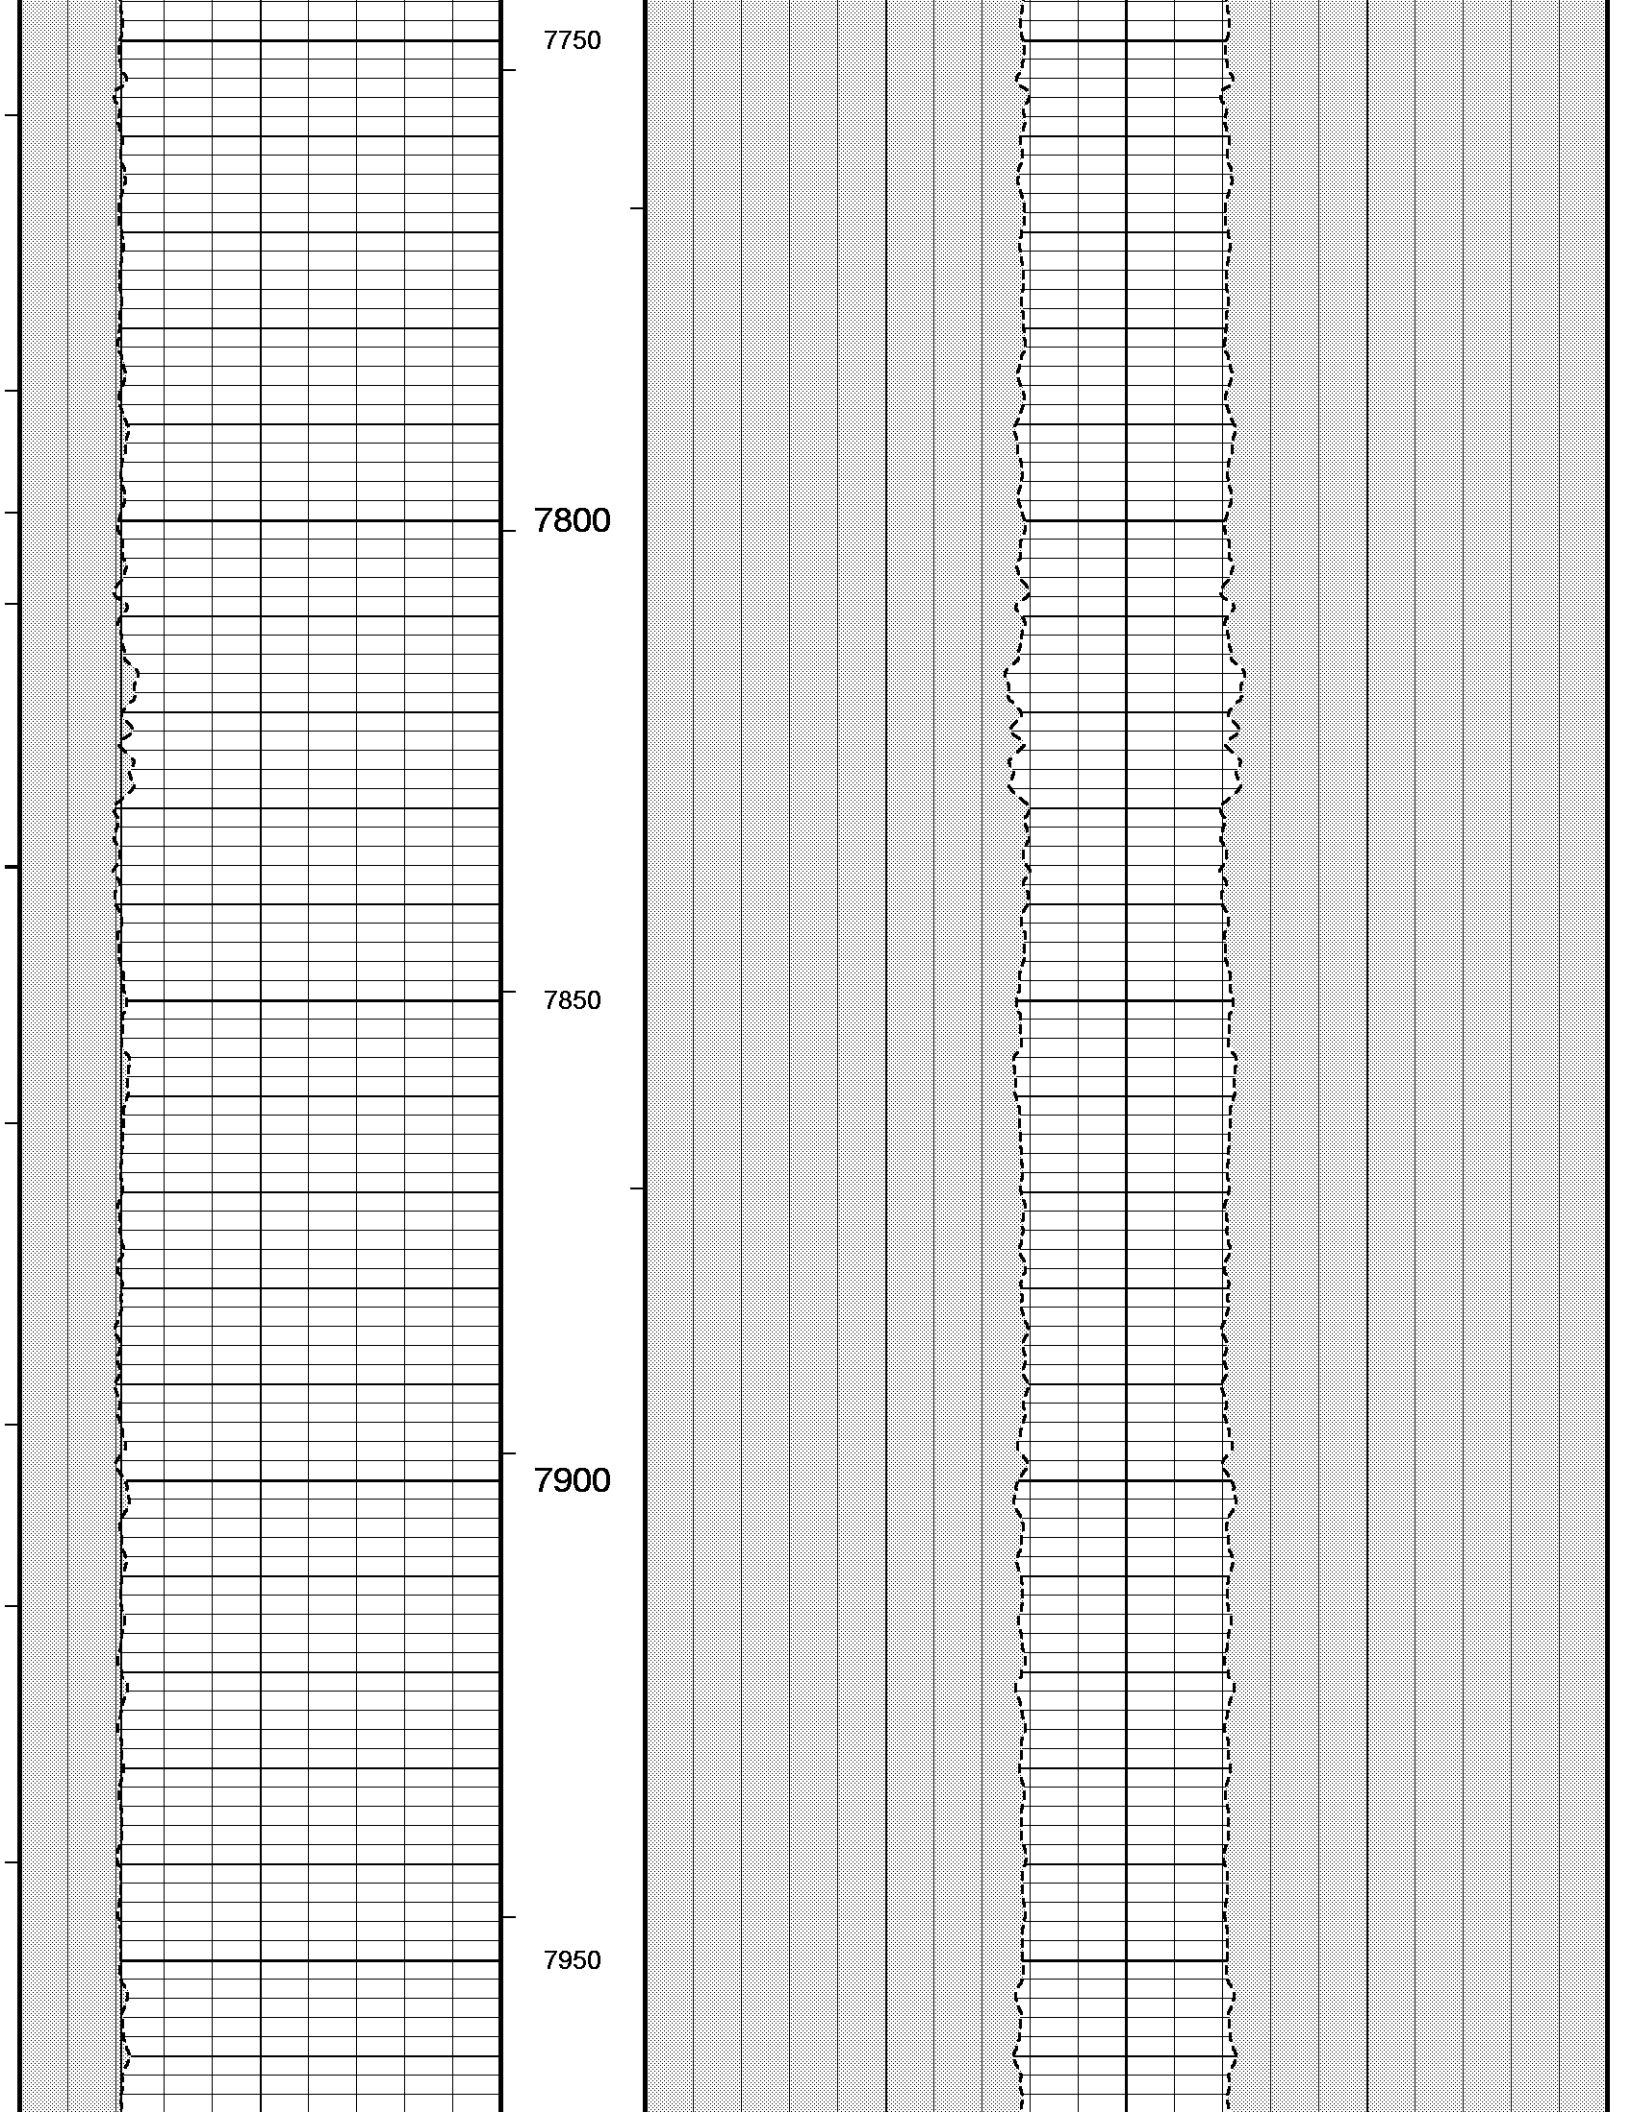

← Bit Size

← Density Caliper

Density Caliper →

Density Caliper →


8000

8050

300

8100

8150

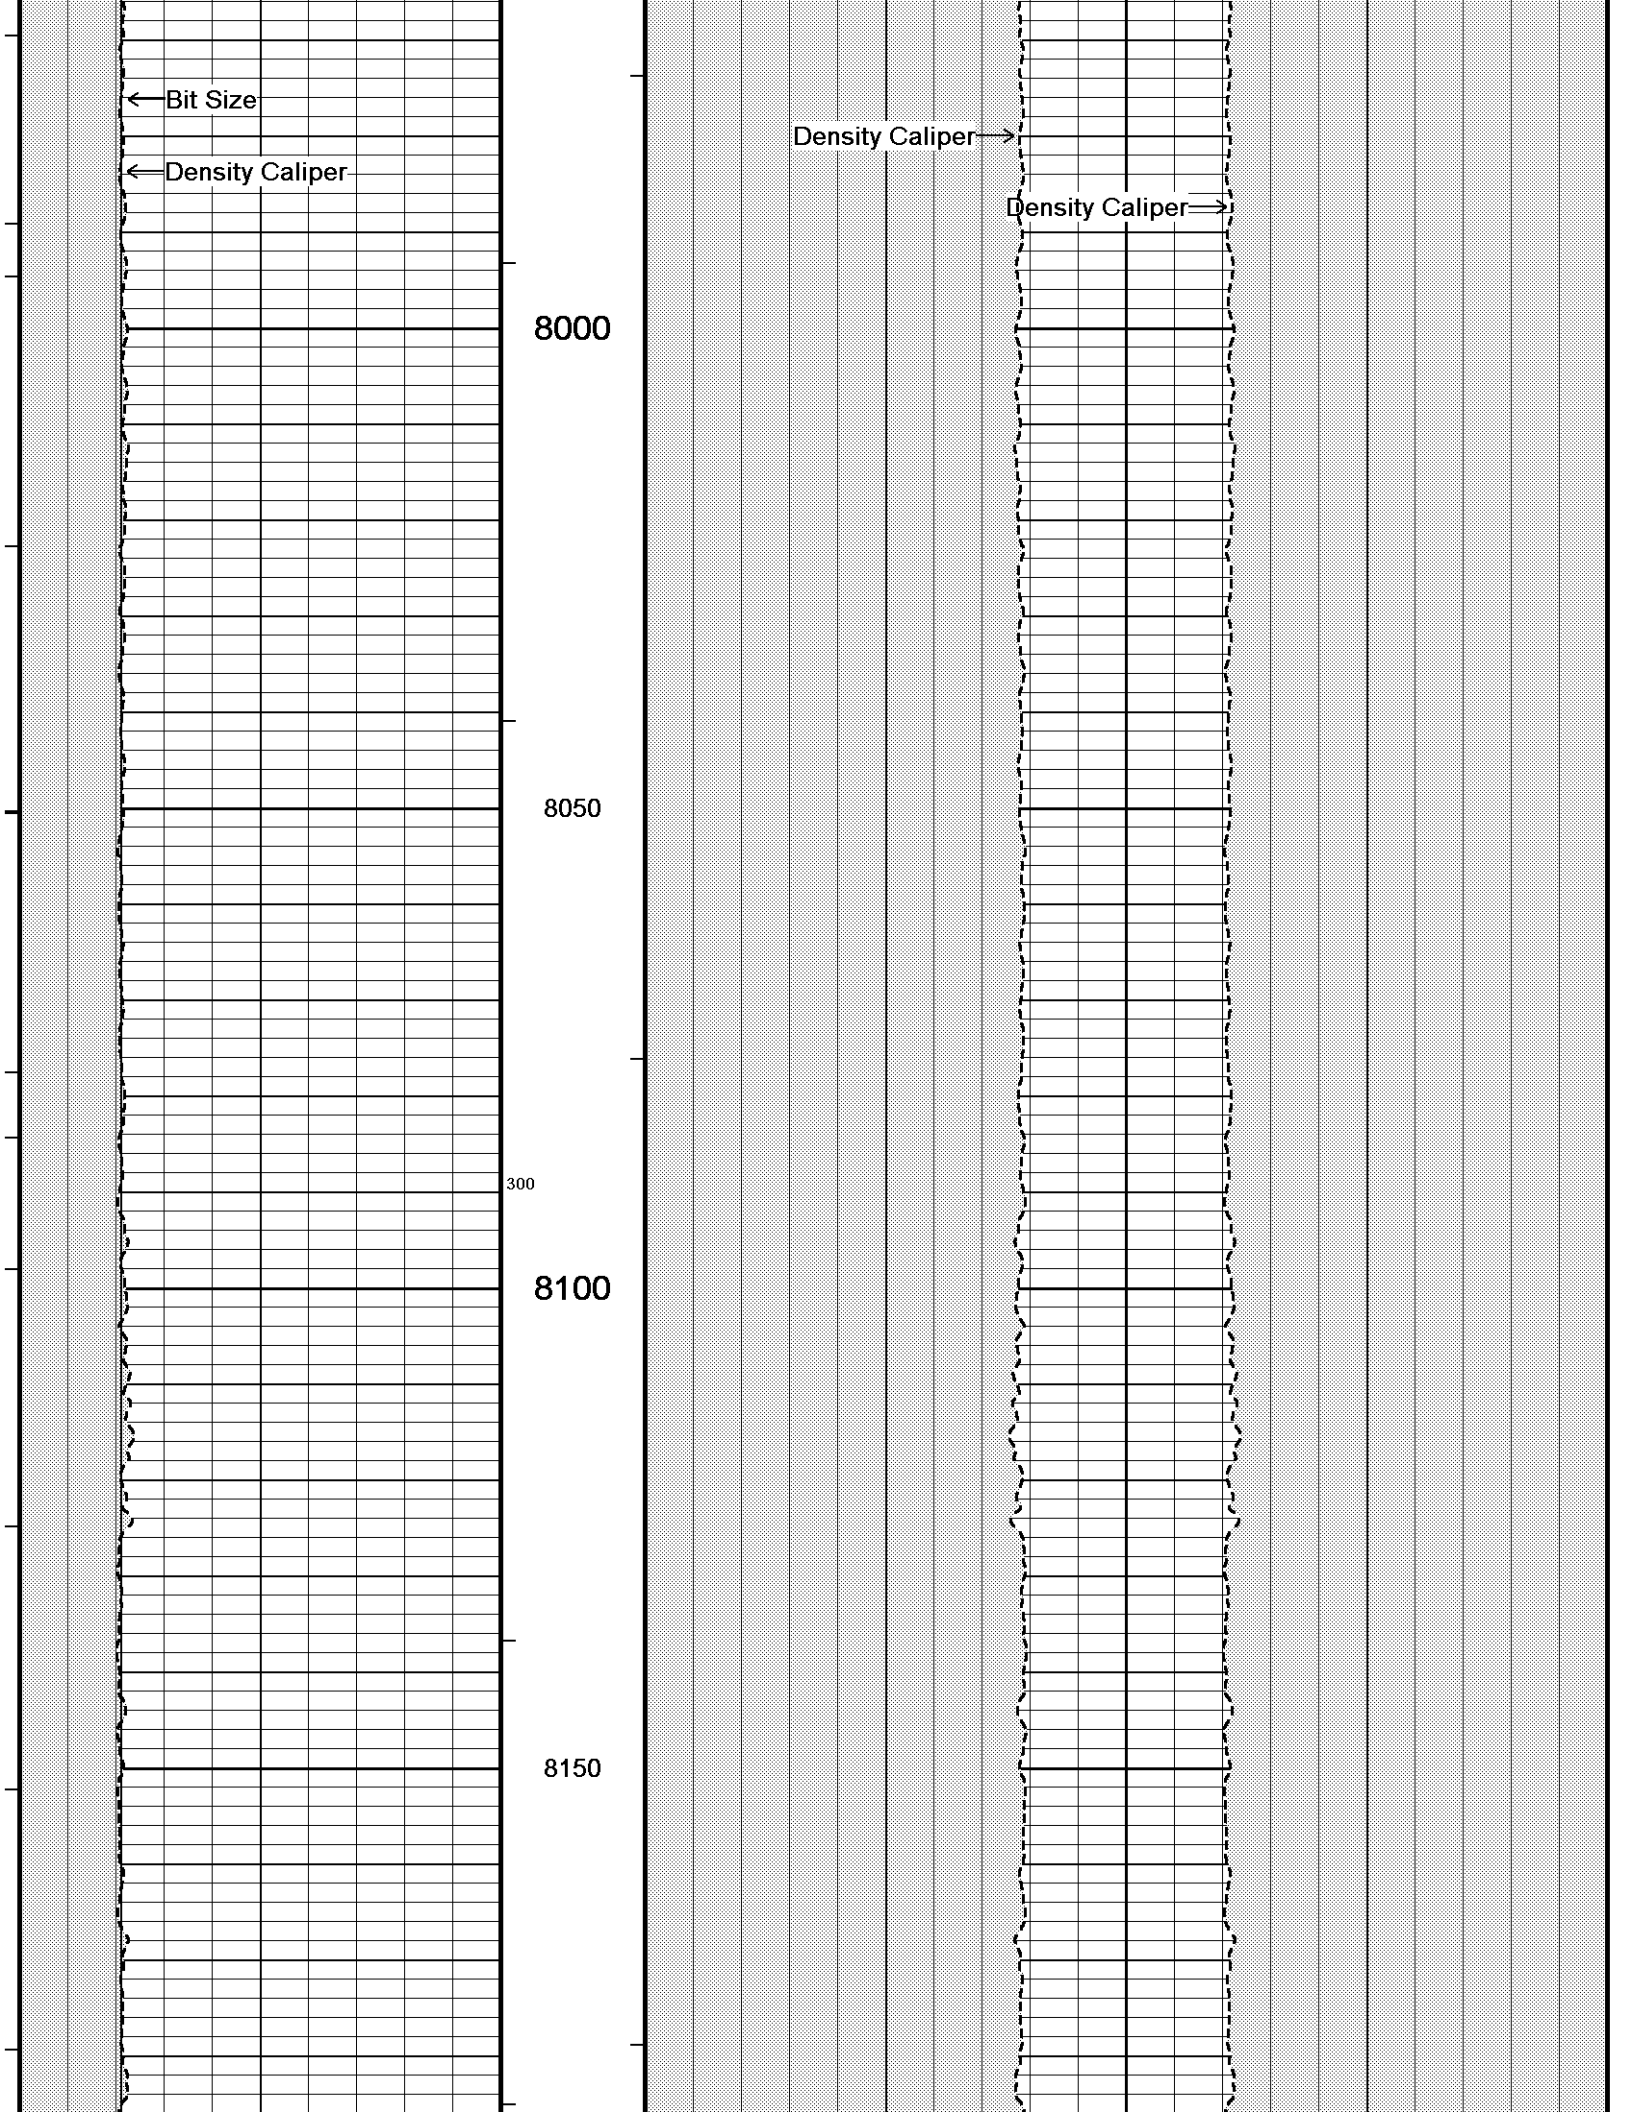

8200

8250

8300

8350


8400


← Bit Size


← Density Caliper

Density Caliper →

Density Caliper →

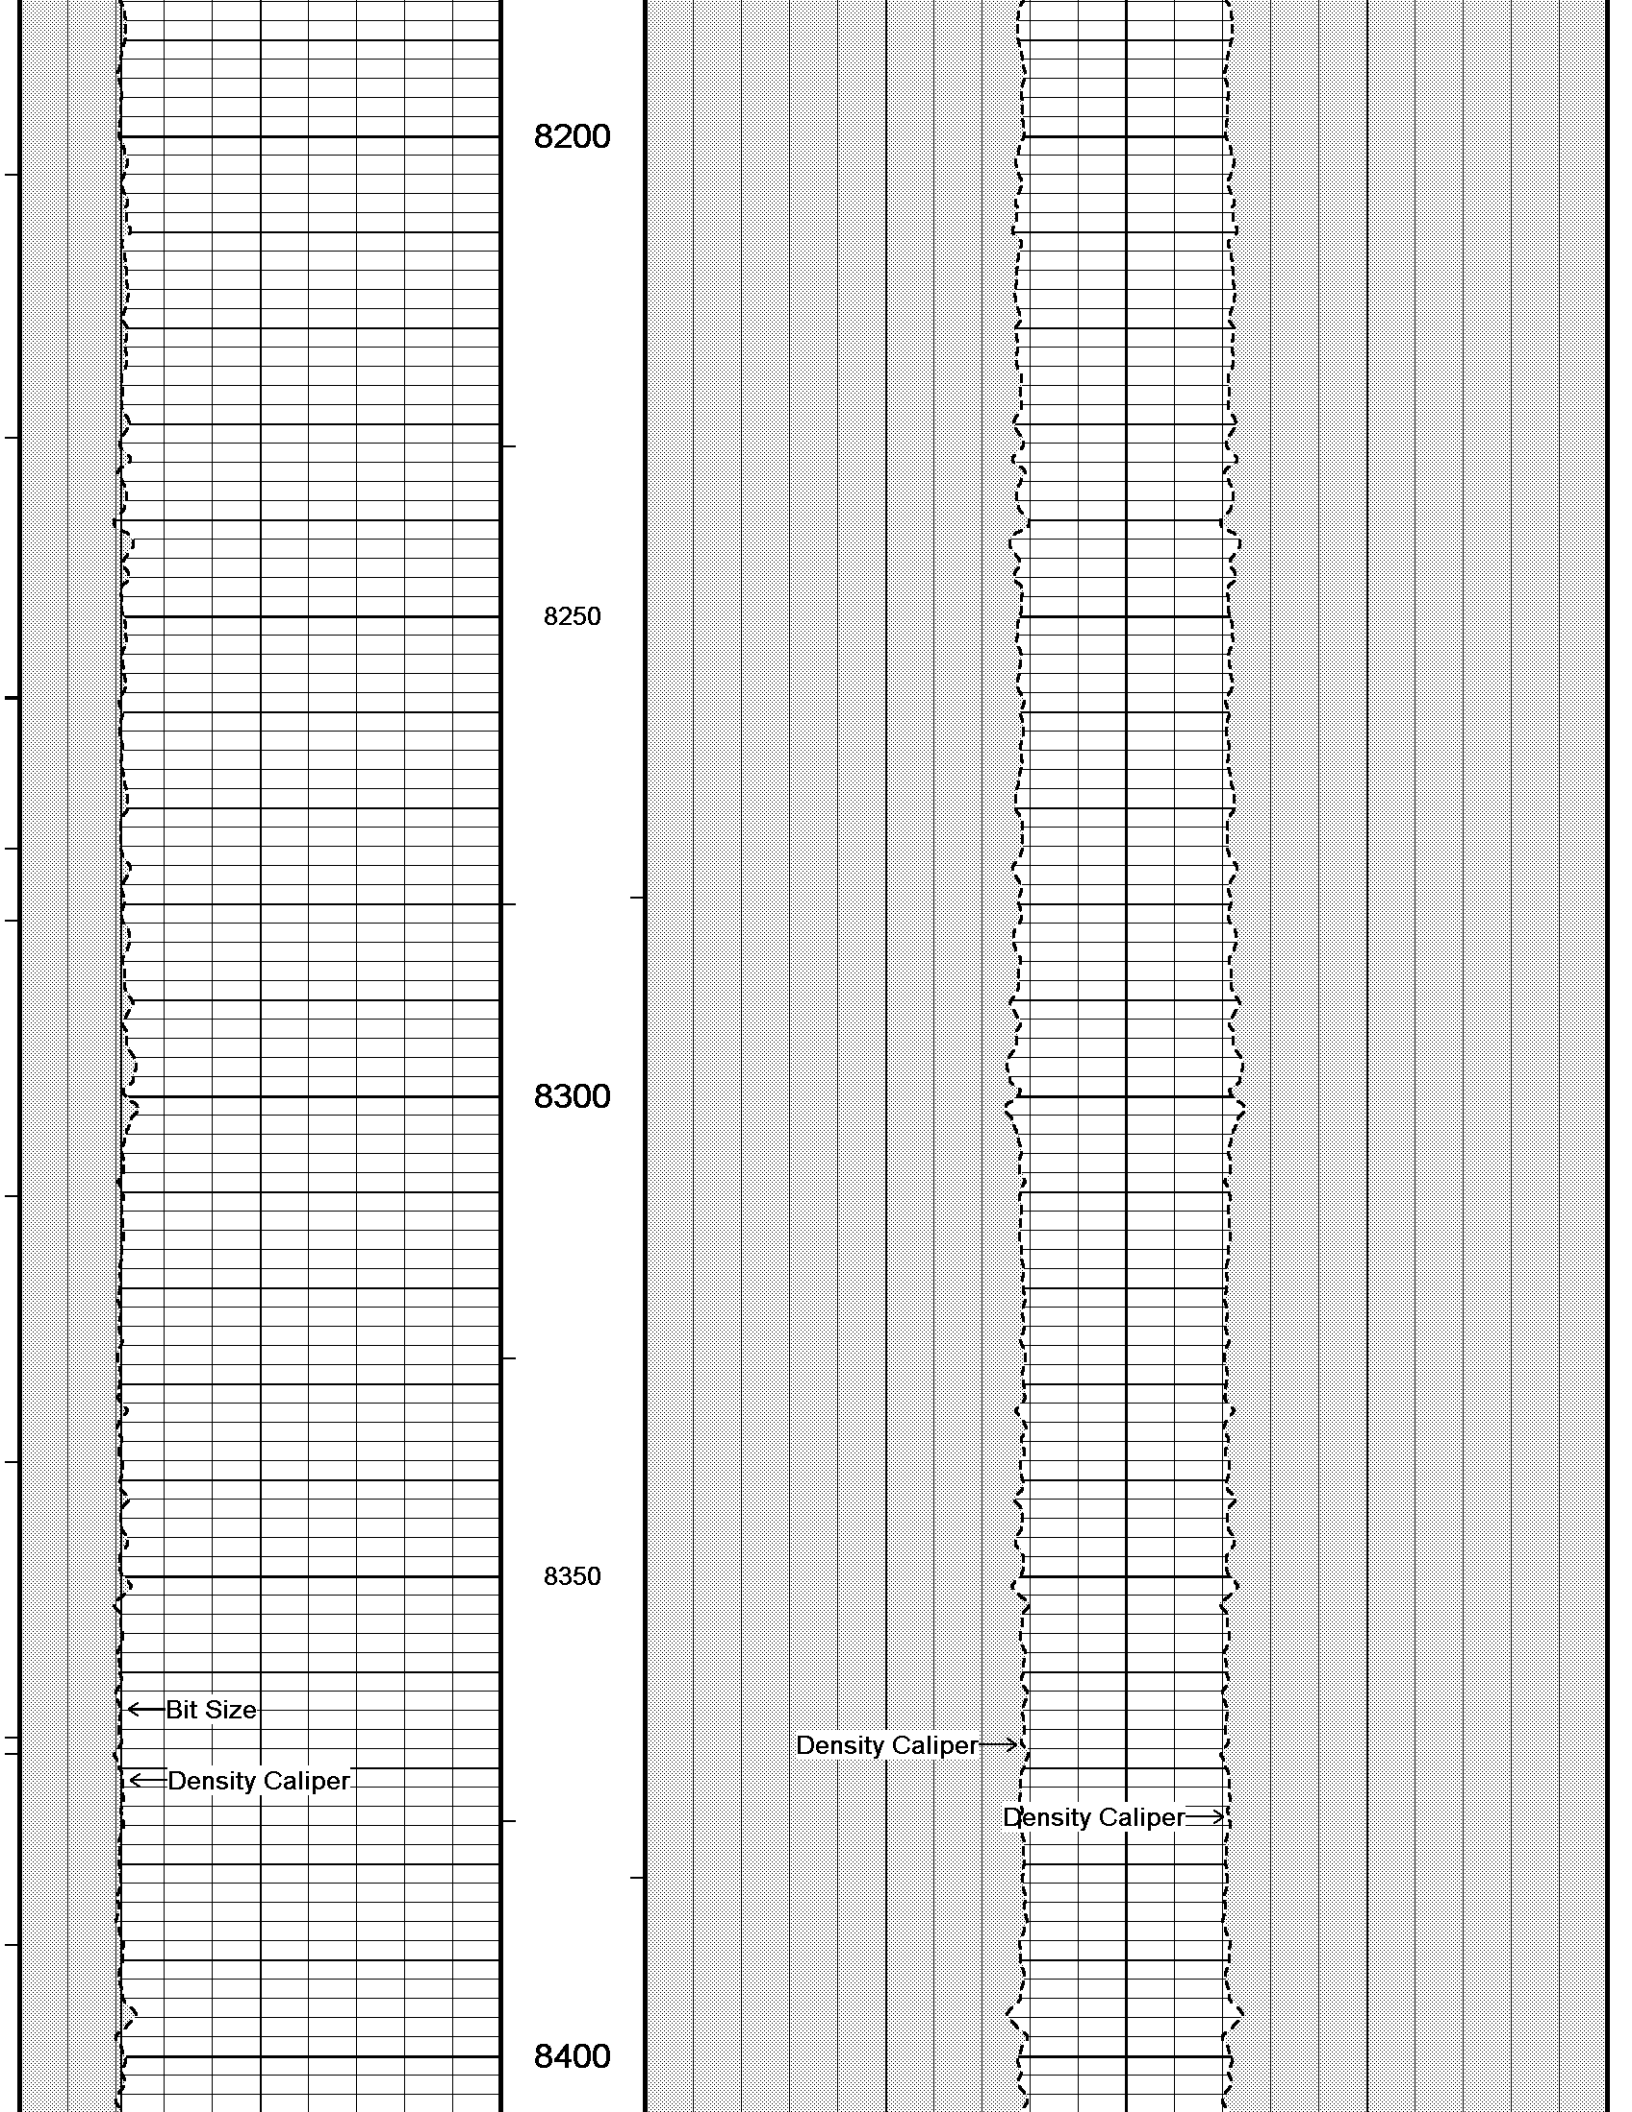

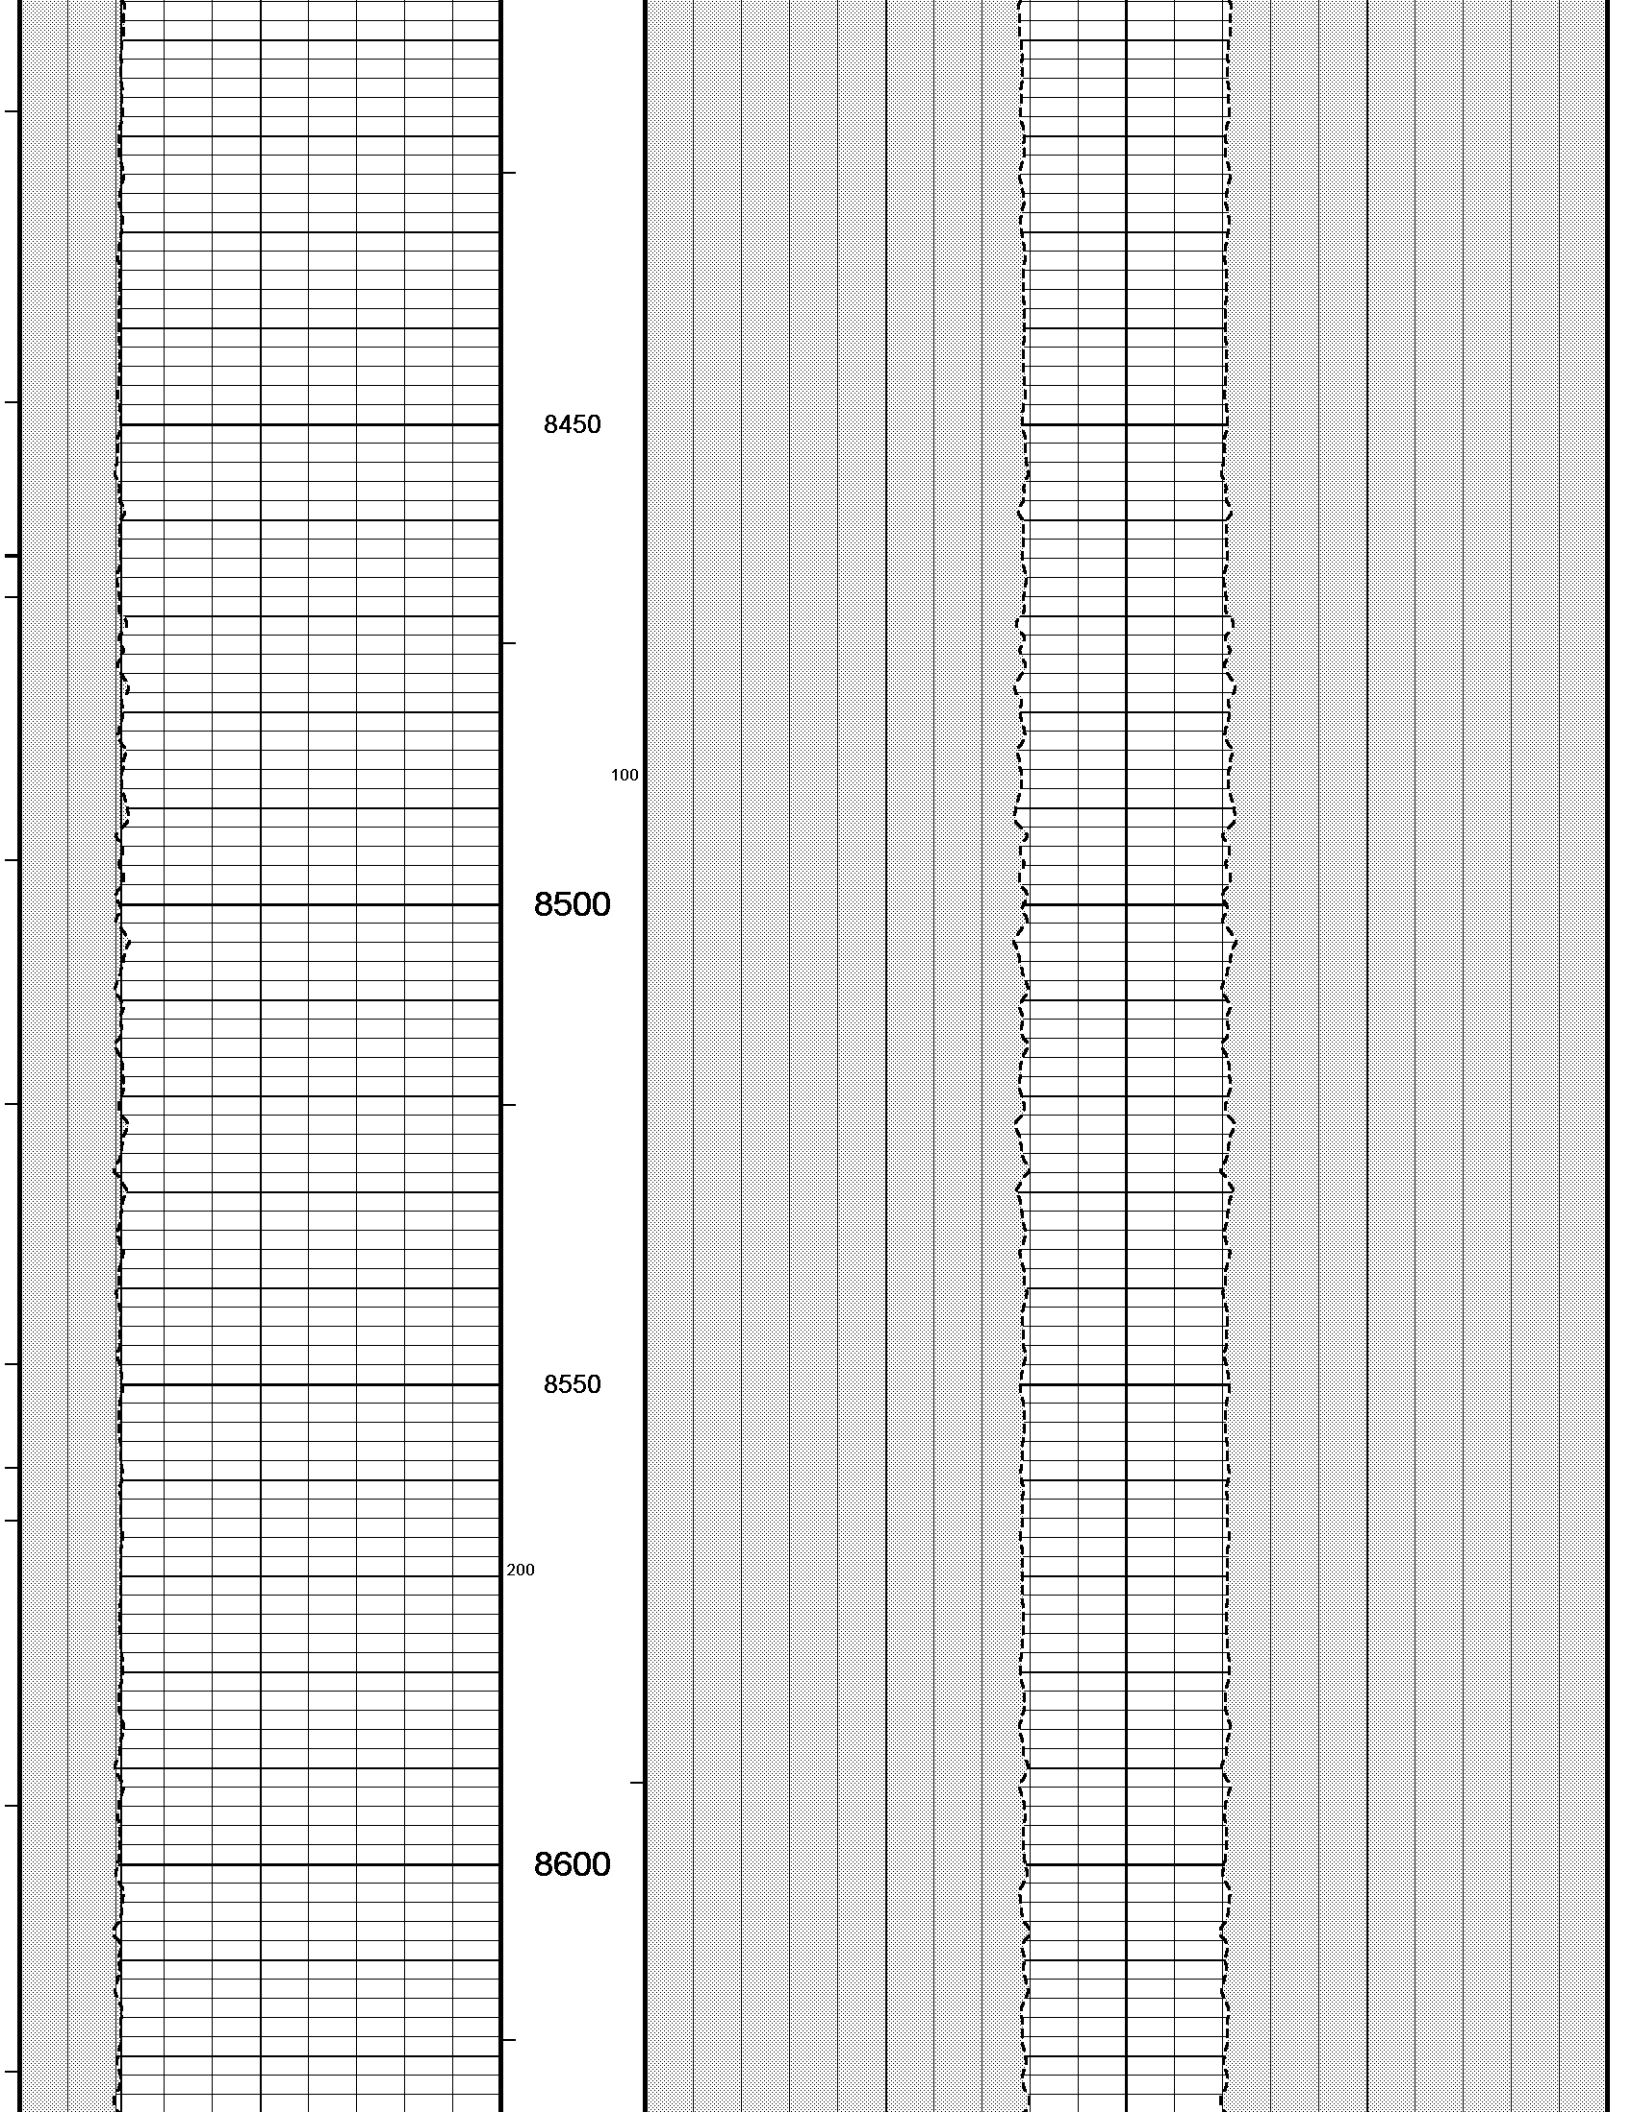

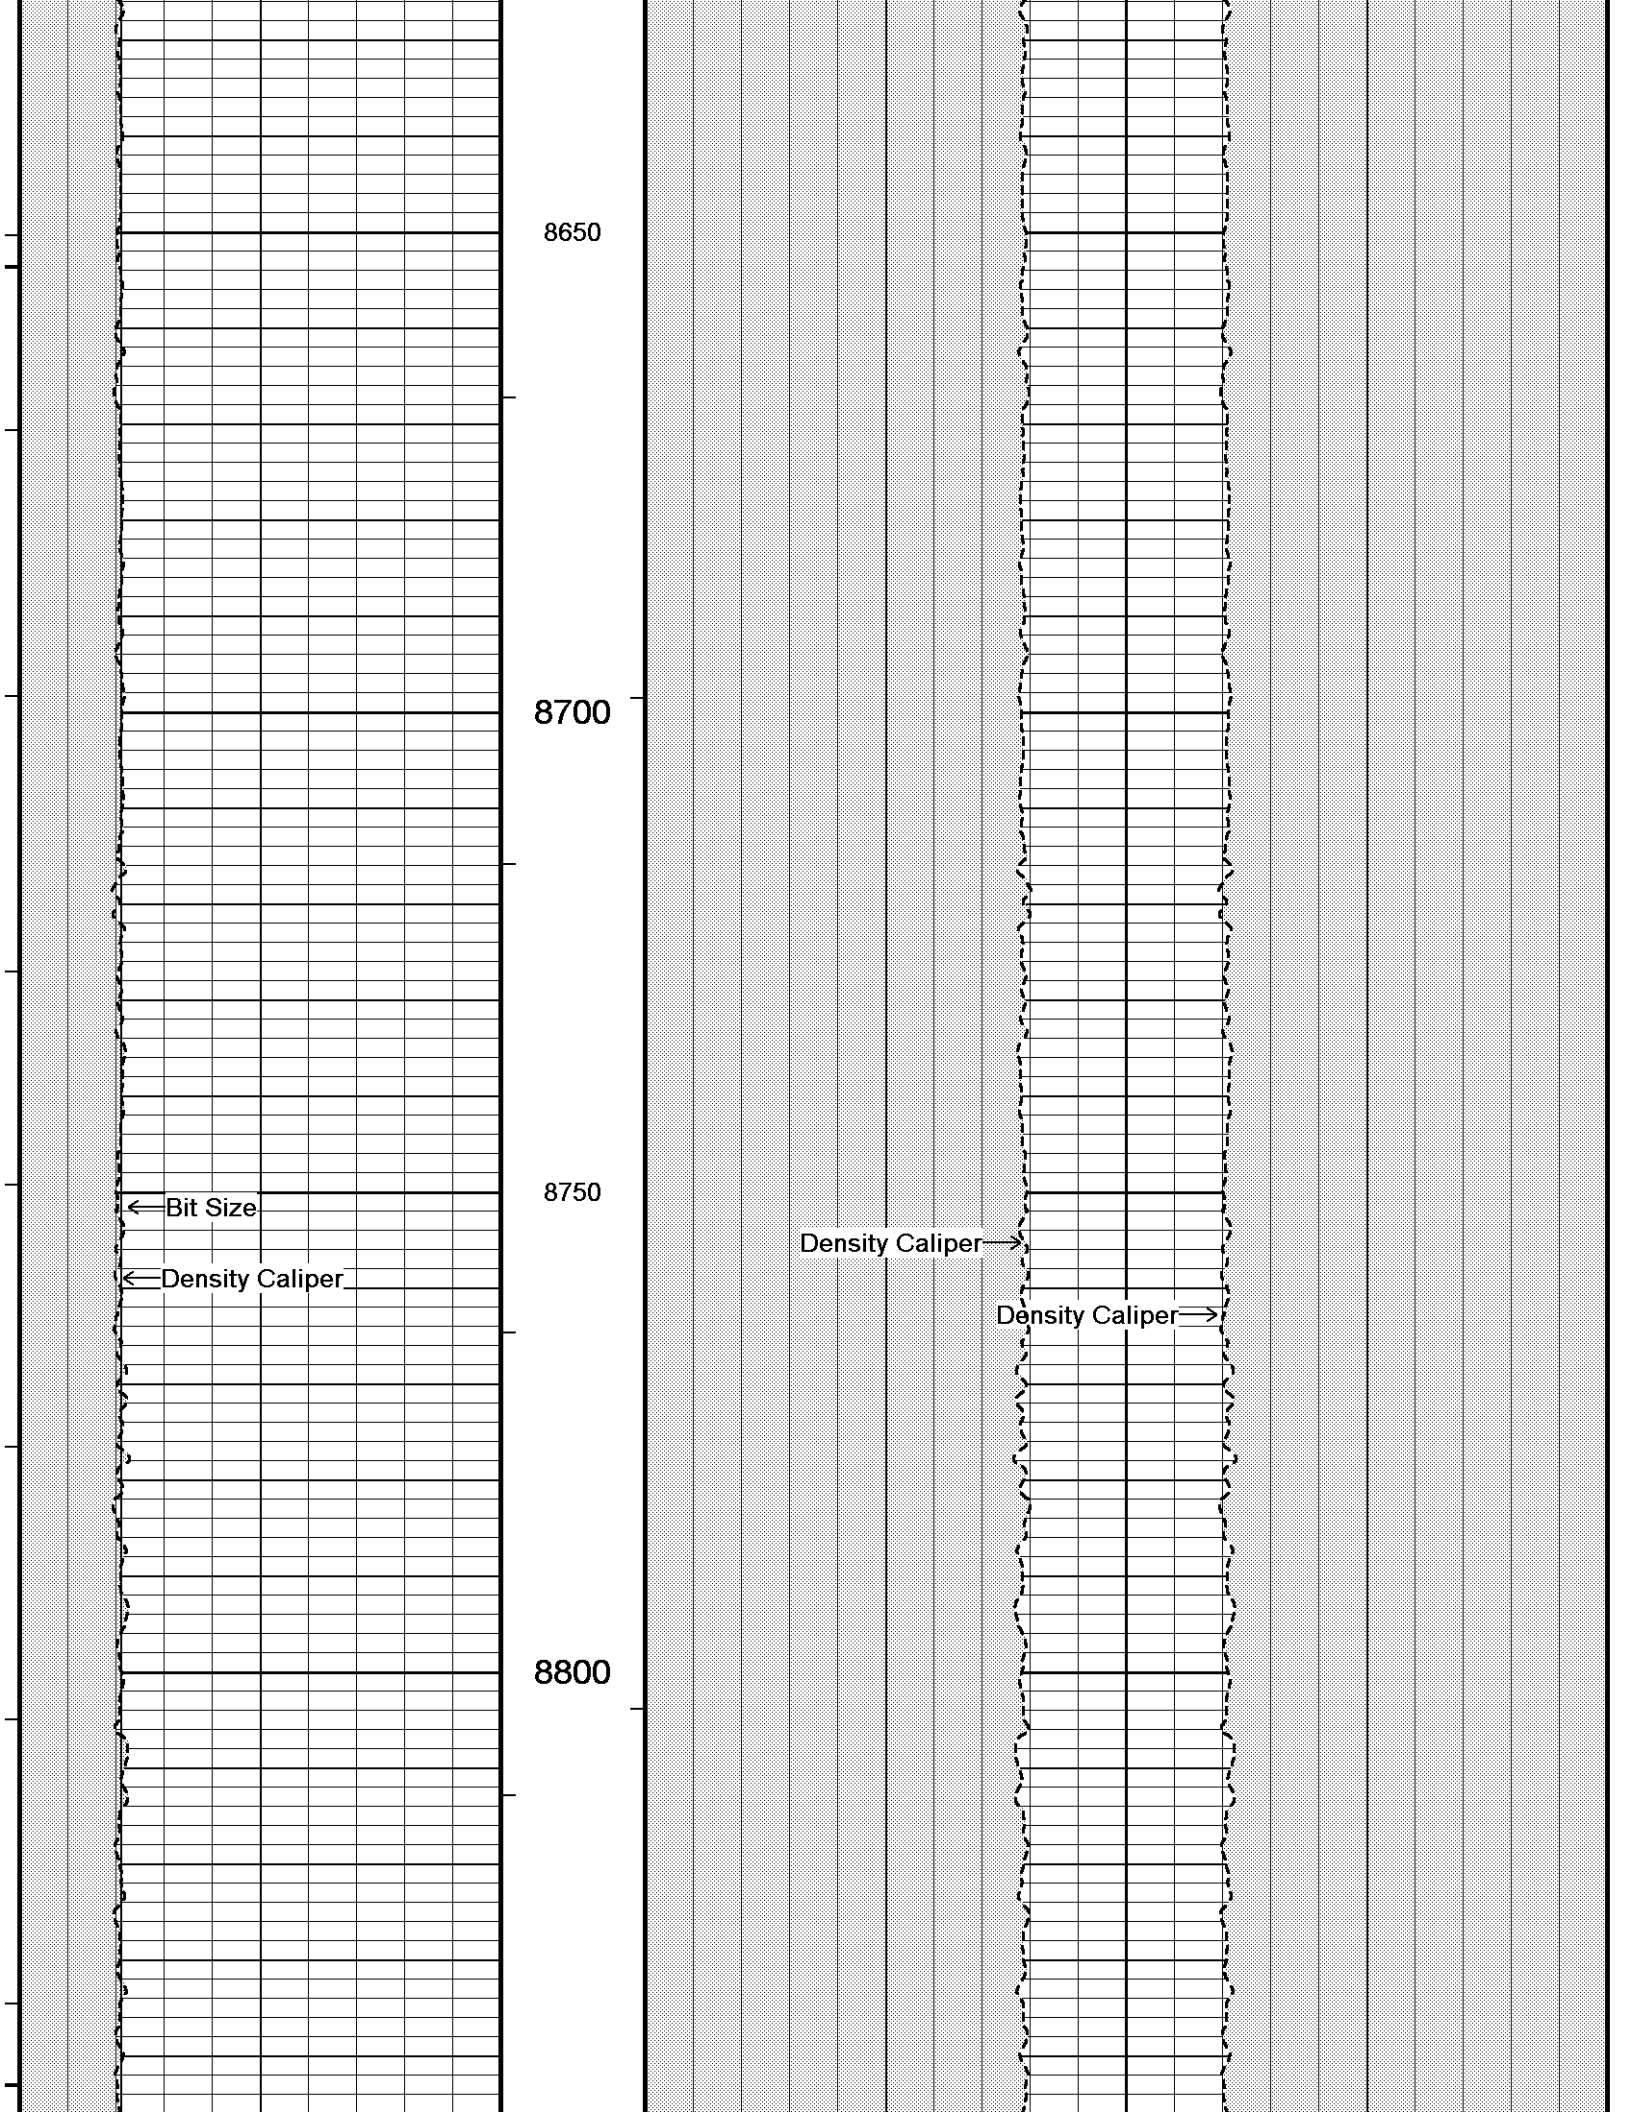

8650

8700

8750

8800

← Bit Size

← Density Caliper

Density Caliper →

Density Caliper →

8850


8900


8950

9000

9050

100

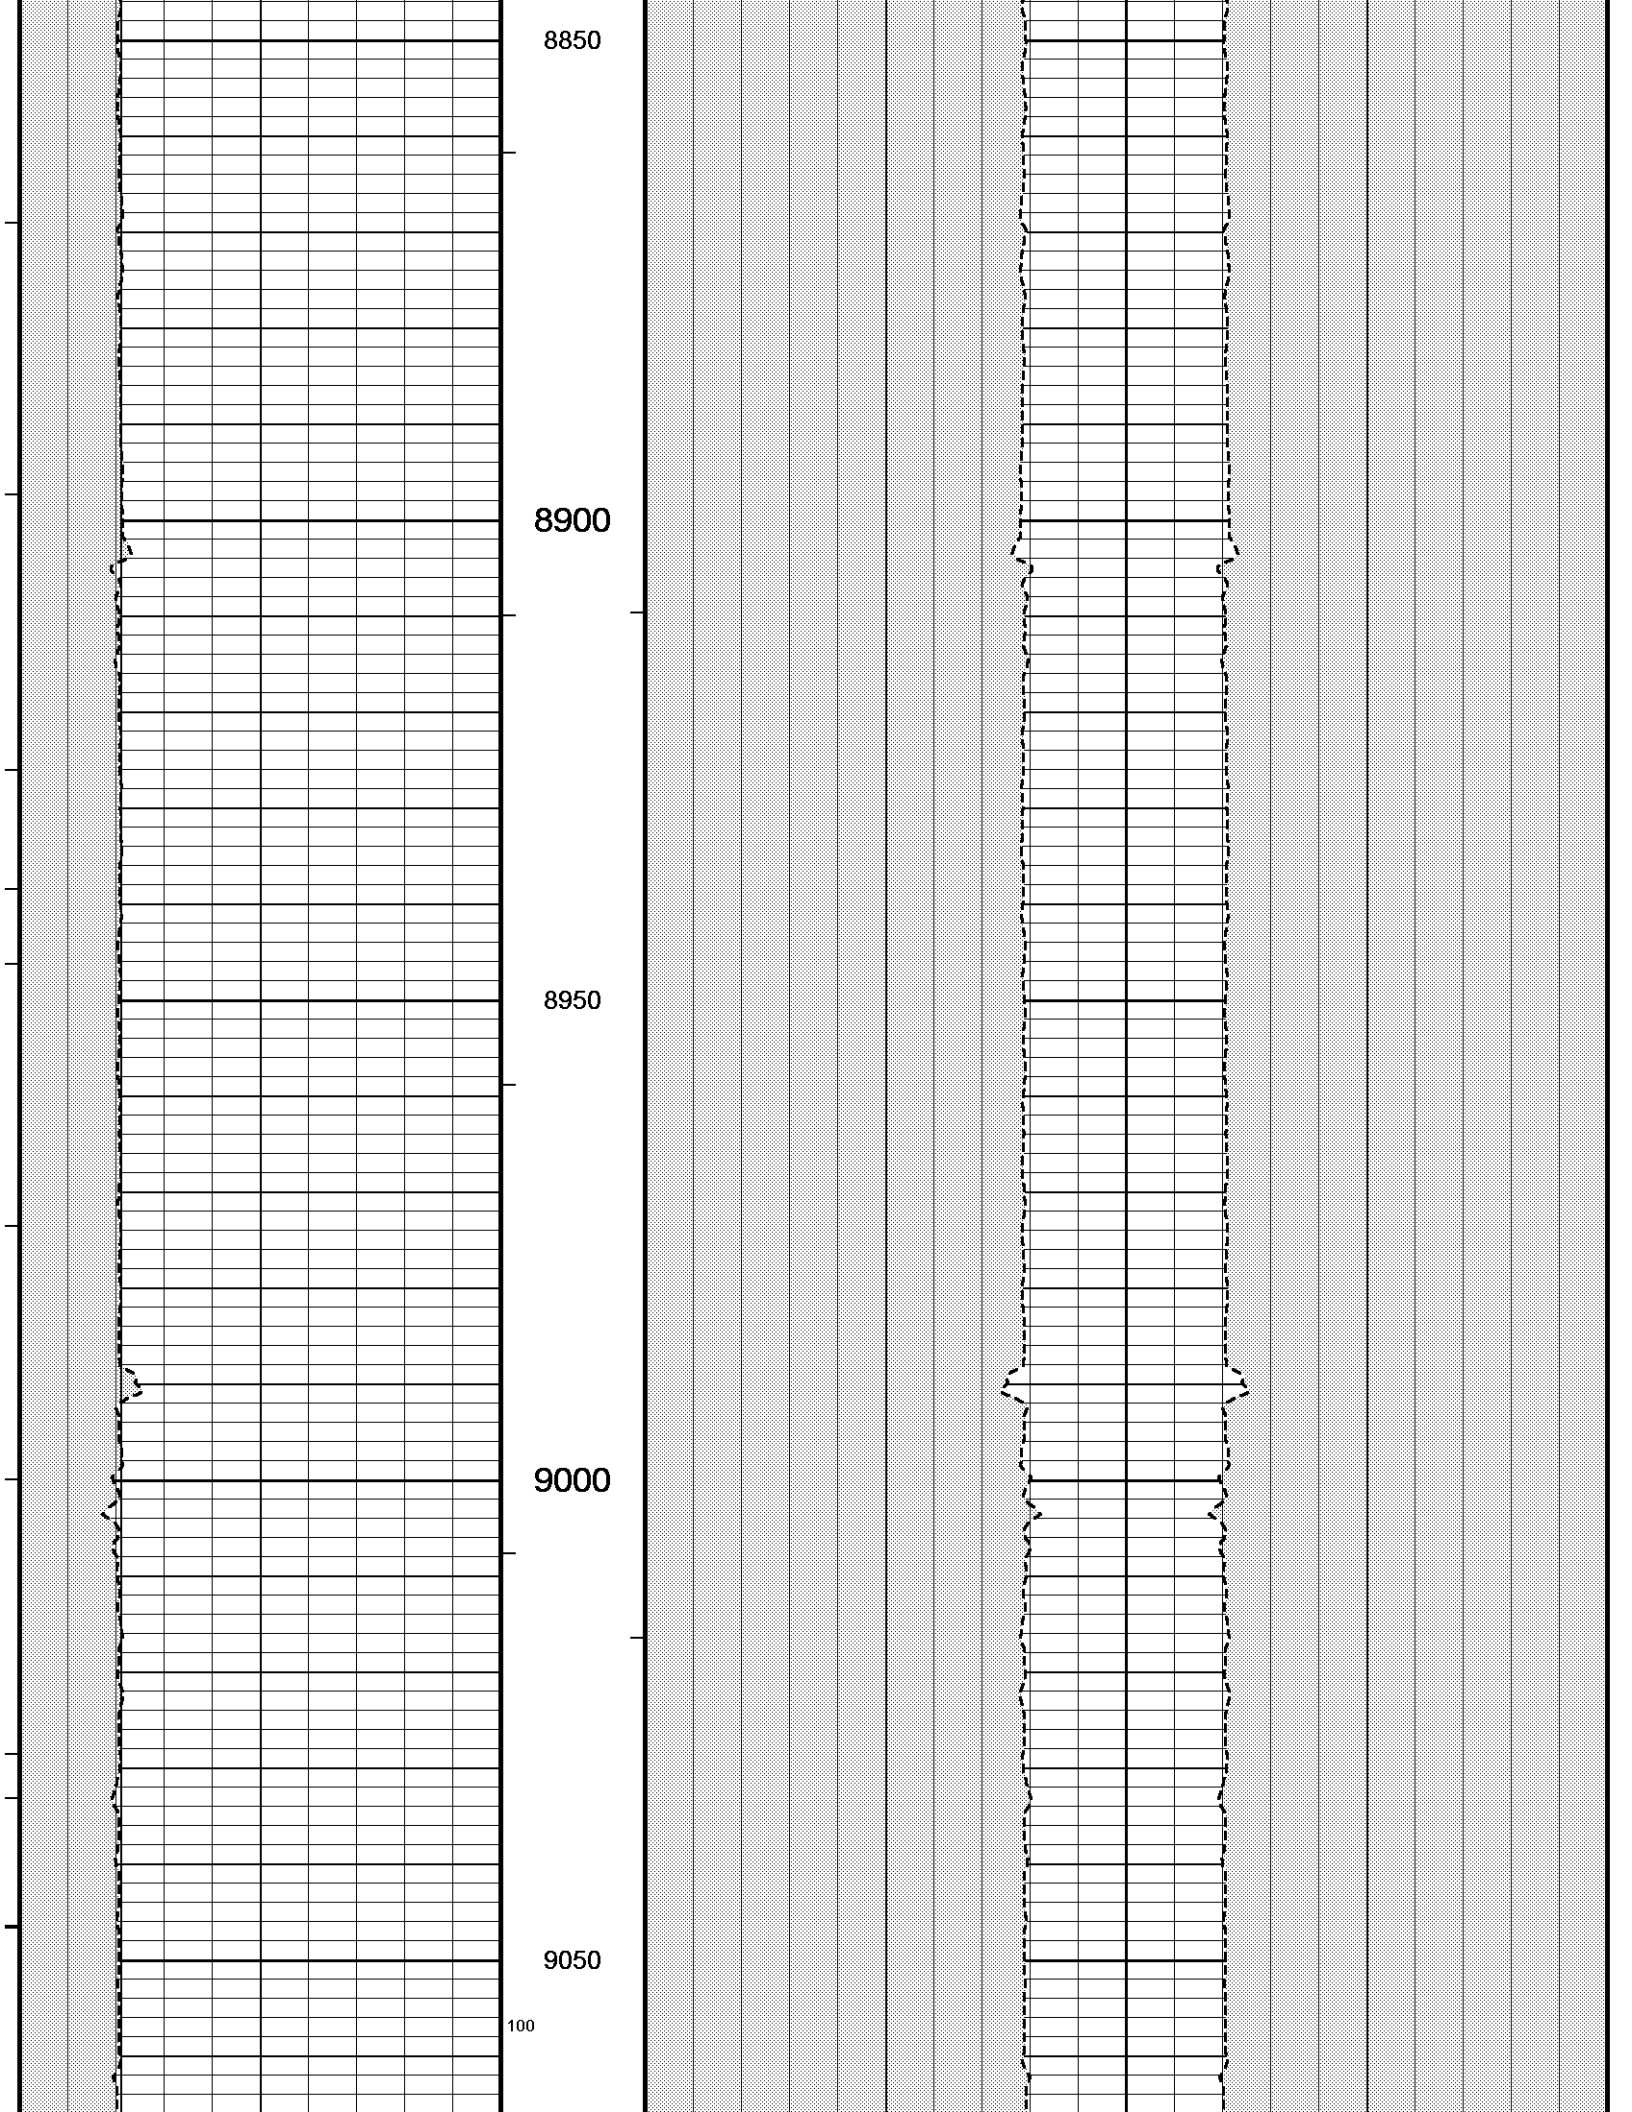

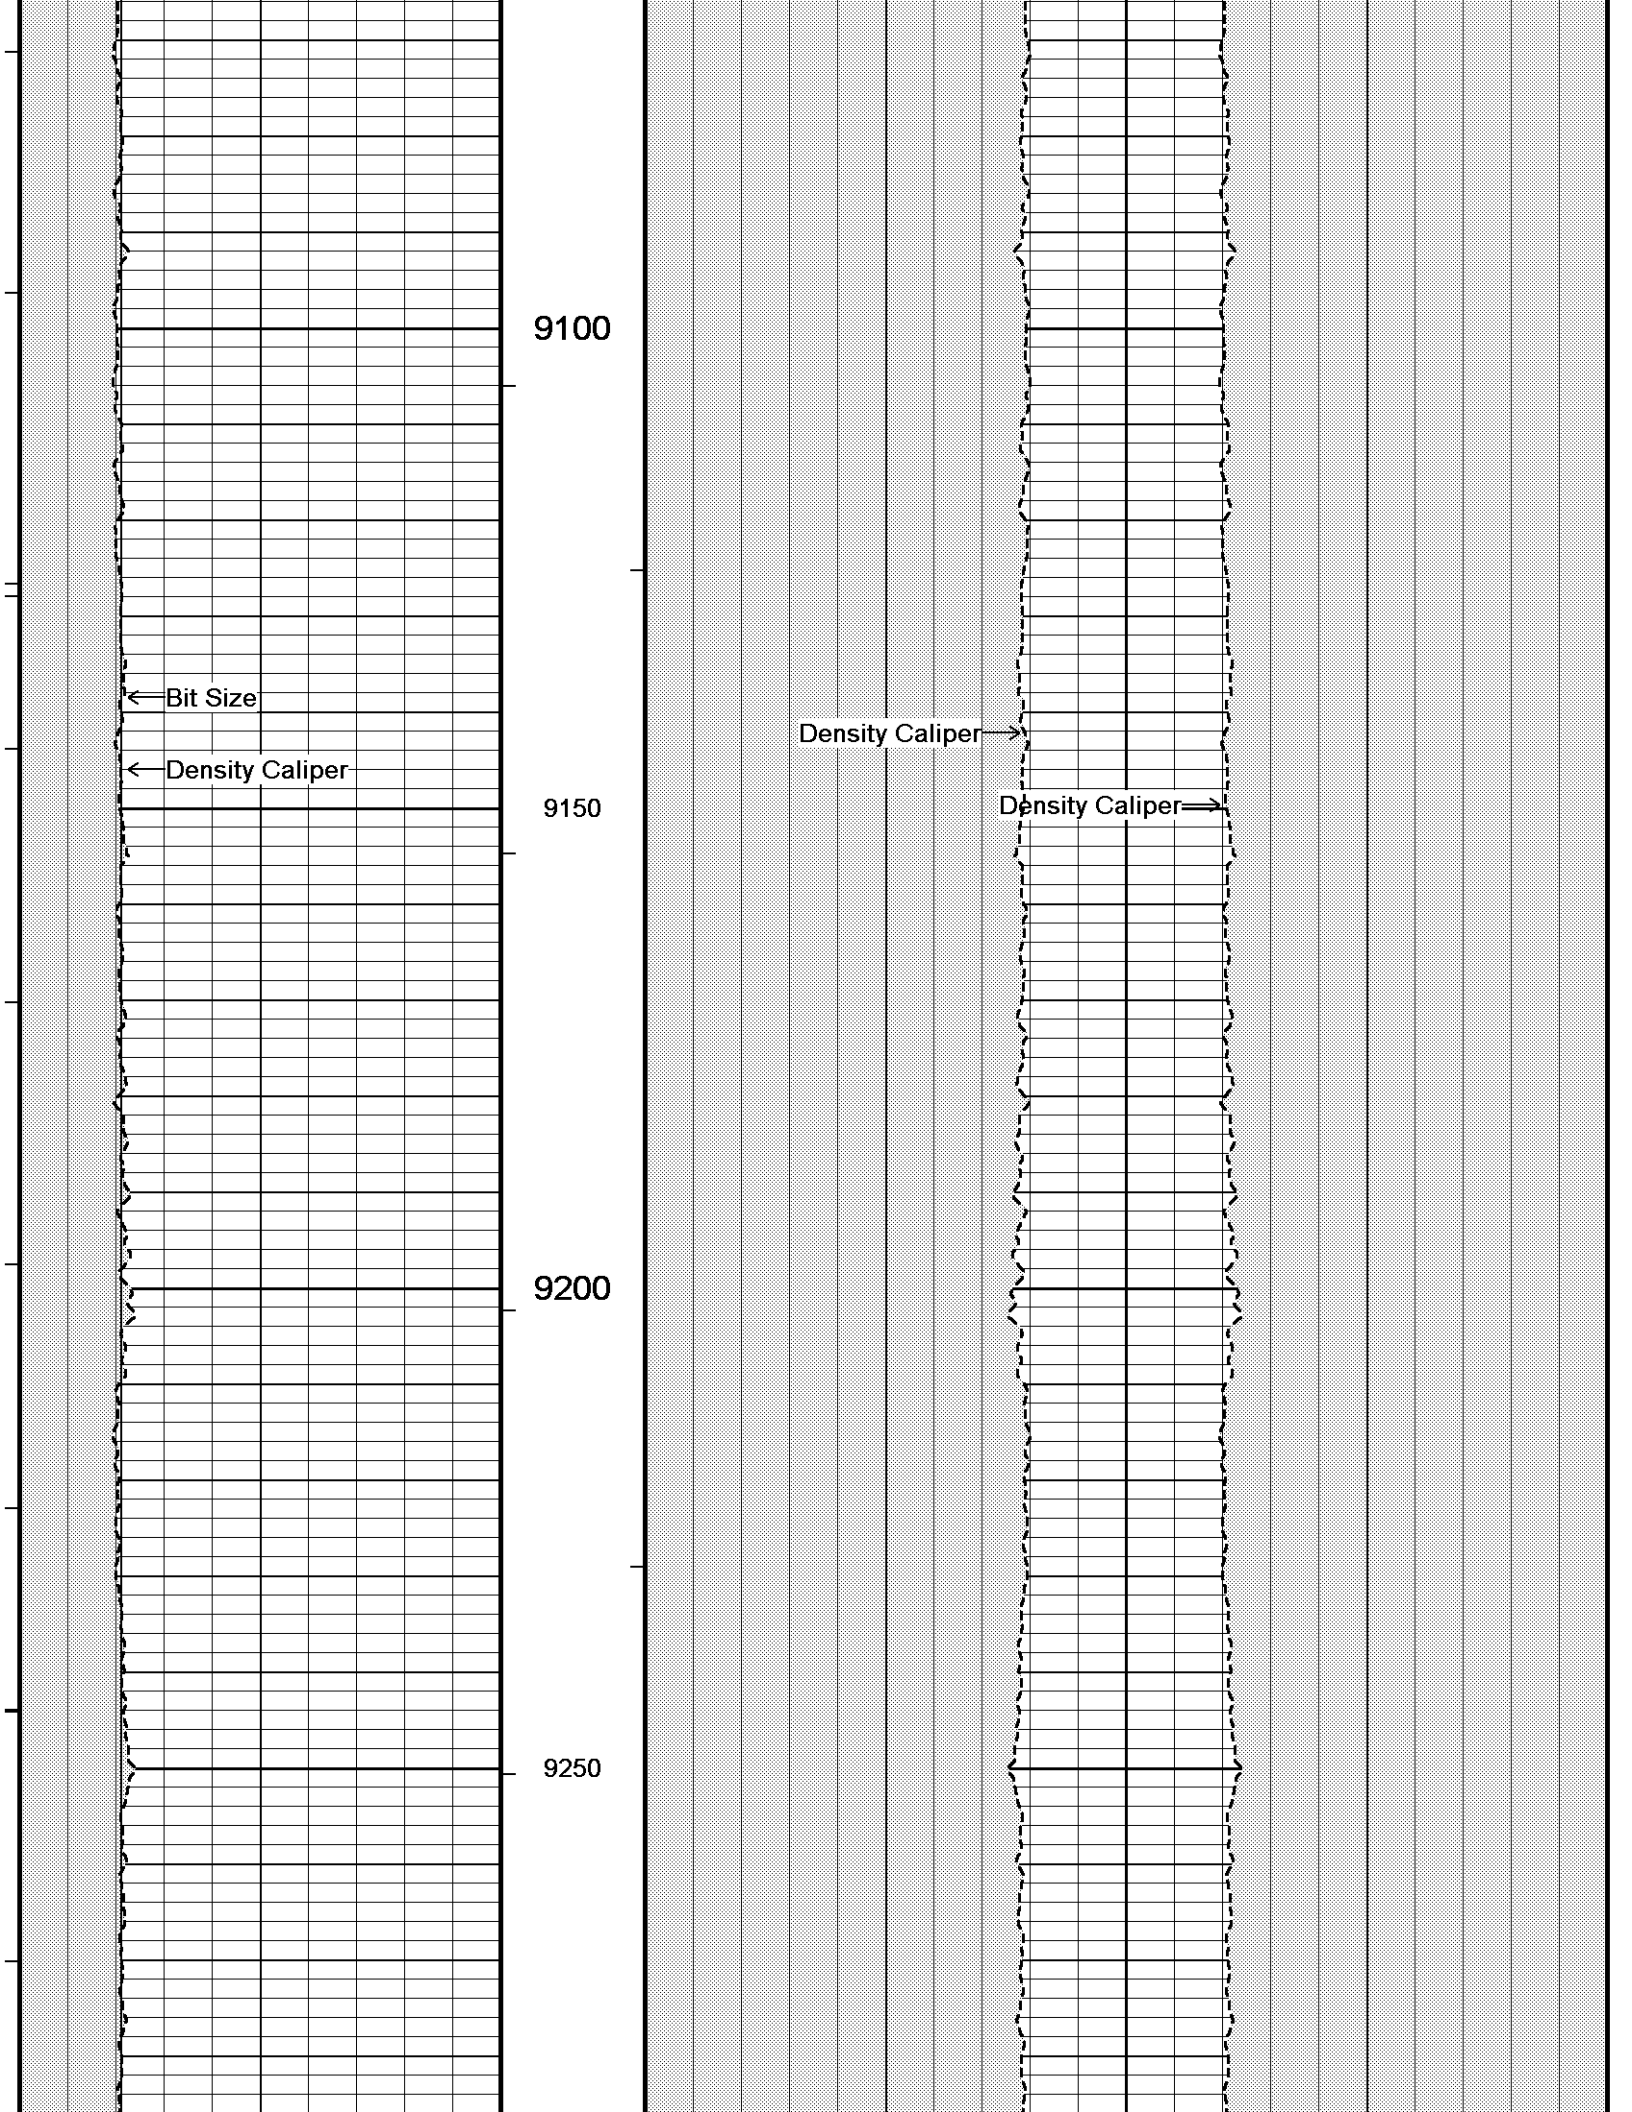

9100

← Bit Size

Density Caliper →


← Density Caliper


9150

Density Caliper →

9200

9250

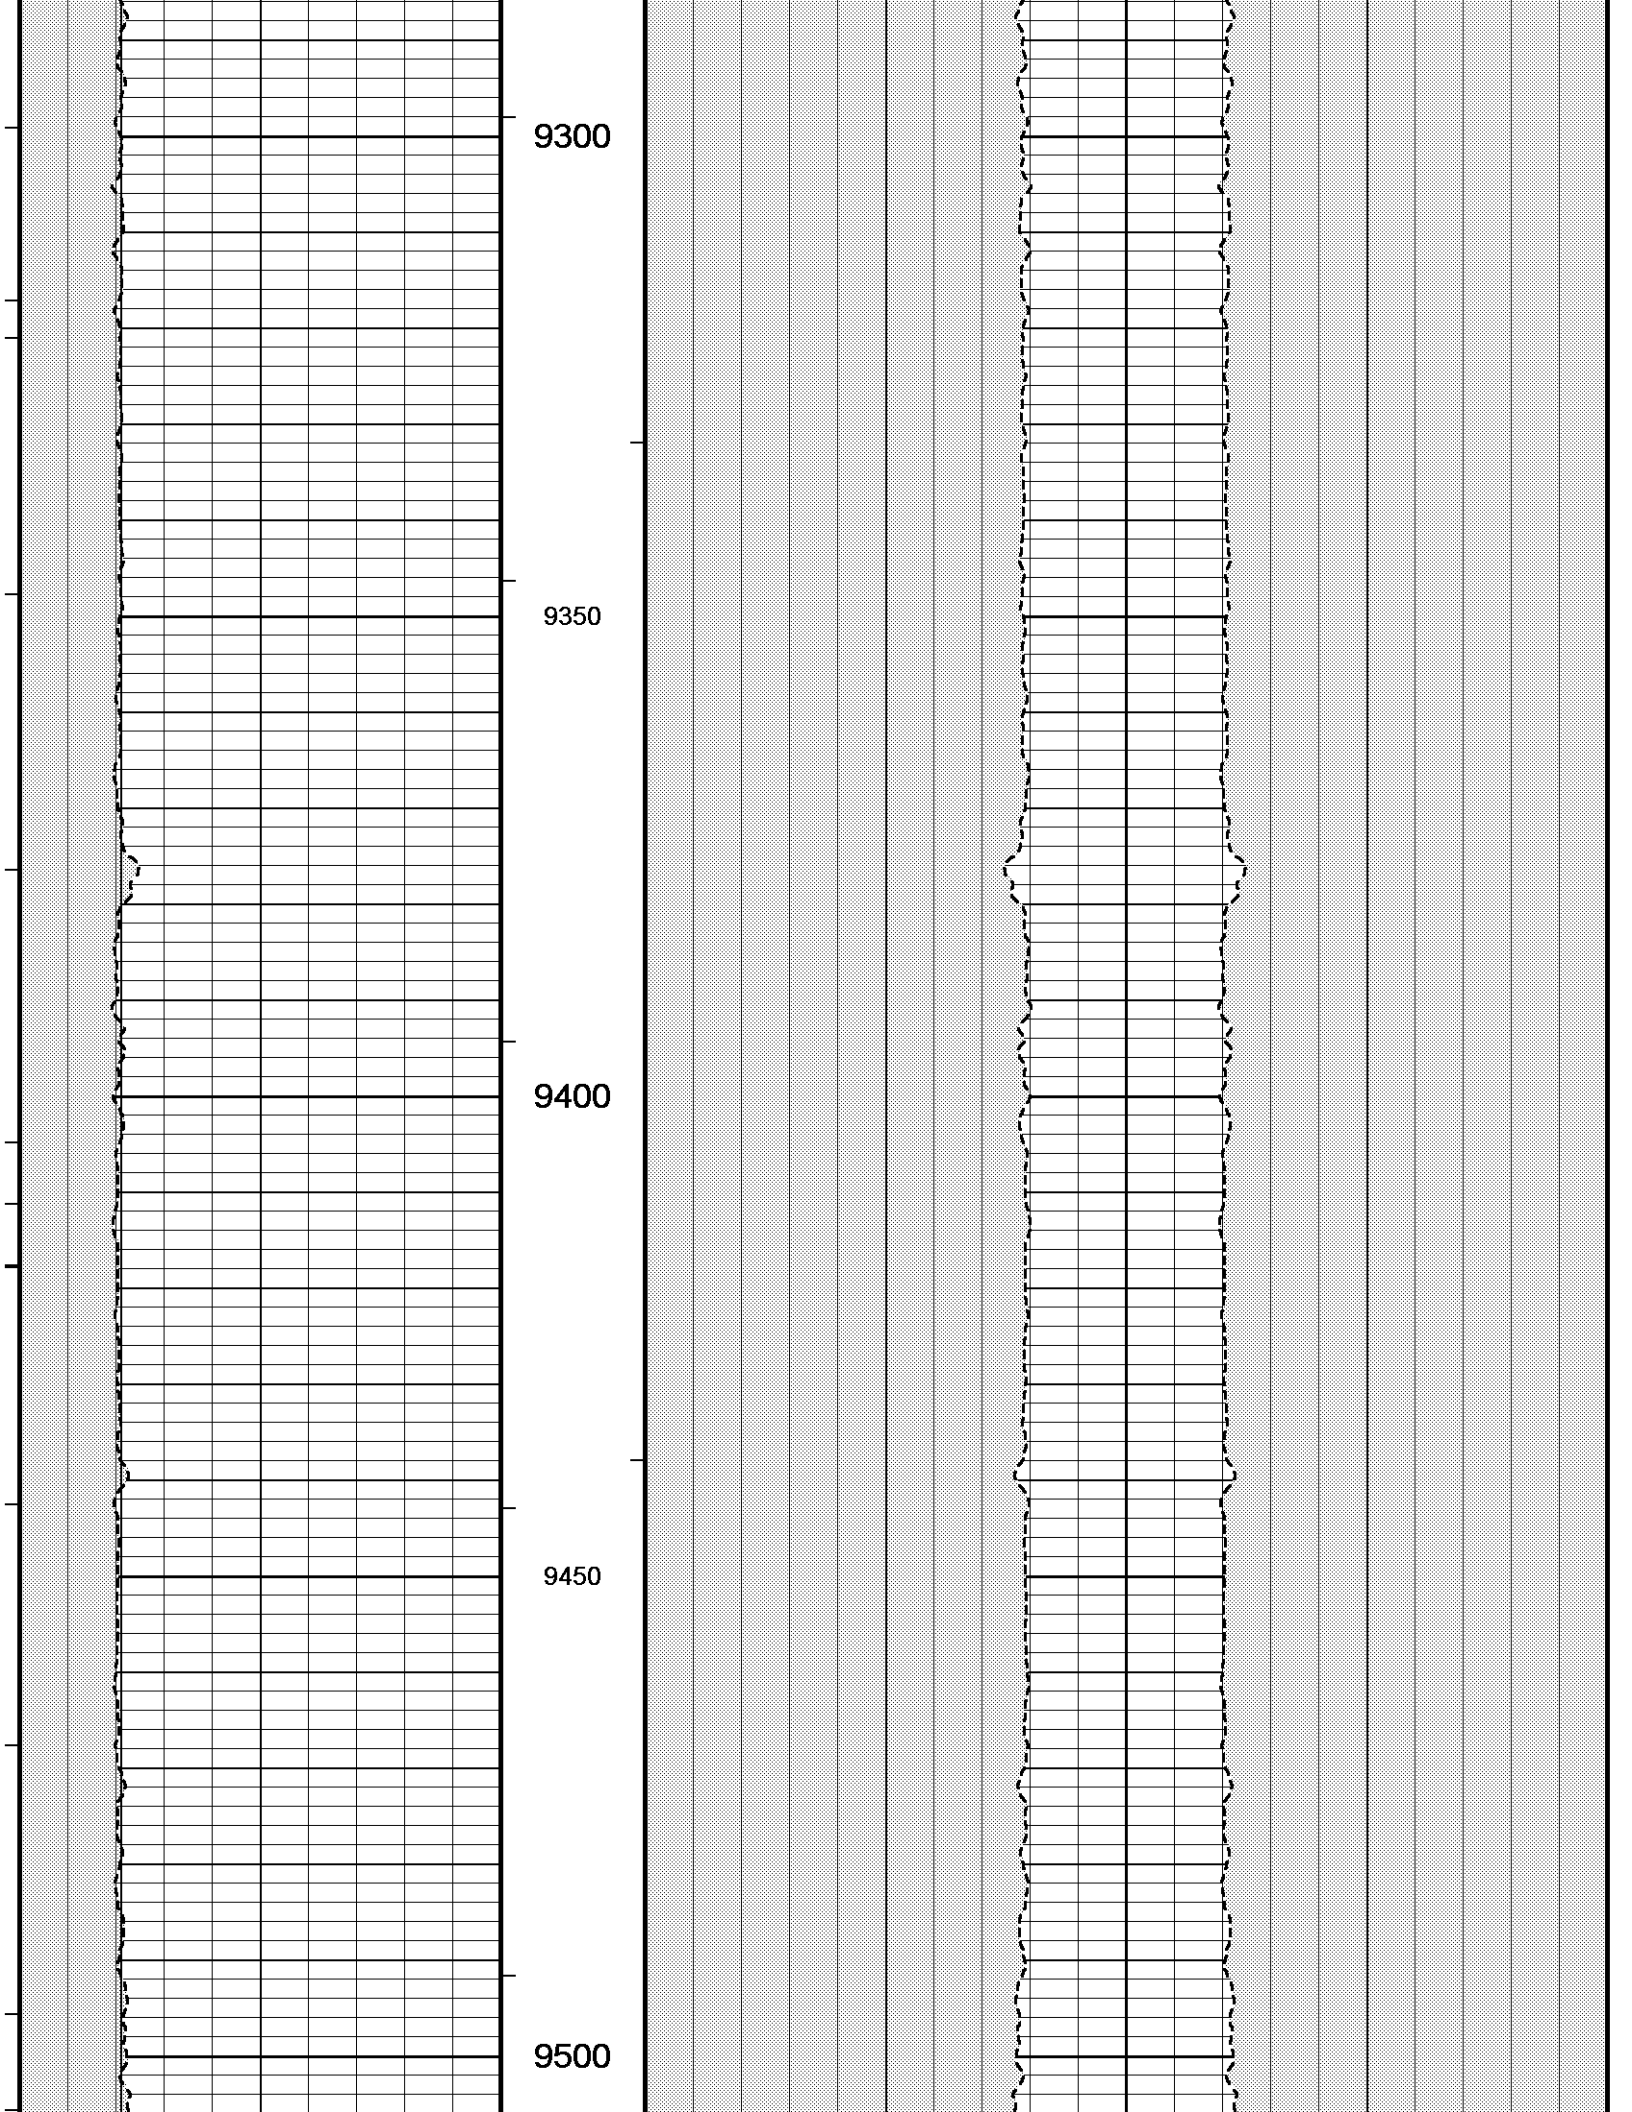

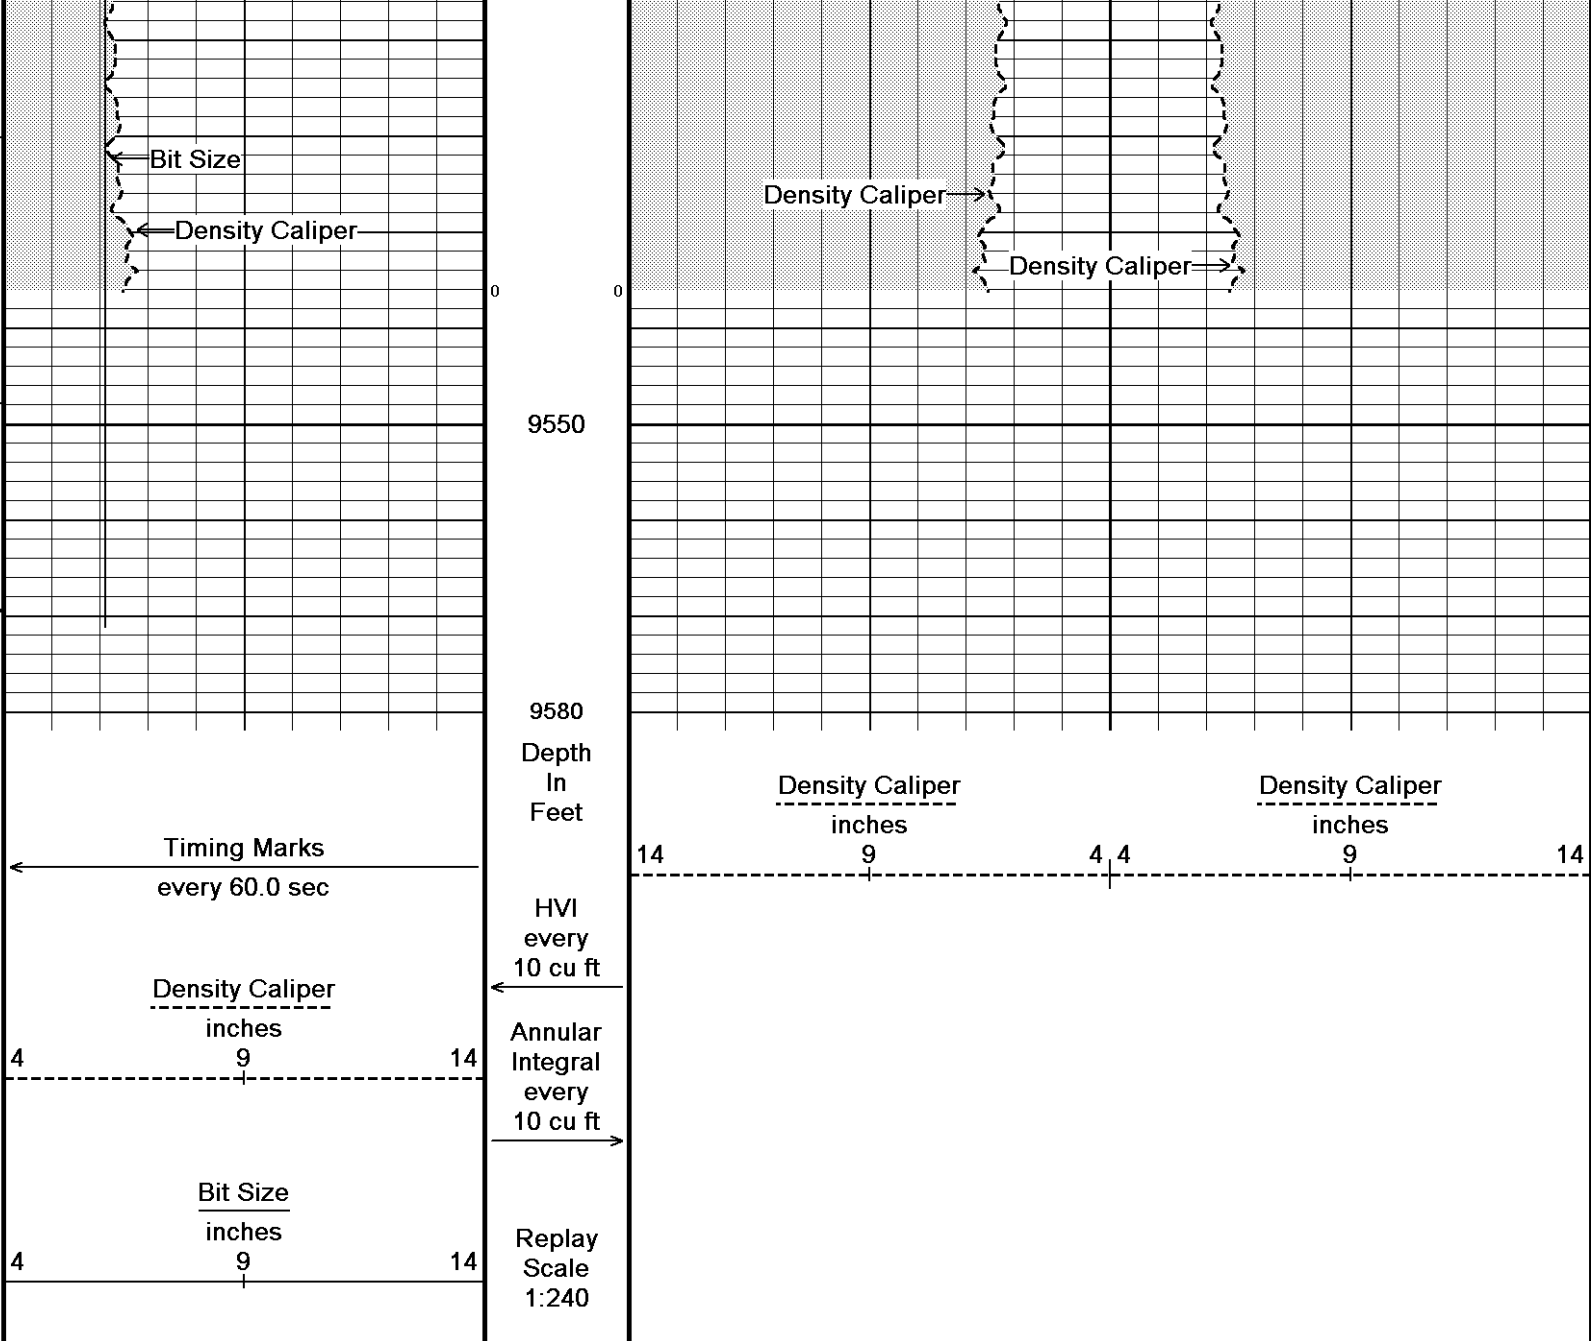

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 11-MAY-2013 02:35  
 Filename: C:\Minimus 13.04.8492\Data\SANDRIDGE (SALLY 34202-12H)\RTAP 28529.dta Recorded on 11-MAY-2013 01:31  
 System Versions: Processed with 13.04.8492 Plotted with 13.04.8492

↑ **RUN 1 / DESCENT 1 DSC** ↑

**BEFORE SURVEY CALIBRATION**  
 C:\Minimus 13.04.8492\Data\SANDRIDGE (SALLY 34202-12H)\RTAP 28529.dta

Down-hole Tension Calibration All 000 Field Calibration on 24-FEB-2009 00:00

Reading No	Measured	
1	14953.75	0.00
2	17846.38	1500.00

General Constants All 000 Last Edited on 11-MAY-2013,01:40

General Parameters

Mud Resistivity	1.600	ohm-metres
Mud Resistivity Temperature	74.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters  
 HVOL Method Single Caliper



Field Calibrator at Base	Calibrated (cps)	1296	1890
Ratio		0.685	
Field Check	Calibrated (cps)	1305	1902
Ratio		0.686	

Neutron Constants MDN-B.J 390

Last Edited on 10-MAY-2013,03:53

Neutron Source Id	p33312b		
Neutron Jig Number	blue		
Epithermal Neutron	No		
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	None		
Formation Pressure	N/A	kpsi	
Temperature Source	None		
Temperature	N/A	degrees F	
Mud Salinity	1.00	kppm	
Salinity Correction	Not Applied		
Formation Fluid Salinity Source	None		
Formation Fluid Salinity	N/A	kppm	
Barite Mud Correction	Not Applied		

FE Calibration MFE-B.J 359

Base Calibration on 06-MAY-2013,03:37  
Field Check on 10-MAY-2013 03:38

Base Calibration			
	Measured	Calibrated (ohm-m)	
Reference 1	0.0	0.0	
Reference 2	960.4	126.8	
Base Check		280.9	
Field Check		280.9	

FE Constants MFE-B.J 359

Last Edited on 10-MAY-2013,03:37

Running Mode	No Sleeve		
MFE K Factor	0.1268		
Caliper Source for FE correction	Density Caliper		
Caliper Value for FE correction	N/A	inches	
Rm Source for FE correction	Temperature Corr		
Temp. for Rm Corr.	MGS External Temperature		
Stand-off	0.5	inches	

Induction Calibration MAI-A.A 158

Base Calibration on 06-APR-2013,15:50  
Field Check on 10-MAY-2013 03:31

Base Calibration					
Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel		Low	High	Low	High
1		17.2	475.3	9.3	966.2
2		6.1	381.2	7.6	821.4
3		3.8	265.2	5.2	566.0
4		2.7	132.2	2.6	279.2
Array Temperature		22.3		Deg F	
Channel		Base Check (mmho/m)		Field Check (mmho/m)	
		Low	High	Low	High
1		0.0	0.0	11.1	3813.3
2		0.0	0.0	28.6	3529.3
3		0.0	0.0	26.0	2980.2
4		0.0	0.0	17.2	2096.5
Deep				14.2	1942.7
Medium				39.5	3886.1
Shallow				45.1	5234.9

## Induction Constants MAI-A.A 158

Last Edited on 11-MAY-2013,01:40

Induction Model		RtAP-WBM	
Caliper for Borehole Corr.		Density Caliper	
Hole Size for Borehole Correction		N/A	inches
Tool Centred		No	
Stand-off Type		Fins	
Stand-off		0.50	inches
Number of Fins on Stand-off		6.0000	
Stand-off Fin Angle		60.00	degrees
Stand-off Fin Width		0.0000	inches
Borehole Corr. Rm Source		Temperature Corr	
Temp. for Rm Corr.	MGS External Temperature		
Squasher Start		0.0020	mhos/metre
Squasher Offset		N/A	mhos/metre
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

## Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

## Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

## High Resolution Temperature Calibration MAI-A.A 158

Field Calibration on 08-MAY-2013,00:40

	Measured	Calibrated(Deg F)
Lower	0.00	0.00
Upper	0.00	0.00

## High Resolution Temperature Constants MAI-A.A 158

Last Edited on 08-MAY-2013,00:40

Pre-filter Length 11

## Caliper Calibration MPD-C.J 395

Base Calibration on 12-APR-2013 12:45

Field Calibration on 10-MAY-2013 03:52

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	16915	4.01
2	26128	5.96
3	36016	7.98
4	45536	9.86
5	56240	11.88
6	N/A	N/A
Field Calibration		
	Measured Caliper (in)	Actual Caliper (in)
	5.95	5.96

## Photo Density Calibration MPD-C.J 395

Base Calibration on 12-APR-2013 13:04

Field Check on 10-MAY-2013 03:49

Density Calibration			
Base Calibration			
	Measured	Calibrated (sdu)	
	Near	Near	Far
Depth 1	54822	25012	28754

Reference 1	54898	25312	59494	30754
Reference 2	23577	2623	26390	2598

Field Check at Base  
1252.9 1430.5

Field Check  
1247.2 1428.2

PE Calibration

Base Calibration		Measured		Calibrated
	WS	WH	Ratio	Ratio
Background	225	1122		
Reference 1	23031	54699	0.426	0.367
Reference 2	6699	23434	0.290	0.270

Field Check at Base  
225.3 1121.8

Field Check  
225.2 1116.6

Density Constants MPD-C.J 395

Last Edited on 10-MAY-2013,16:25

Density Source Id	p21137b	
Nylon Calibrator Number	766	
Aluminium Calibrator Number	856	
Density Shoe Profile	4 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.08	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

DOWNHOLE EQUIPMENT

C:\Minimus 13.04.8492\Data\SANDRIDGE (SALLY 34202-12H)\RTAP 28529.dta

Shuttle Running Tool 3.5" )  
SRT-A.A 70 LG: 6.62 ft WT: 37.5 lb OD: 2.52 in



MBS-F.A 200v Compact Battery Sub  
MBS-F.A 112 LG: 10.61 ft WT: 70.5 lb OD: 2.24 in



Compact Neutron  
MDN-B.J 390 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in


Compact Density/Caliper  
MPD-C.J 395 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

MIS-D.B Compact Inline Bowspring sub  
MIS-D.B 591 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor  
SHA-J.A 435 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint  
SKJ-E.B 469 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in


MIS-E.B Compact Inline Standoff sub  
MIS-E.B 576 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

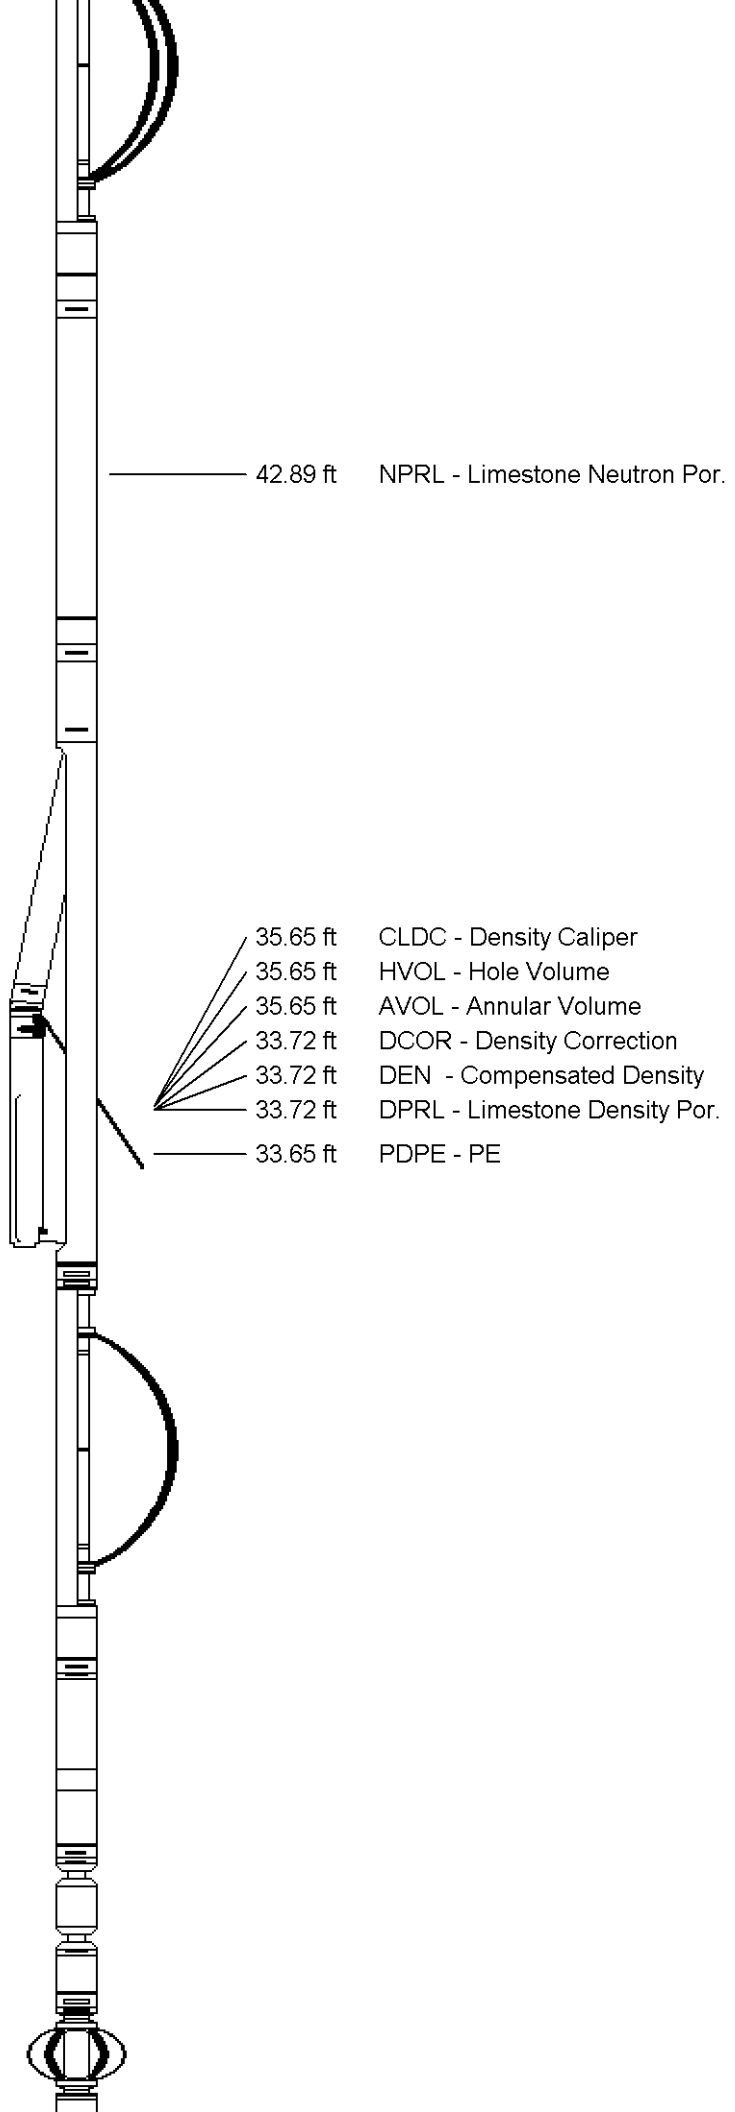

Compact Focussed Electric  
 MFE-B.J 359 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

MIS-E.B Compact Inline Standoff sub  
 MIS-E.B 573 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Induction  
 MAI-A.A 158 LG: 12.52 ft WT: 48.5 lb OD: 2.24 in



- 3.34 ft CTAO - Array Ind. One Cond Ct
- 3.34 ft R300 - Array Ind. One Res 30
- 3.34 ft R400 - Array Ind. One Res 40
- 3.34 ft R600 - Array Ind. One Res 60
- 3.34 ft R850 - Array Ind. One Res 85
- 3.34 ft RTAO - Array Ind. One Res Rt

Tool Zero (1.84ft from bottom)

Total Length: 88.36 ft Weight: 637.1 lb

All measurements relative to tool zero.

**COMPANY** SANDRIDGE ENERGY  
**WELL** SALLY 3420 2-12H  
**FIELD** COMANCHE PROSPECT  
**PROVINCE/COUNTY** COMANCHE  
**COUNTRY/STATE** USA / KANSAS

Elevation Kelly Bushing	1809.00	feet	First Reading	9537.00	feet
Elevation Drill Floor	1809.00	feet	Depth Driller	9599.00	feet
Elevation Ground Level	1791.00	feet	Depth Logger	9599.00	feet



**Weatherford**<sup>®</sup>

CML MESSENGER SHUTTLE

CALIPER LOG