NABORS
COMPLETION & PRODUCTION SERVICES CO.

COMPENSATED DENSITY / NEUTRON LOG

Company TRANS PACIFIC OIL CORPORATION
Well ALLISON A #9-13
Field SOLOMON NE
County ELLIS State KANSAS

Location: API # : 15-051-26552-00-00
430' FNL & 680' FWL
SW - NE - NW - NW
SEC 13 TWP 11S RGE 19W

Other Services
DIL/MEL

Elevation
K.B. 1974
D.F. 1972
G.L. 1967

Permanent Datum GROUND LEVEL Elevation 1967
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Date	7-4-13		
Run Number	ONE		
Depth Driller	3530		
Depth Logger	3530		
Bottom Logged Interval	3506		
Top Log Interval	2950		
Casing Driller	1330		
Casing Logger	1328		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.0 / 58		
pH / Fluid Loss	11 / 7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.90 @ 93F		
Rmf @ Meas. Temp	0.68 @ 93F		
Rmc @ Meas. Temp	1.08 @ 93F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.75 @ 112F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	112F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	ALEX CHAPIN		

Company TRANS PACIFIC OIL CORPORATION
Well ALLISON A #9-13
Field SOLOMON NE
County ELLIS
State KANSAS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: HAYS, KS. - NORTH TO SALINE RIVER RD. - WEST 3 MILES TO RD. 210 - SOUTH INTO


Database File: 011356ddn.db
Dataset Pathname: pass3.2
Presentation Format: _den_neu
Dataset Creation: Thu Jul 04 02:16:32 2013 by Calc Open-Cased 090629

Charted by: Depth in Feet scaled 1:240

0 GAMMA RAY (GAPI) 150		ABHV	30 COMPENSATED DENSITY (pu) -10		
6 CALIPER (in) 16	10 (ft3) 0		30 COMPENSATED NEUTRON (pu) -10		
0 MINMK 20	TBHV		-0.25 CORRECTION (g/cc) 0.25		
	0 (ft3) 10				

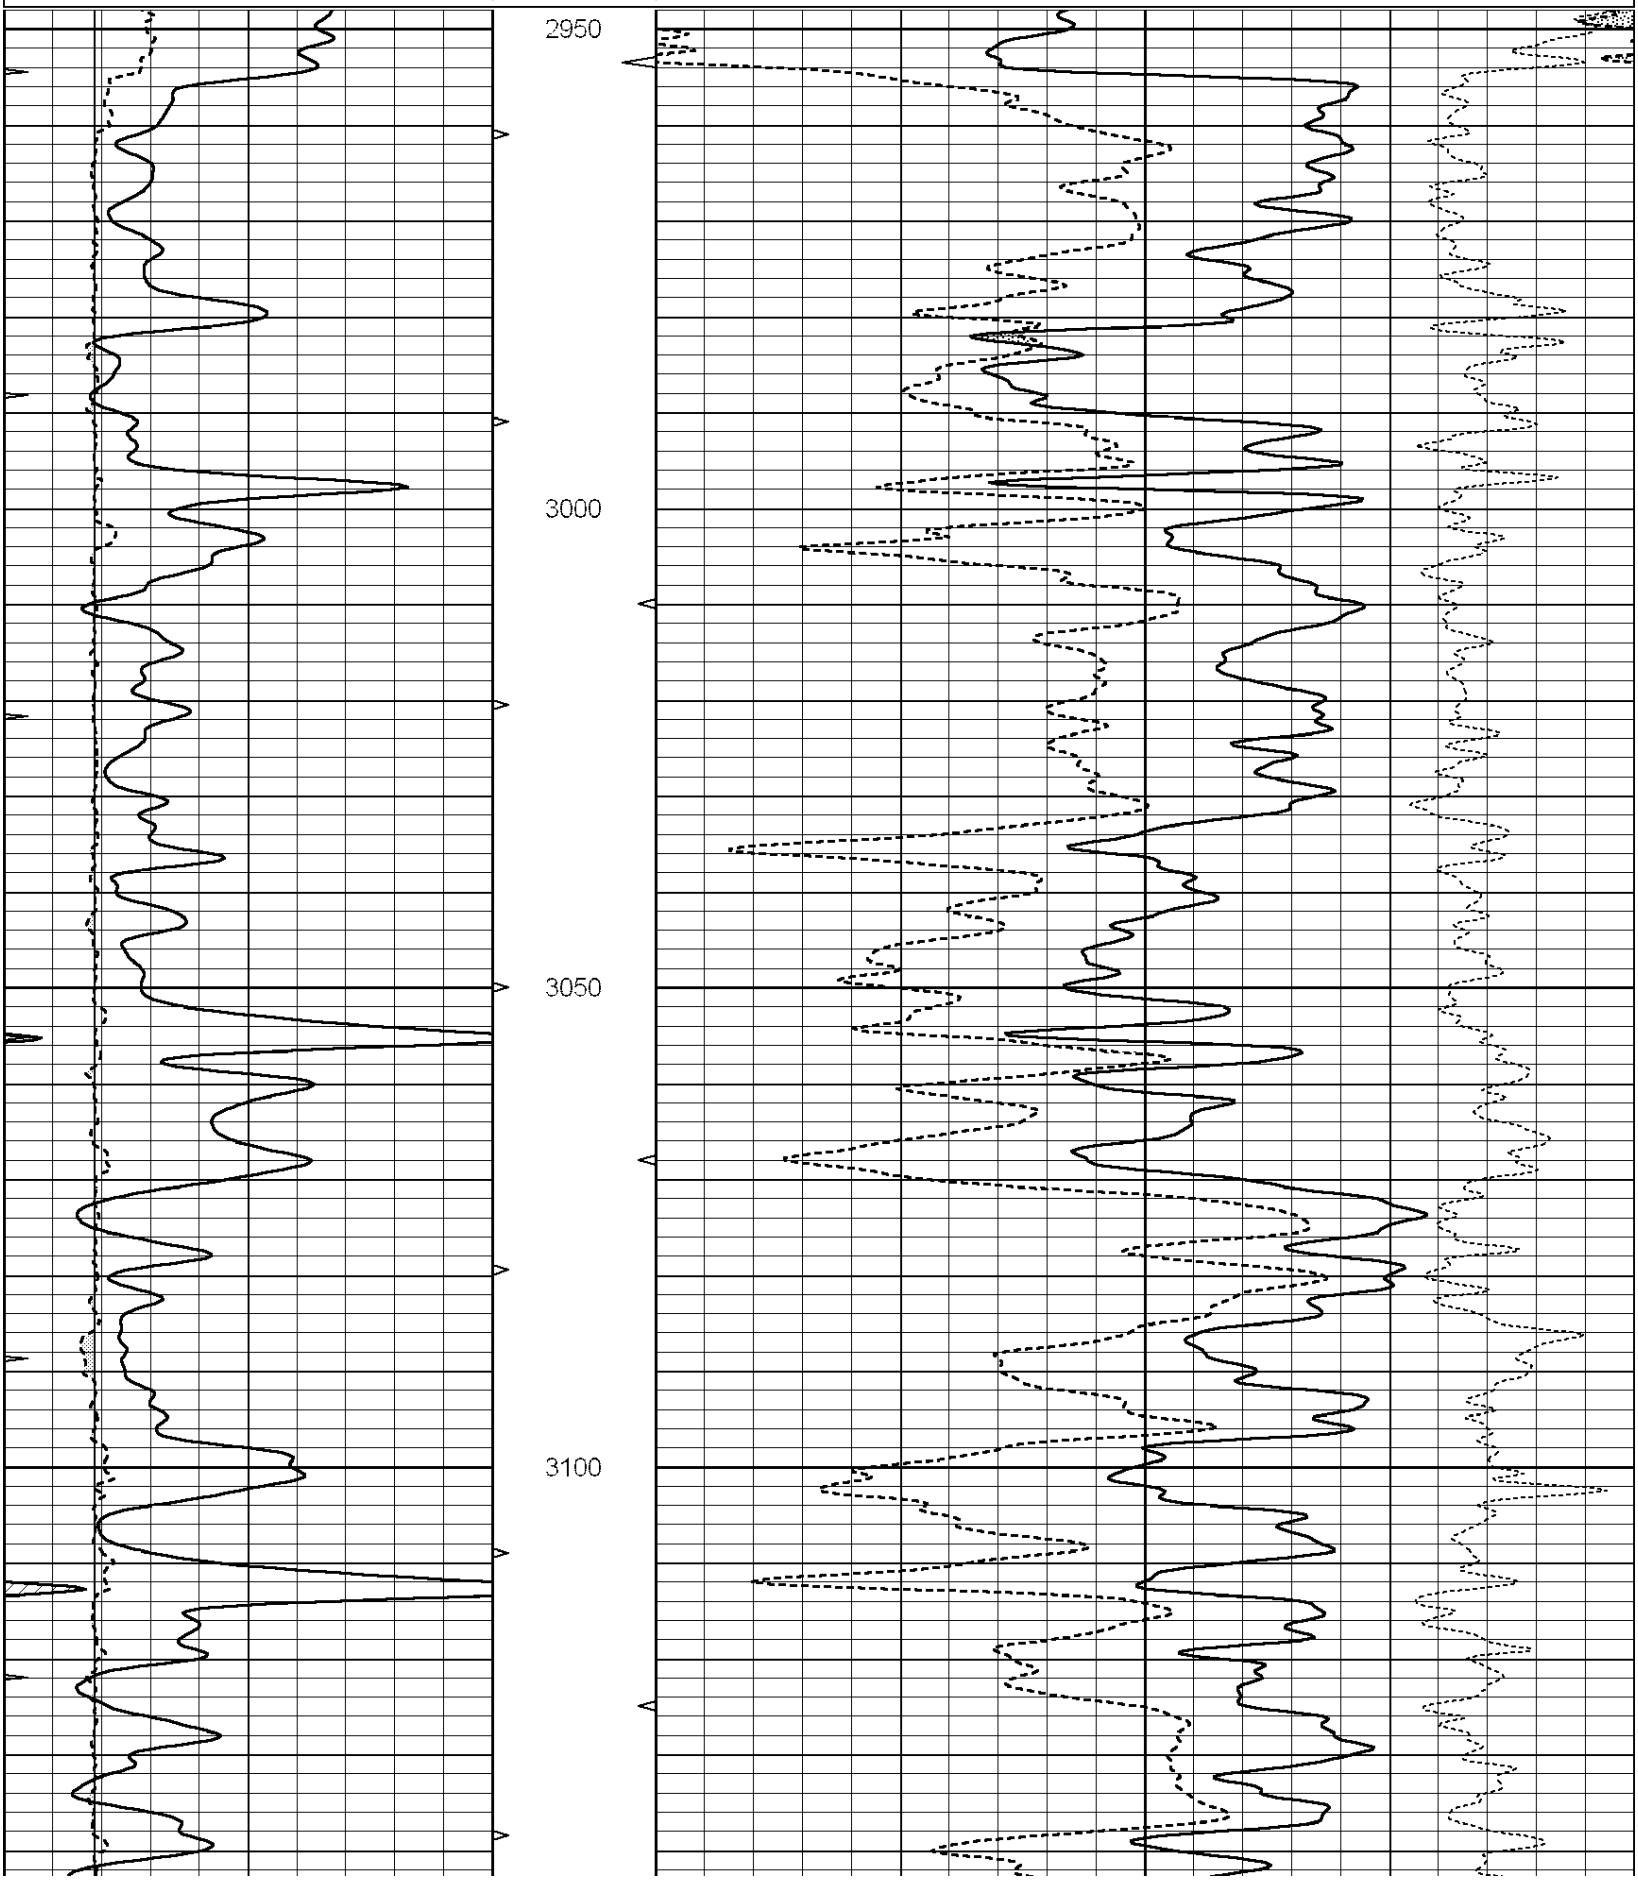

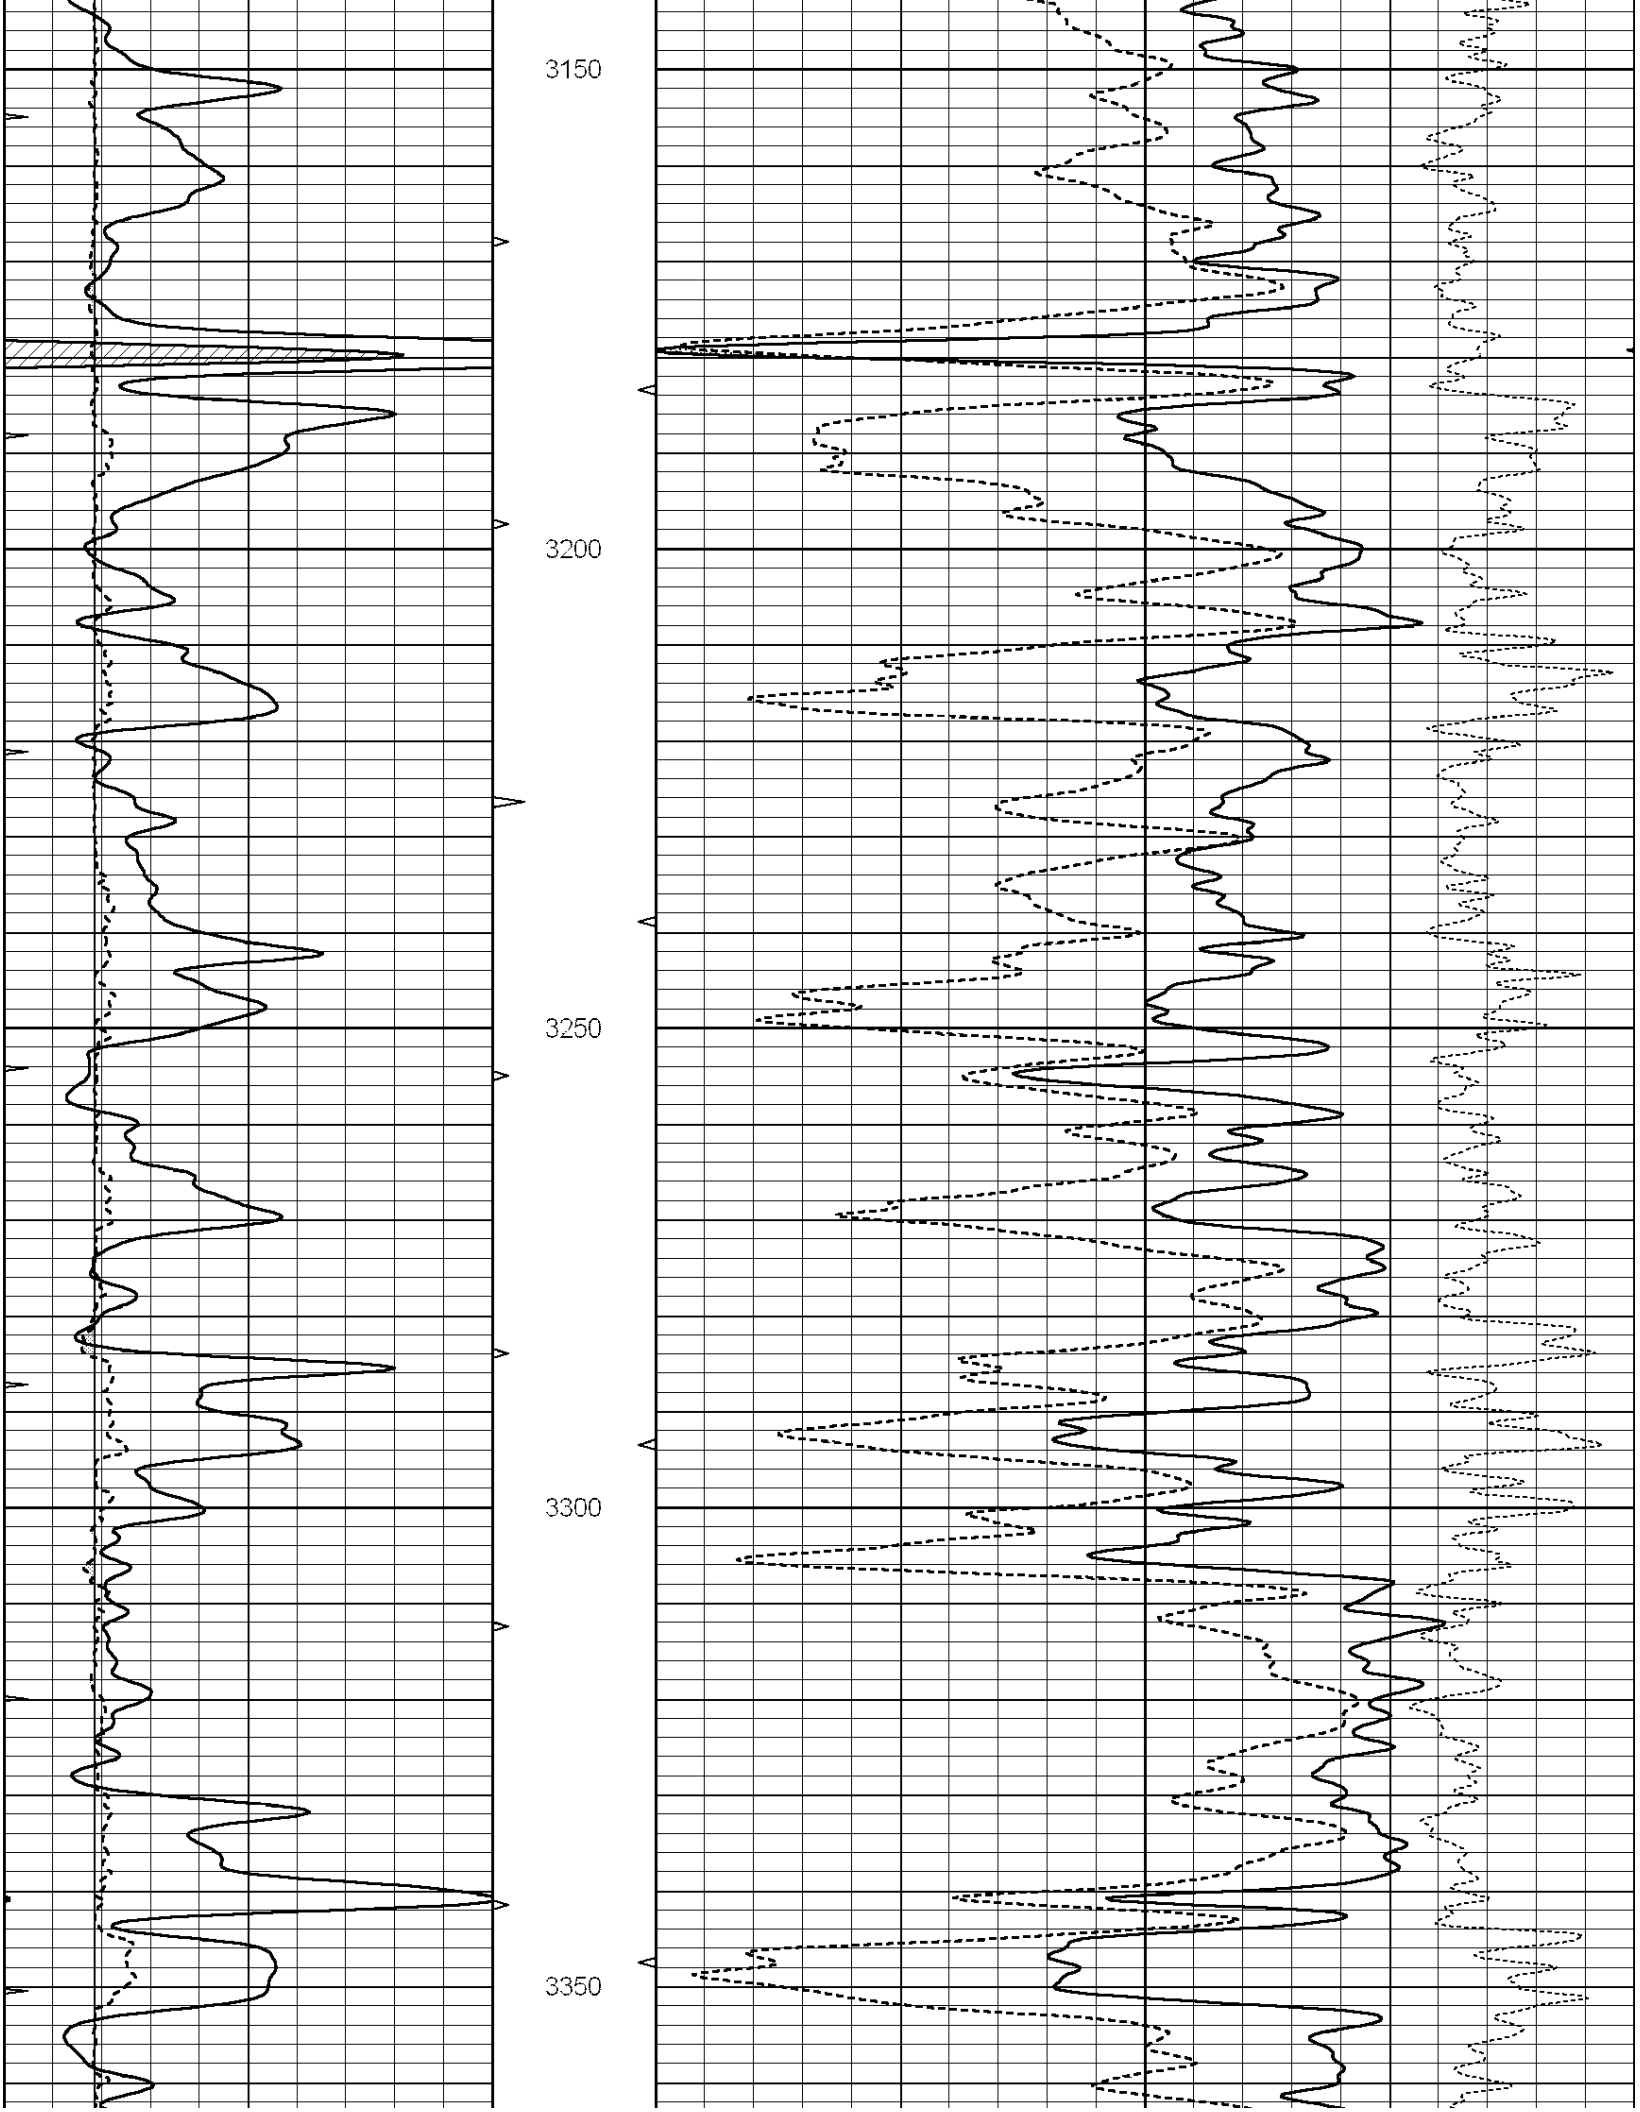
3150
3200
3250
3300
3350

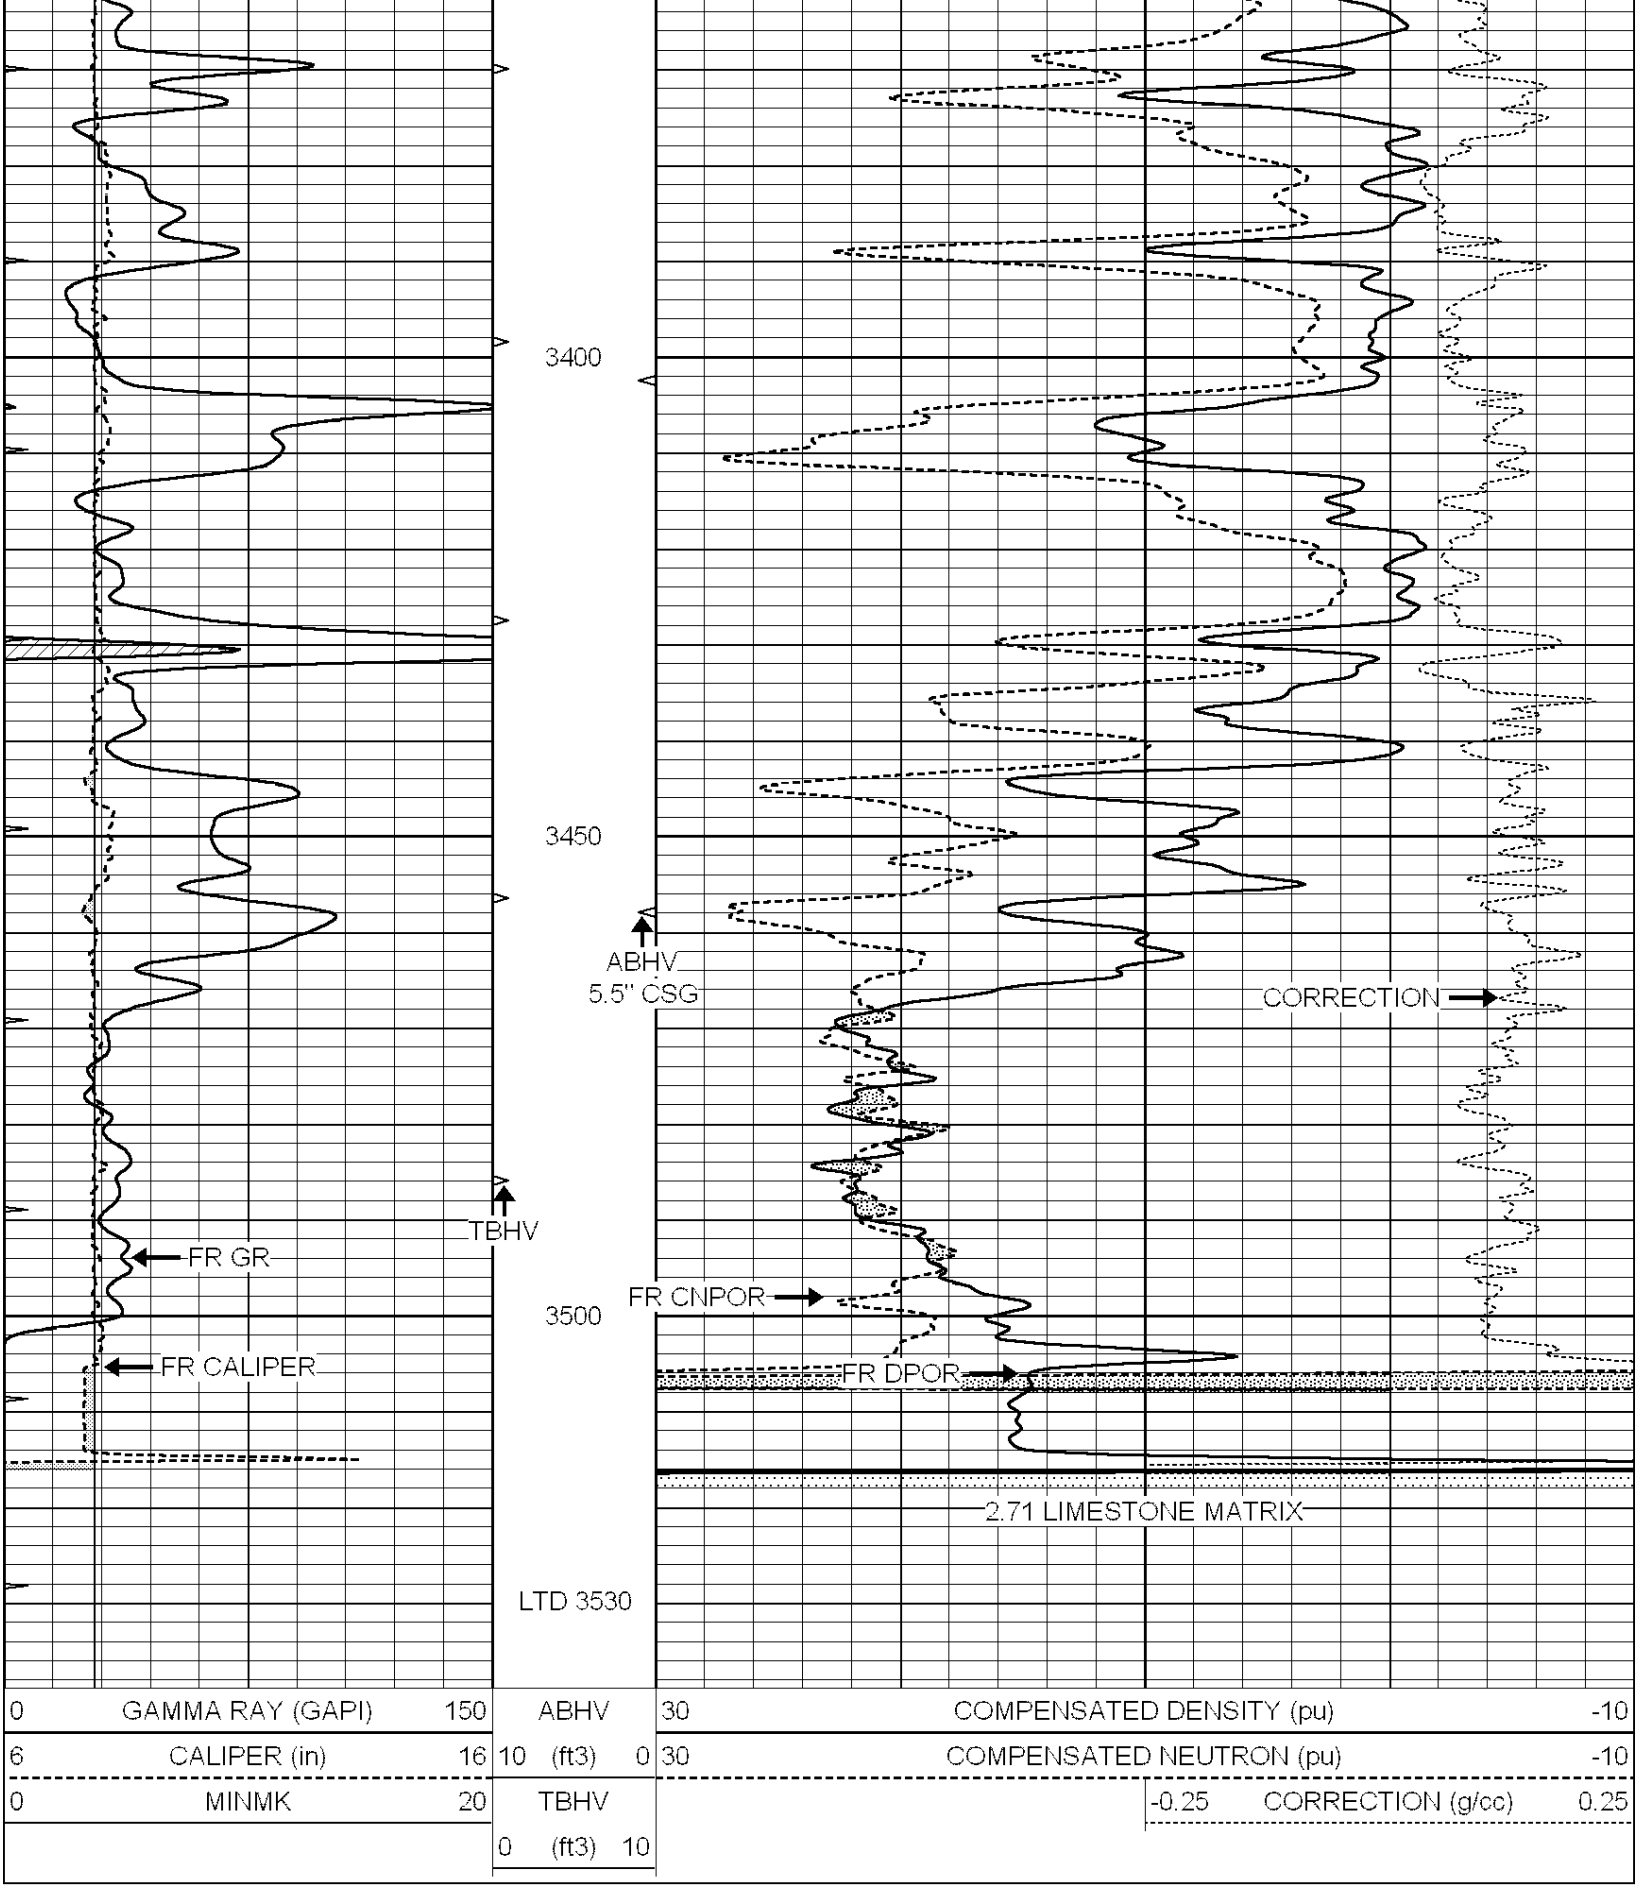

NABORS


COMPLETION & PRODUCTION SERVICES CO


REPEAT SECTION

SERVICES CO.

Database File:	011356ddn.db
Dataset Pathname:	pass2.1
Presentation Format:	_den_neu
Dataset Creation:	Thu Jul 04 01:45:56 2013 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV	-0.25	CORRECTION (g/cc)	0.25
			0 (ft3) 10			

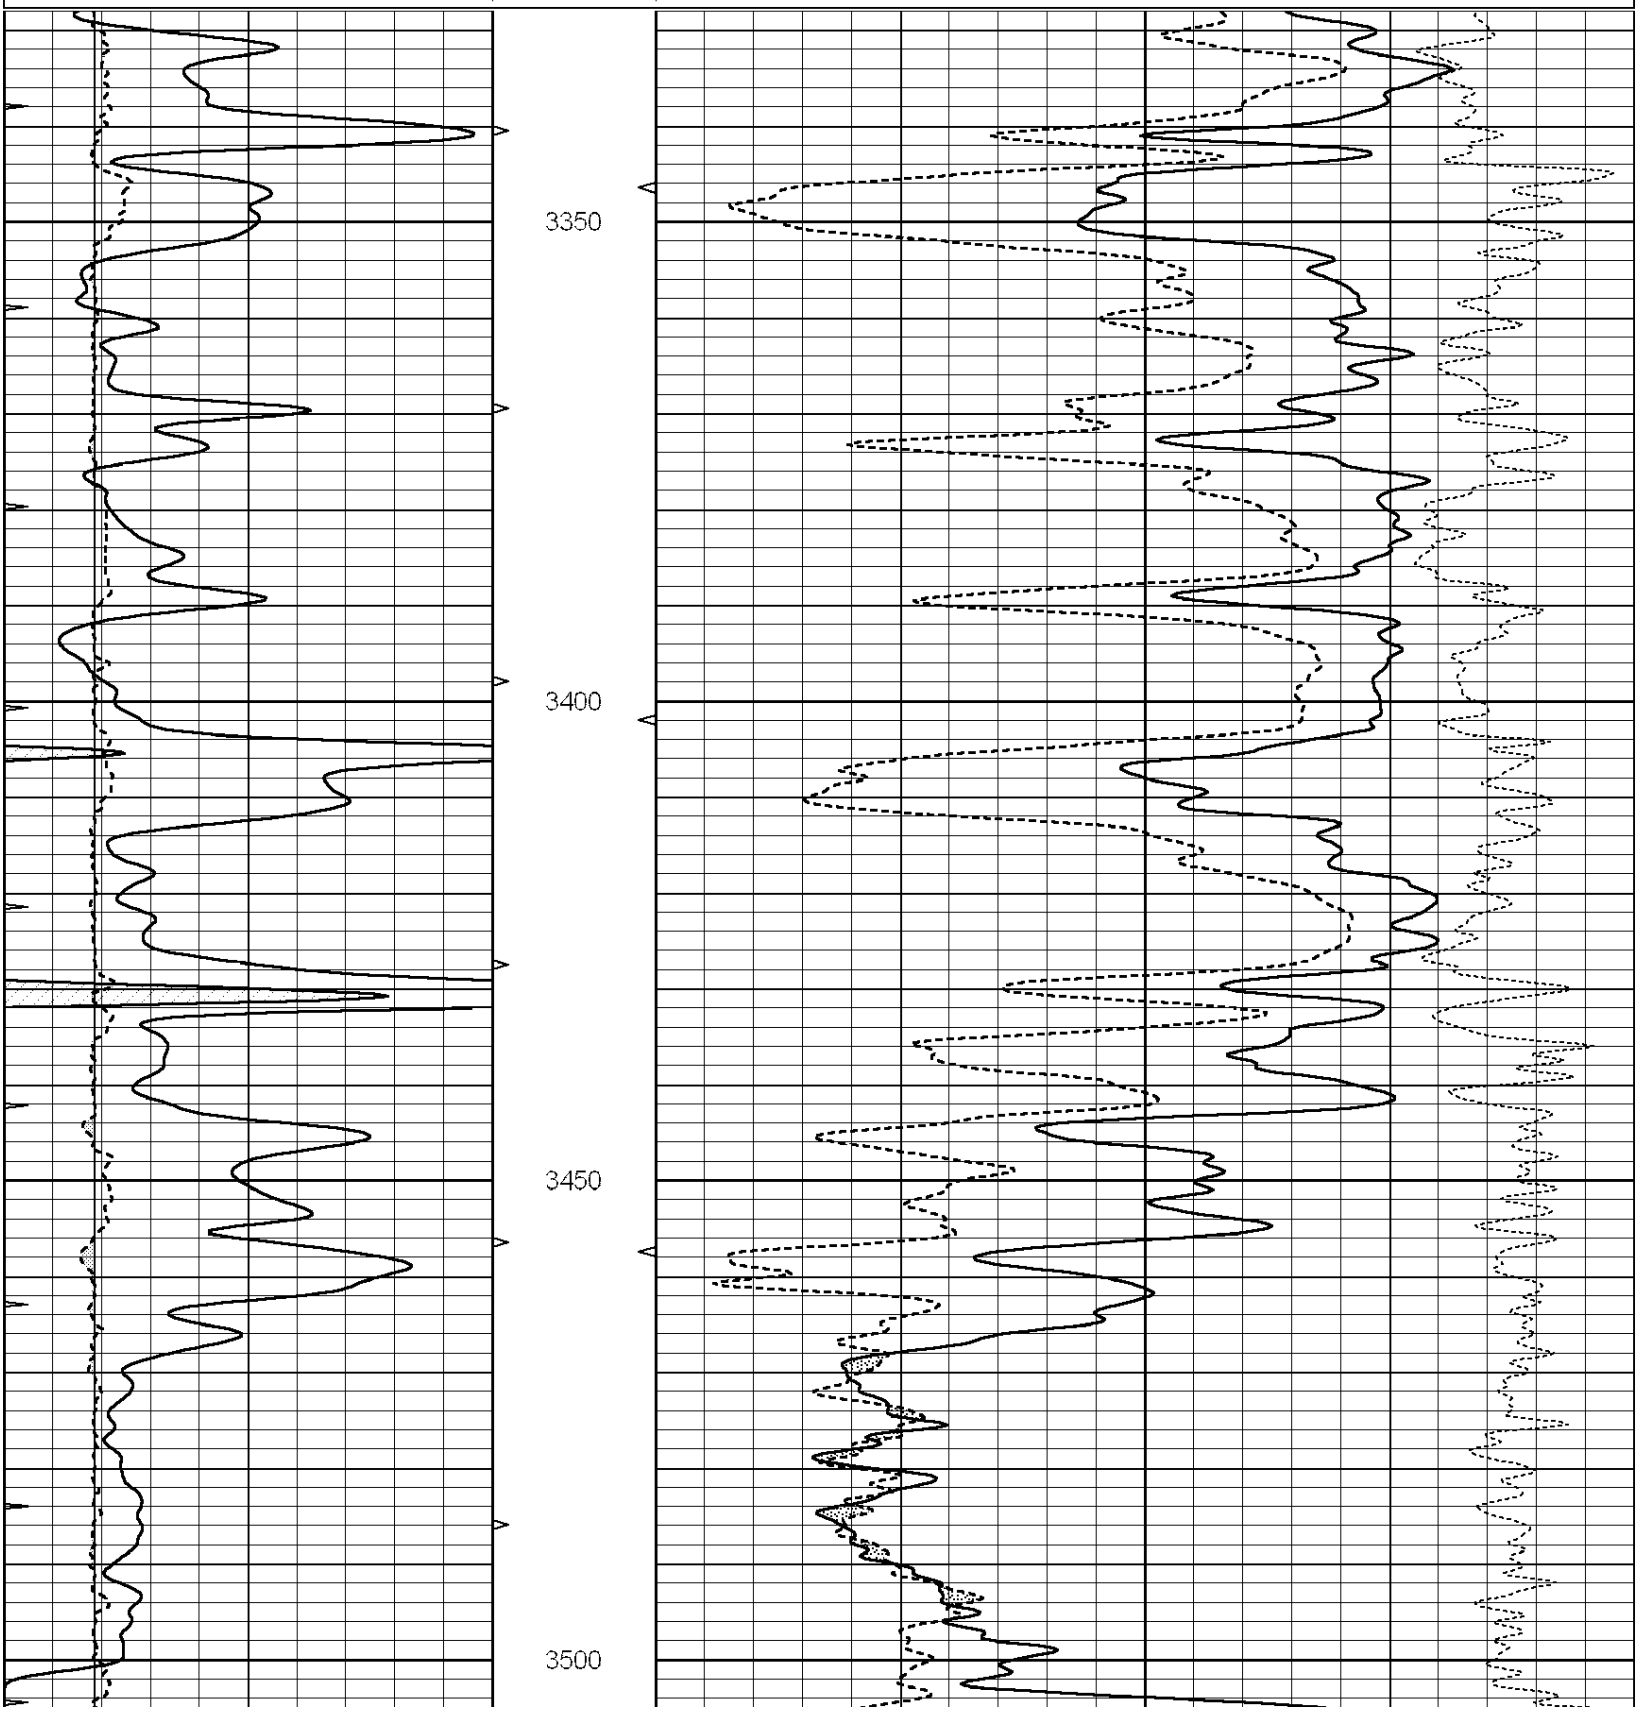

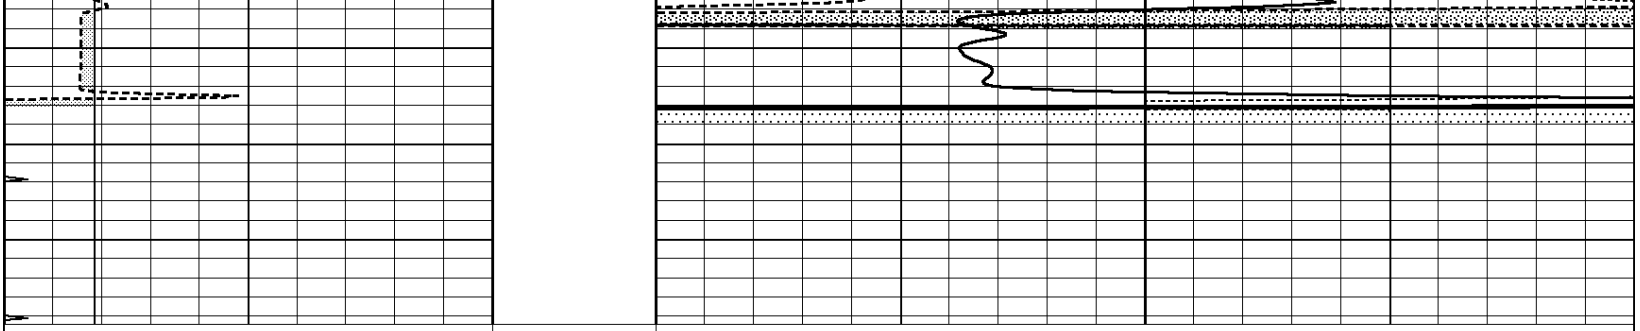

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)		-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)		-10
0	MINMK	20	TBHV			-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10				

Calibration Report

Database File: 011356ddn.db
Dataset Pathname: pass3.2
Dataset Creation: Thu Jul 04 02:16:32 2013 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model:	PROBE7-DILG
Surface Cal Performed:	Mon Jul 01 07:10:41 2013
Downhole Cal Performed:	Sat Jan 19 19:51:38 2013
After Survey Verification Performed:	Sat Jan 19 19:51:38 2013

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.793	0.790	V	0.000	400.000	mmho/m	620.000	22.000
Medium	0.992	1.002	V	0.000	464.000	mmho/m	660.000	-30.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.041	0.642	V	0.000	400.000	mmho/m	664.874	-27.011
Medium	0.035	0.802	V	0.000	464.000	mmho/m	604.936	-21.367

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	135384.000	27094.500	mmho/m	135400.000	27082.400	mmho/m	1.000	-19.259
Medium	-47330.100	-9381.740	mmho/m	-47327.100	-9389.280	mmho/m	1.000	-10.154
LL3		7.322	V		1400.000	Ohm-m		
		0.038	V		20.000	Ohm-m		
		-7.273	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	135384.000	27094.500	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	-47330.100	-9381.740	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1400.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		4000.000	mmho-m		

Compensated Density Calibration Report

Serial-Model:	GEAR2-GEARHART

Source / Verifier:	147 / 147
Master Calibration Performed:	Mon Jul 01 05:43:11 2013

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.710	g/cc	923.76	475.45	cps
Aluminum	2.600	g/cc	205.31	331.69	cps

Spine Angle = 76.54 Density/Spine Ratio = 0.576

	Size		Reading	
Small Ring	8.40	in	5.48	V
Large Ring	14.00	in	7.58	V

Compensated Neutron Calibration Report

Serial Number:	NEU_4I
Tool Model:	G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Mon Jul 01 05:22:08 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.9000	GAPI/cps