NABORS COMPLETION & PRODUCTION SERVICES CO.

DUAL INDUCTION LOG

Company	O'BRIEN RESOURCES, LLC.
Well	SNIDER - SHARP 35 #1
Field	HEALY SOUTHWEST
County	LANE
State	KANSAS

Company O'BRIEN RESOURCES, LLC.
Well SNIDER - SHARP 35 #1
Field HEALY SOUTHWEST
County LANE State KANSAS
Location: API # : 15-101-22445-0000
175' FSL & 765' FWL
SW - SE - SW - SW
SEC 35 TWP 16S RGE 30W

Other Services: CDL/CNL/PE, MEL

Permanent Datum	GROUND LEVEL	Elevation 2850	Elevation: K.B. 2861
Log Measured From	KELLY BUSHING 11' A.G.L.		D.F. 2859
Drilling Measured From	KELLY BUSHING		G.L. 2850

Date	7/28/13		
Run Number	ONE		
Depth Driller	4675		
Depth Logger	4668		
Bottom Logged Interval	4666		
Top Log Interval	00		
Casing Driller	8 5/8"@262'		
Casing Logger	263		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,400 PPM	
Density / Viscosity	9.3/56		
pH / Fluid Loss	10.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.55@80F		
Rmf @ Meas. Temp	1.16@80F		
Rmc @ Meas. Temp	1.86@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.02@122F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	2:30 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KURT TALBOTT		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

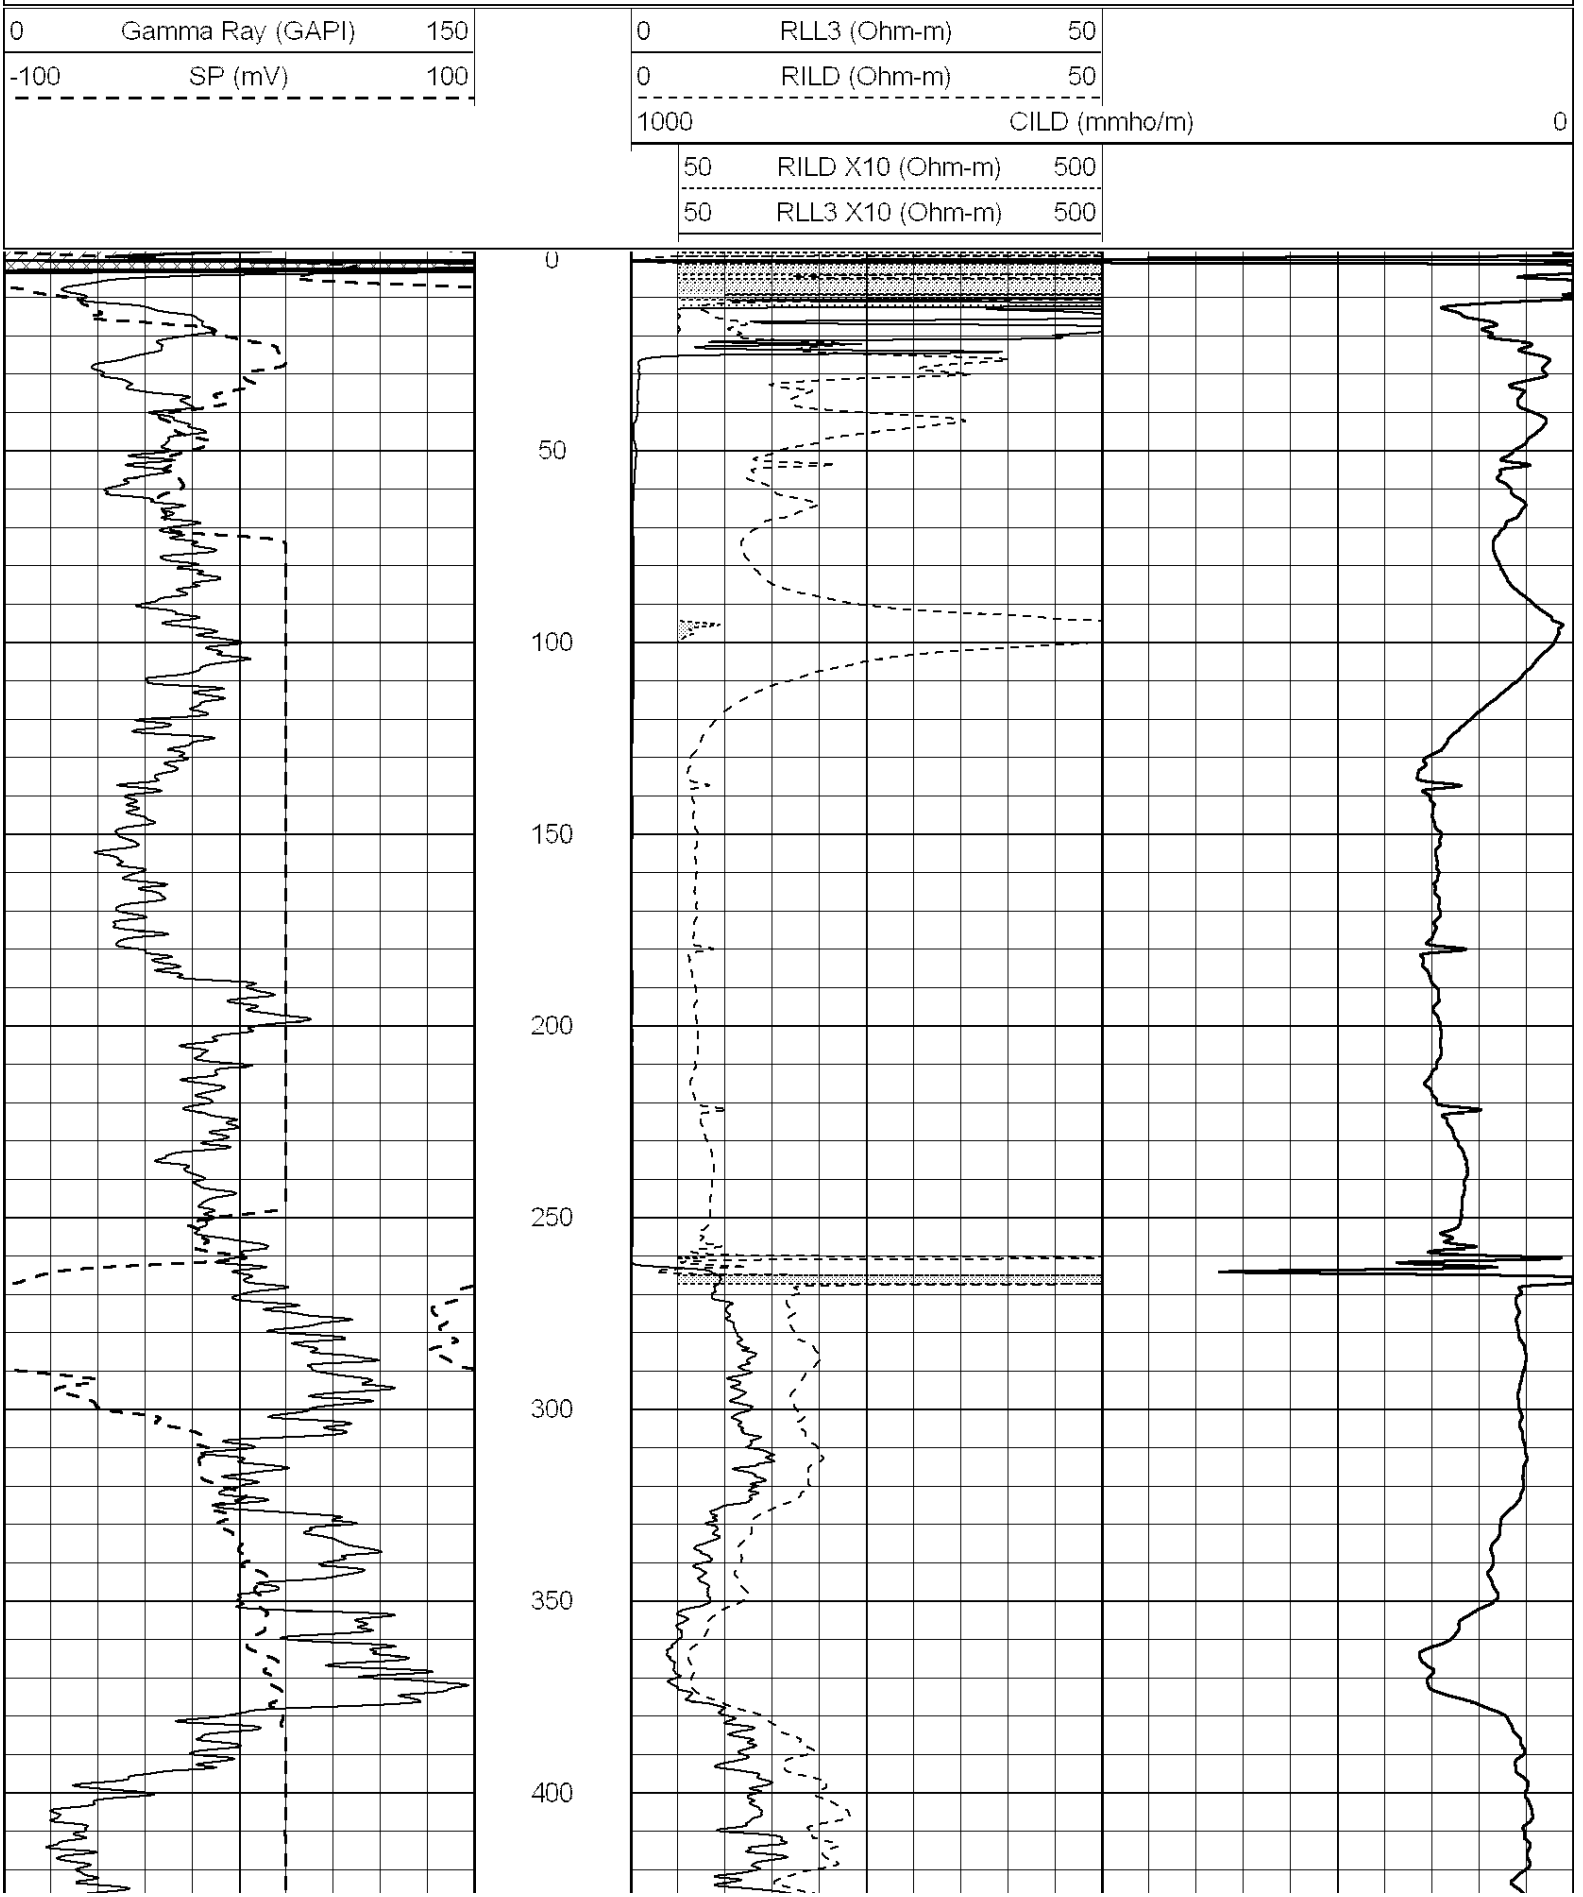
THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
HEALY, KS. & "DODGE ST." (HEALY OIL CO.) 1N. PAST HIGH SCHOOL, 1/4E., N. INTO

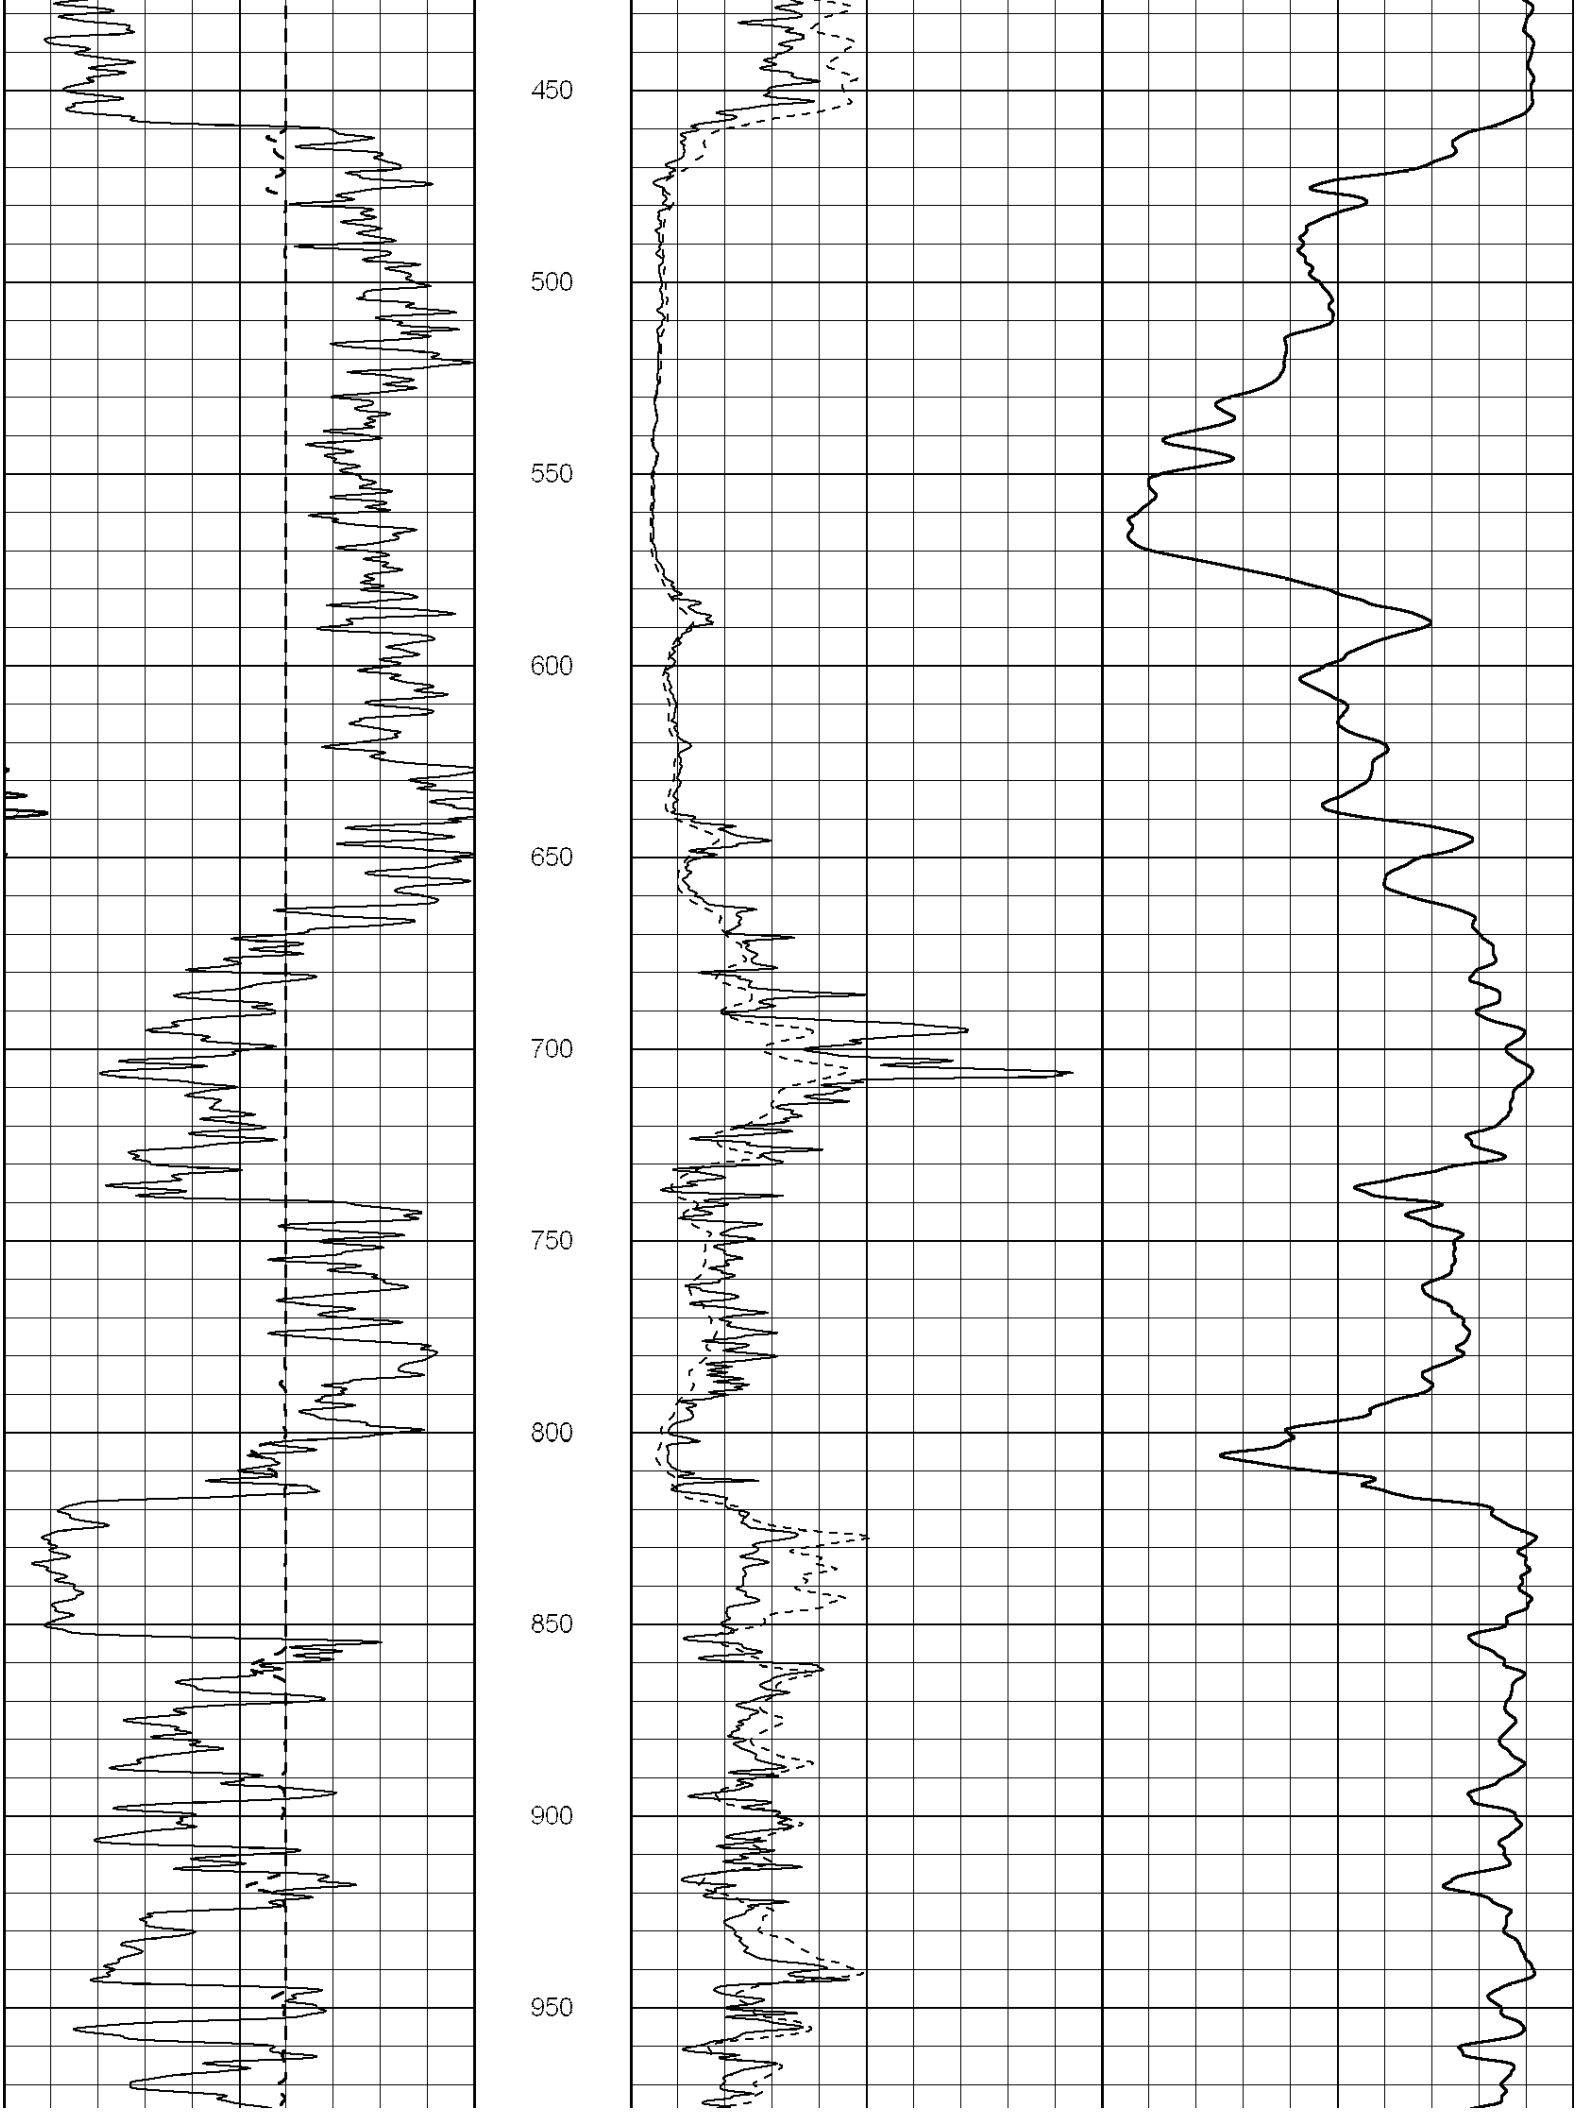
NABORS COMPLETION & PRODUCTION SERVICES CO.

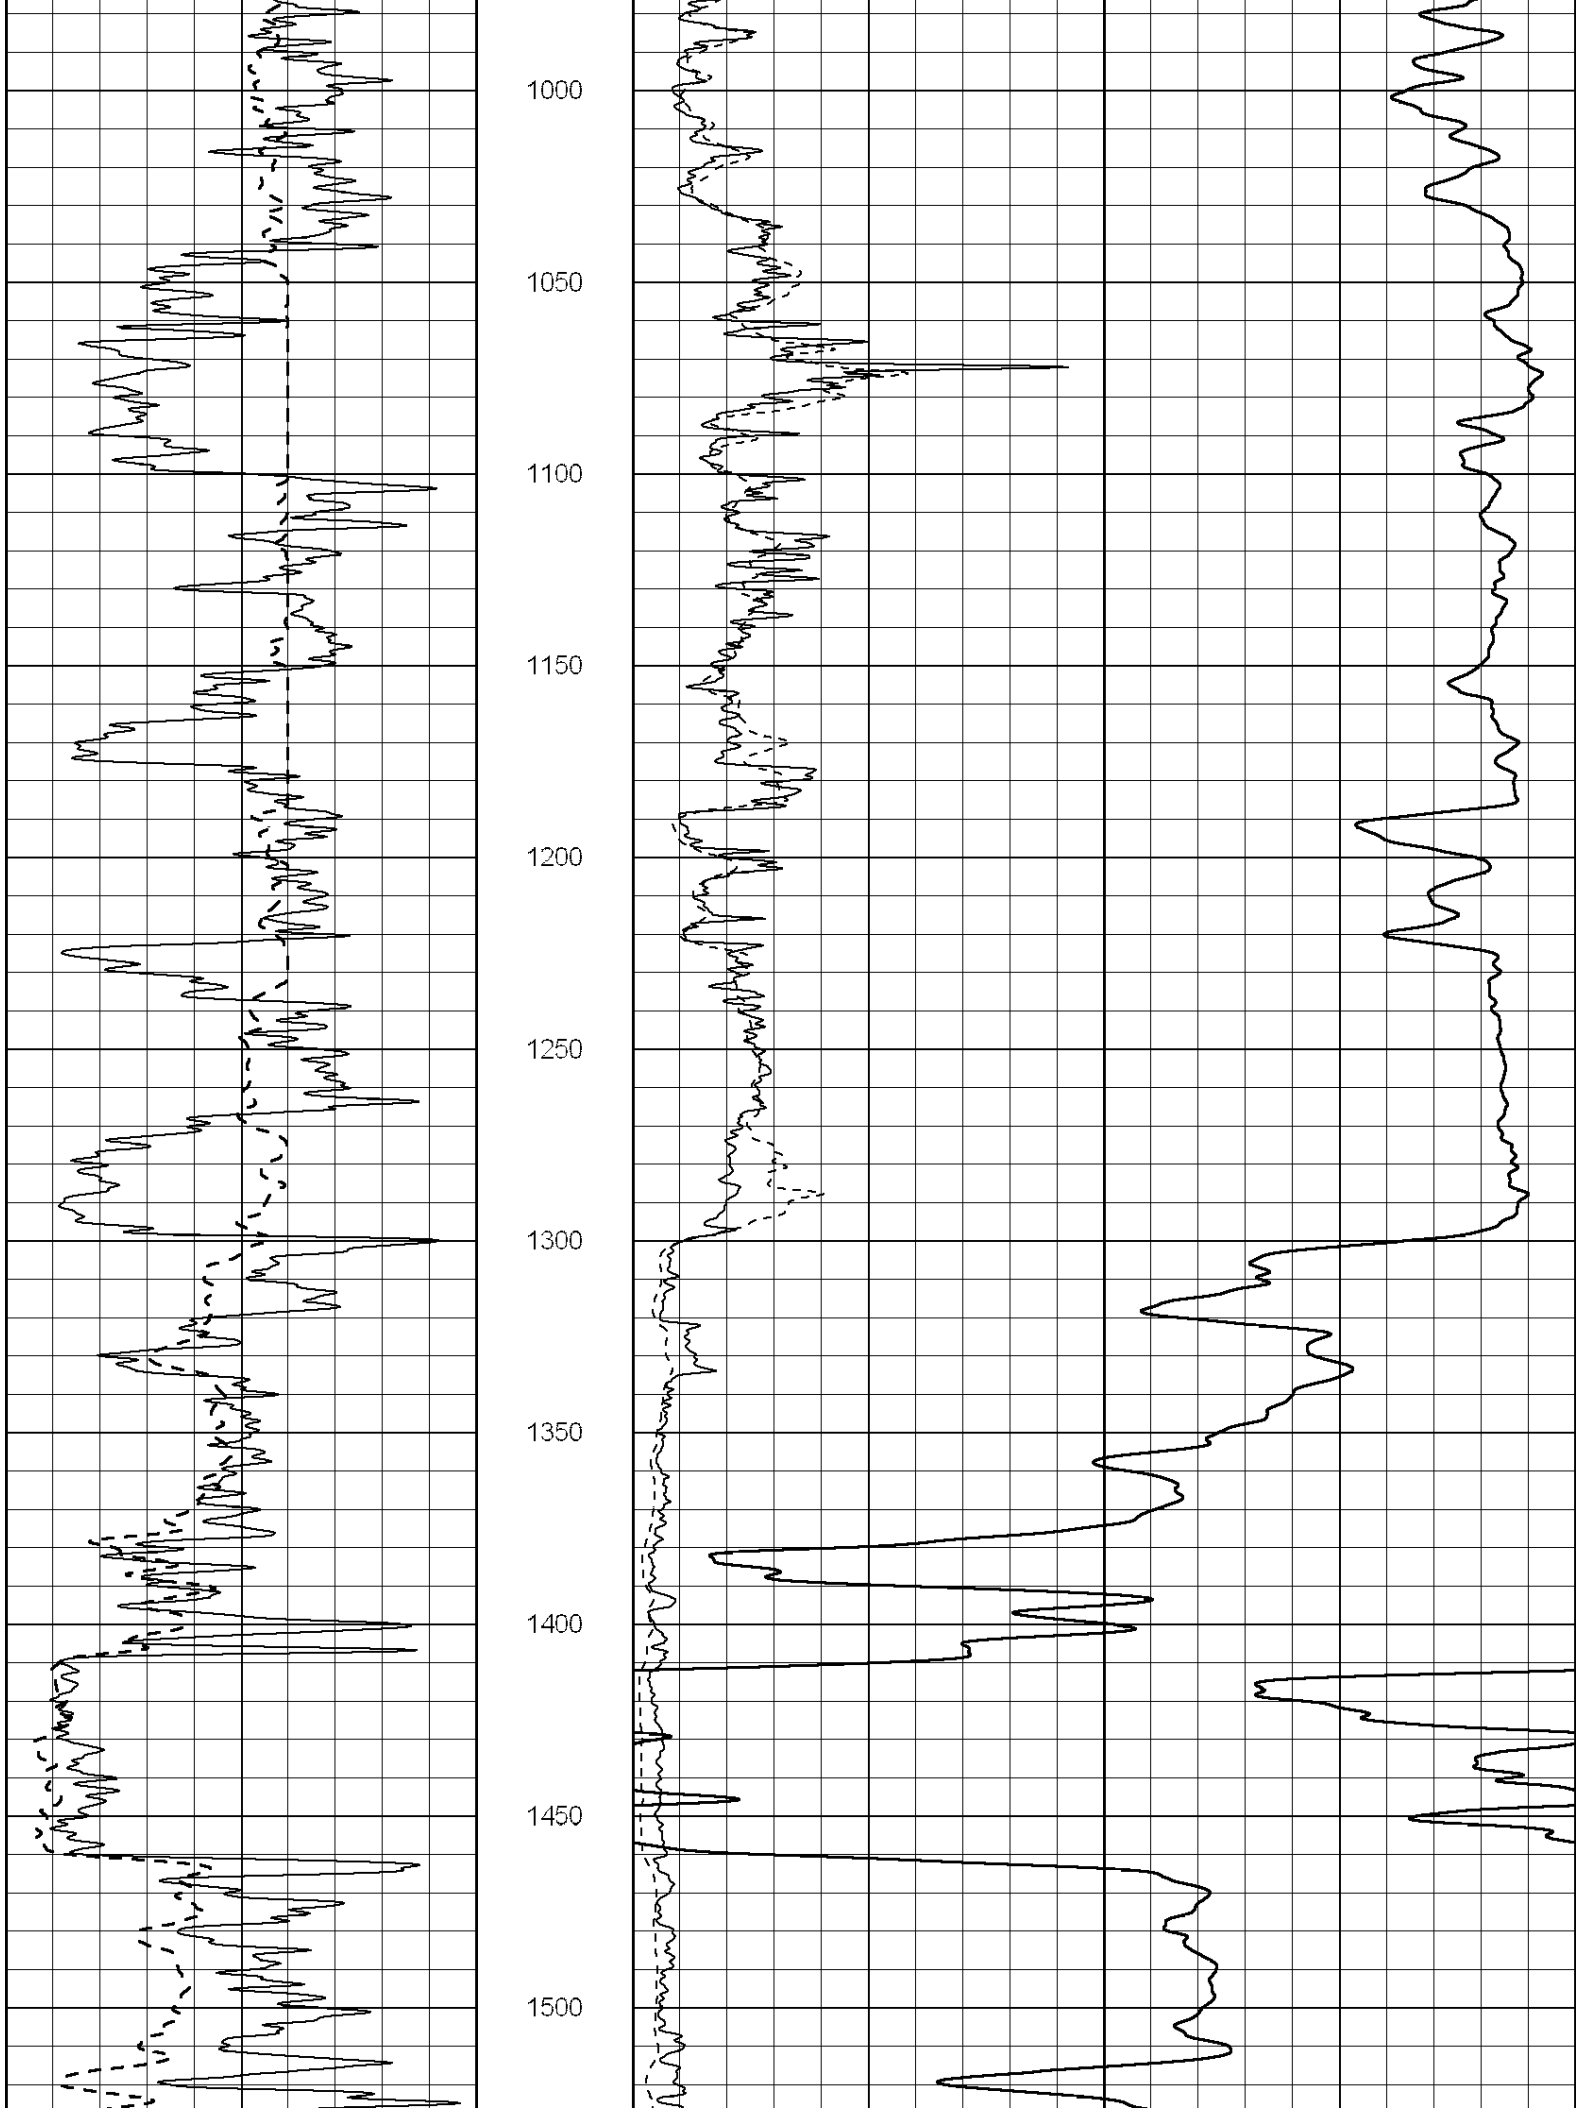
MAIN SECTION

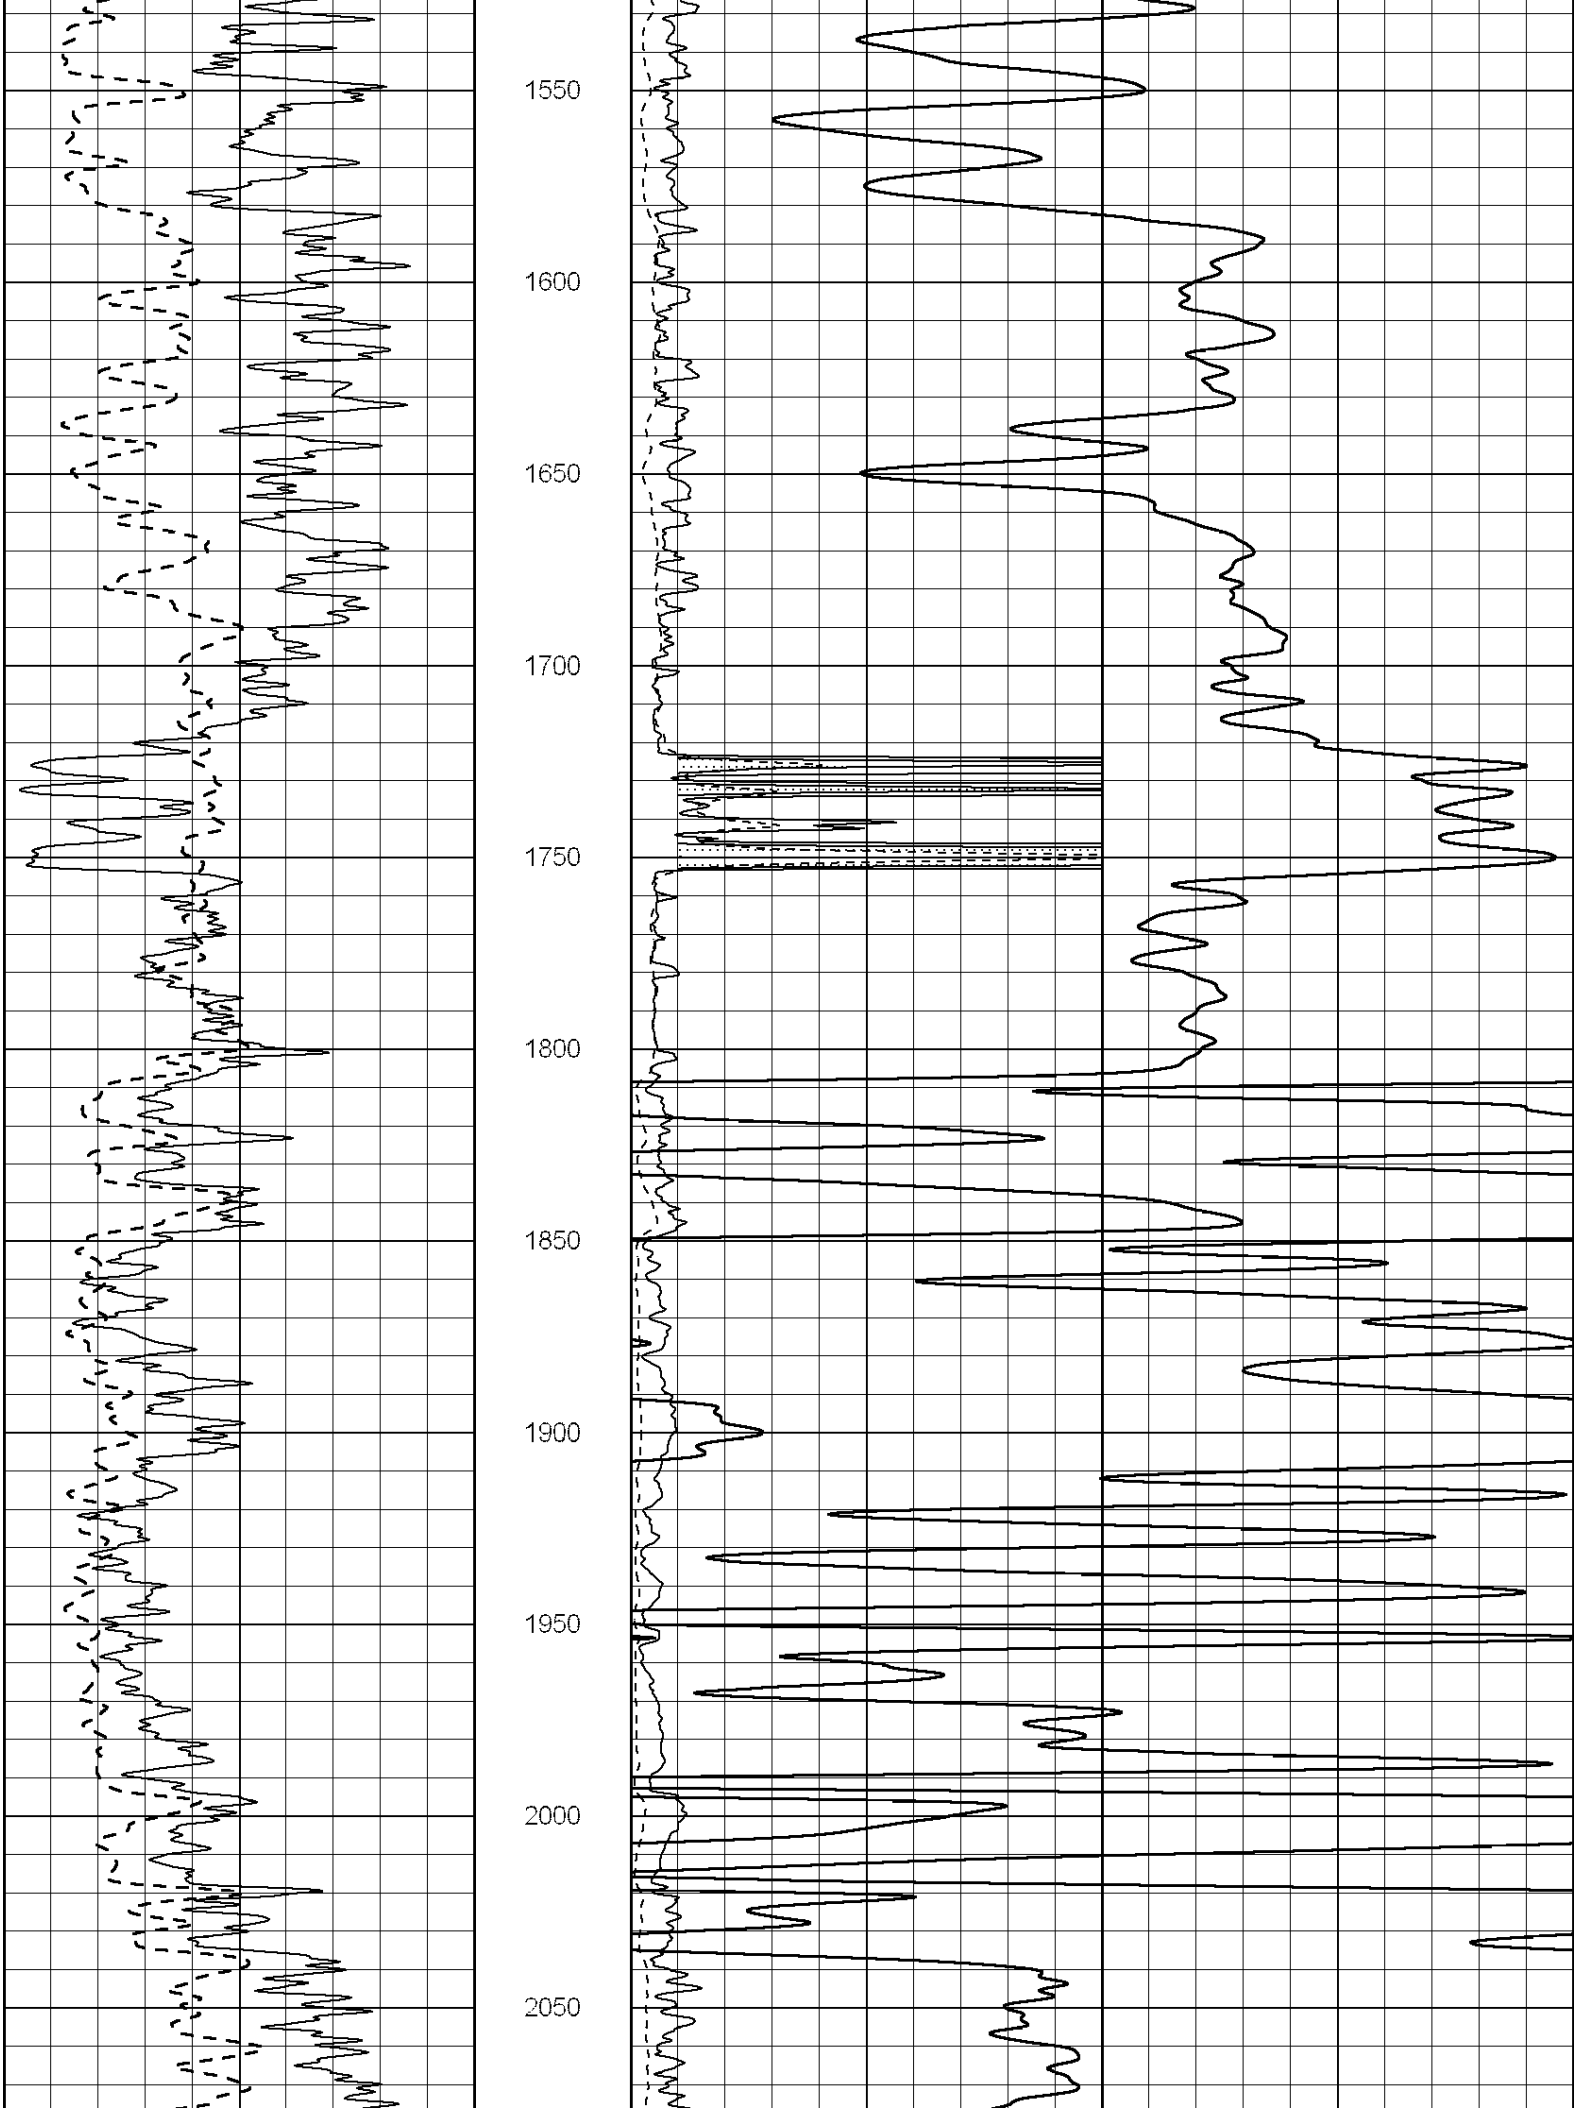
SERVICES CO.

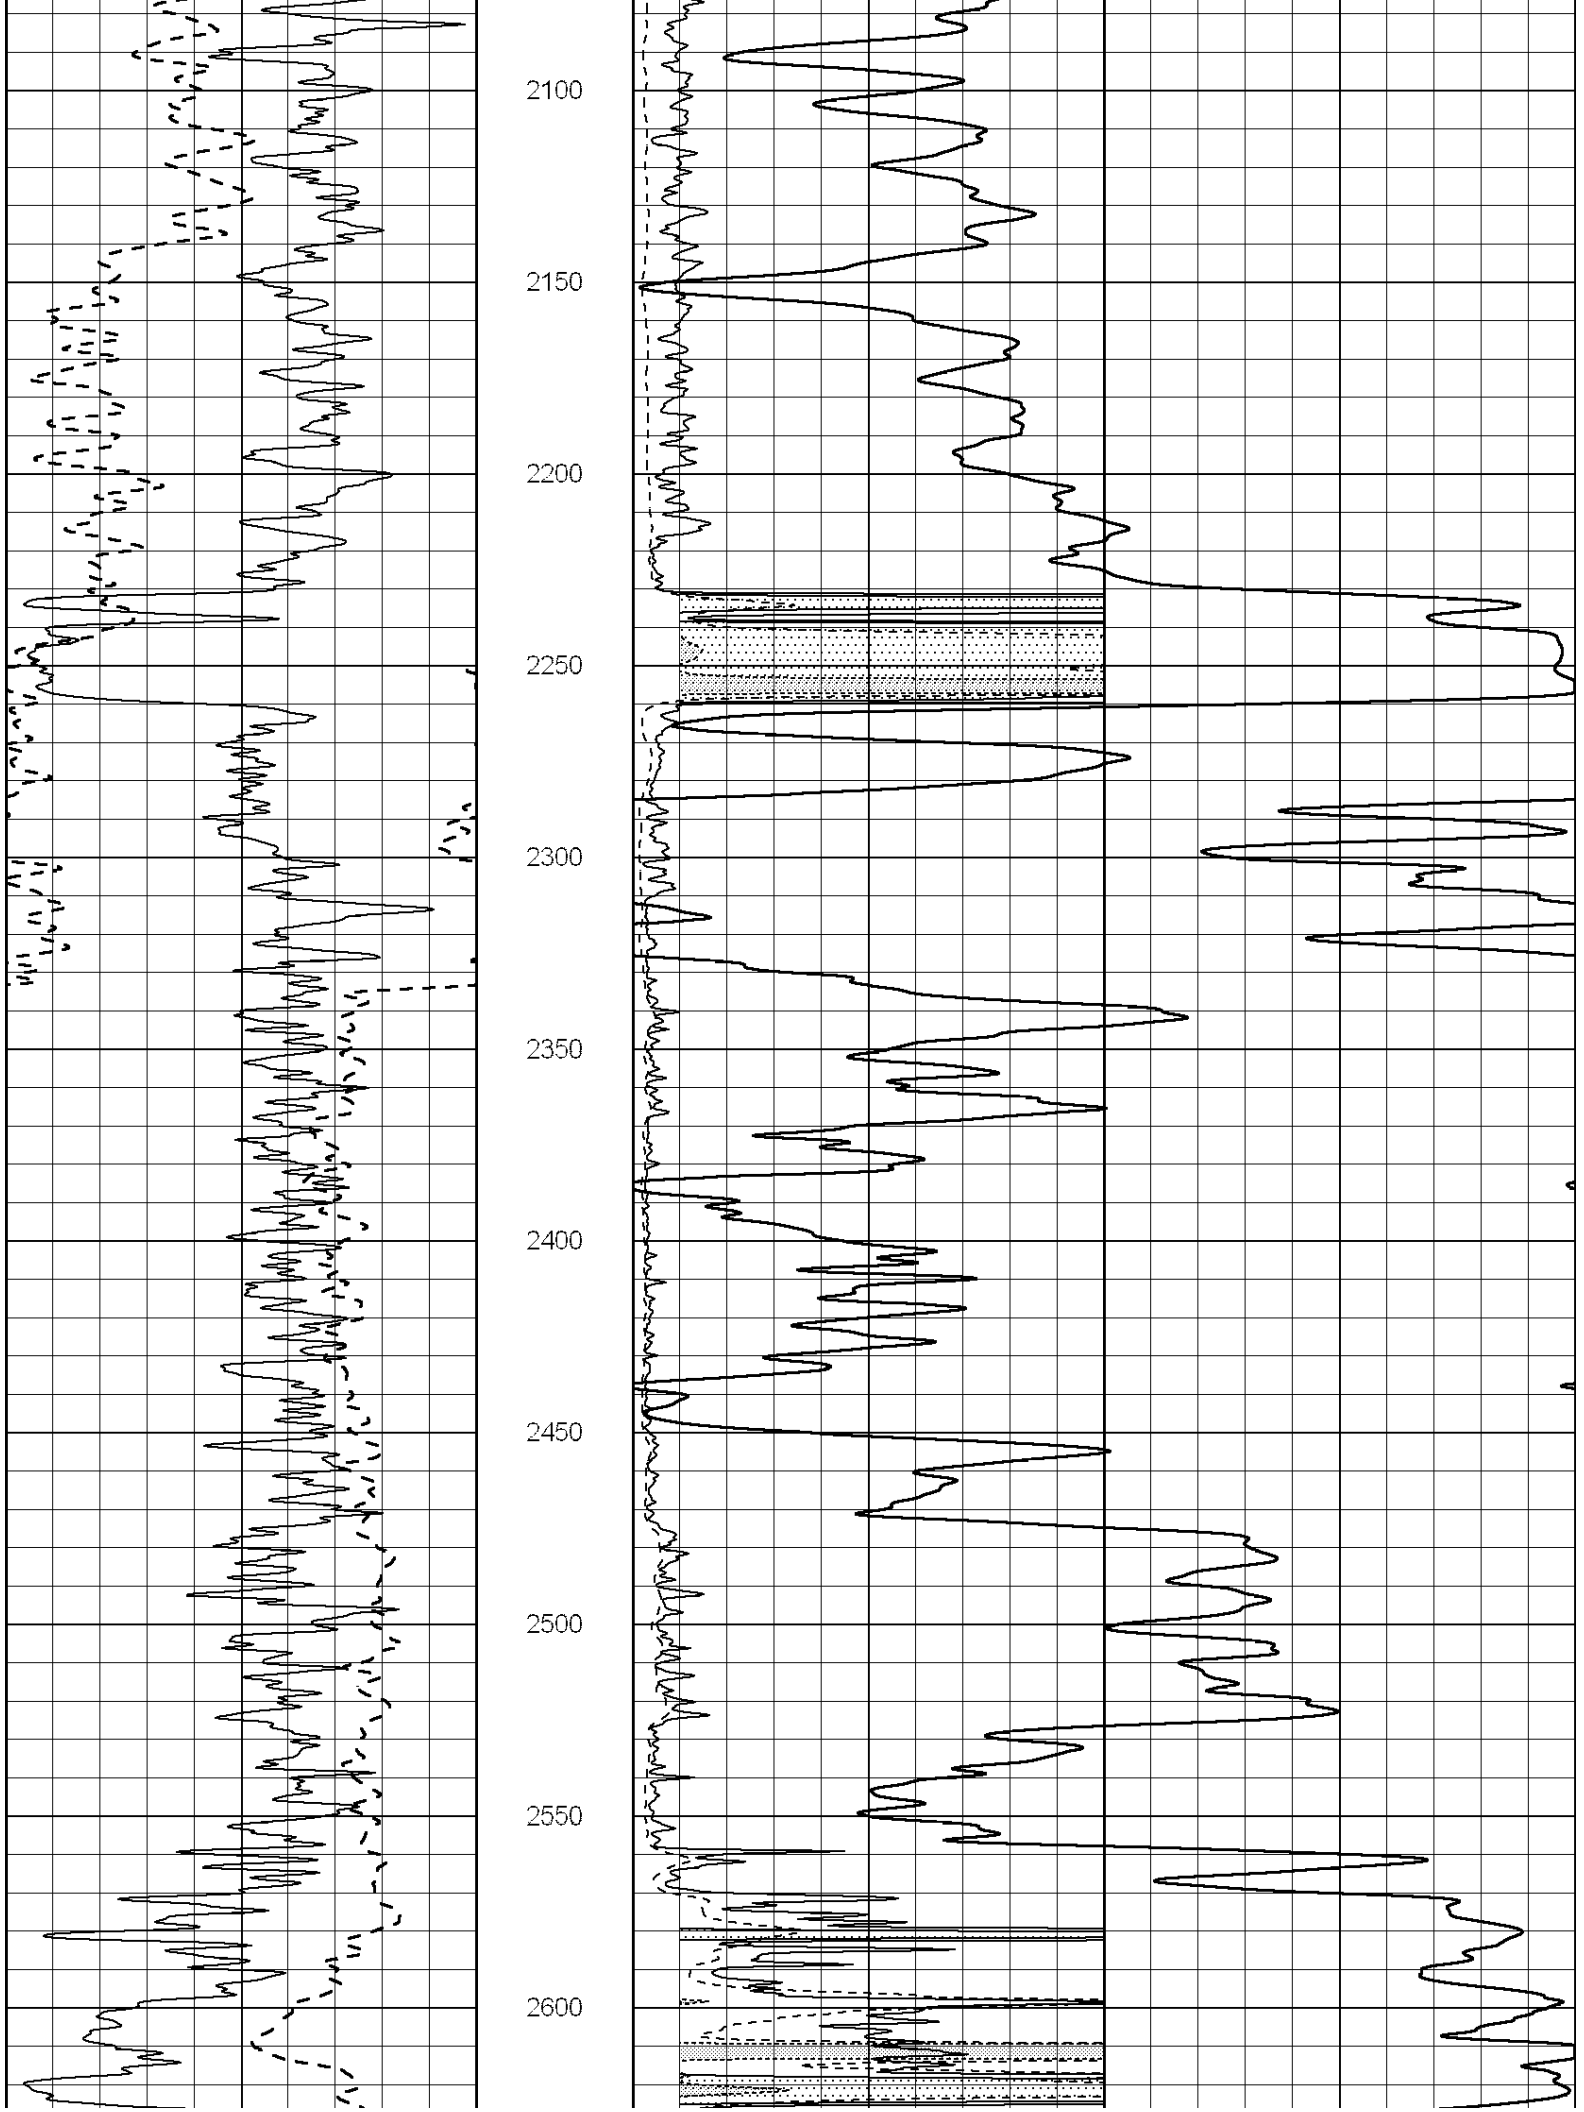
Database File: 011195pe.db
Dataset Pathname: pass4.11
Presentation Format: dil2
Dataset Creation: Sun Jul 28 04:27:56 2013
Charted by: Depth in Feet scaled 1:600

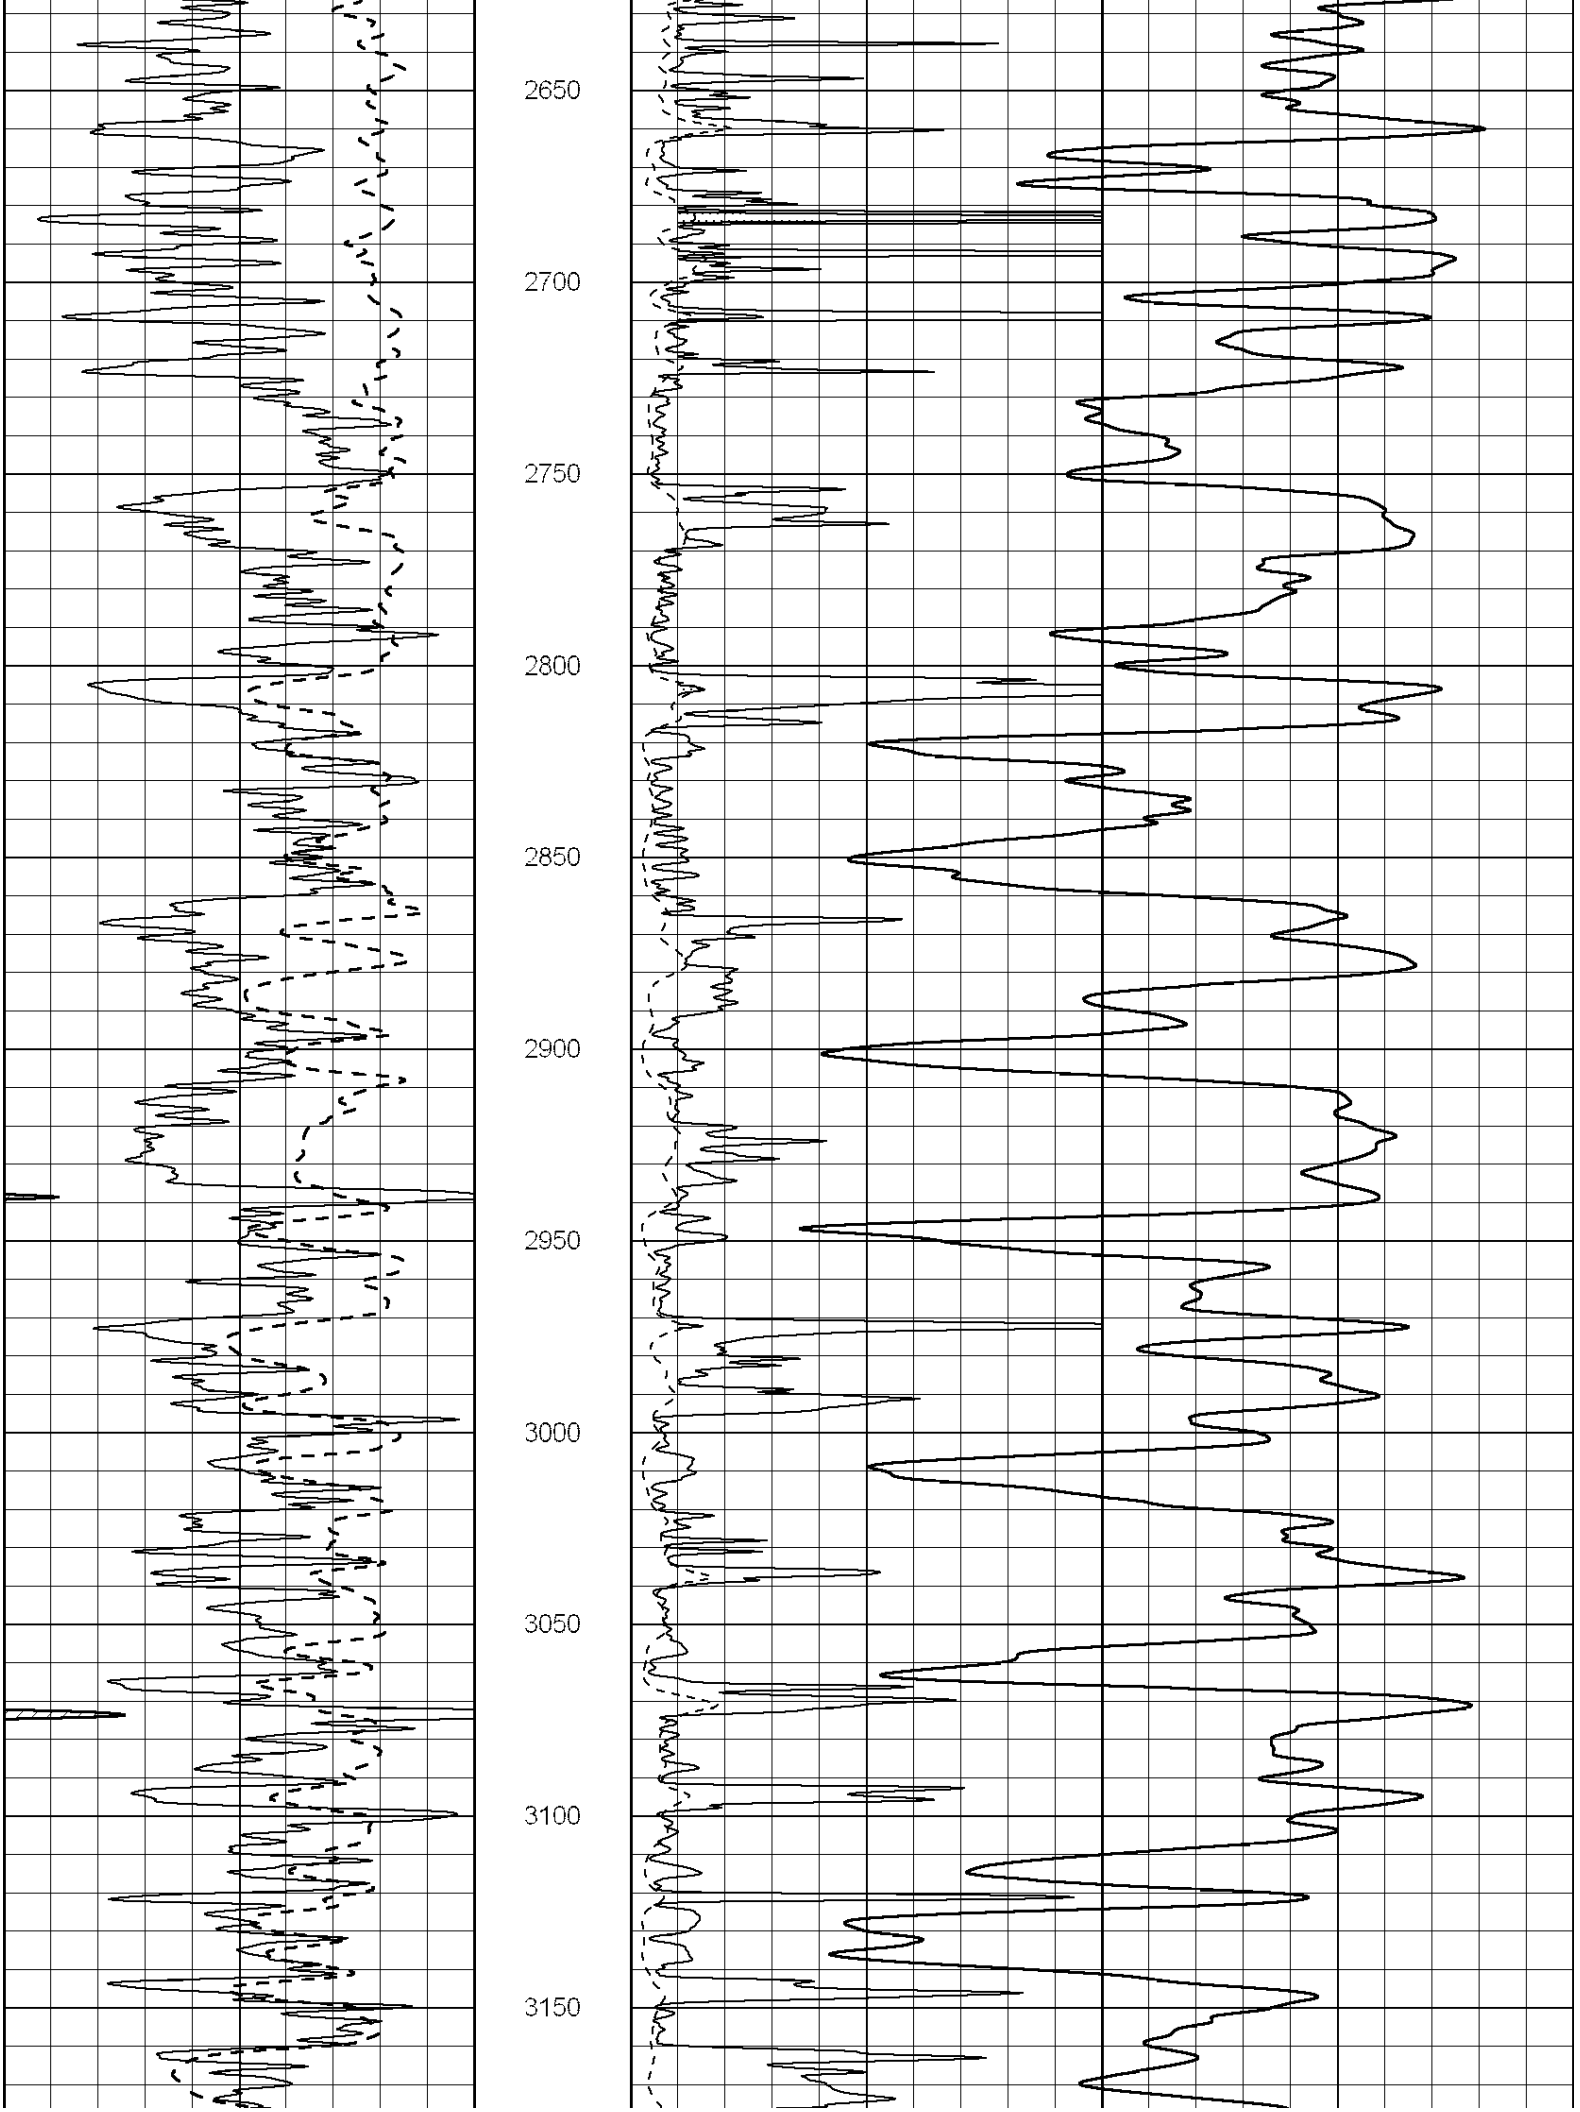


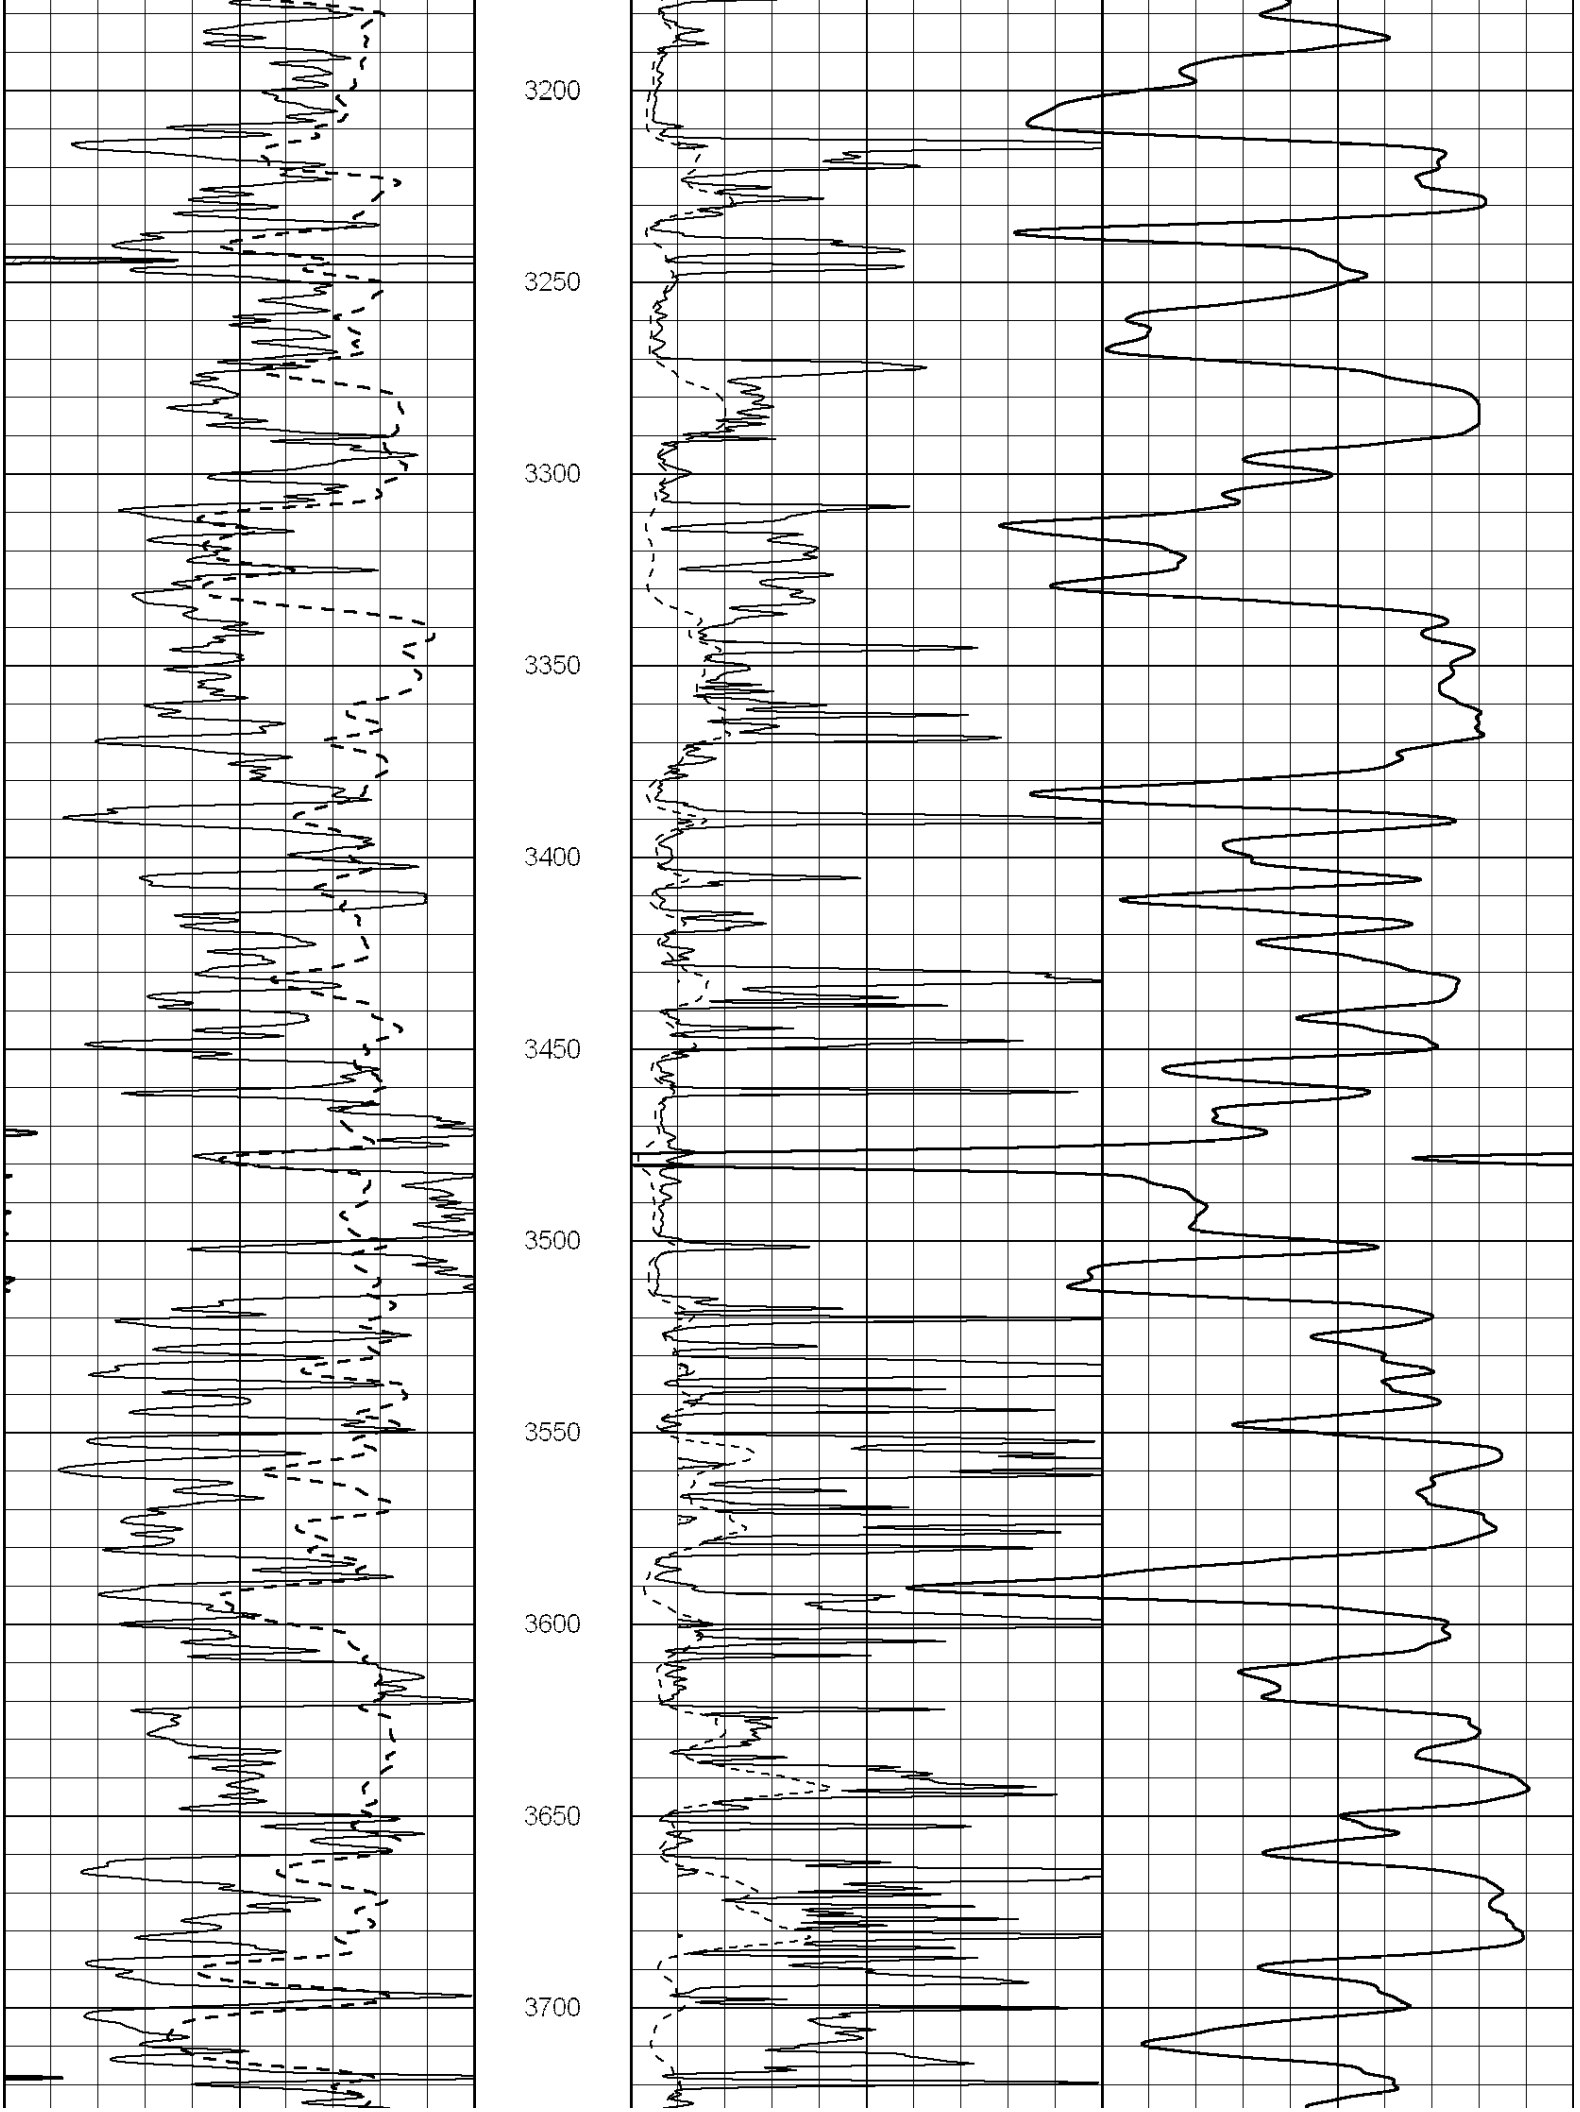

450
500
550
600
650
700
750
800
850
900
950

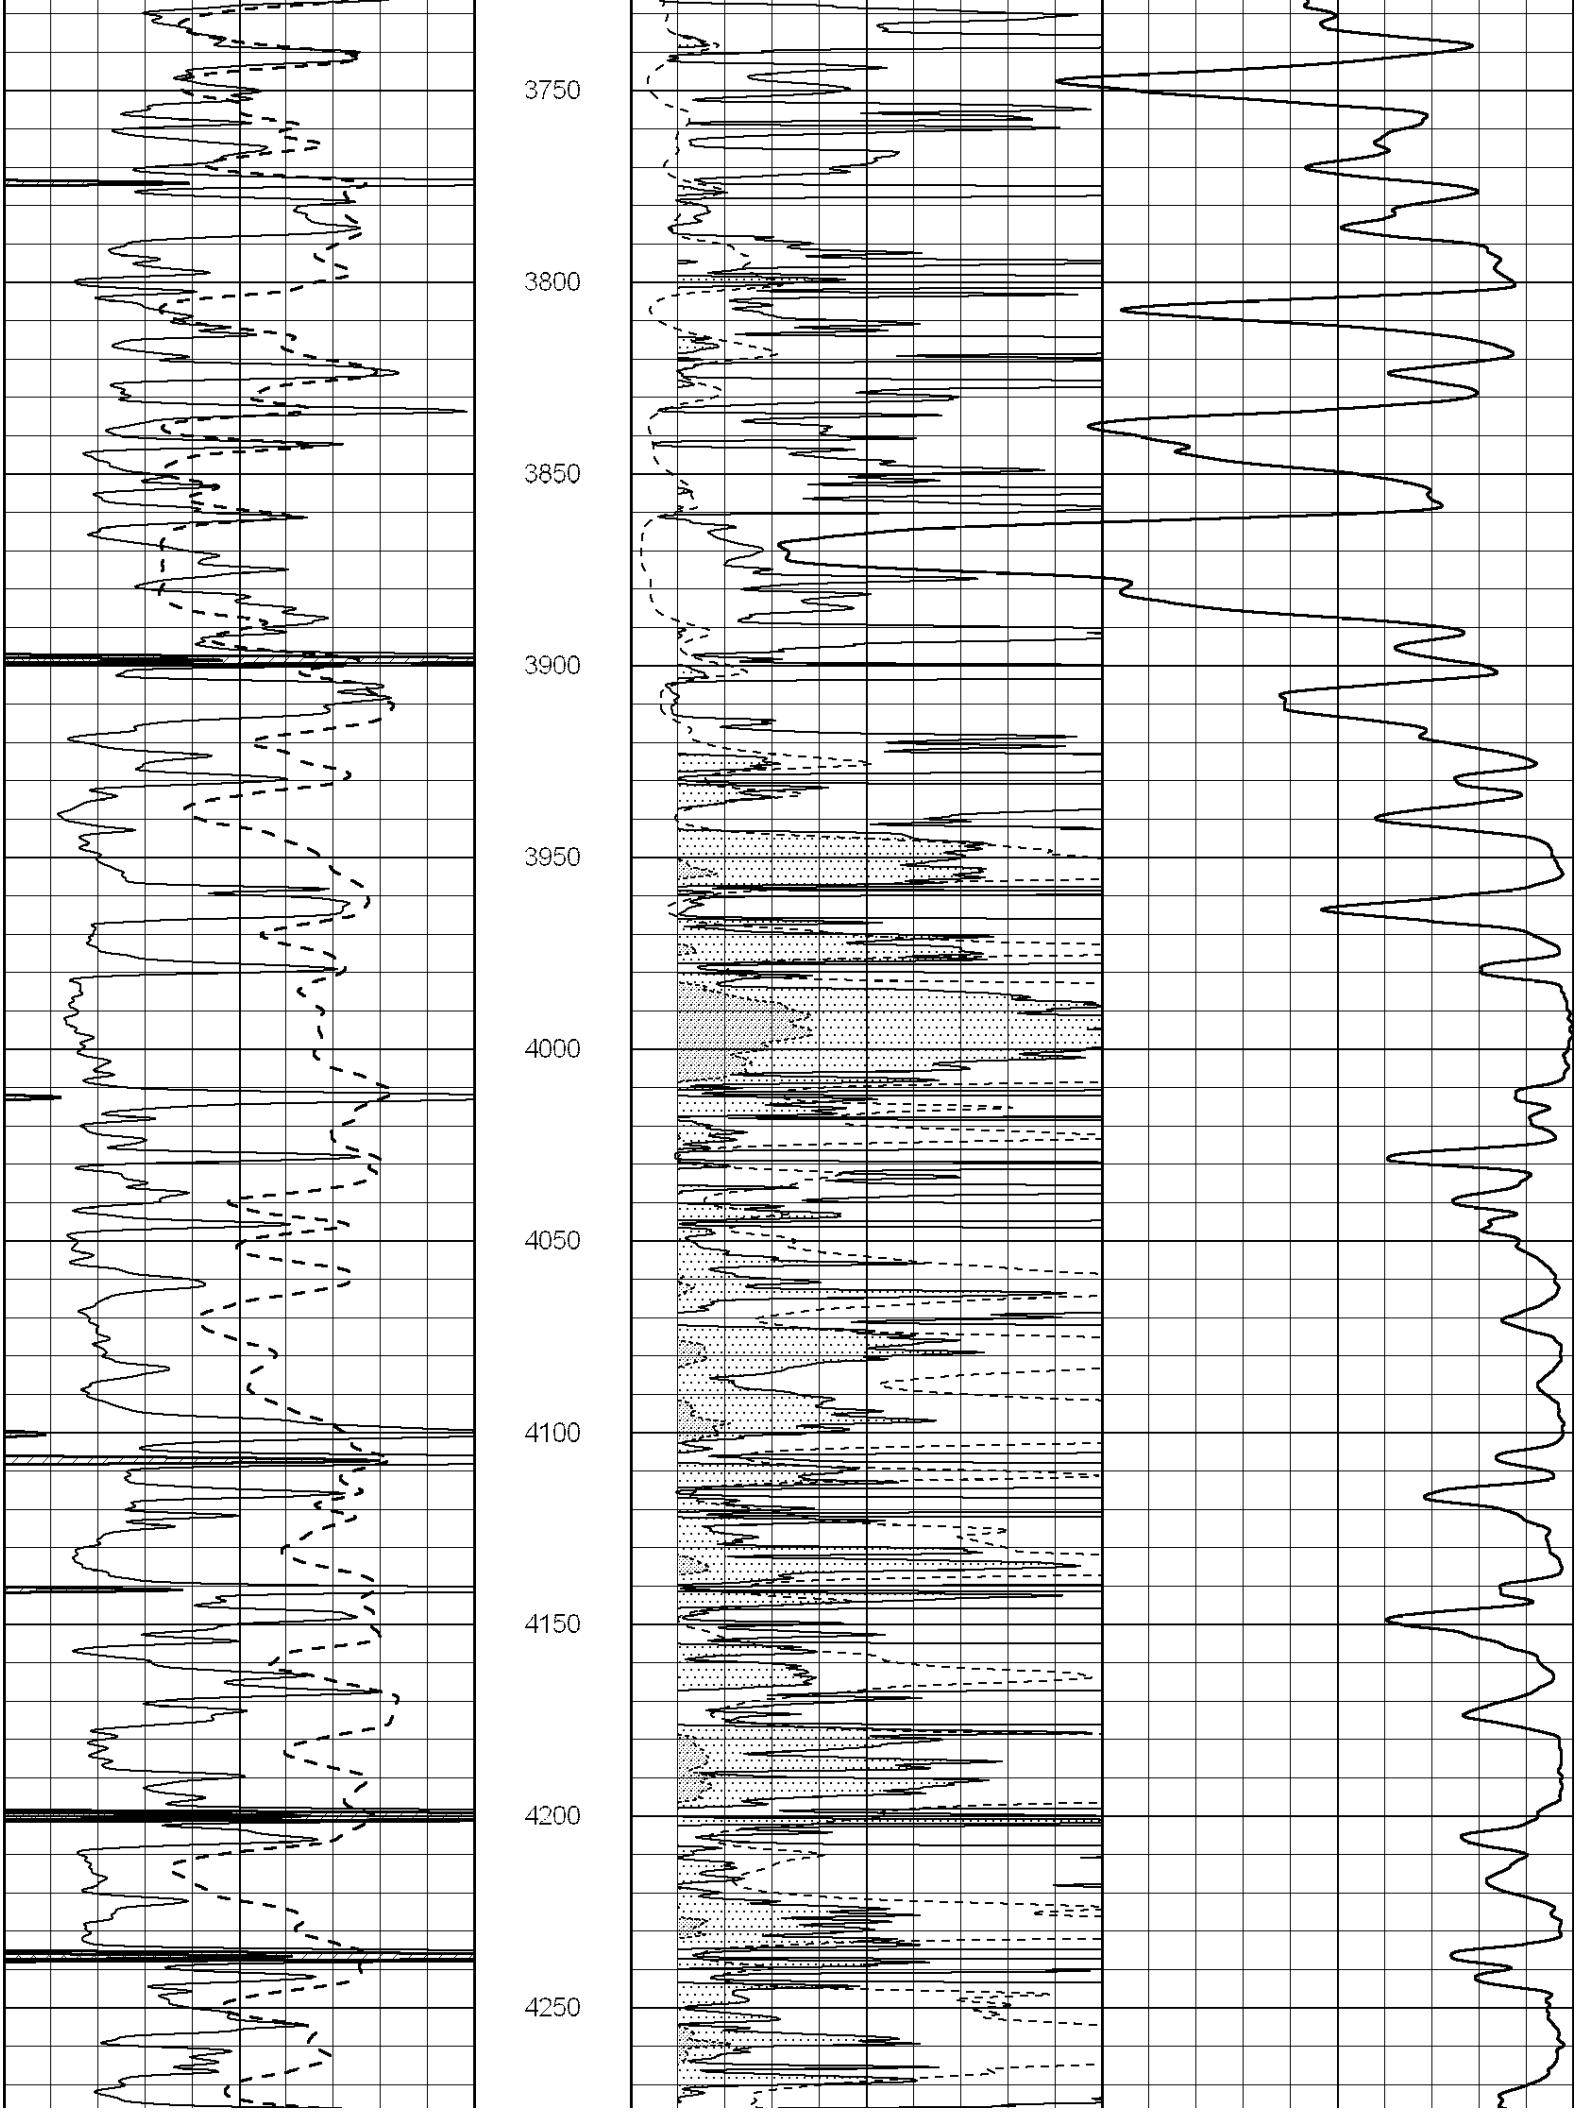

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

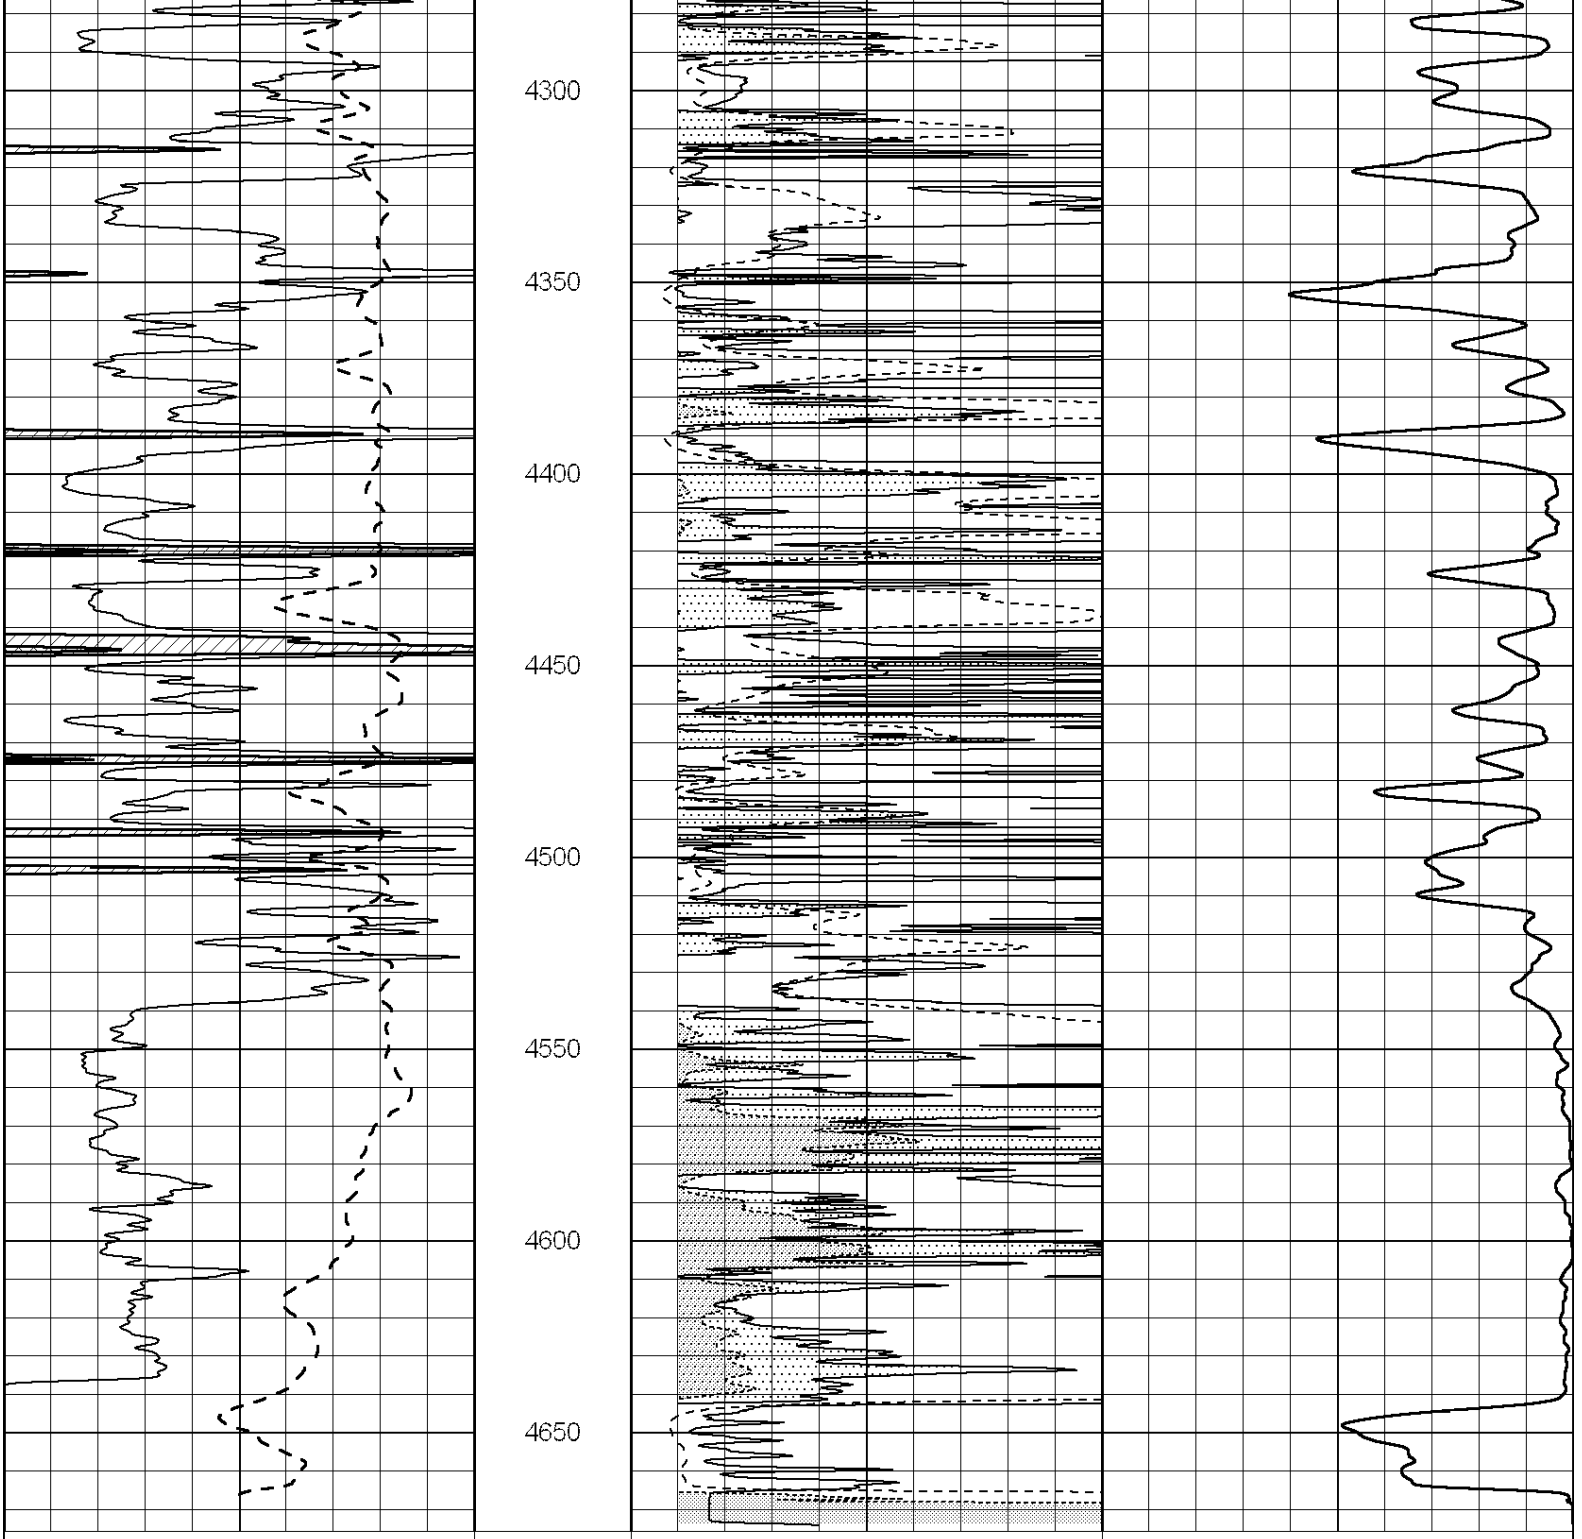

1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050


2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600


2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150


3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700


3750
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250



NABORS
COMPLETION & PRODUCTION SERVICES CO.

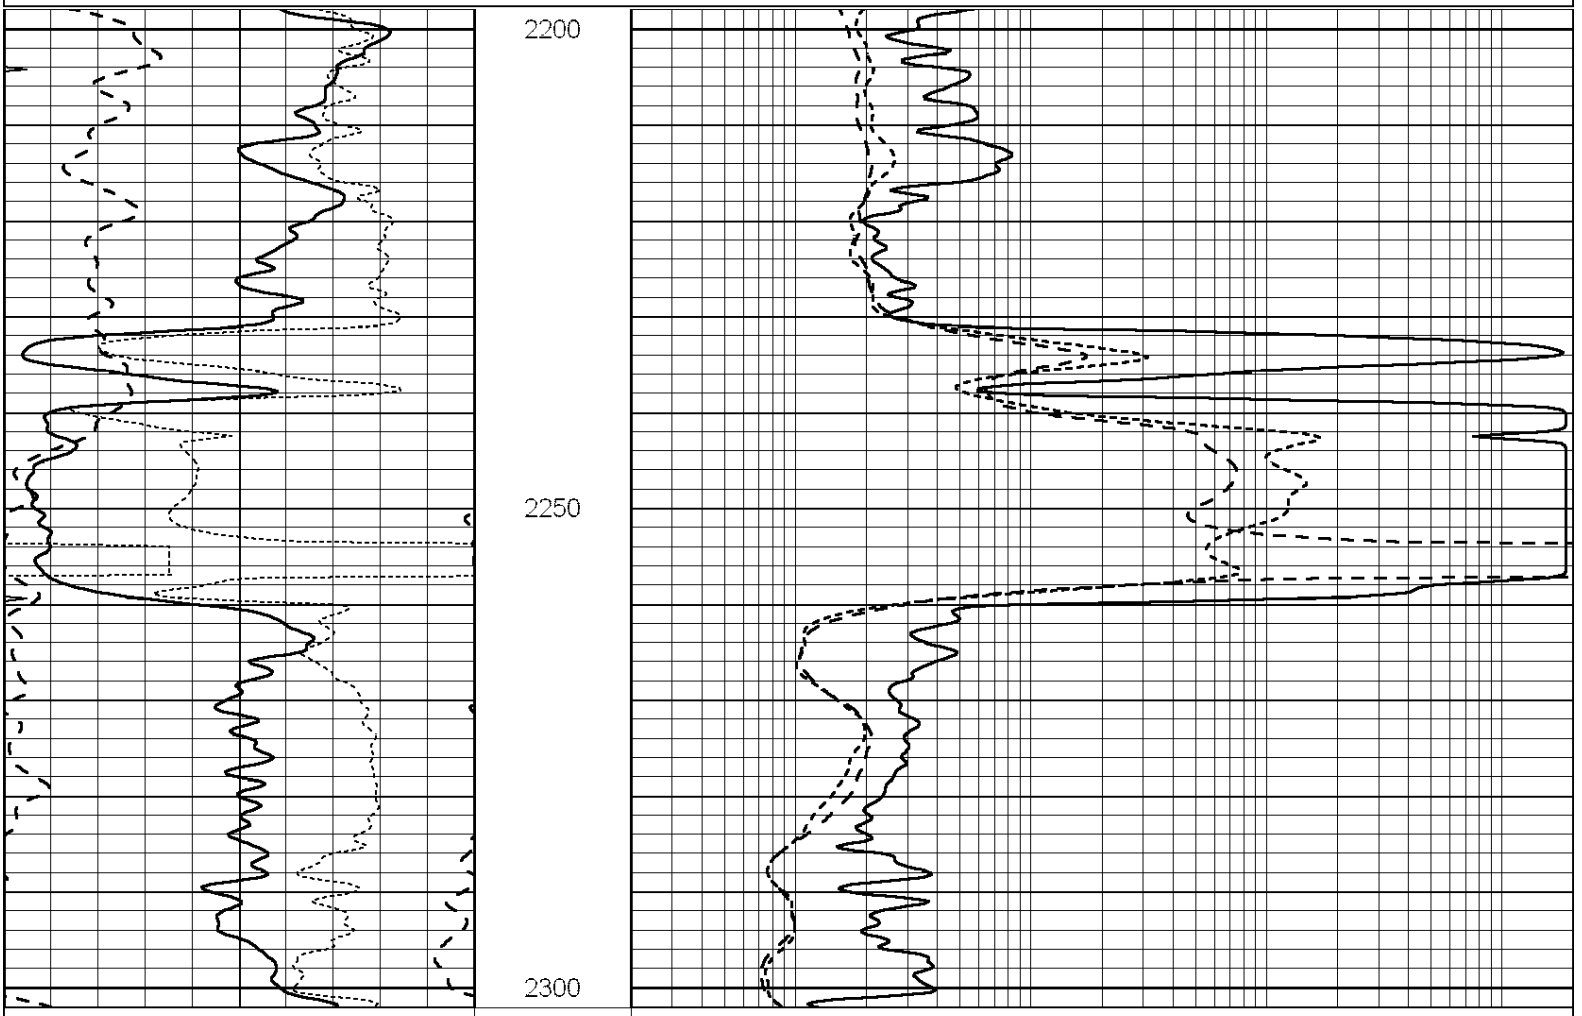
ANHYDRITE

Database File: 011195pe.db
Dataset Pathname: pass4.9
Presentation Format: dil

Presentation Format: dil
Dataset Creation: Sun Jul 28 04:10:58 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

NABORS
COMPLETION & PRODUCTION SERVICES CO.

MAIN SECTION

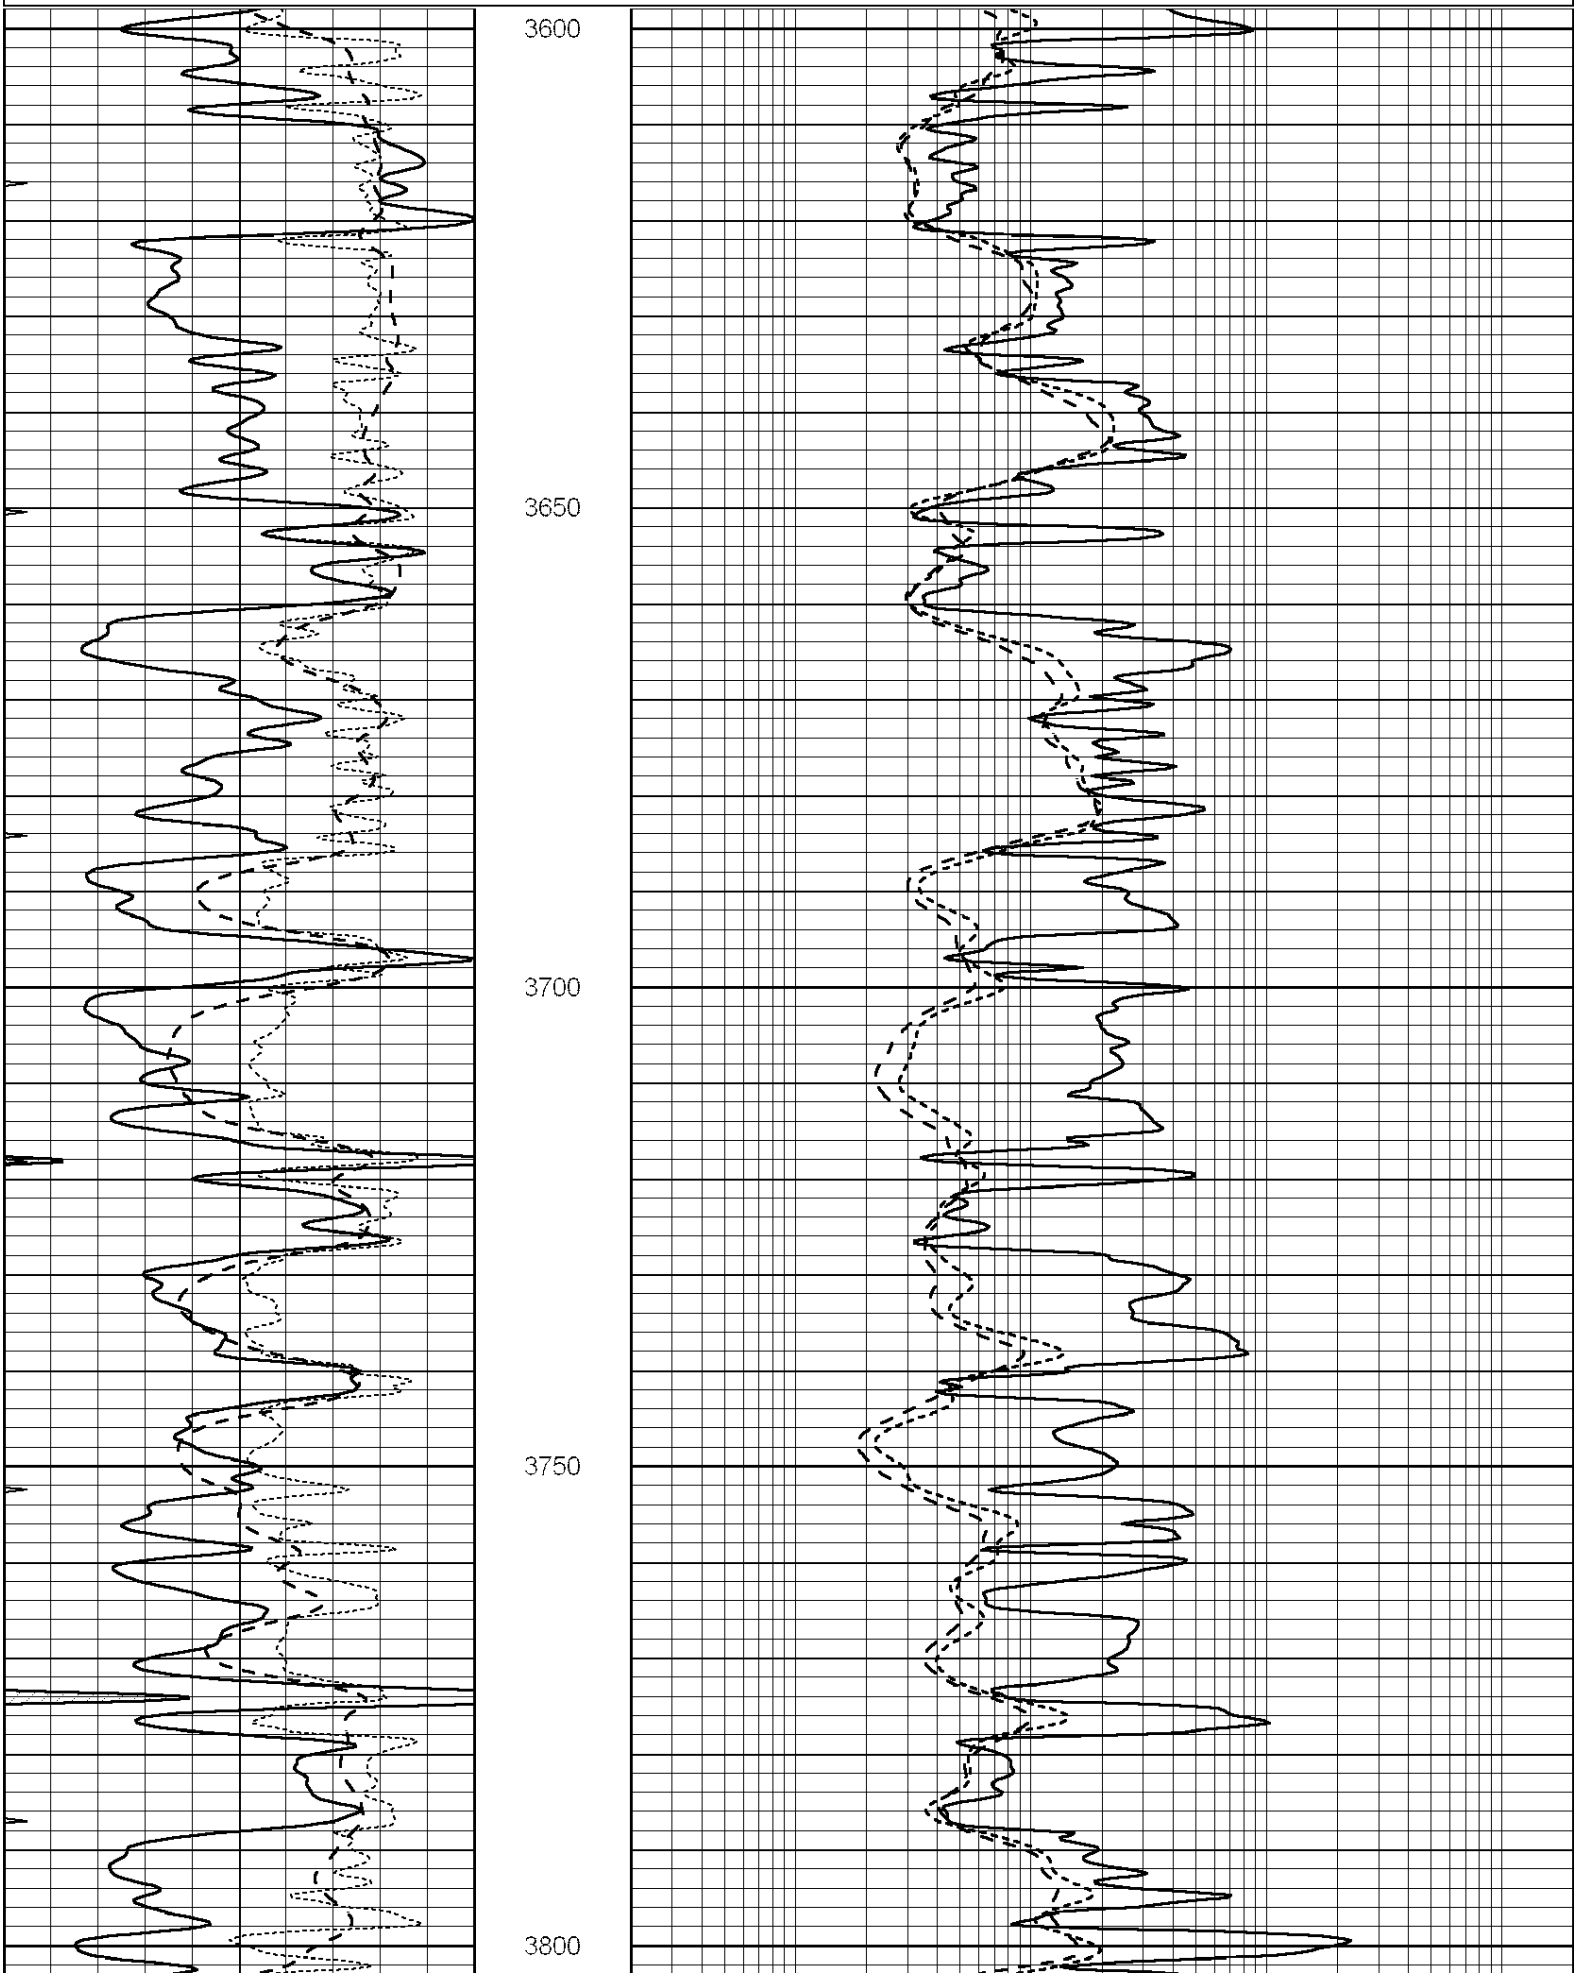
Database File: 011195pe.db
Dataset Pathname: pass4.11
Presentation Format: dil
Dataset Creation: Sun Jul 28 04:27:56 2013
Charted by: Depth in Feet scaled 1:240

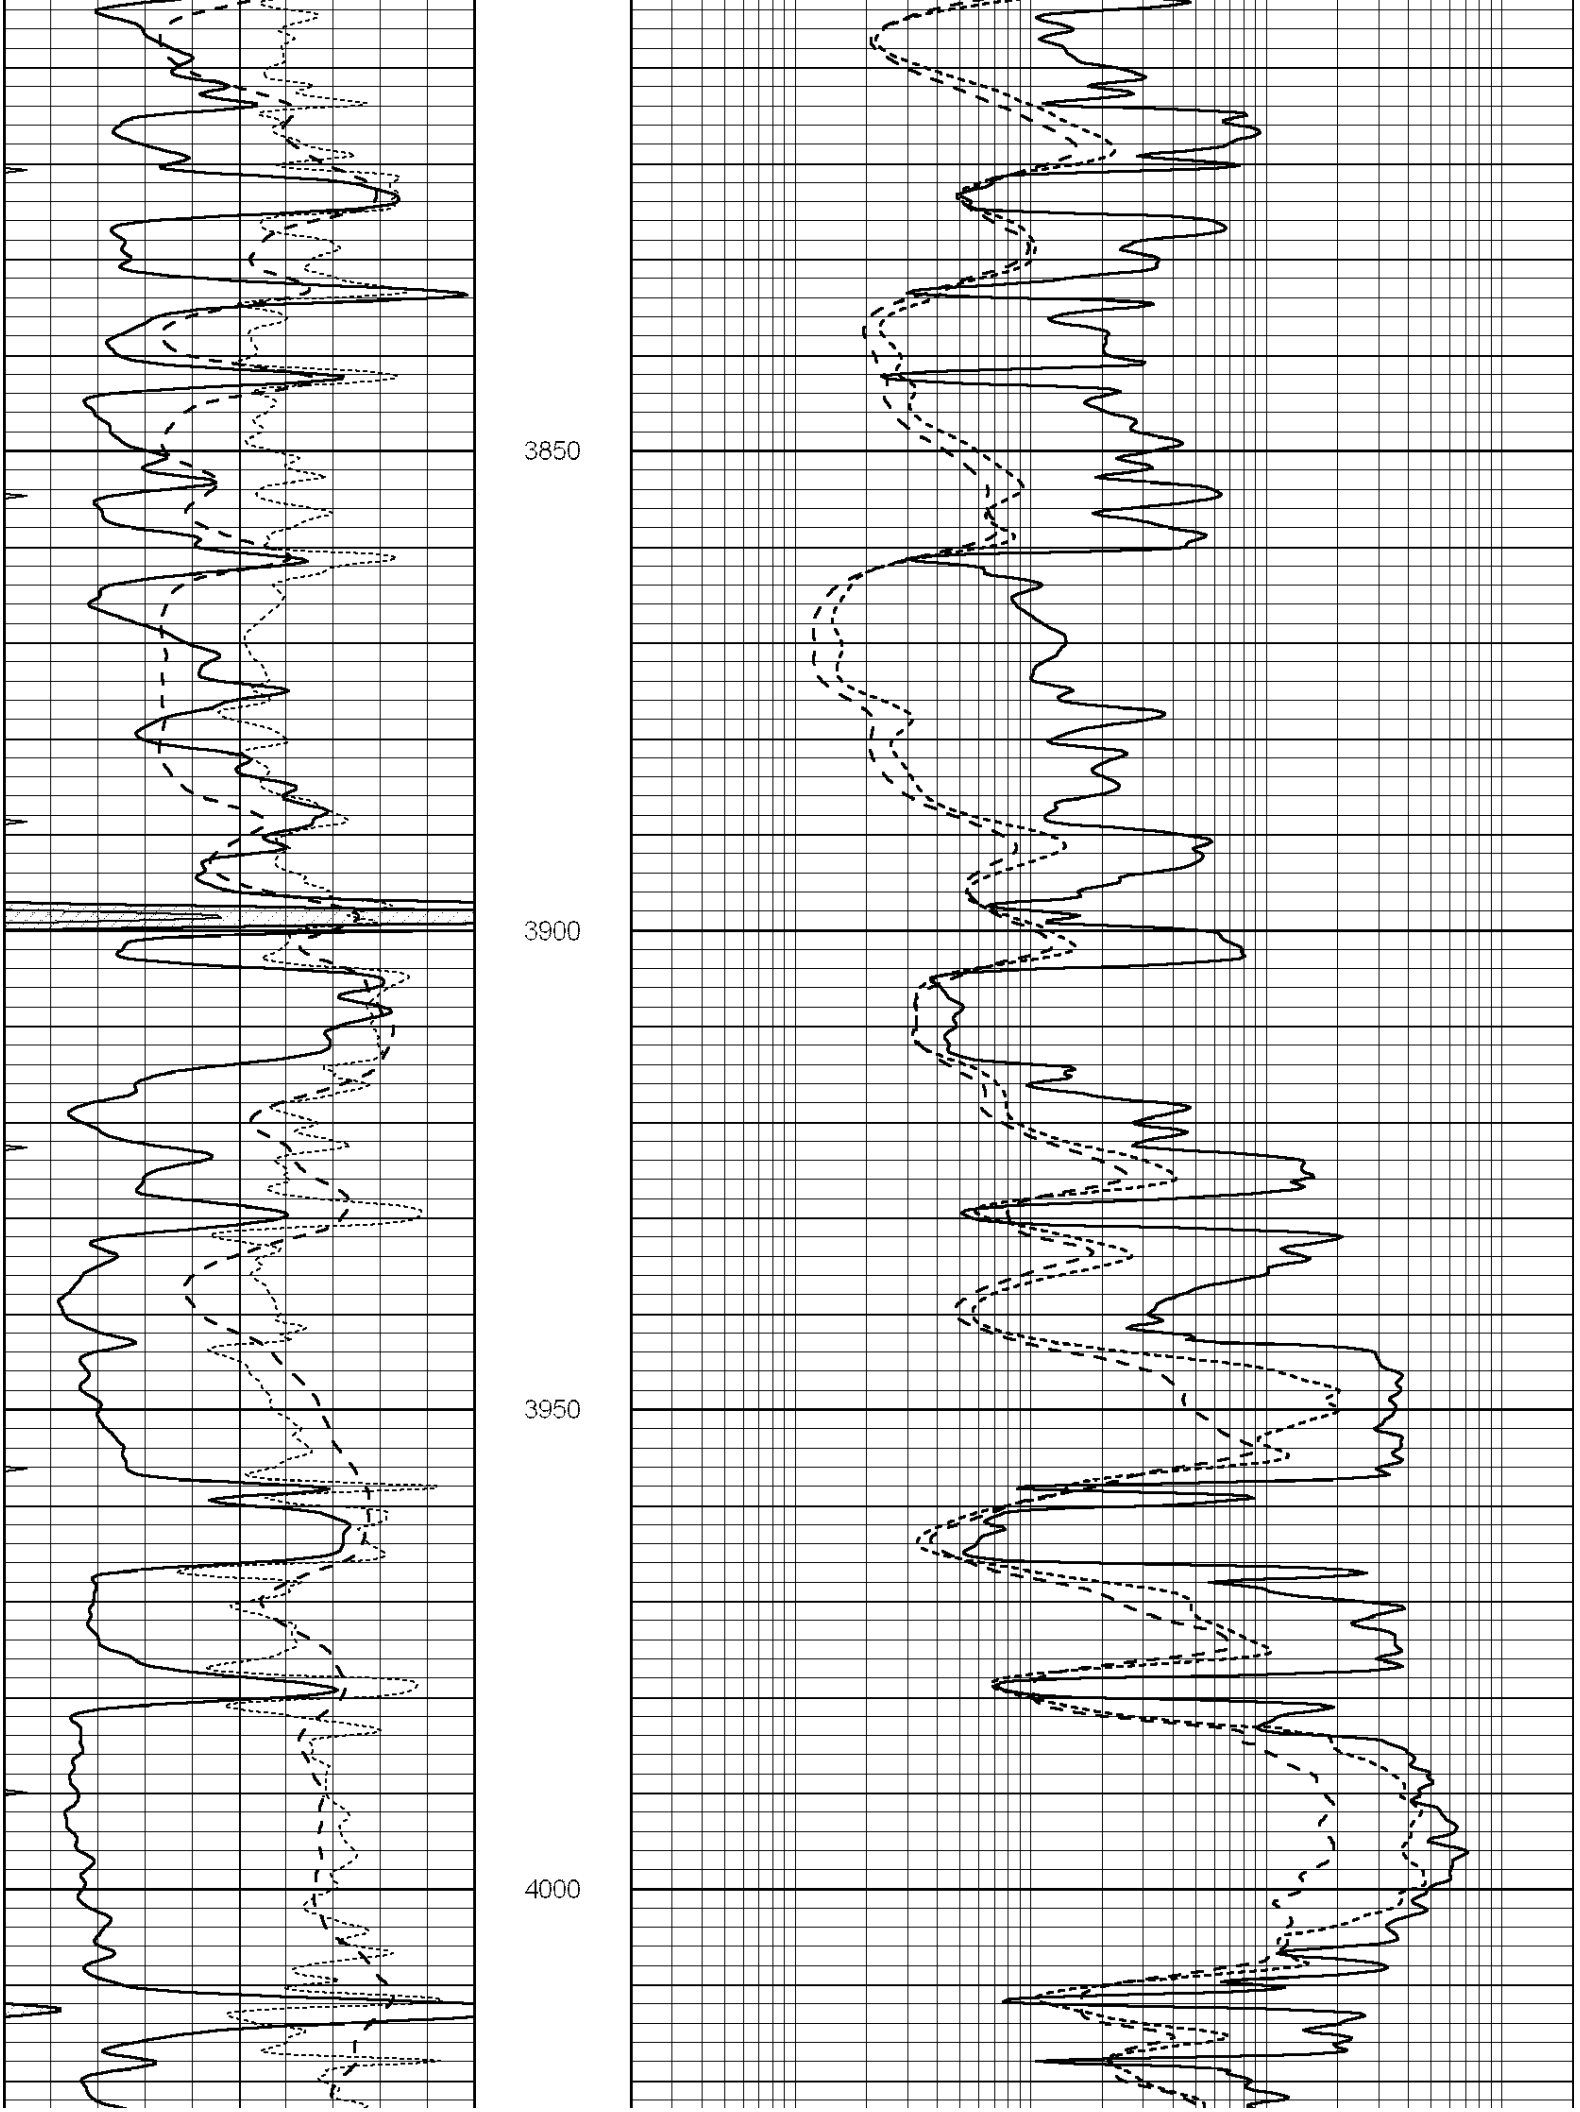
0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100

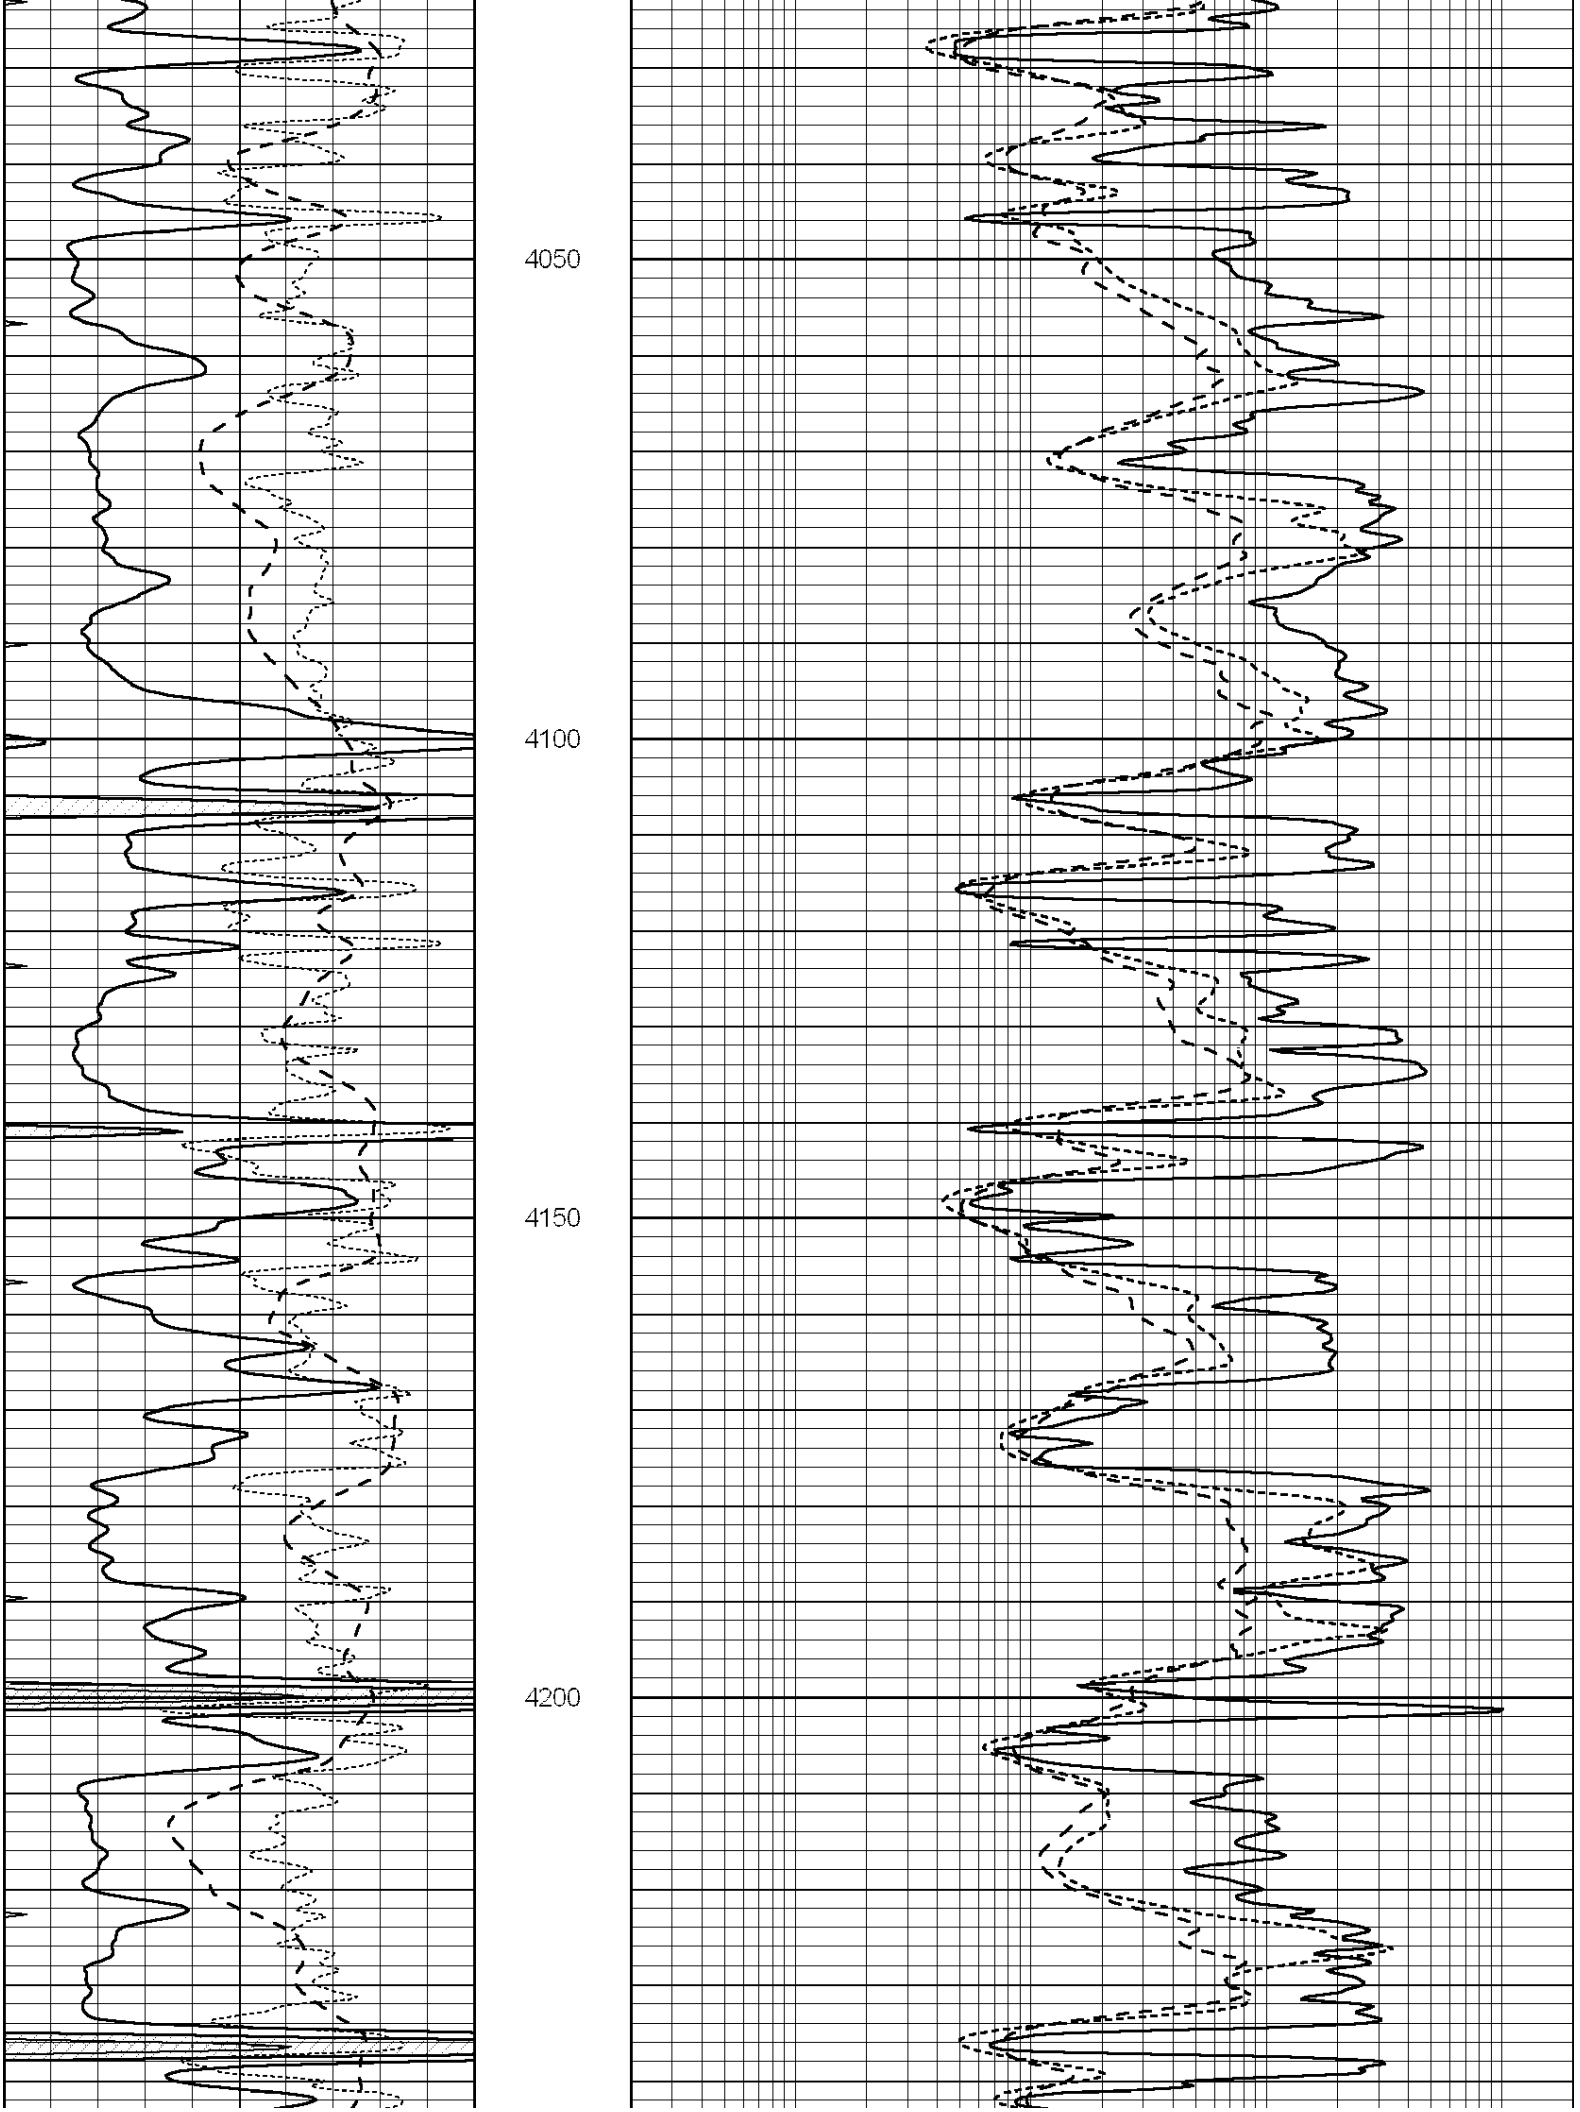
0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

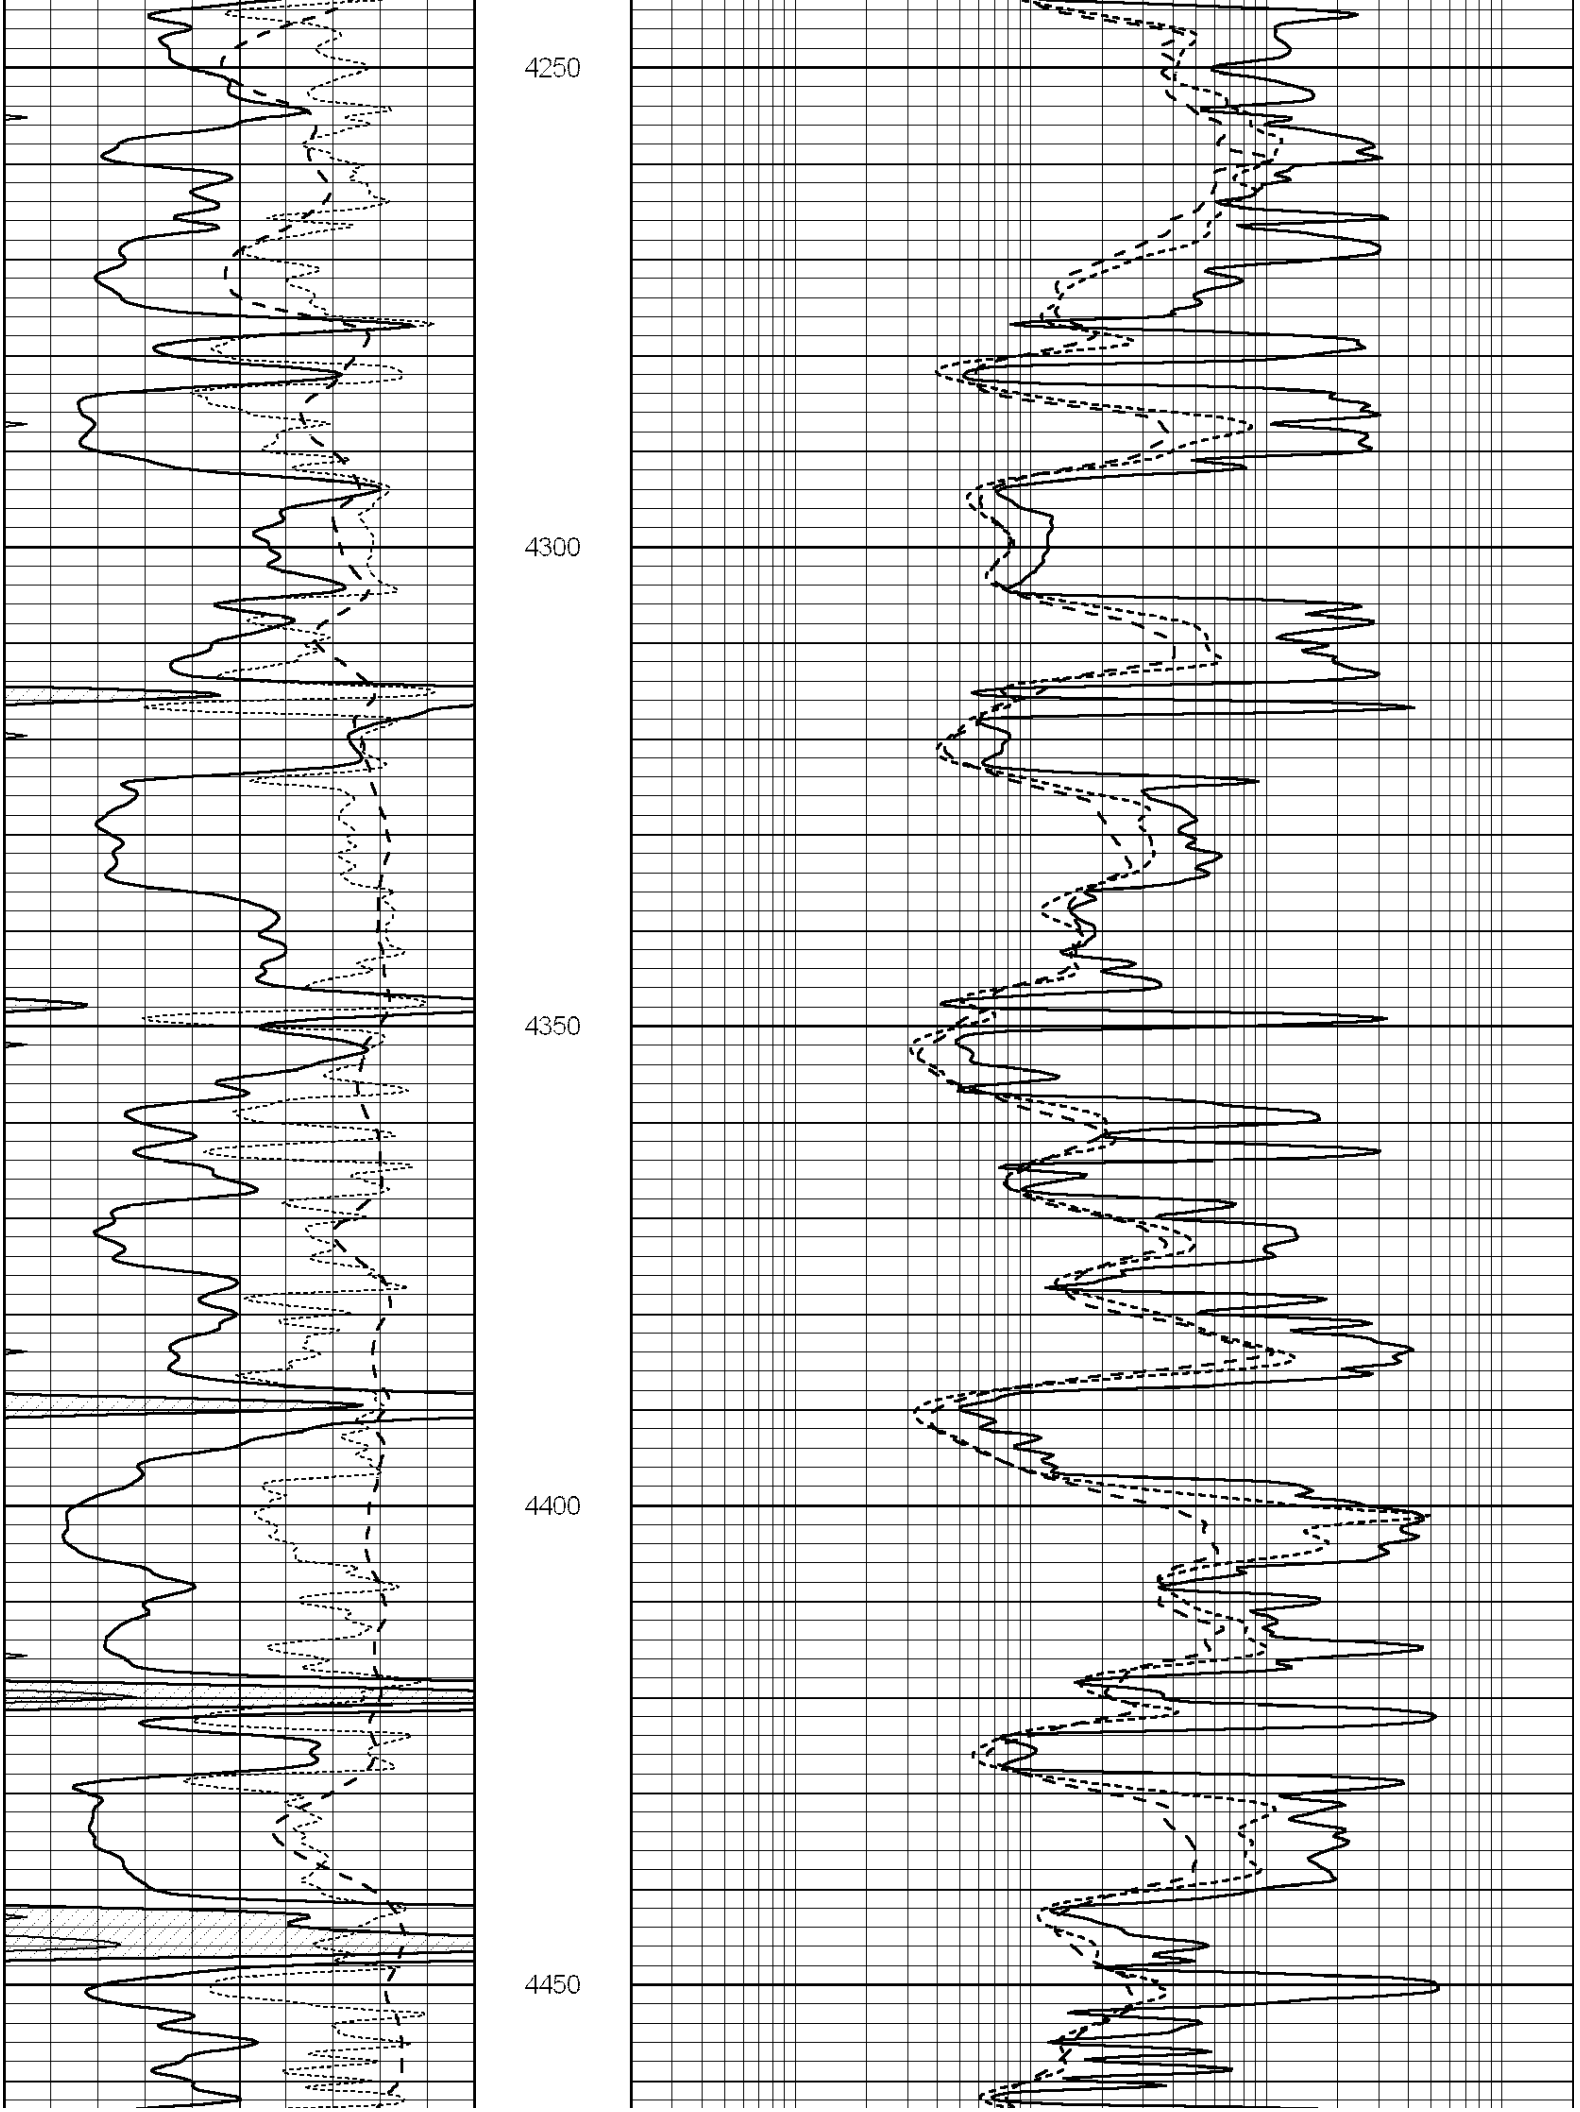
-250	Rxo/Rt	50
0	MINMK	20

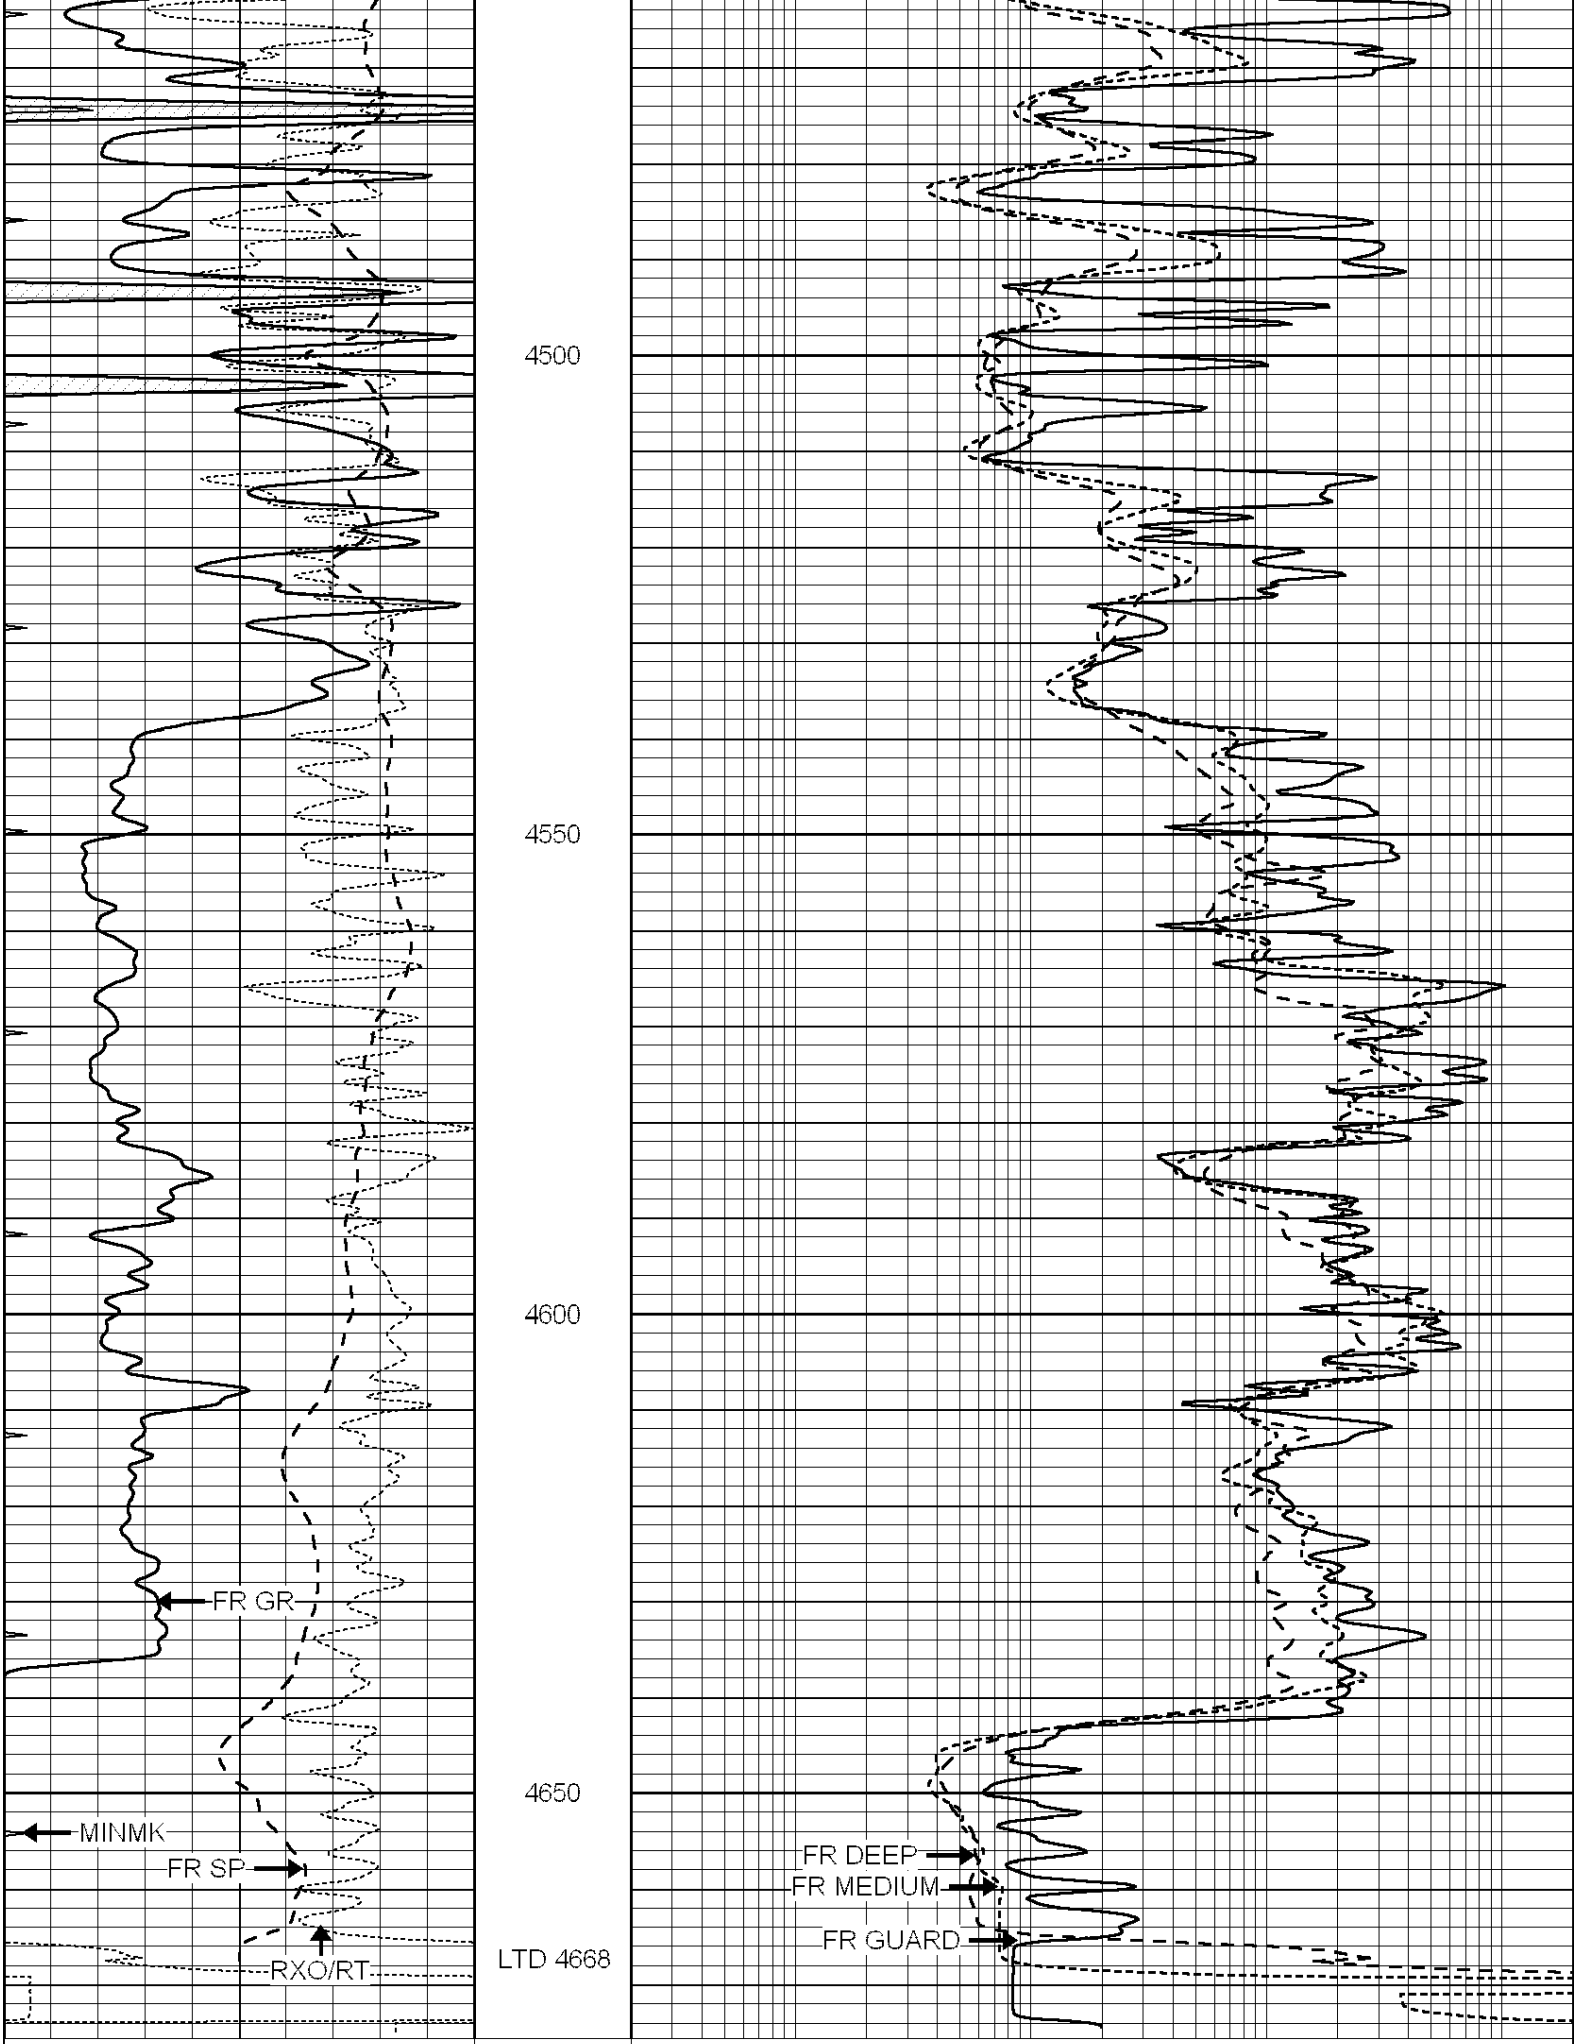
0.2	MEDIUM INDUCTION (Ohm-m)	2000




3850
3900
3950
4000


4050
4100
4150
4200


4250
4300
4350
4400
4450


4500
4550
4600
4650
FR GR
MINMK
FR SP
RXO/RT
LTD 4668
FR DEEP
FR MEDIUM
FR GUARD
0
GAMMA RAY (GAPI)
150
0.2
SHALLOW GUARD (Ohm-m)
2000
100
SP (mV)
100
0.2
DEEP INDUCTION (Ohm-m)
2000

-250	Rxo/Rt	50
0	MINMK	20

0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

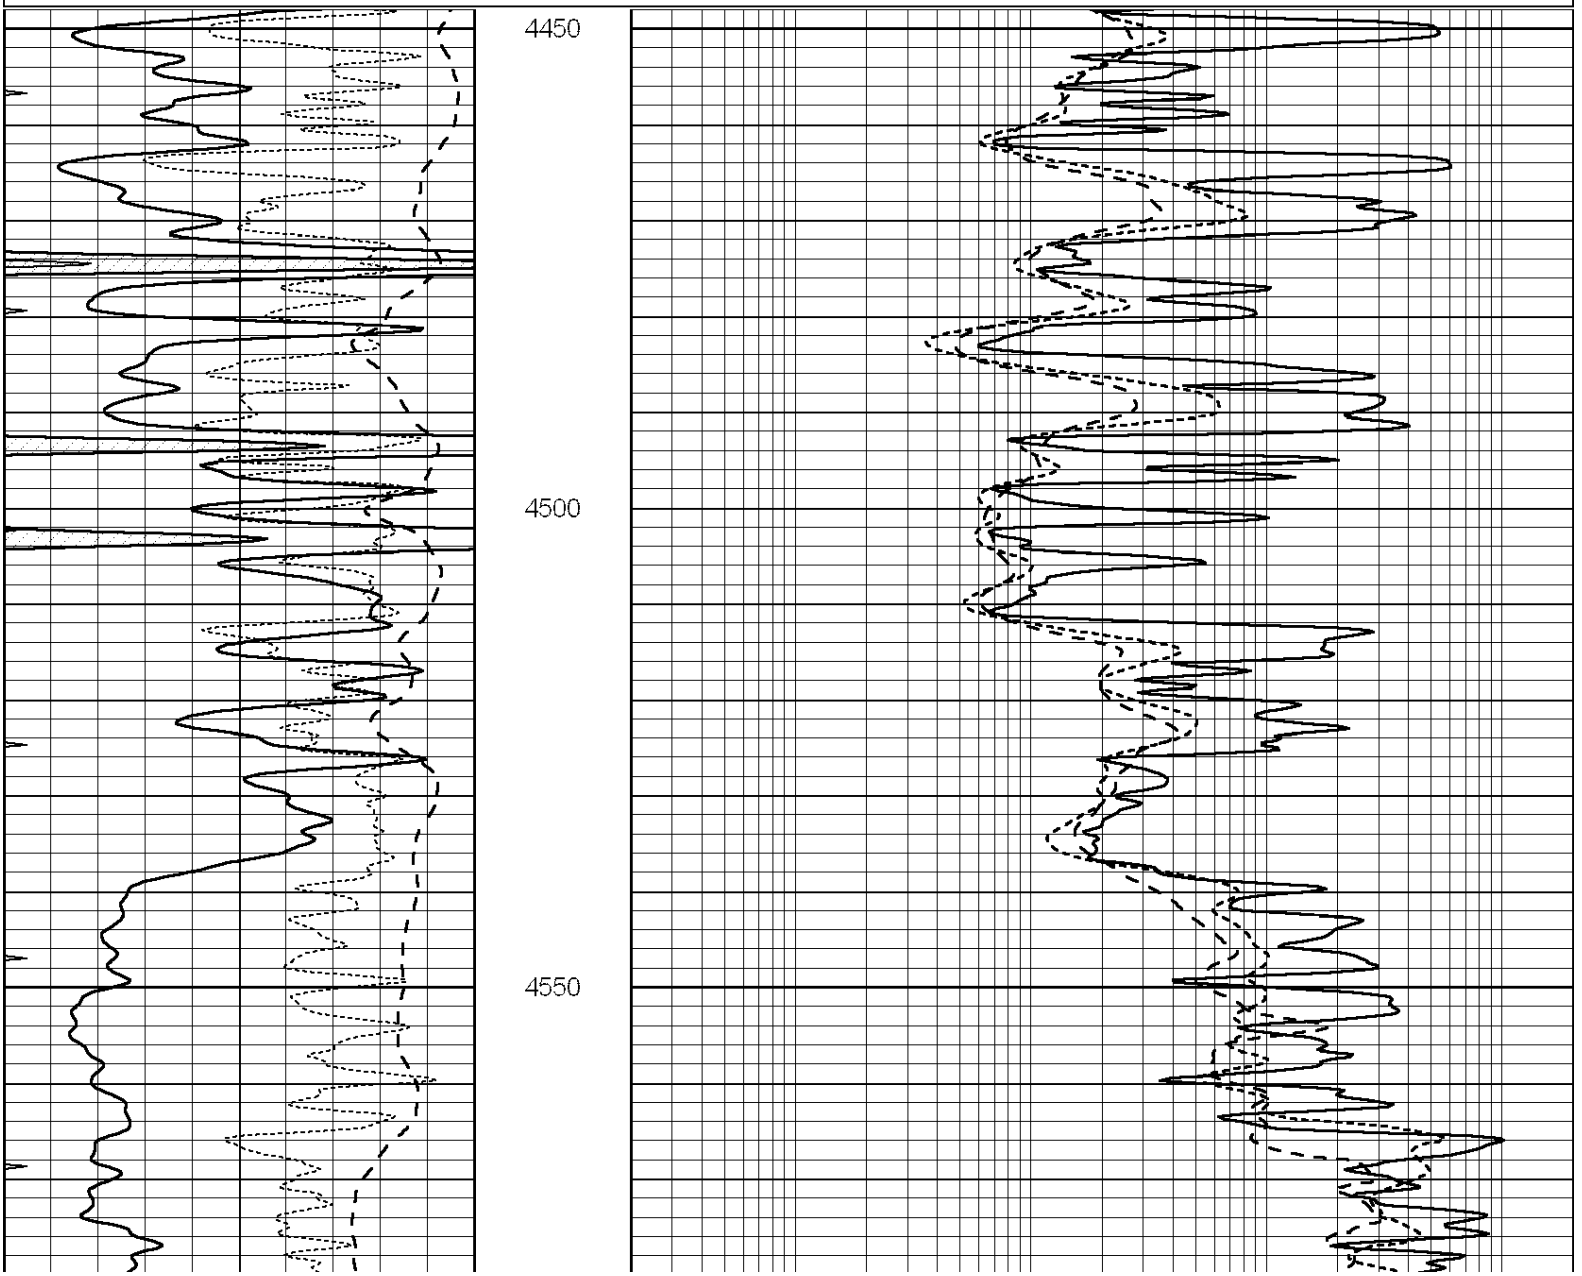
NABORS
COMPLETION & PRODUCTION SERVICES CO.

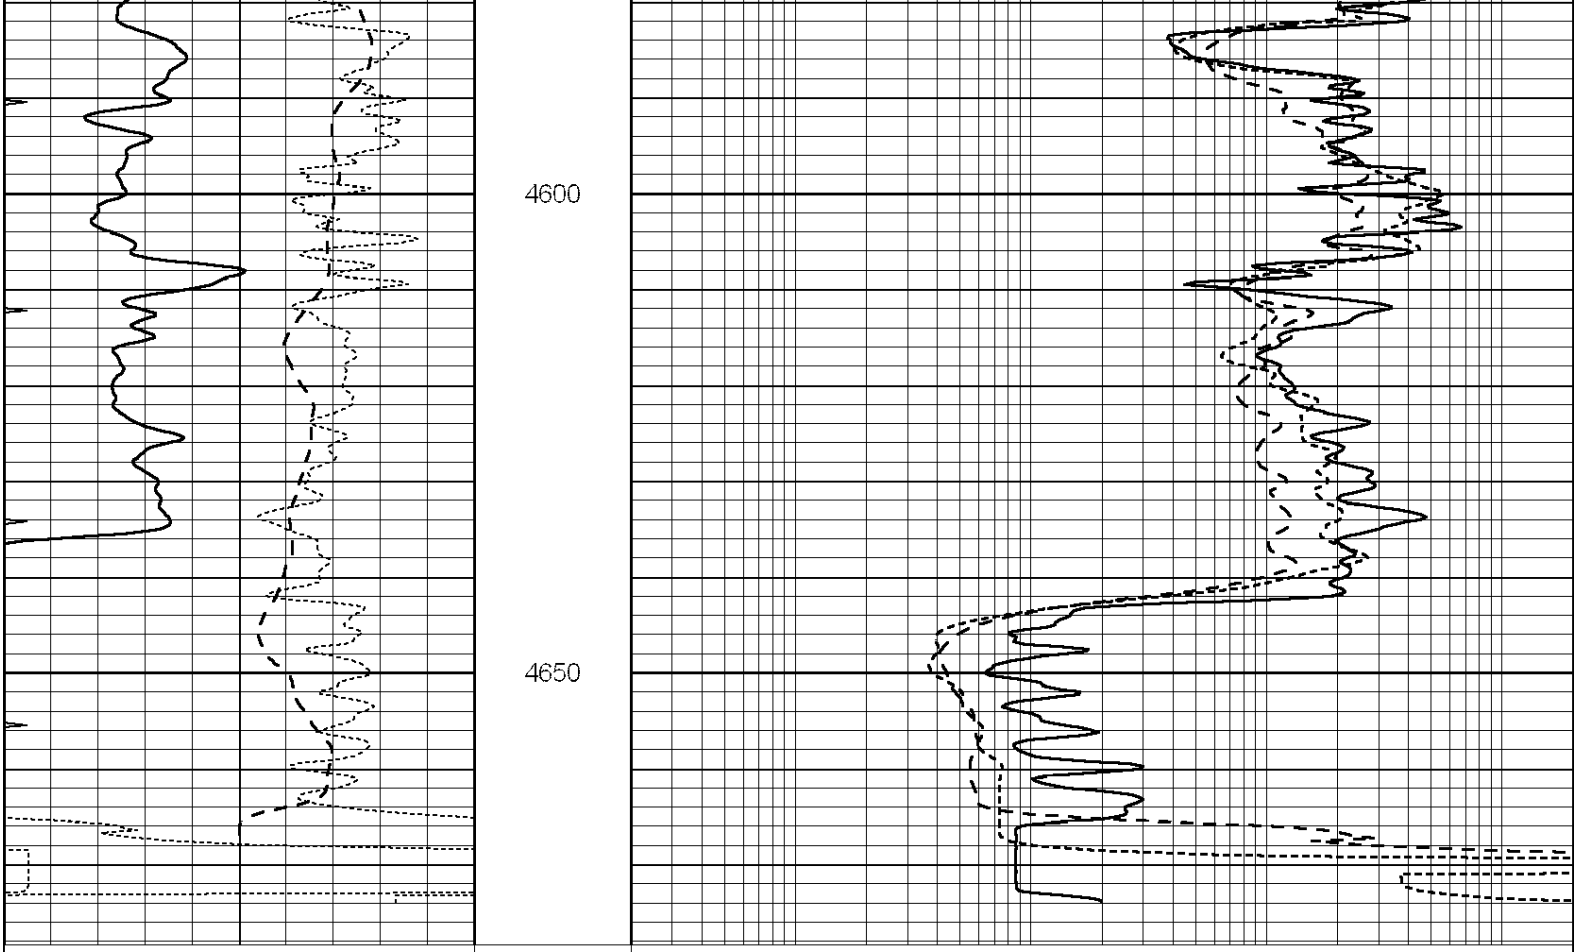
REPEAT SECTION

Database File: 011195pe.db
Dataset Pathname: pass3.6
Presentation Format: _dil
Dataset Creation: Sun Jul 28 03:04:53 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000





Calibration Report

Database File: 011195pe.db
Dataset Pathname: pass4.11
Dataset Creation: Sun Jul 28 04:27:56 2013

Dual Induction Calibration Report

Serial-Model:	PROBE9-DILG
Surface Cal Performed:	Thu Jul 11 13:14:55 2013
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	-6.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	

	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 004N Model: PRB

Master Calibration — Performed Mon Jun 03 09:36:56 2013

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1417.6	10391.4	3464.6	11537.5	cps
Window 2	1295.0	8959.7	3050.1	9816.4	cps
Window 3	1105.1	5464.2	2051.0	5838.8	cps
Window 4	315.0	317.7	312.9	319.8	cps
Long Space	0.0	7664.6	1755.0	8521.3	cps
Short Space	1.8	1582.4	1040.8	1699.4	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle	: 44.1	Rib Slope	: 0.970	Density/Spine Ratio	: 0.574
Spine Angle	: 74.1	Spine Slope	: 3.519	Spine Intercept	: -17.0

Before Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Wed Jun 12 18:25:42 2013

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3500	GAPI/cps