

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-163-22,719 -00-00

LEASE NAME Stice

WELL NUMBER 9D13

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

1650 Ft. from S Section Line

330 Ft. from E Section Line

LEASE OPERATOR Advantage Resources, Inc.

SEC. 13 TWP. 7 RGE. 20 (X) or (W)

ADDRESS 1775 Sherman St., Suite 1980, Denver, CO 80203

COUNTY Rooks

PHONE#(303) 831-1912 OPERATORS LICENSE NO. 6926

Date Well Completed 7/22/85

Character of Well D&A

Plugging Commenced 7/22/85

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 7/22/85

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? 6

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. _____

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
		-0-	209'	8-5/8"	209'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Mud laden fluid 3545' - 3490'
25 sks cement @ 3490' 50 sks @ 240'
25 sks cement @ 1590' 10 sks @ 40'
100 sks cement @ 930' 10 sks cement in rat hole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750


Address Box 506, Russell, KS 67665

STATE OF Kansas COUNTY OF Russell, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

JUL 25 1985 (Signature) [Signature]

(Address) Box 506, Russell, KS 67665



SUBSCRIBED AND SWORN TO before me this 24 day of July, 1985

Glenda R. Tiffin
Glenda R. Tiffin Notary Public

My Commission Expires: February 6, 1988

15-163-22719-00-00

EMPHASIS OIL OPERATIONS

P. O. Box 506
Russell, KS 67665

DRILLERS LOG

OPERATOR: Advantage Resources, Inc.
1600 Broadway, Suite 1940
Denver, CO 80202

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Stice WELL #9-13

LOCATION: ^{K.B.B. 7/19/2005} ~~NE~~ SE NE SE
Section 13-7S-20W
Rooks County, Kansas

Rotary Total Depth: 3545'

Elevation:

Commenced: 7/15/85

Completed: 7/22/85

Casing: 8-5/8" @ 209' w/150 sks cement

Status: Dry Hole


DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil & Sand	40'	Anhydrite	1605'
Sand	210'	Shale	2047'
Sand & Shale	1079'	Shale & Lime	3218'
Cedar Hills Sand	1310'	Lime & Shale	3444'
Shale & Red Shale	1572'	Lime (R.T.D.)	3545'


STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

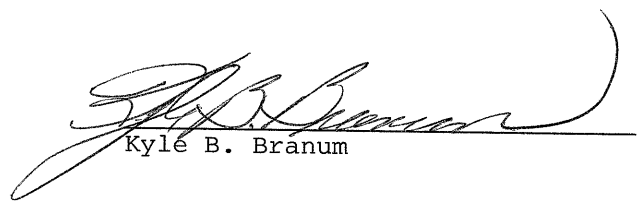
Kyle B. Branum

Subscribed and sworn to before me this 24th of July, 1985.

My Commission Expires: February 6, 1988.




Glenda R. Tiffin, Notary Public
JUL 25 1985
JUL 25, 1985