

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

RECEIVED
SEP 12 2005
KCC WICHITA
Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 137-20,132 -00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date 10-3-78

Well Operator: Gore Oil Company KCC License #: 5552
(Owner / Company Name) (Operator's)

Address: P.O. Box 2757 City: Wichita

State: KS Zip Code: 67201-2757 Contact Phone: (316) 263 - 3535

Lease: Bittel Well #: 1 Sec. 12 Twp. 5 S. R. 22 East West

NW - SE - SE Spot Location / QQQQ County: Norton

990 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

990 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8" Set at: 251' Cemented with: 200 Sacks

Production Casing Size: 4 1/2" Set at: 3467' Cemented with: 125 Sacks

List (ALL) Perforations and Bridgeplug Sets: _____

Elevation: 2048' (G.L. / K.B.) T.D.: 3470' PBTD: _____ Anhydrite Depth: 1642'
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): As per KCC District Office Agent.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Gary Reh

Phone: (308) 345 - 1597

Address: P.O. Box 878 City / State: McCook, NE 69001

Plugging Contractor: Swift Services, Inc. KCC License #: 32382
(Company Name) (Contractor's)

Address: P.O. Box 466, Ness City, KS 67560-0466 Phone: (785) 798 - 2300

Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 9-8-05 Authorized Operator / Agent: Gary M. Gach
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

WICHITA BRANCH

12-5-22W
NW-SE-SE

OPERATOR:
CONTRACTOR:
WELL NAME:
LOCATION:

K.C.S. WICHITA

SPUD DATE:
COMPLETION DATE:

R. P. Nixon Operations
Abercrombie Drilling, Inc.
Bittel #1
NW SE SE Section 12-5S-22W
Norton County, Kansas
October 2, 1978
October 6, 1978

RECEIVED
SEP 12 2005
KCC WICHITA

0	253	Sand & shale
253	1641	Shale & sand
1641	1672	Anhydrite
1672	1800	Shale & sand
1800	2182	Shale & lime
2182	2414	Lime & shale
2414	3065	Shale & lime
3065	3290	Lime & shale
3290	3435	Shale & lime
3435	3471	Lime
	3471	Rotary Total Depth

SAMPLE TOPS:

Anhydrite 1642' (+ 406)
B/Anhydrite 1672' (+ 376)

Spud hole at 6:30 p.m., October 2, 1978. Drilled 253' of 12 1/4" hole. Ran 6 joints of 8-5/8" surface casing. Set at 251' with 200 sacks 60-40 posmix, 3% CaCl, 2% gel. Cement did circulate. Plug was down at 11:15 p.m., October 2, 1978.

T.D. 3471'. Ran 87 joints of 4 1/2" - 9 1/2" production casing. Set at 3468'. Ran 15 bbls. of salt flush, 125 sacks of common cement, 10% salt. Plug was down at 7:15 p.m., October 6, 1978.

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Bittel #1, NW SE SE Section 12-5S-22W, Norton County, Kansas.

ABERCROMBIE DRILLING, INC.

R.P. NIXON OPERATIONS
207 W. 12TH
HAYS, KS 67601

#1 BITTEL 12-5-22W
NW SE SE

CONTR ABERCROMBIE DRILLING CTY NORTON

GEOL _____ FIELD DENSMORE


2048 KB CM 10/3/78 CARD ISSUED 2/17/79 IP P 16 BOPD & 30% W
REAG SD OH 3467-70


API 15-137-20, 132

SMP	TOPS	DEPTH	DATUM
ANH		1642	+ 406
BANH		1672	+ 376
HEEB		3180	-1132
TOR		3207	-1159
LKC		3223	-1175
REAG AD		3465	-1417
RTD		3470	-1422

8-5/8" 251/200sx, 4 1/2 3467/125sx
NO LOG
NO DST'S
MICT - CO (REAG SD OH) SWB 1-3/4, BFPH,
90% OIL ON/FU 1700' (300'w) SWB 2 1/2
BFPH, 90% OIL, RT, POP

Subscribed and s
aforesaid, as of



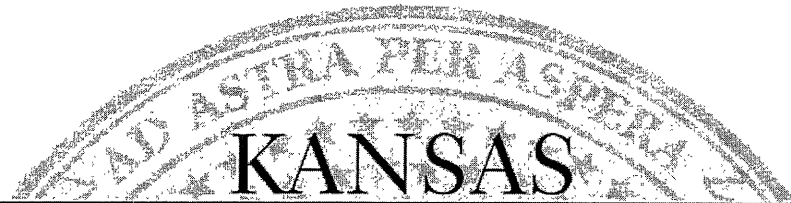

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Gore Oil Company
202 South St. Francis
PO Box 2757
Wichita, KS 67201-2757

September 13, 2005

Re: BITTEL #1
API 15-137-20132-00-00
NWSESE 12-5S-22W, 990 FSL 990 FEL
NORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4
2301 E. 13th
Hays, KS 67601
(785) 625-0550

Sincerely

David P. Williams
Production Supervisor