



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company	RITCHIE EXPLORATION, INC.		
Well	#1 INMAN 8 C		
Field	WILDCAT		
County	GOVE	State	KANSAS
Location:	AP1 # : 15-063-22112-0000		Other Services
SEC 8 TWP 15S RGE 31W		CDL/CNL	
1245' FSL & 1430' FWL			
Permanent Datum	GROUND LEVEL	Elevation	2711
Log Measured From	KELLY BUSHING 5' A.G.L.	K.B. 2716	
Drilling Measured From	KELLY BUSHING	D.F. 2714	
		G.L. 2711	
Date	6/18/13		
Run Number	ONE		
Depth Driller	4546		
Depth Logger	4546		
Bottom Logged Interval	4544		
Top Log Interval	00		
Casing Driller	8 5/8" @ 257'		
Casing Logger			
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3000 PPM	
Density / Viscosity	9.2/58		
pH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.85 @ 94F		
Rmt @ Meas. Temp	.63 @ 94F		
Rmc @ Meas. Temp	1.02 @ 94F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.66 @ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	121F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	MAX LOVELY		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS:
OAKLEY, KS. - 24 S. TO DAKOTA RD. - 1 1/2 E. - 1 N. - 1 1/2 E. - N. INTO

Database File:

011257ddn.db

Dataset Pathname:

pass3.2

Presentation Format:

_dil

Dataset Creation:


Tue Jun 18 20:09:40 2013 by Calc Open-Cased 090629

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

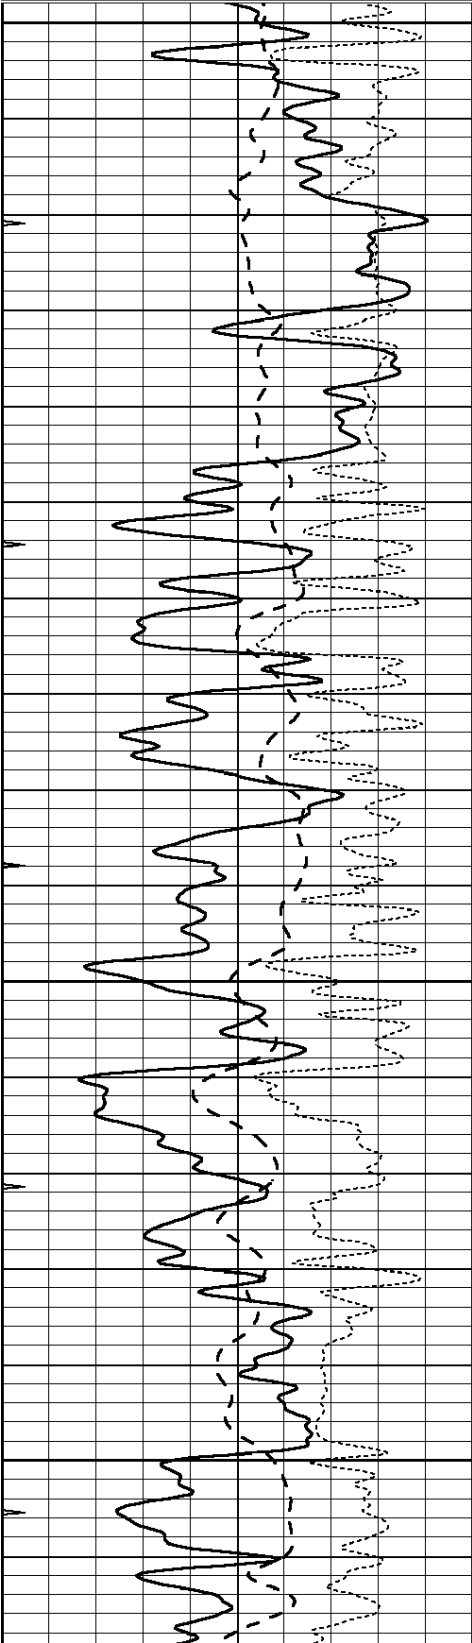



3300

3350

3400

3450

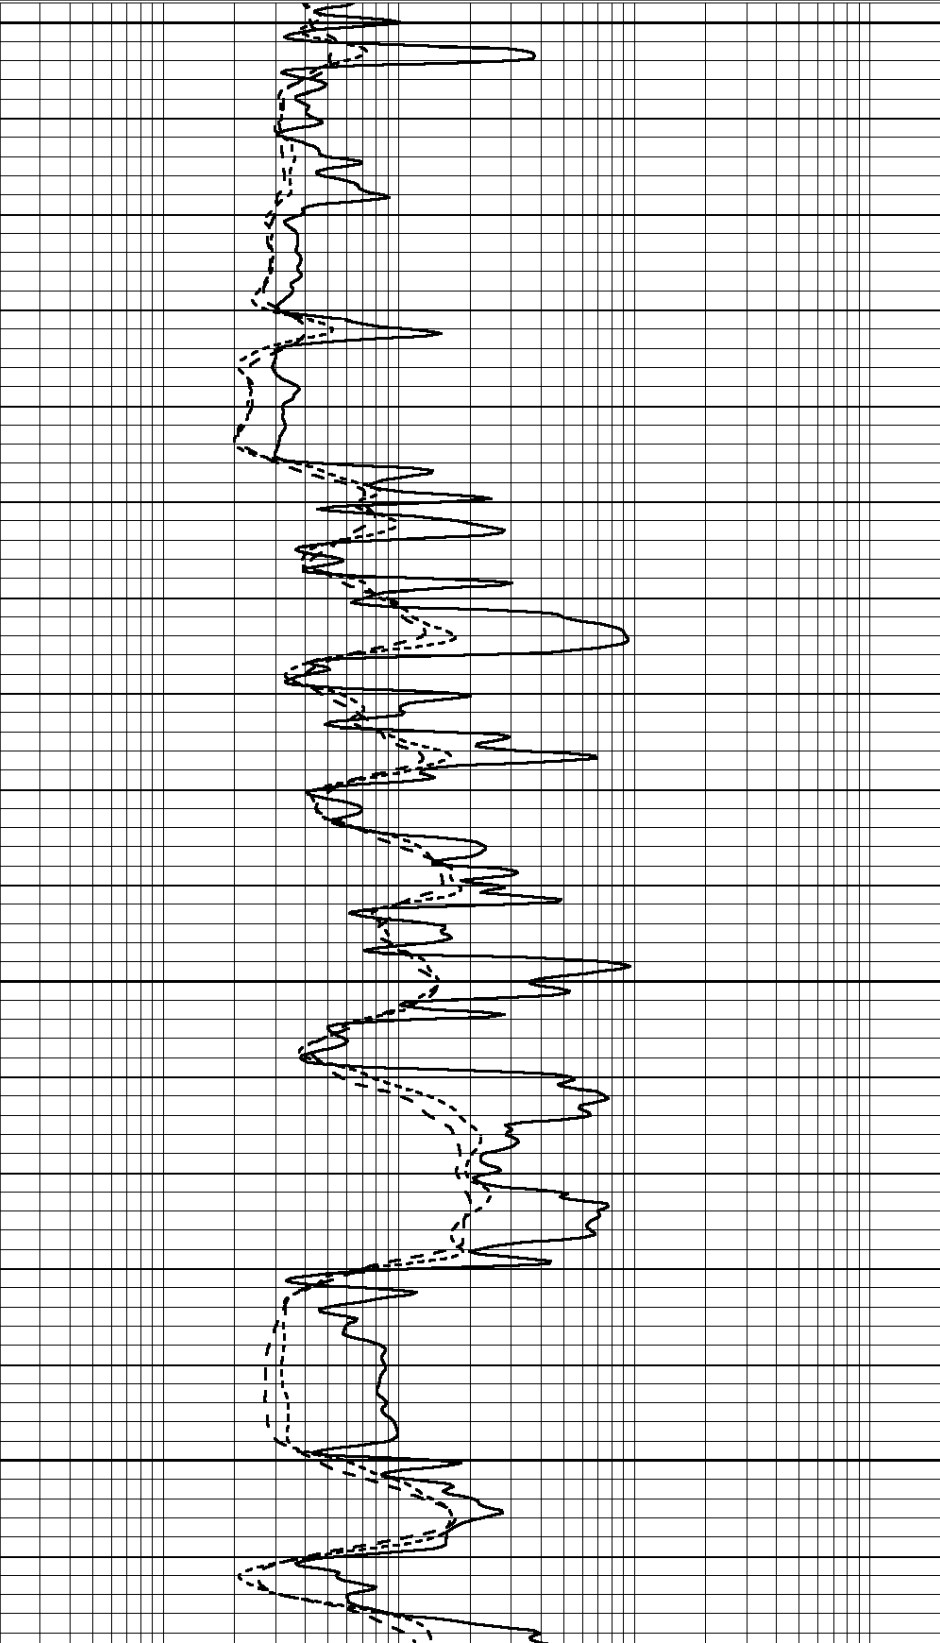

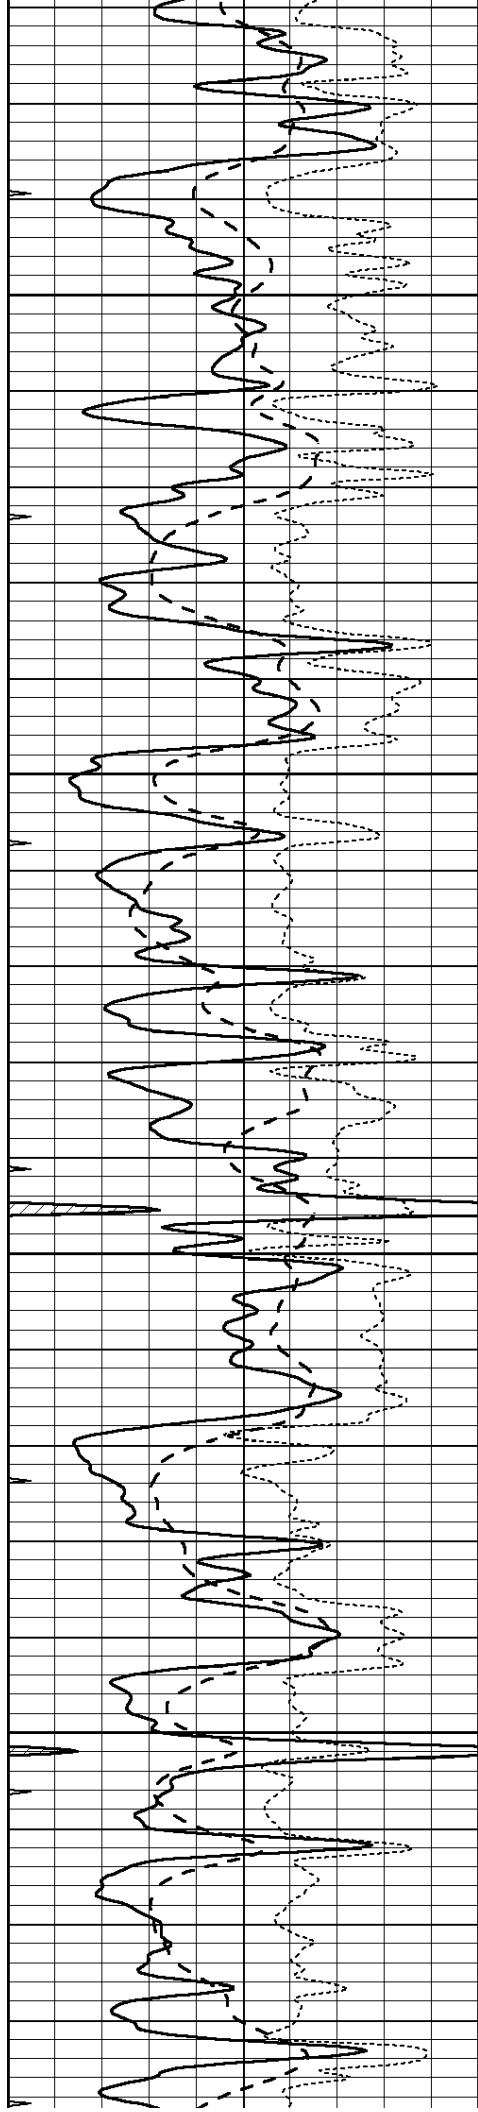



3500

3550

3600

3650

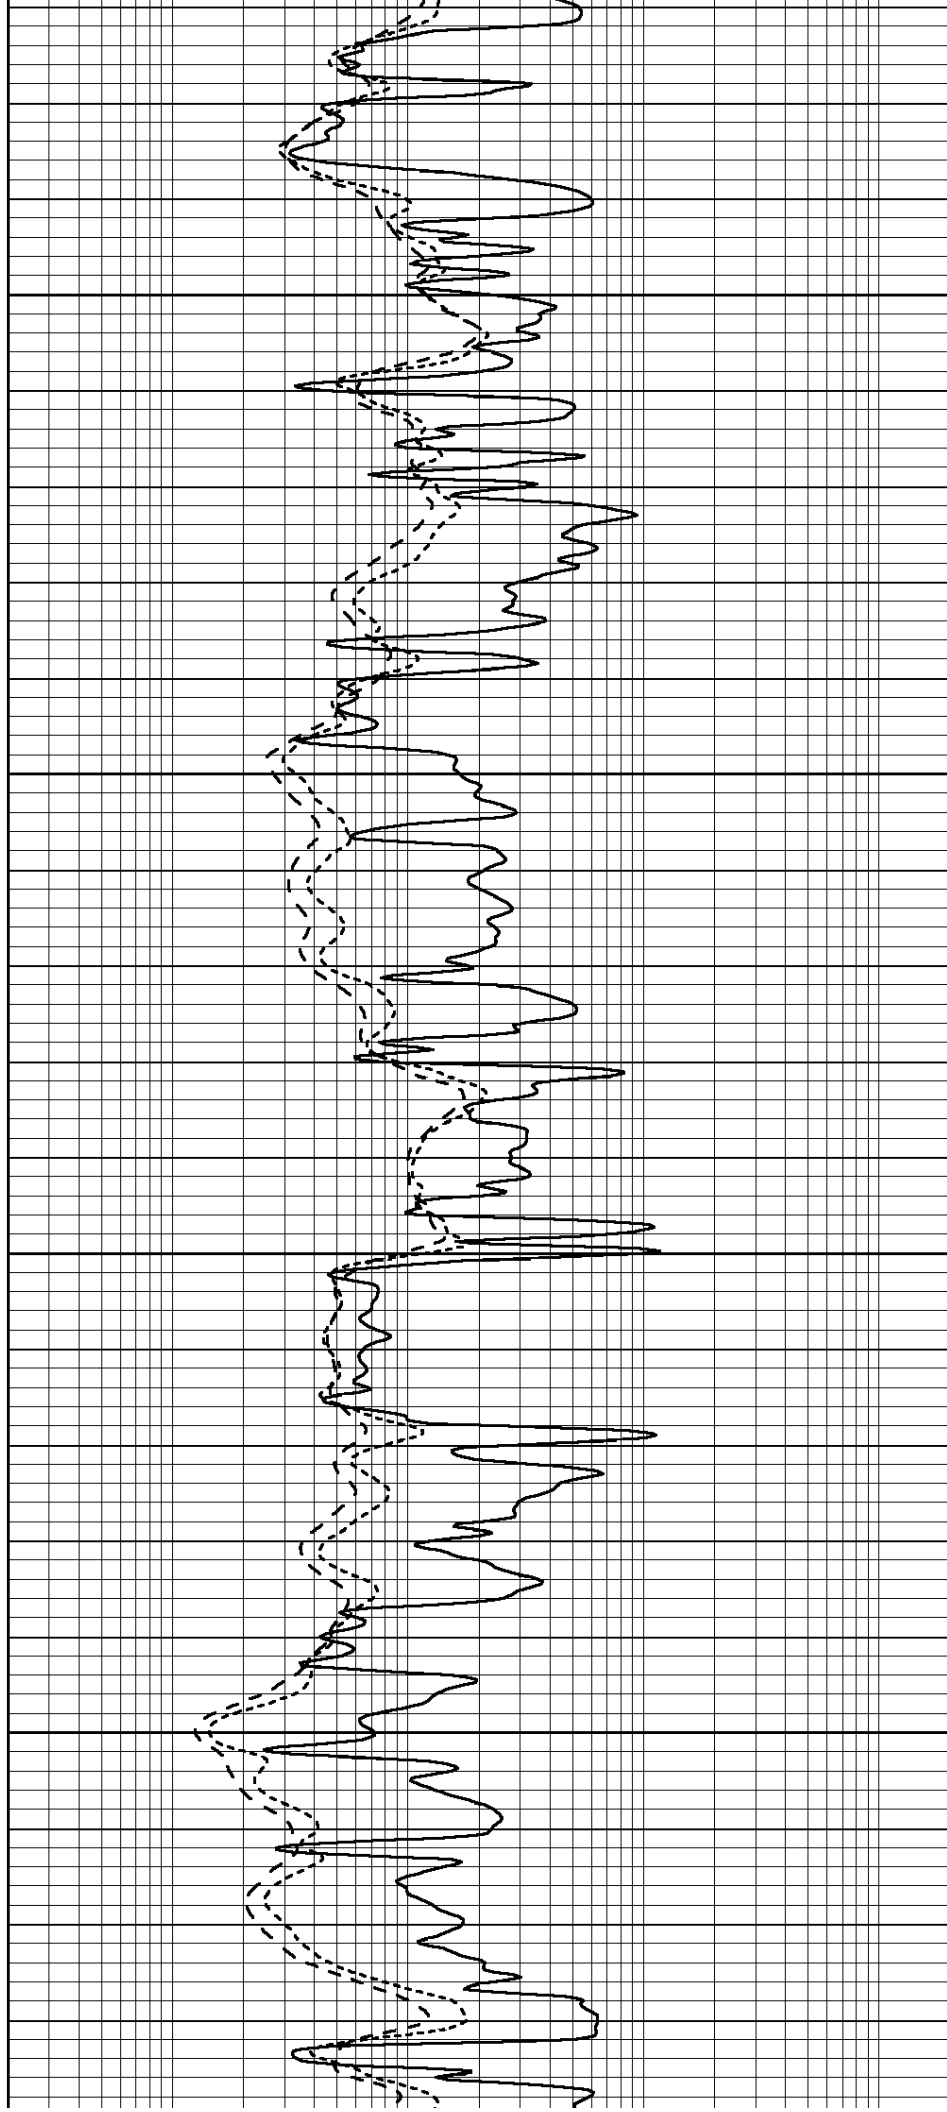

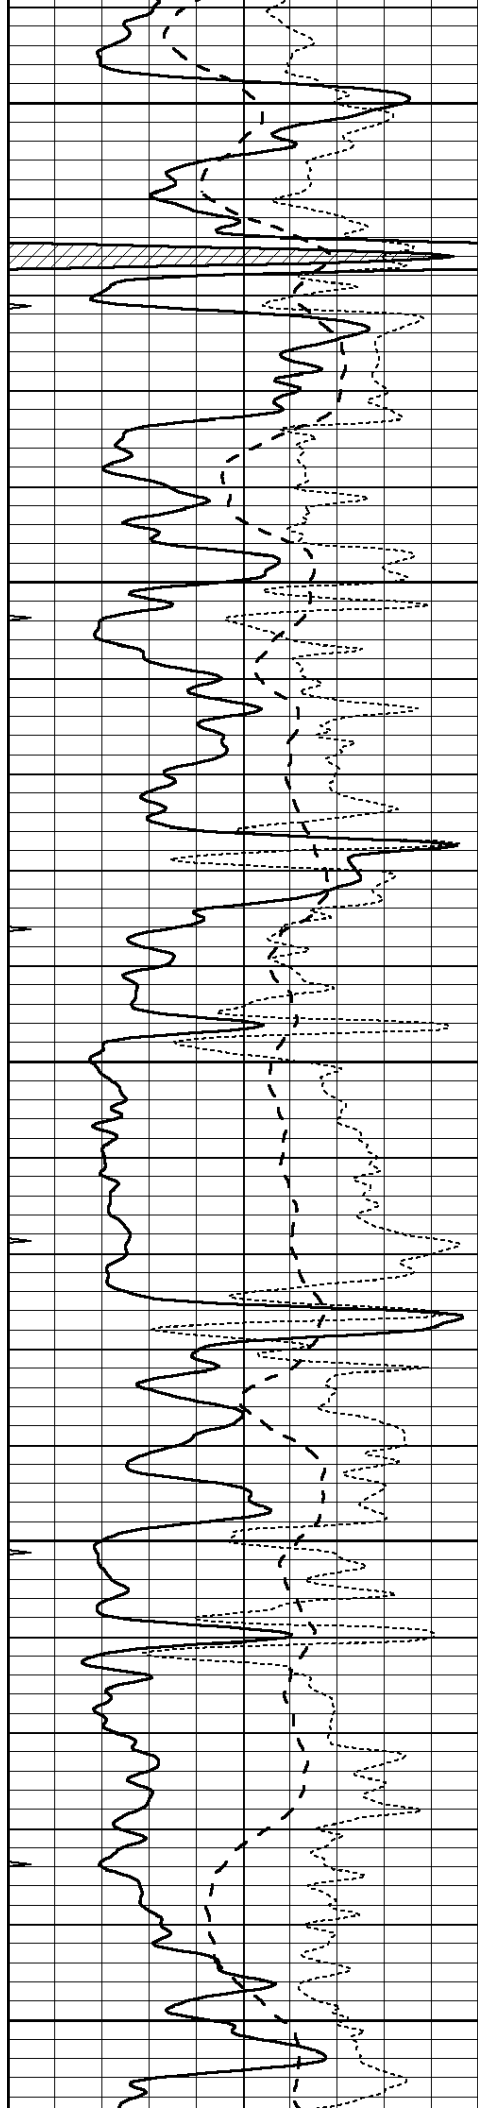


3700


3750

3800

3850

3900

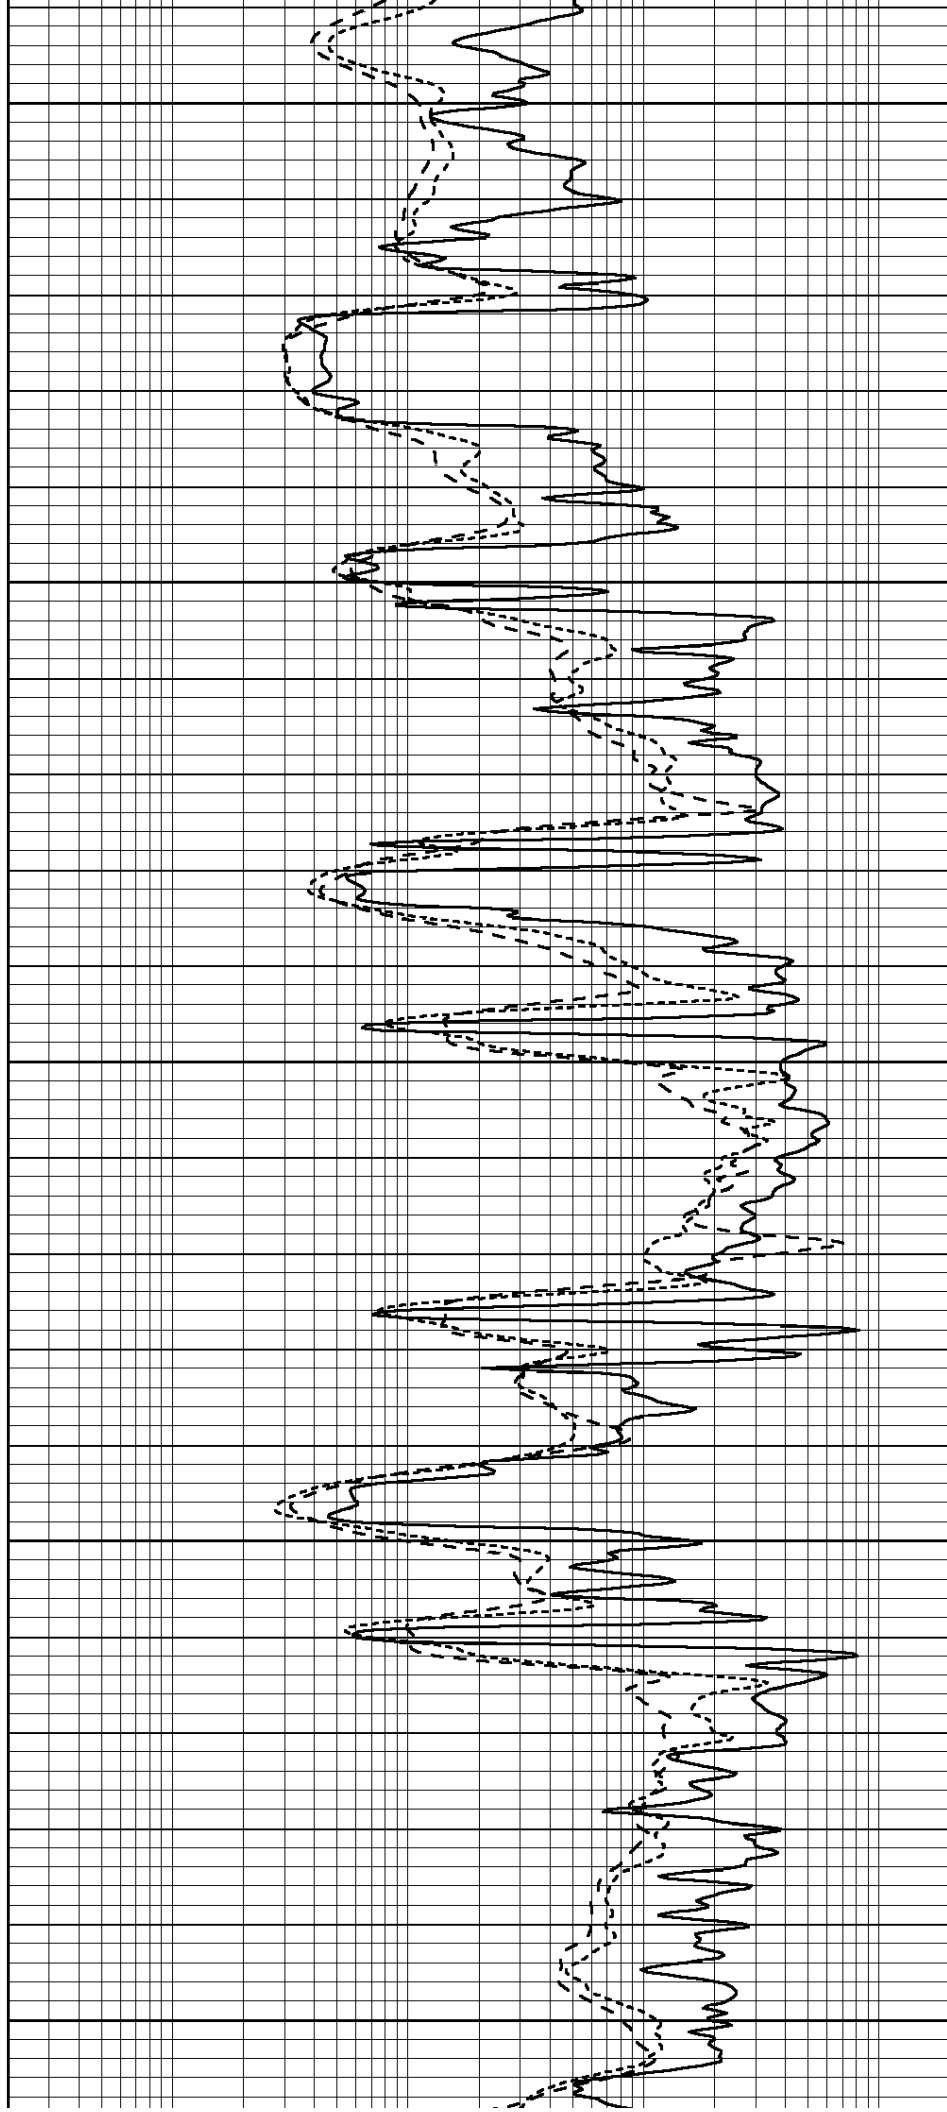

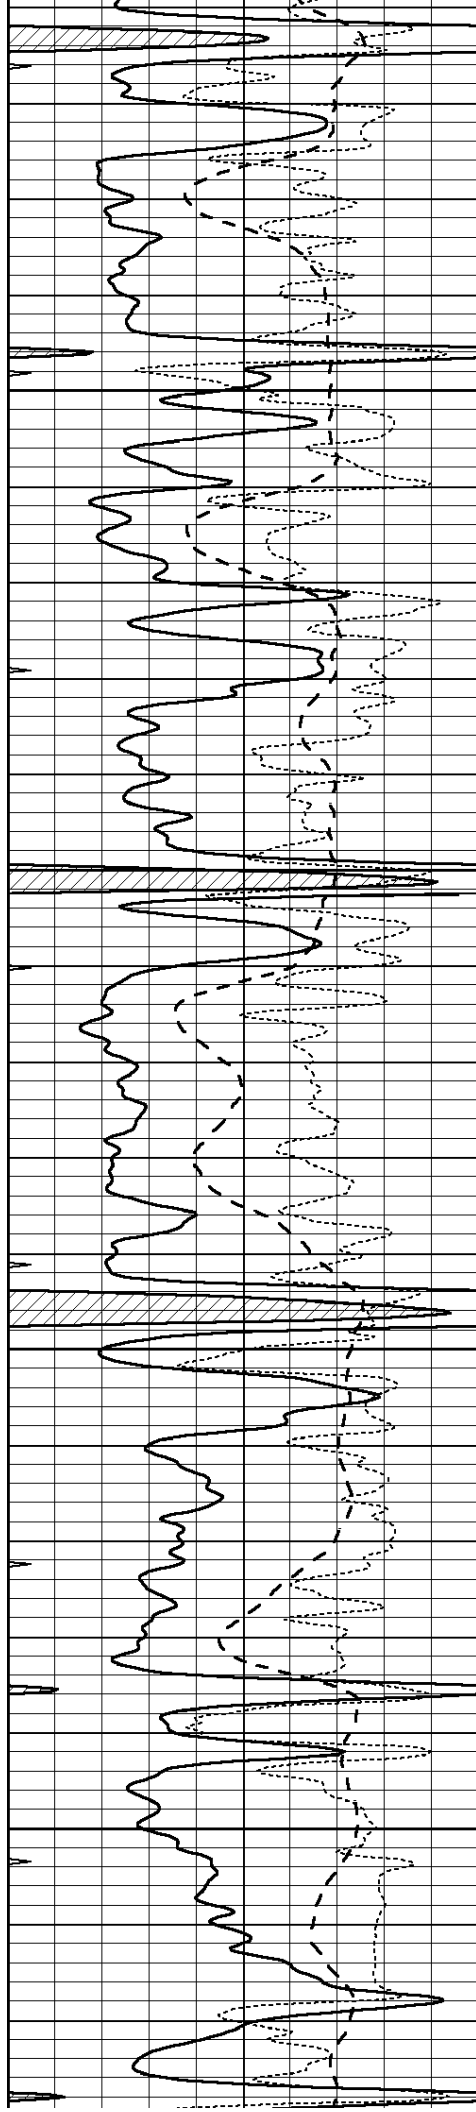



3950

4000

4050

4100

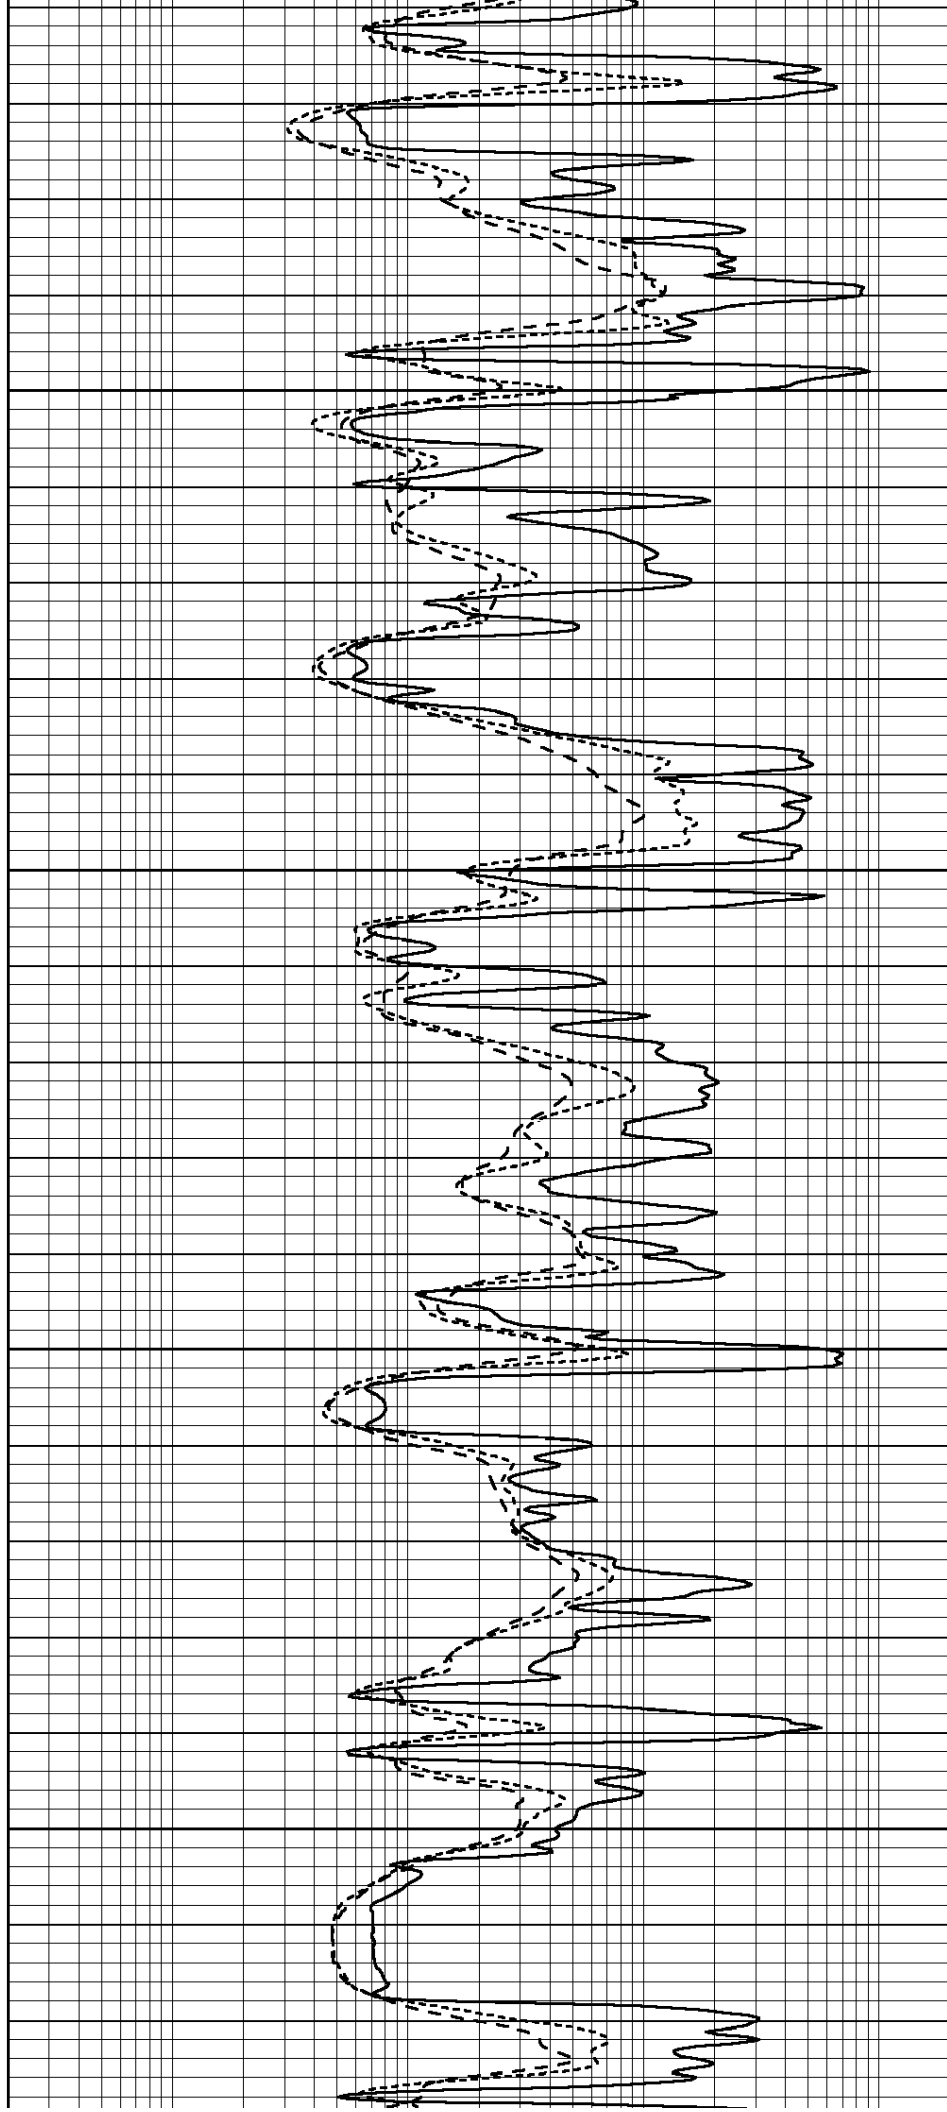

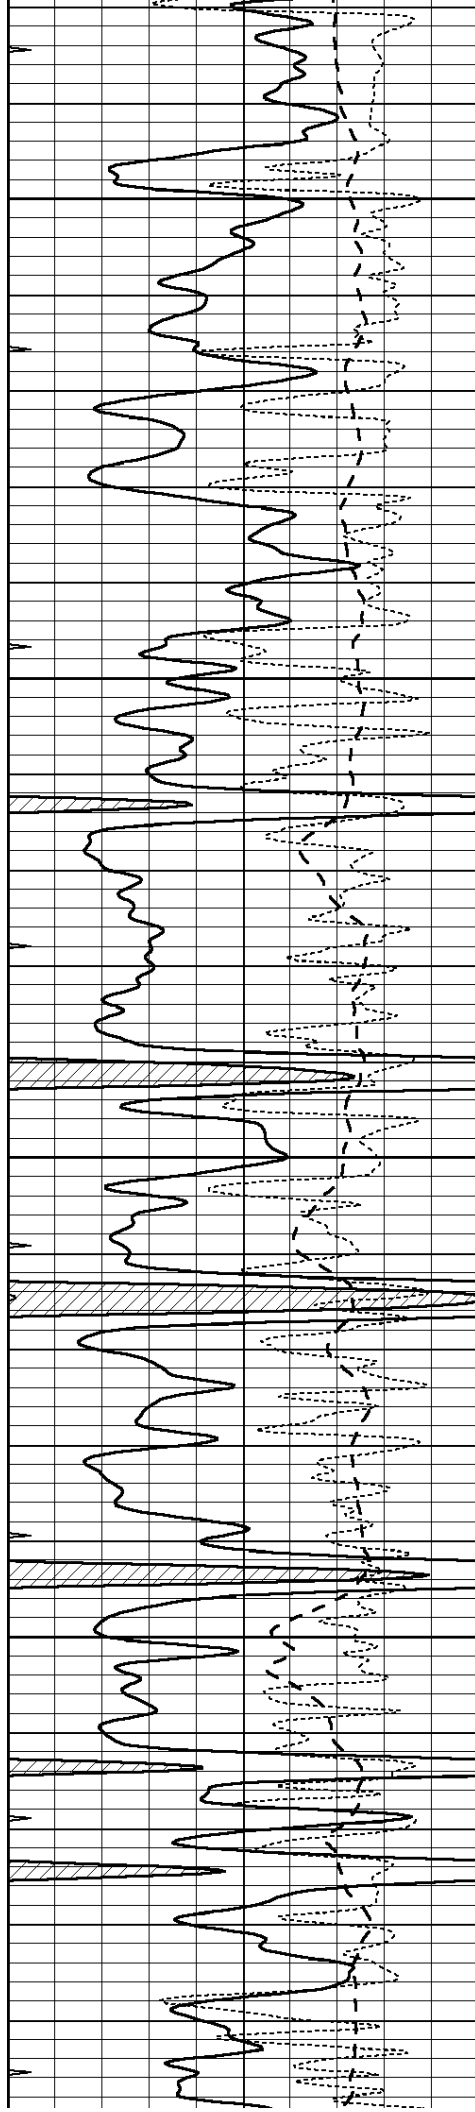



4150

4200

4250


4300

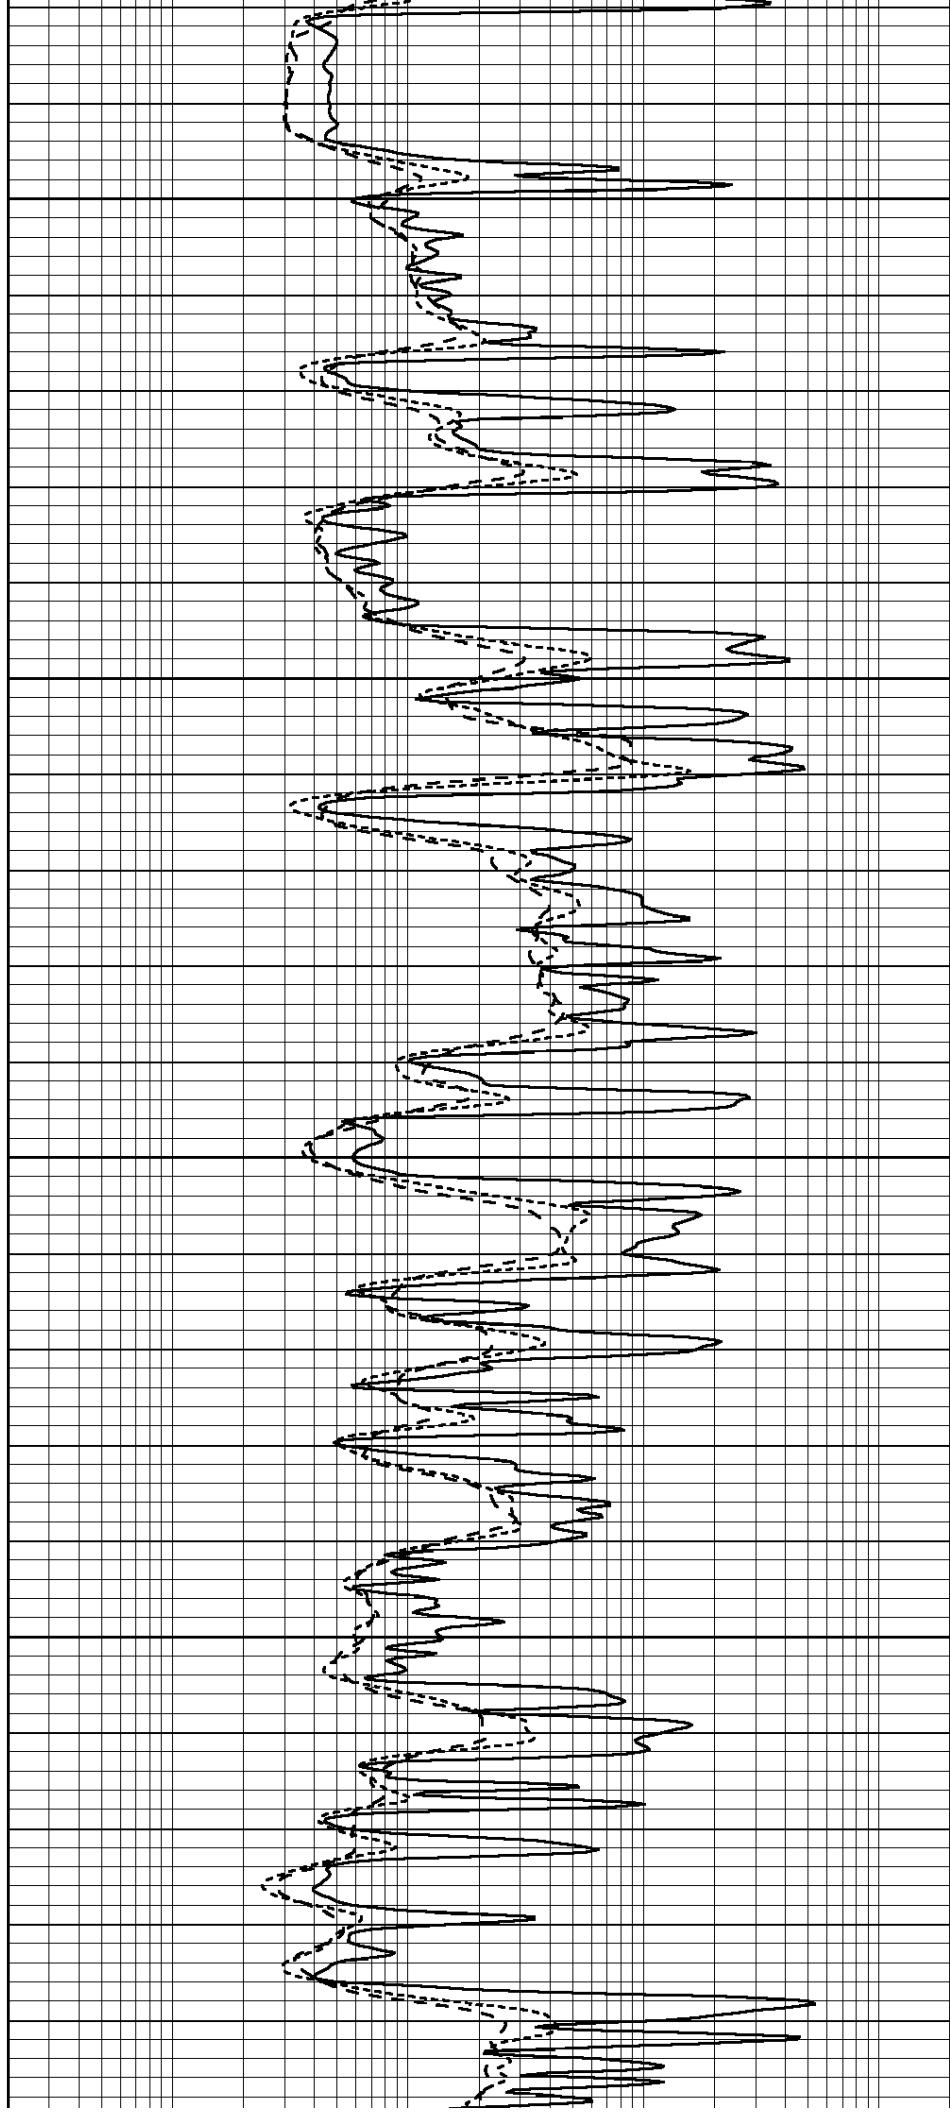

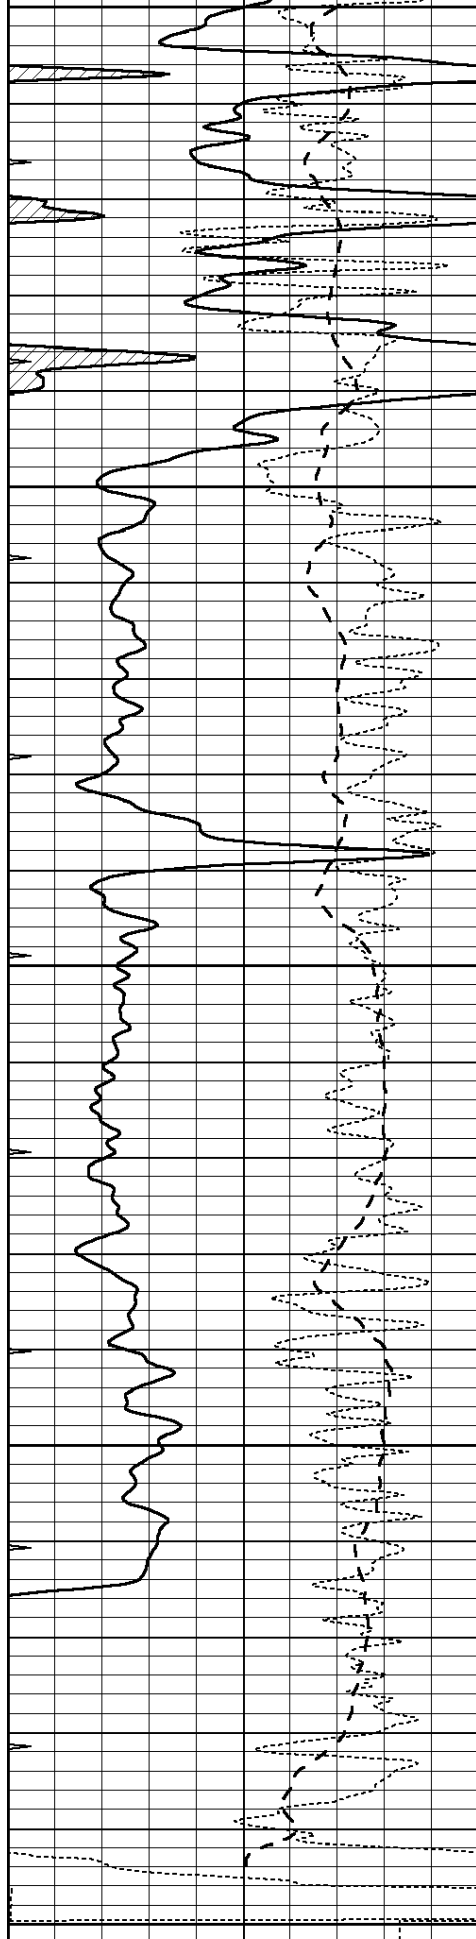

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4350
4400
4450
4500
4550

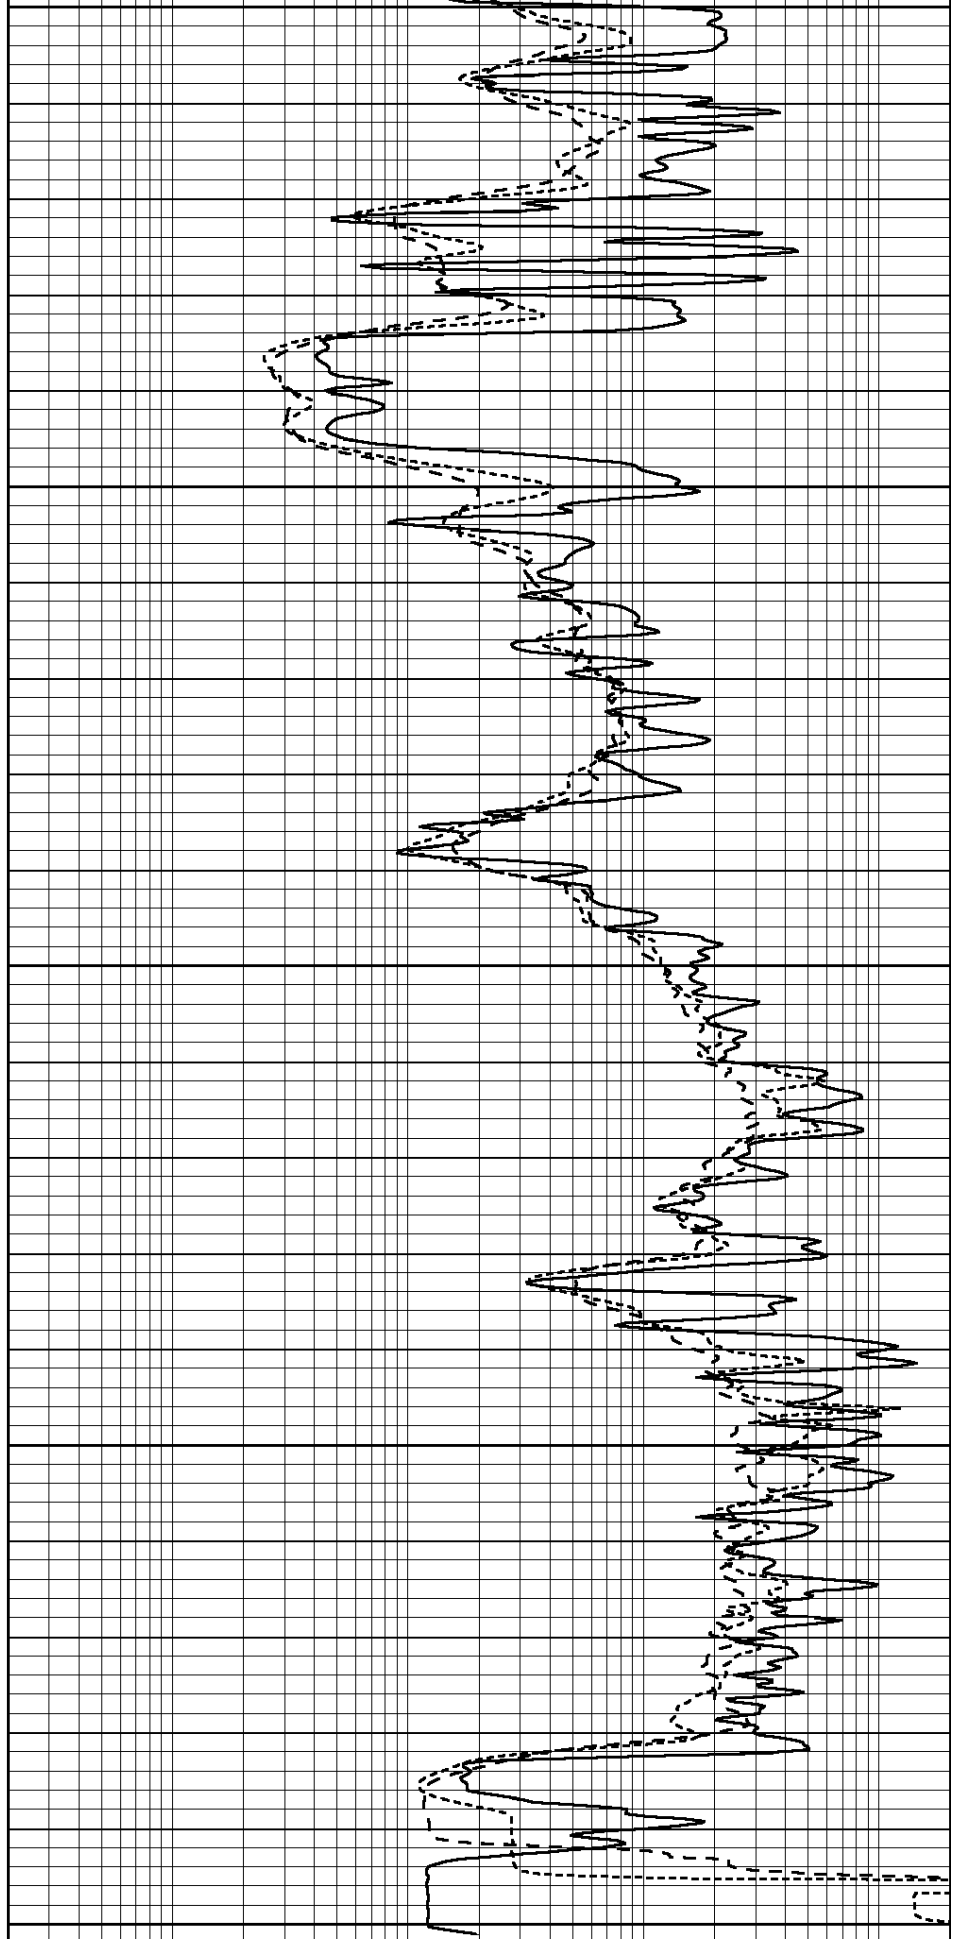

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 011257ddn.db
 Dataset Pathname: pass2.1
 Dataset Creation: Tue Jun 18 19:47:32 2013 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Fri Aug 01 06:33:19 2008
 Downhole Cal Performed: Mon Jul 28 11:08:27 2008
 After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Compensated Density Calibration Report

Serial-Model: GEAR4-GEARHART
 Source / Verifier: 143 / 143
 Master Calibration Performed: Mon Jan 07 11:07:28 2013
 Before Survey Verification Performed:
 After Survey Verification Performed:

Master Calibration

	Density			Far Detector	Near Detector	
Magnesium	1.710	g/cc		1075.98	532.39	cps
Aluminum	2.600	g/cc		286.51	422.88	cps

Spine Angle = 80.13

Density/Spine Ratio = 0.663

Size

Reading

Small Ring	8.00	in	3.21	V
Large Ring	14.00	in	5.46	V
Before Survey Verification				
	Target		Measured	
		g/cc		g/cc
		g/cc		g/cc
		g/cc		g/cc
After Survey Verification				
	Target		Measured	
		g/cc		g/cc
		g/cc		g/cc
		g/cc		g/cc
Compensated Neutron Calibration Report				
Serial Number:		6I		
Tool Model:		G		
CALIBRATION				
	Detector	Readings	Target	Normalization
	Short Space	1.00 cps	1.00 cps	1.0000
	Long Space	1.00 cps	1.00 cps	1.0000
PRE-SURVEY VERIFICATION				
	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	
POST-SURVEY VERIFICATION				
	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu
Gamma Ray Calibration Report				
Serial Number:		#8		
Tool Model:		OPEN		
Performed:		Mon Jun 13 16:56:43 2011		
Calibrator Value:		150.0	GAPI	
Background Reading:		0.0	cps	
Calibrator Reading:		175.0	cps	
Sensitivity:		0.0274	GAPI/cps	

05/11/19 00:00