

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

15-163-02667-00-00

WELL PLUGGING APPLICATION FORM

Well Location CSW - SW Sec. 26 Twp. 7 Rge. (E) (W) 17

Field Name (if any) ? County Rooks

Lease (Farm Name) Clayton Well No. 1

Was well log filed with application? yes If not, explain circumstances
and give available data (Use an additional sheet if necessary)

Date and hour plugging is desired to begin July 10, 1947

Plugging of the well will be done in accordance with the Rules and
Regulations of the State Corporation Commission, or with the approval
of the following exceptions: Explain fully any exceptions desired
(Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner

George Hanzlick Address Russell, Kansas


Name of well owner or Acting Agent Cooperative Refinery Association

Address 402 Schweiter Building, Wichita, Kansas

Invoice covering assessment for plugging this well should be sent to:

Address (Same)

and payment will be guaranteed by applicant.



Operator or Acting Agent

Date June 30-1947

COOPERATIVE REFINERY ASSOCIATION



15-163-02667-00-00

402 Schweiter Bldg.
Wichita, Kansas
June 30, 1947

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

Dear Sirs:

We are enclosing well plugging application and a log of the Clayton
No. 1 CSW - SW Sec. 26-7-17W, Rooks County, Kansas.

Very truly yours,

COOPERATIVE REFINERY ASSOCIATION

O. W. Gosnell

O. W. Gosnell, Supt.
Kansas Production Department

JUL 1 - 1947

7-1-47

WELL LOG BUREAU-KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company- CO-OP & ALLAN
Farm - Clayton No. 1
Total Depth 3096'
Comm 9-18-43 Comp. 10-30-43
Shot or Treated
Contractor Thos. H. Allan
Issued 1-15-44

Sec. 26 T. 7 R. 17W
CSW SW

County Rocks

15-63-02667-00-00

CASING:
8 5/8" 106 Cem.
5 1/2" 3058' Cem.

Elevation 1918'
Production Shut Down


Figures indicate Bottom of Formations.

Soil & Chalk	0-50
Cem. Surf. Csg 35 sx 106	
Shale blue	480
Dakota sand & shale	940
red beds	1258
anhydrite white	1294
red beds	1480
Shale & shells	1970
shale red	1990
limestone	2015
shale red	2030
lime cherty	2050
shale & shells	2168
lime w/fusulinids	2180
shale red	2214
Neva oolitic lime	2235
shale & shells	2720
shale & sdy grit	2768
Topeka lime	2783
shale	2792
lime	2795
lime porous-oil saturated	2802
lime	2805
shale	2825
lime	2860
shale	2885
lime	2900
shale	2929
lime sft-sm sh oil	2934
lime	2938
shale	2950
lime oolitic-probably wtr	2955
lime	2960
shale	2970
lime cherty	2982
shale	3003
lime	3014
shale red	3023
lime dense oolitic wh cherty	3029
shale red	3037
lime dense very cherty	3041
shale green & red	3046
lime	3050
shale green & red	3061
lime dense buff	3066
lime wh sugary	3070
lime wh dense cherty	3076
shale red	3080
lime wh dense	3088
shale	3090
lime fossiliferous	3093
s hale	3095
lime	3096
Total Depth	

Lost Cable Tools:
Whipstock prematurely
set at 2740 plugging
hole
Shut down

Tops: Anhydrite	1258
Neva	2214
Topeka	2768
Lansing	3037

3037
2768
2214
1258
303

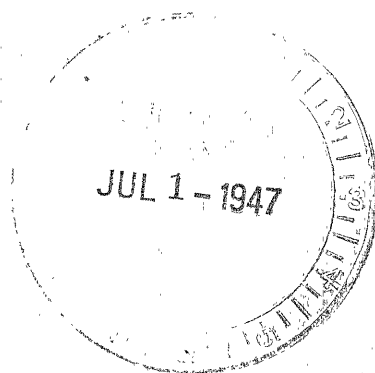

17-1-47



15-163-02667-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

July 1, 1947

IN REPLY PLEASE
REFER TO THIS
SUBJECT

Well No. 1
Lease Clayton
Description OSW SW 25-7-17W
County Rooks
File: 117-30

**Cooperative Refinery Association,
402 Schweiter Building,
Wichita, Kansas**

Gentlemen:

This letter is your permit to plug the
above subject well, in accordance with the
Rules and Regulations of the State Corpora-
tion Commission.

Very truly yours,

STATE CORPORATION COMMISSION
CONSERVATION DIVISION

BY:

J. P. Roberts
J. P. ROBERTS

HA

NOTICE: **Mr. C. D. Stough,
Hays, Kansas**