

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-025-20646-00-01  
Spot: NENENE Sec/Twnshp/Rge: 35-33S-22W  
330 feet from N Section Line, 330 feet from E Section Line  
Lease Name: RUTH YORK Well #: 1 OWWO  
County: CLARK Total Vertical Depth: 5500 feet

Operator License No.: 33185  
Op Name: QUAIL OIL & GAS, LC  
Address: 109 HAMPTON CT.  
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4650		WITH 2 SX CMT
CIBP		5350		WITH 2 SX CMT
PROD	5.5	5500	3830	WITH 265 SX CMT
SURF	8.625	725		WITH 200 SX CMT

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/22/2005 2:00 PM  
Plug Co. License No.: 5105 Plug Co. Name: CLARKE CORPORATION  
Proposal Revd. from: JOHN SWINFORD Company: CLARKE CORPORATION Phone: (620) 886-5665

Proposed Plugging Method: CIBP @ 4700' WITH 2 SX CMT. PLUG AT 975' WITH 15 SX GEL & 40 SX CMT. PLUG AT 750' WITH 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 08/22/2005 3:45 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4650' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. SPOT PLUGS THROUGH CASING. 1ST PLUG AT 975' WITH 15 SX GEL & 40 SX CMT. 2ND PLUG AT 750' WITH 50 SX CMT. 3RD PLUG AT 300' WITH 50 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
5442	5446		
5404	5409		
4714	4717		

INVOICED  
DATE 9-7-05  
INV. NO. 2006060444

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

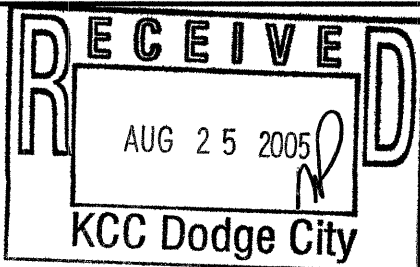

Signed \_\_\_\_\_

RECEIVED  
(TECHNICIAN)  
SEP 06 2005  
KCC WICHITA

Form C