



15-193-00046-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas



WELL PLUGGING RECORD

Thomas County, Sec. 12 Twp. 6 Rge. 35 (E) W (W)

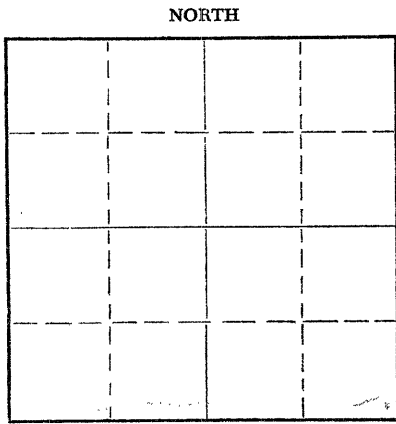

Locate well correctly on above Section Plat

Location as "NE/CNW%SW%" or footage from lines CSW/4 - NE/1  
Lease Owner Musgrove Drilling Company  
Lease Name Brown Well No. A-1  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Now dry  
Date well completed 11-3-59 19  
Application for plugging filed 5-18-60 19  
Application for plugging approved 5-24-60 19  
Plugging commenced 5-24-60 19  
Plugging completed 5-28-60 19  
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius.  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3842 Feet  
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	208'	None
				5-1/2"	3794'	1832'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3796' and found it open.  
Filled with sand to 3735' and dumped 3 sacks of cement.  
Pulled 5 1/2" casing and cleared hole. Mudded hole to 200' and set bridge to 195'. Ran 25 sacks of cement and mudded hole to 40'. Set rock bridge to 35' and ran 10 sacks of cement to base of cellar.  
Plugging completed.



(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Knight Casing Pulling Company Wichita, Kansas  
Address Chase, Kansas 6-9-60

STATE OF Kansas, COUNTY OF Rice, ss.  
\_\_\_\_\_(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Neil Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of June, 1960

Thomas T. Doyz  
Notary Public.

My commission expires 9-27-62

