


15-163-20832-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

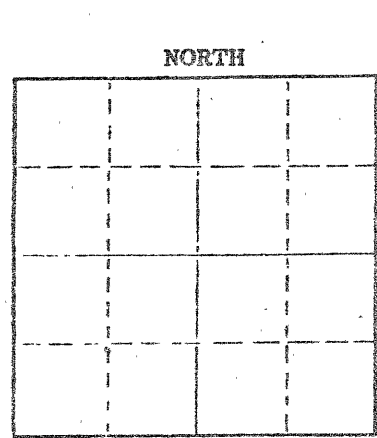

Locate well correctly on above Section Plat

Rooks County, Sec. 30 Twp. 7 Rge. 17 (E) W (W)
Location as "NE/CNW/SE/SW" or footage from lines NW SW NE
Lease Owner Shields Oil Producers, Inc.
Lease Name Griffith Well No. 1
Office Address Shields Bldg., Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed July 31 1978
Application for plugging filed July 31 1978
Application for plugging approved July 31 1978
Plugging commenced July 31 1978
Plugging completed July 31 1978
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,320 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	254'	Cmtd. w/150 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Push bridge plug to 550'
Pump 50 sax cement on plug thru 4 1/2" drill pipe
Push bridge plug to 240'
Spot 20 sax cement on plug thru 4 1/2" drill pipe
Push bridge plug to 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar
Dump 4 sax cement in rat hole and mouse hole

RECEIVED
STATE CORPORATION COMMISSION
AUG 21 1978
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas 67665

8-21-78

STATE OF KANSAS COUNTY OF RUSSELL, SS.
R.L. Shields (employee/owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) R.L. Shields
Shields Bldg., Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 17th day of August 1978

My commission expires May 26, 1979 Notary Public.