



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	LOTUS OPERATING COMPANY, LLC		
Well	EADS #2		
Field	WILDCAT		
County	PRATT	State	KANSAS
Location:	API # : 15-151-22420-00-00		Other Services
	1290' FNL & 1650' FWL		CNL/CDL/PE DIL/SONIC
	SEC 26 TWP 29S RGE 15W	Elevation	
Permanent Datum	GROUND LEVEL	Elevation	1976
Log Measured From	KELLY BUSHING 13' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	7-13-13		
Run Number	TW0		
Depth Driller	5000		
Depth Logger	5002		
Bottom Logged Interval	5000		
Top Log Interval	3800		
Casing Driller	270		
Casing Logger	269		
Bit Size	10.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.4 / 54		
pH / Fluid Loss	10.0 / 10.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.5 @ 93F		
Rmf @ Meas. Temp	0.38 @ 93F		
Rmc @ Meas. Temp	0.60 @ 93F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	0.37 @ 125F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	125F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	HARLEY SAYLES		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: CULLISON, KS. & HWY 54 - SOUTH 1 MILE - WEST 1 MILE - SOUTH 8 MILES - WEST 1/2 MILE
- SOUTH INTO

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

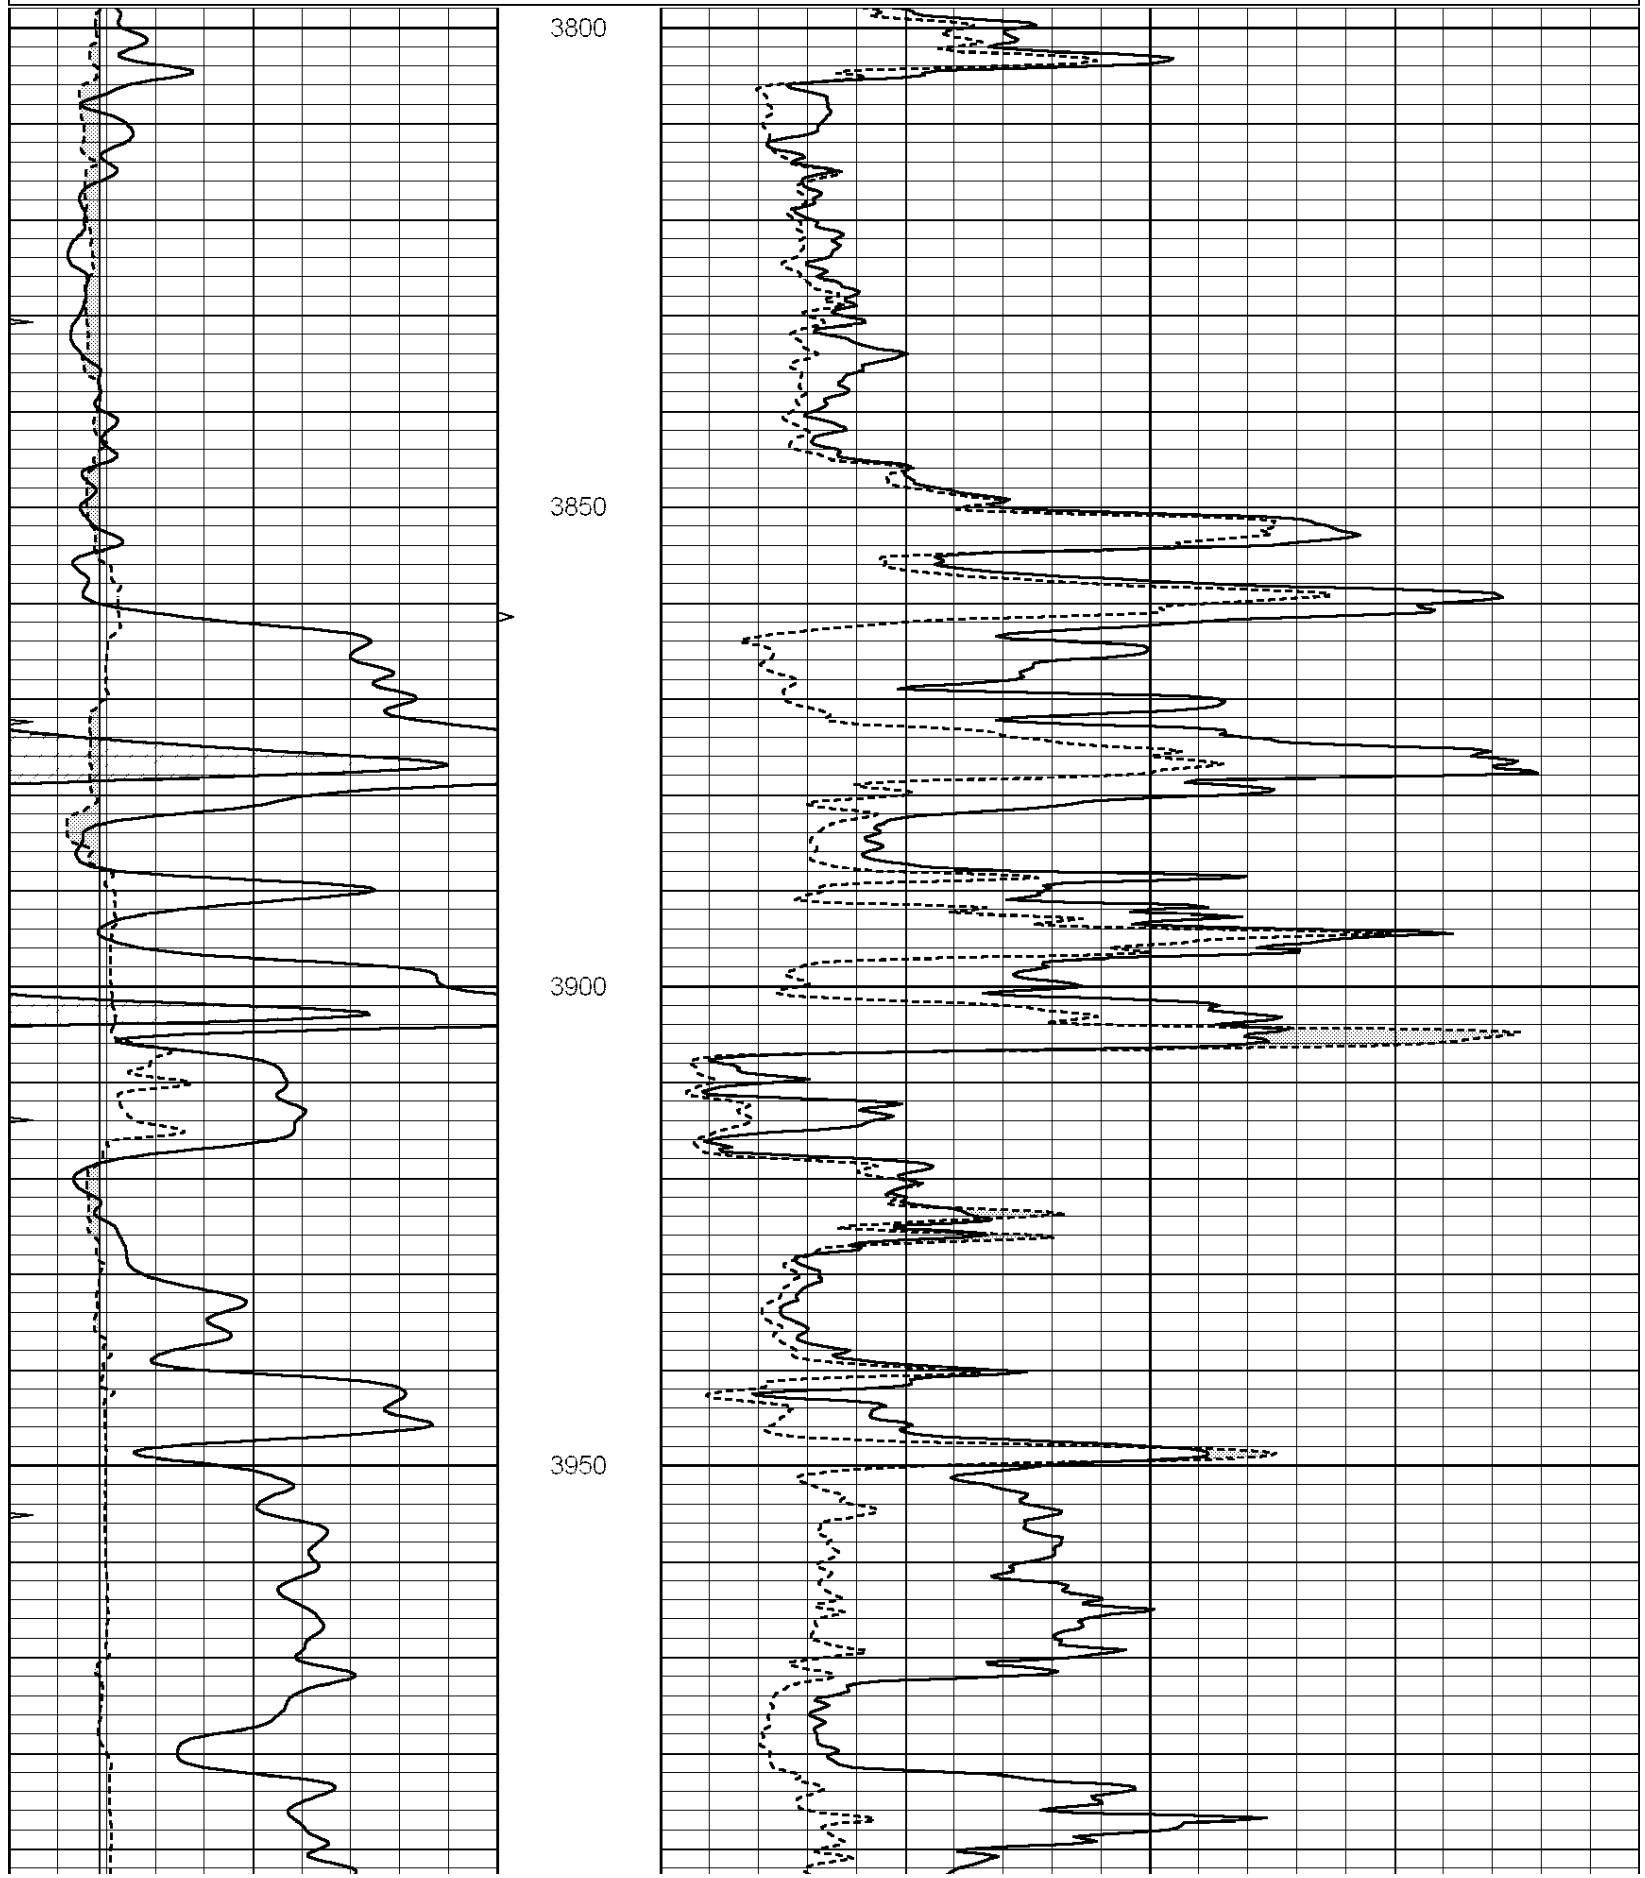

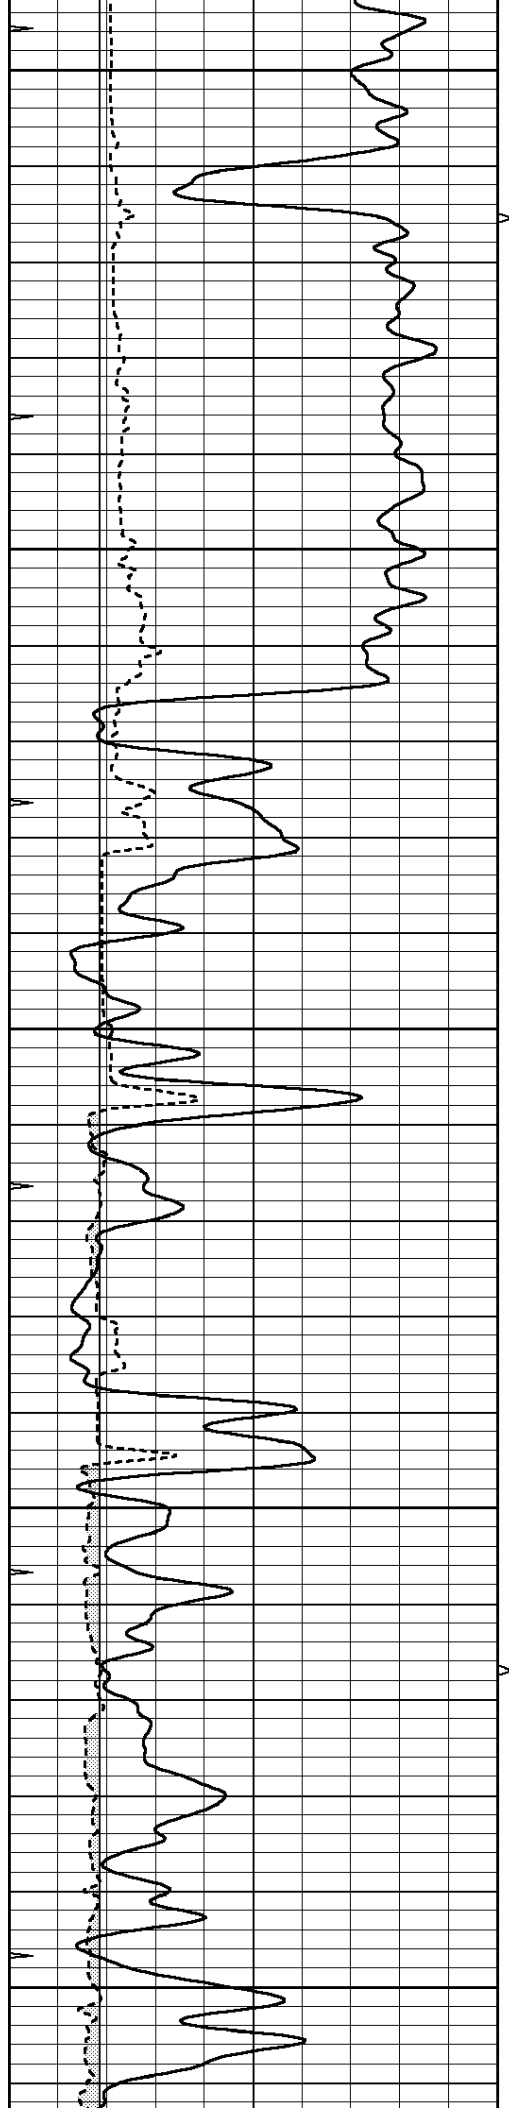


4000


4050

4100

4150

4200

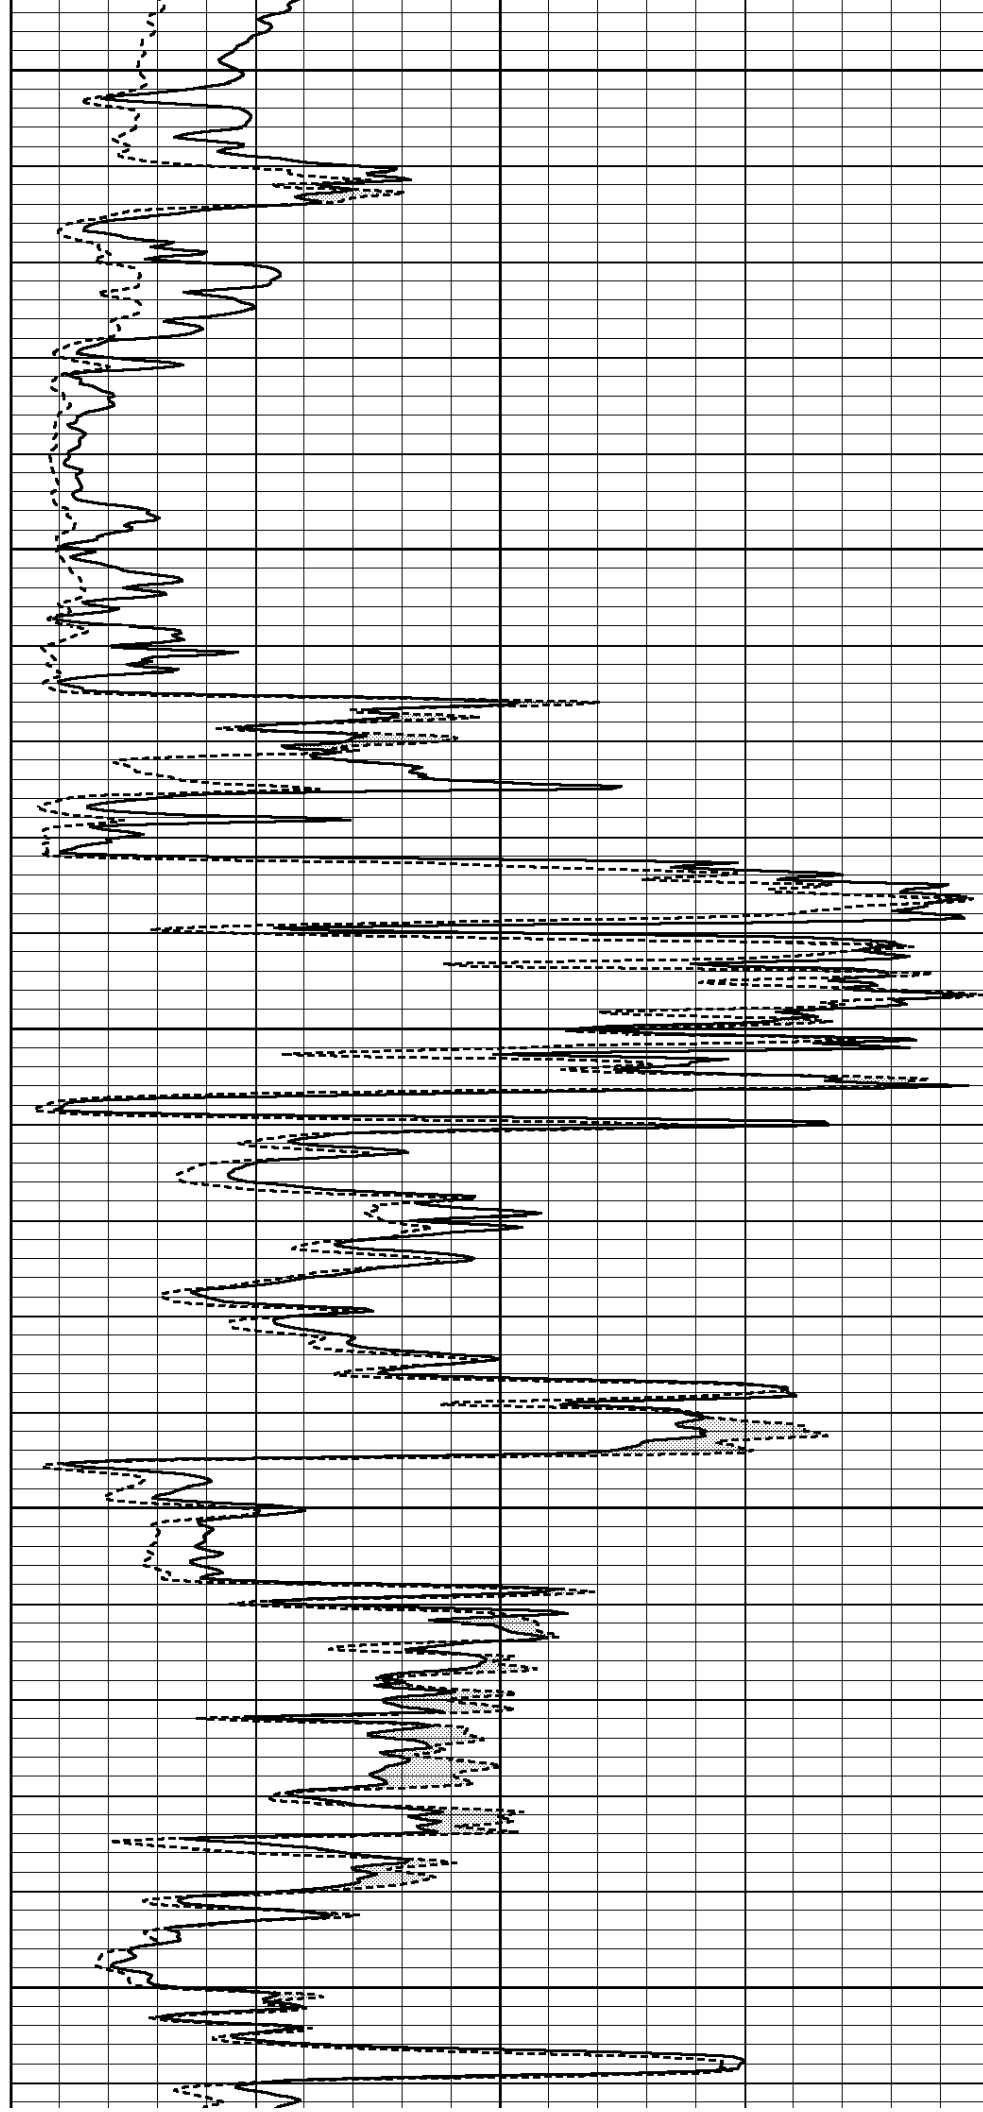

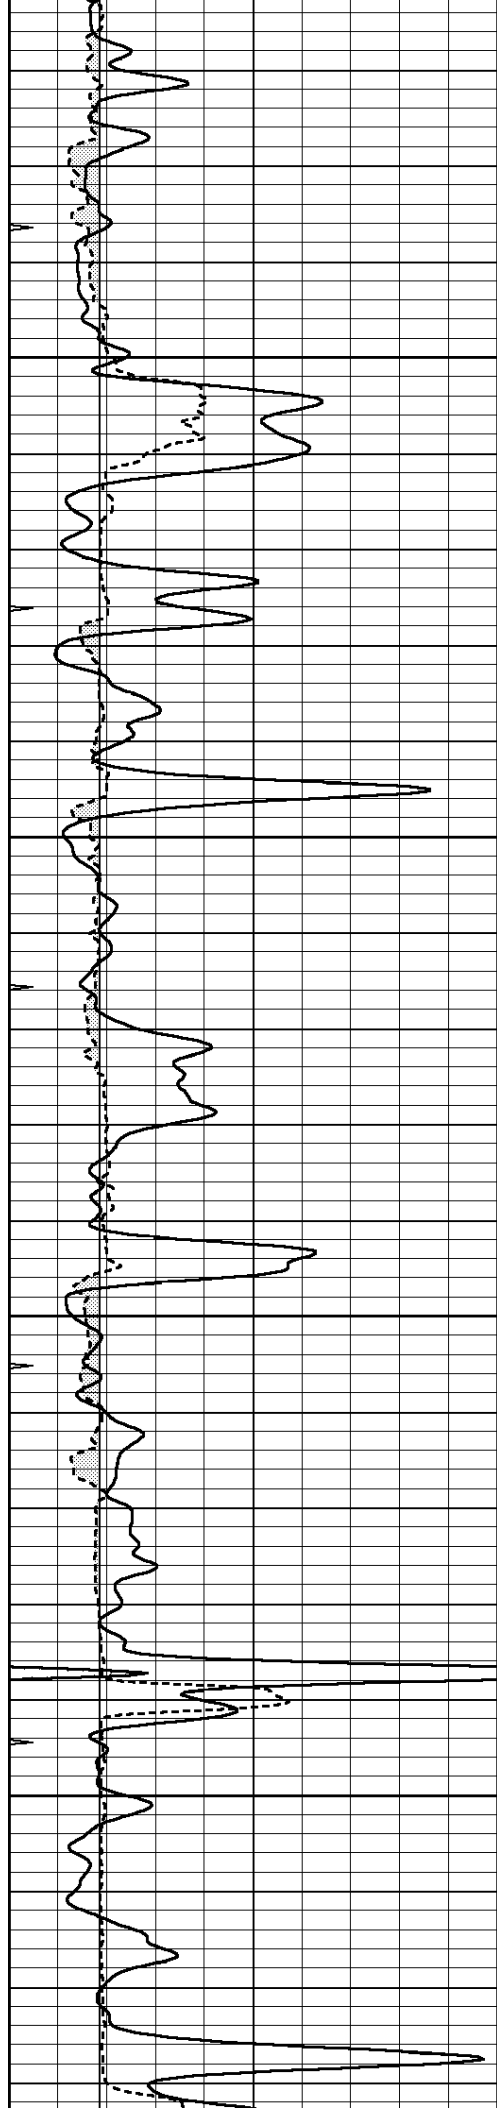



4250

4300

4350

4400

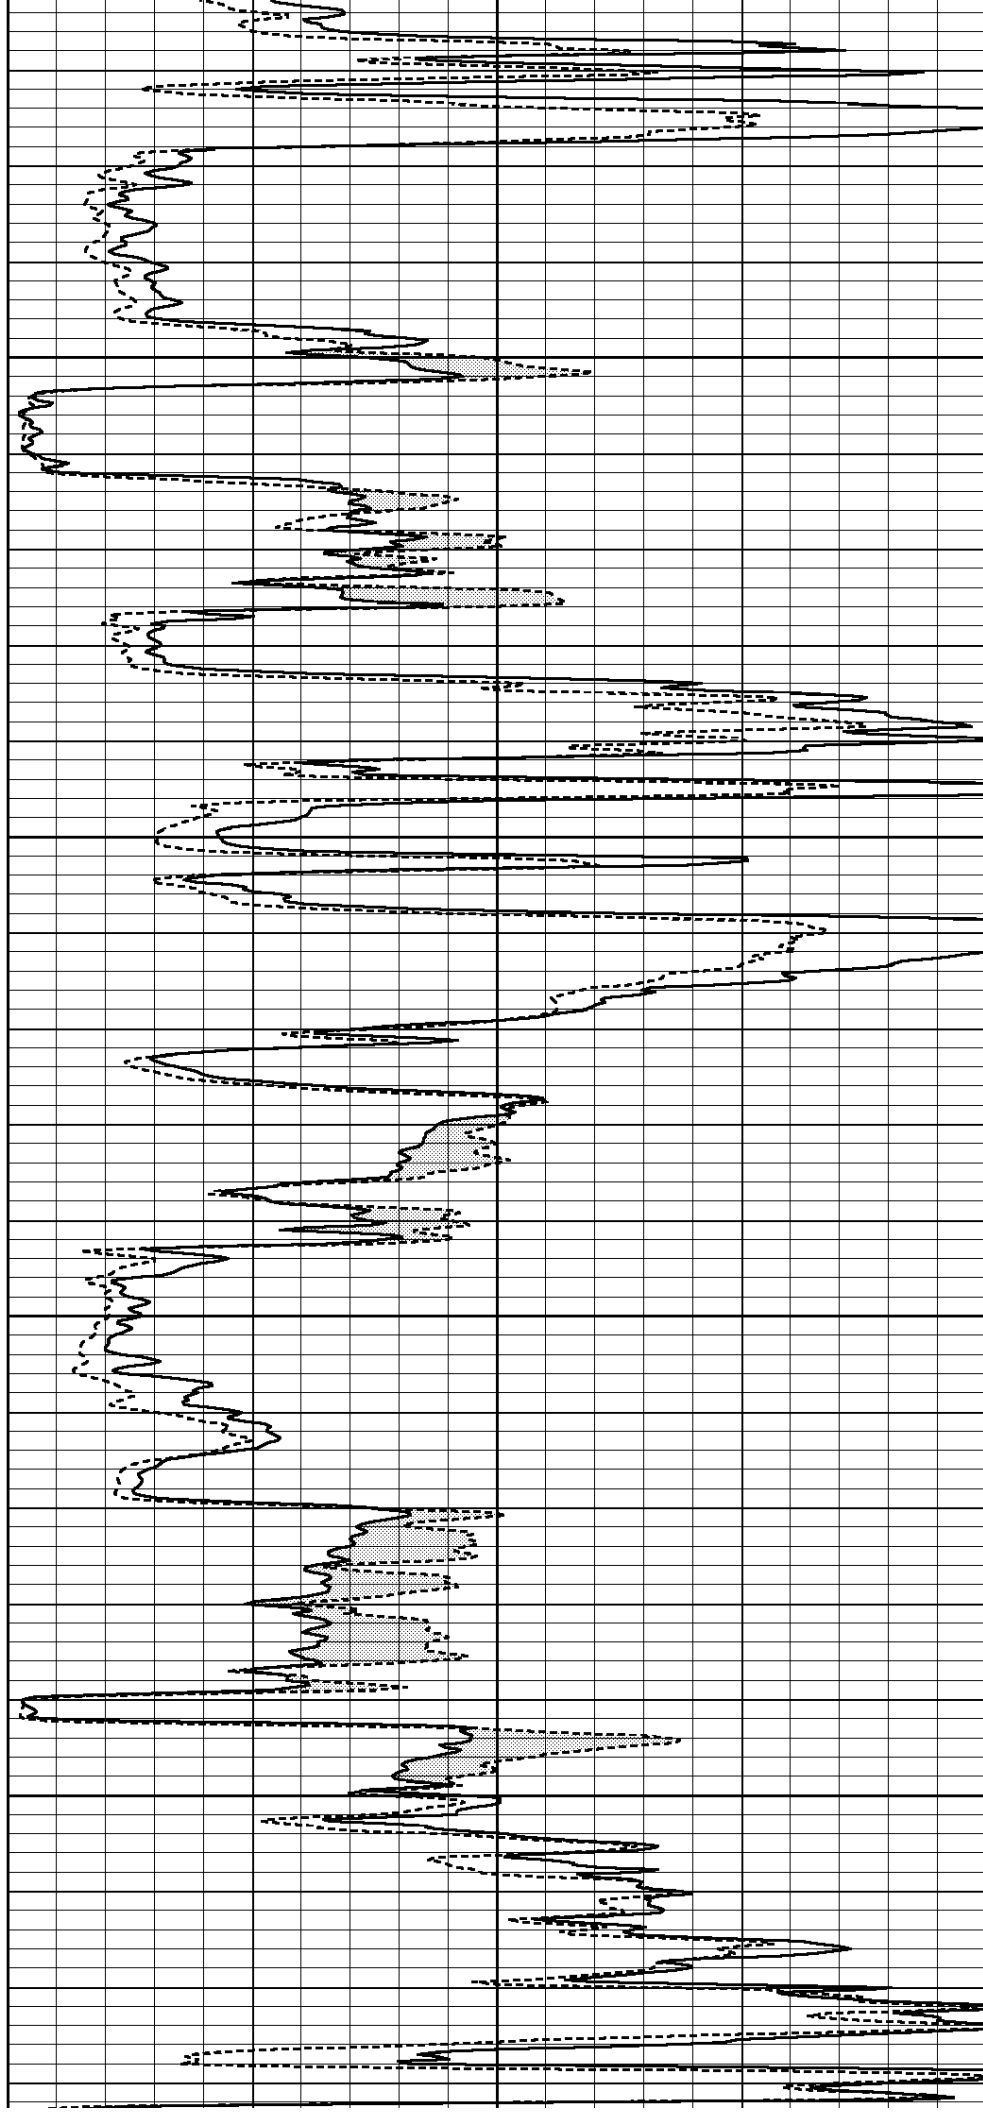

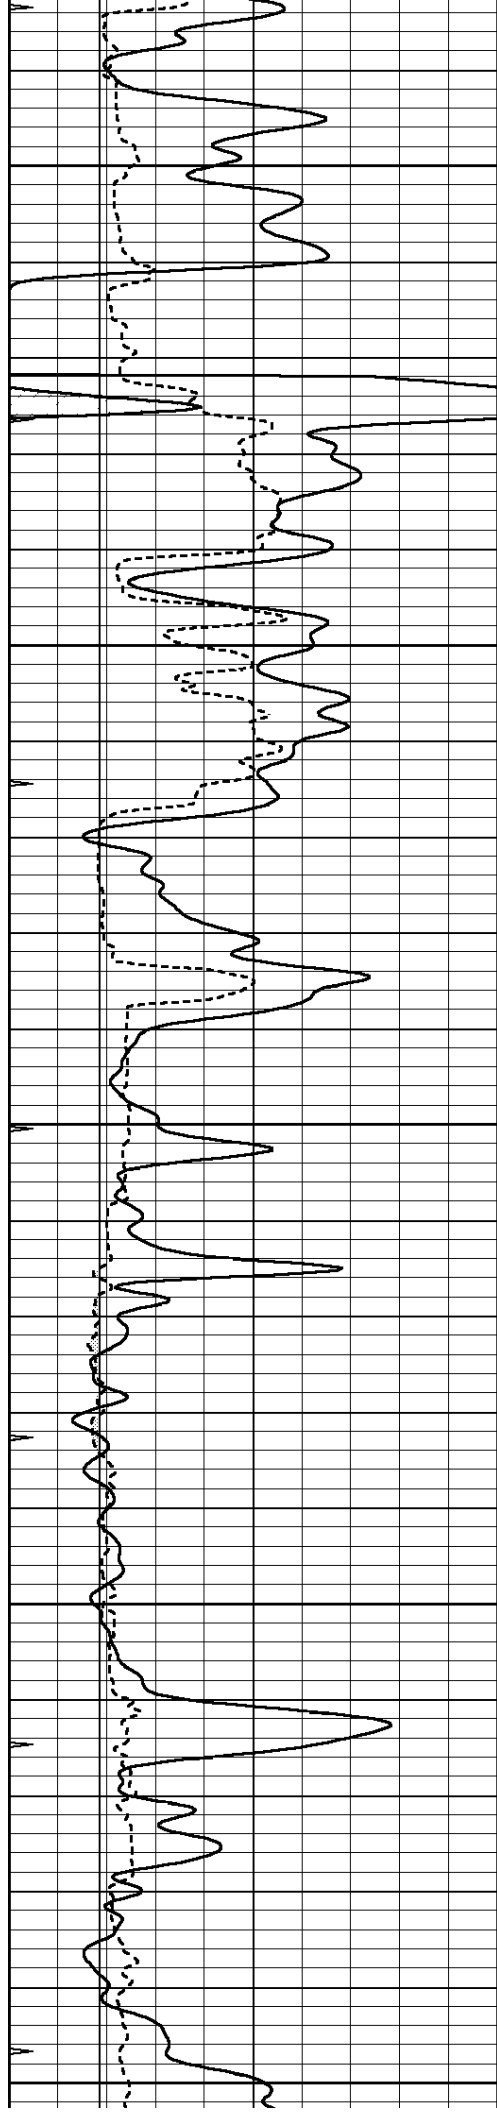


4450


4500

4550

4600

4650

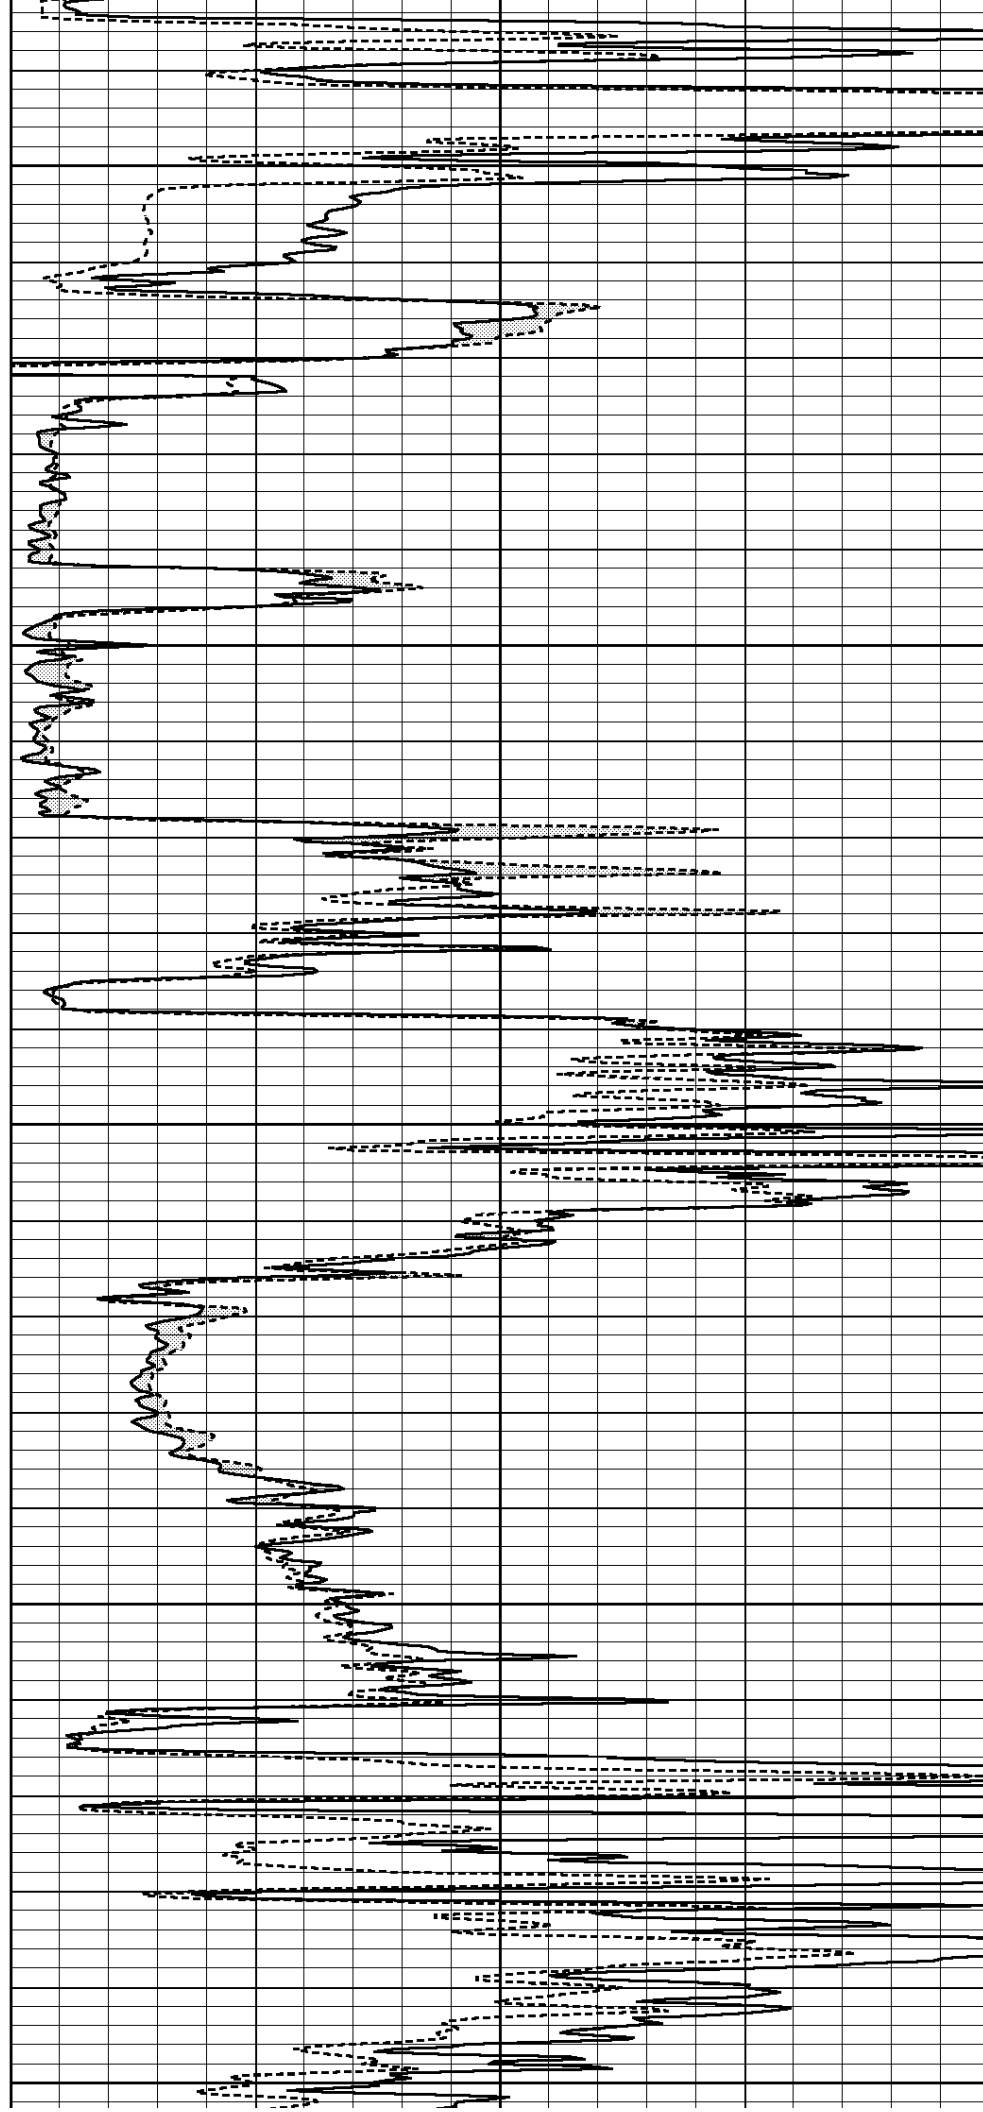

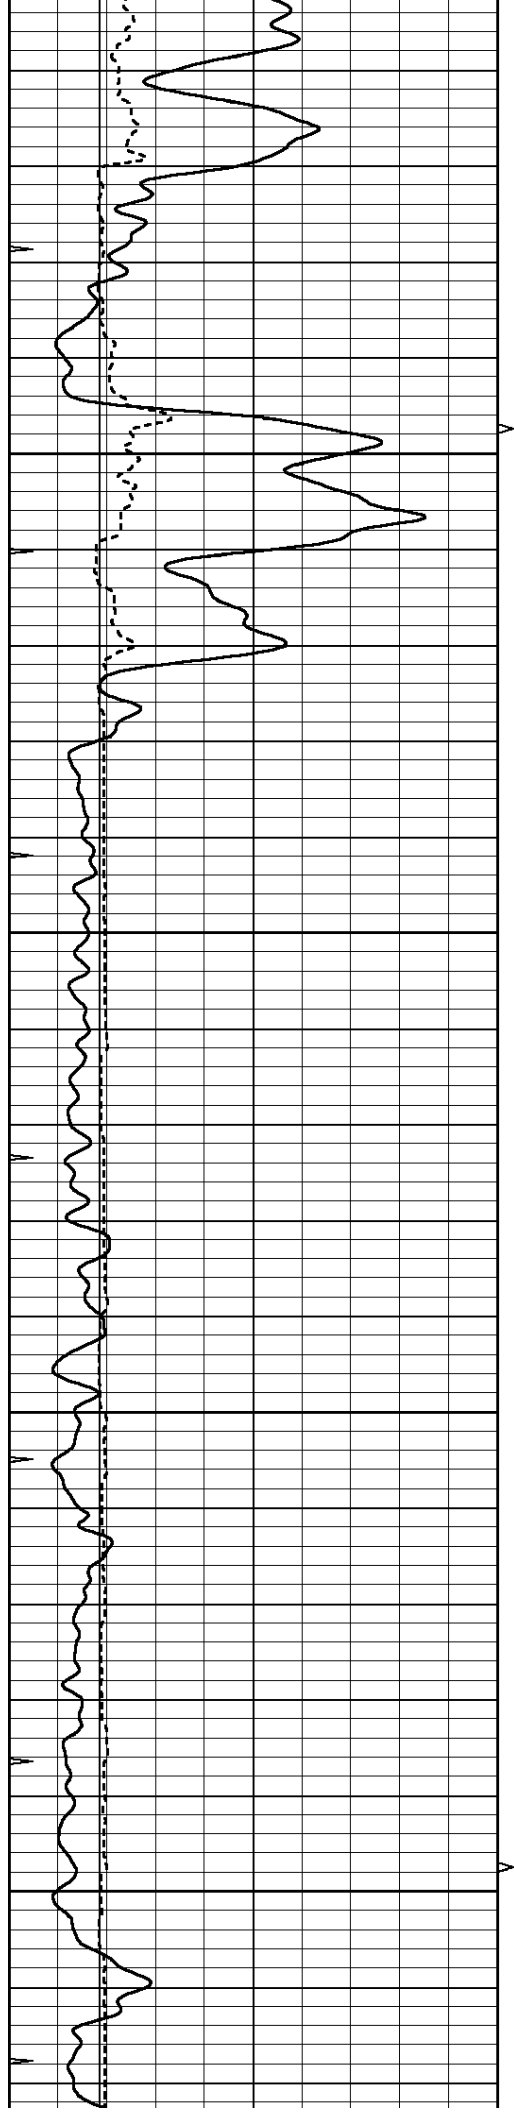




4700

4750

4800

4850

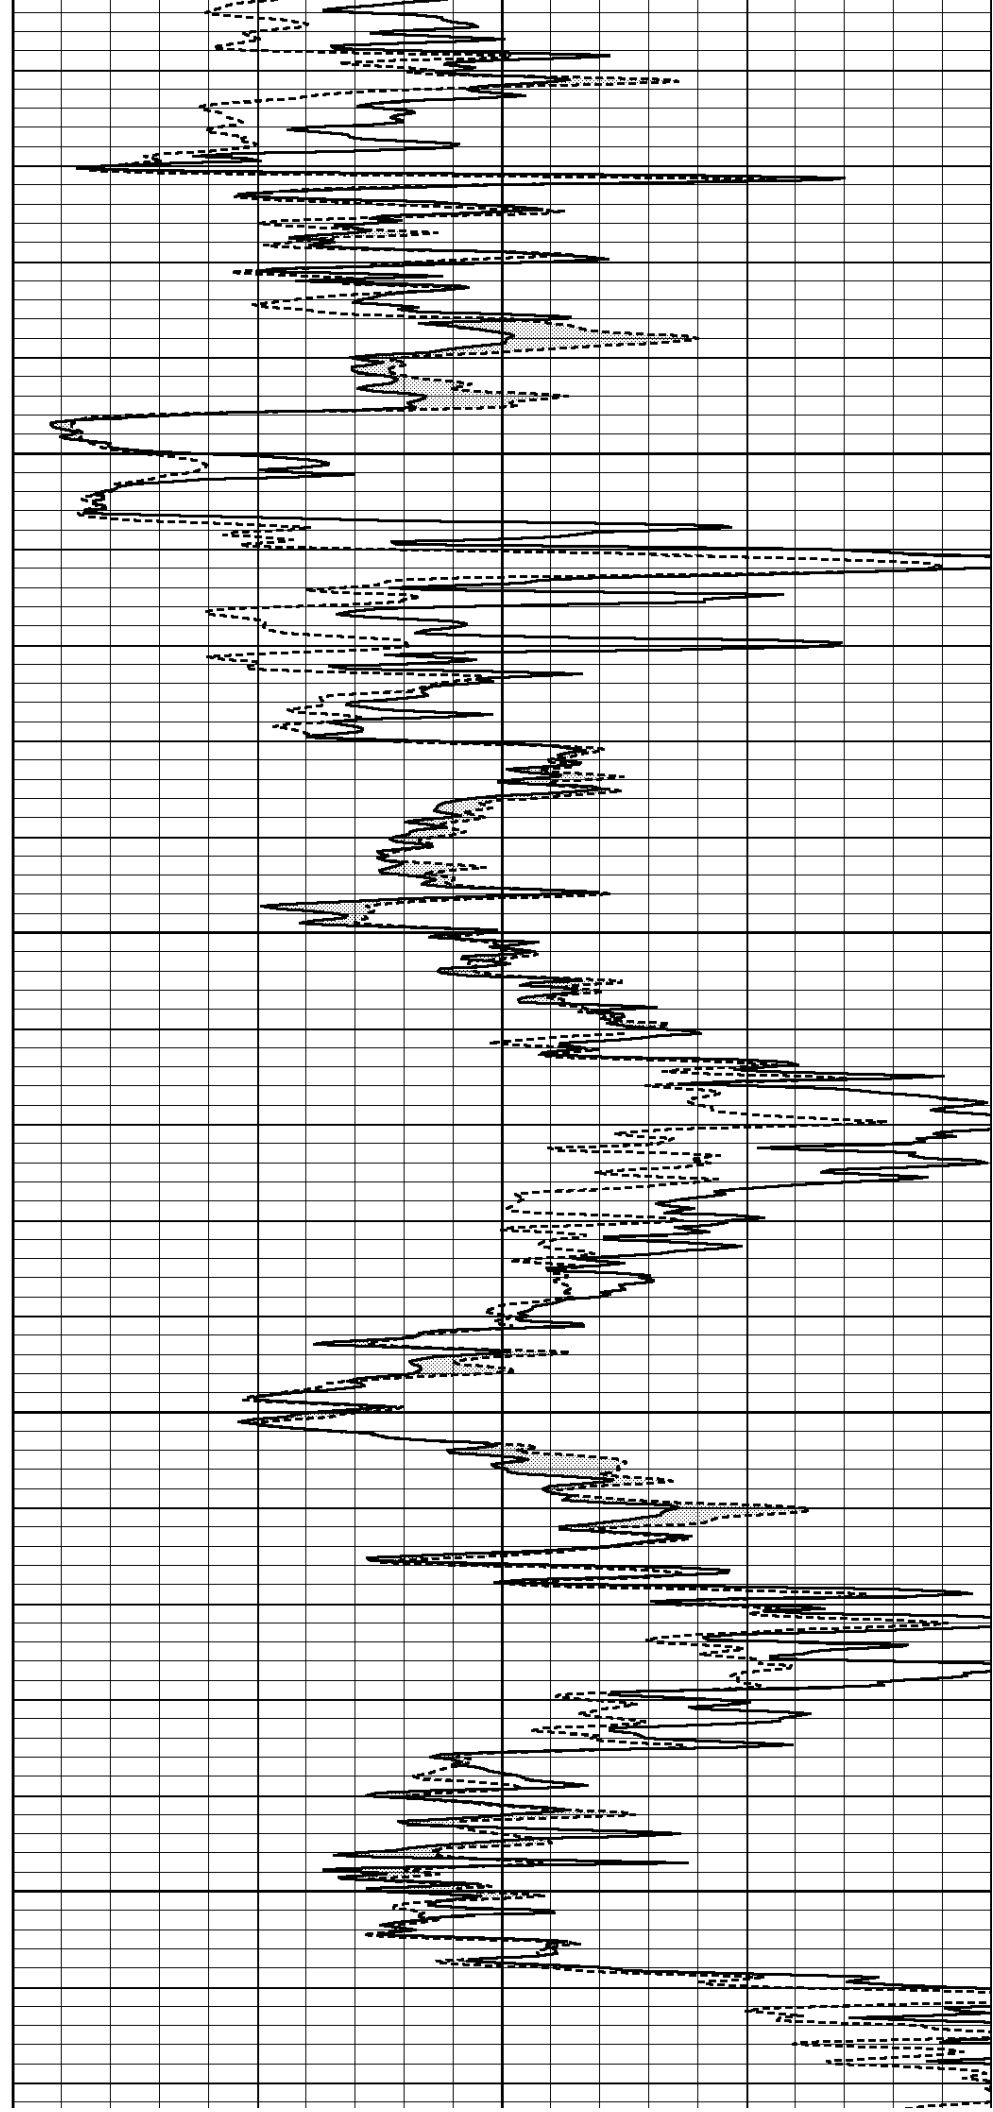


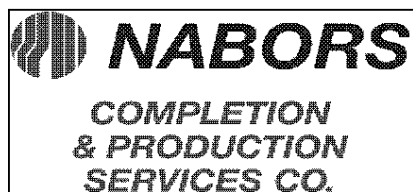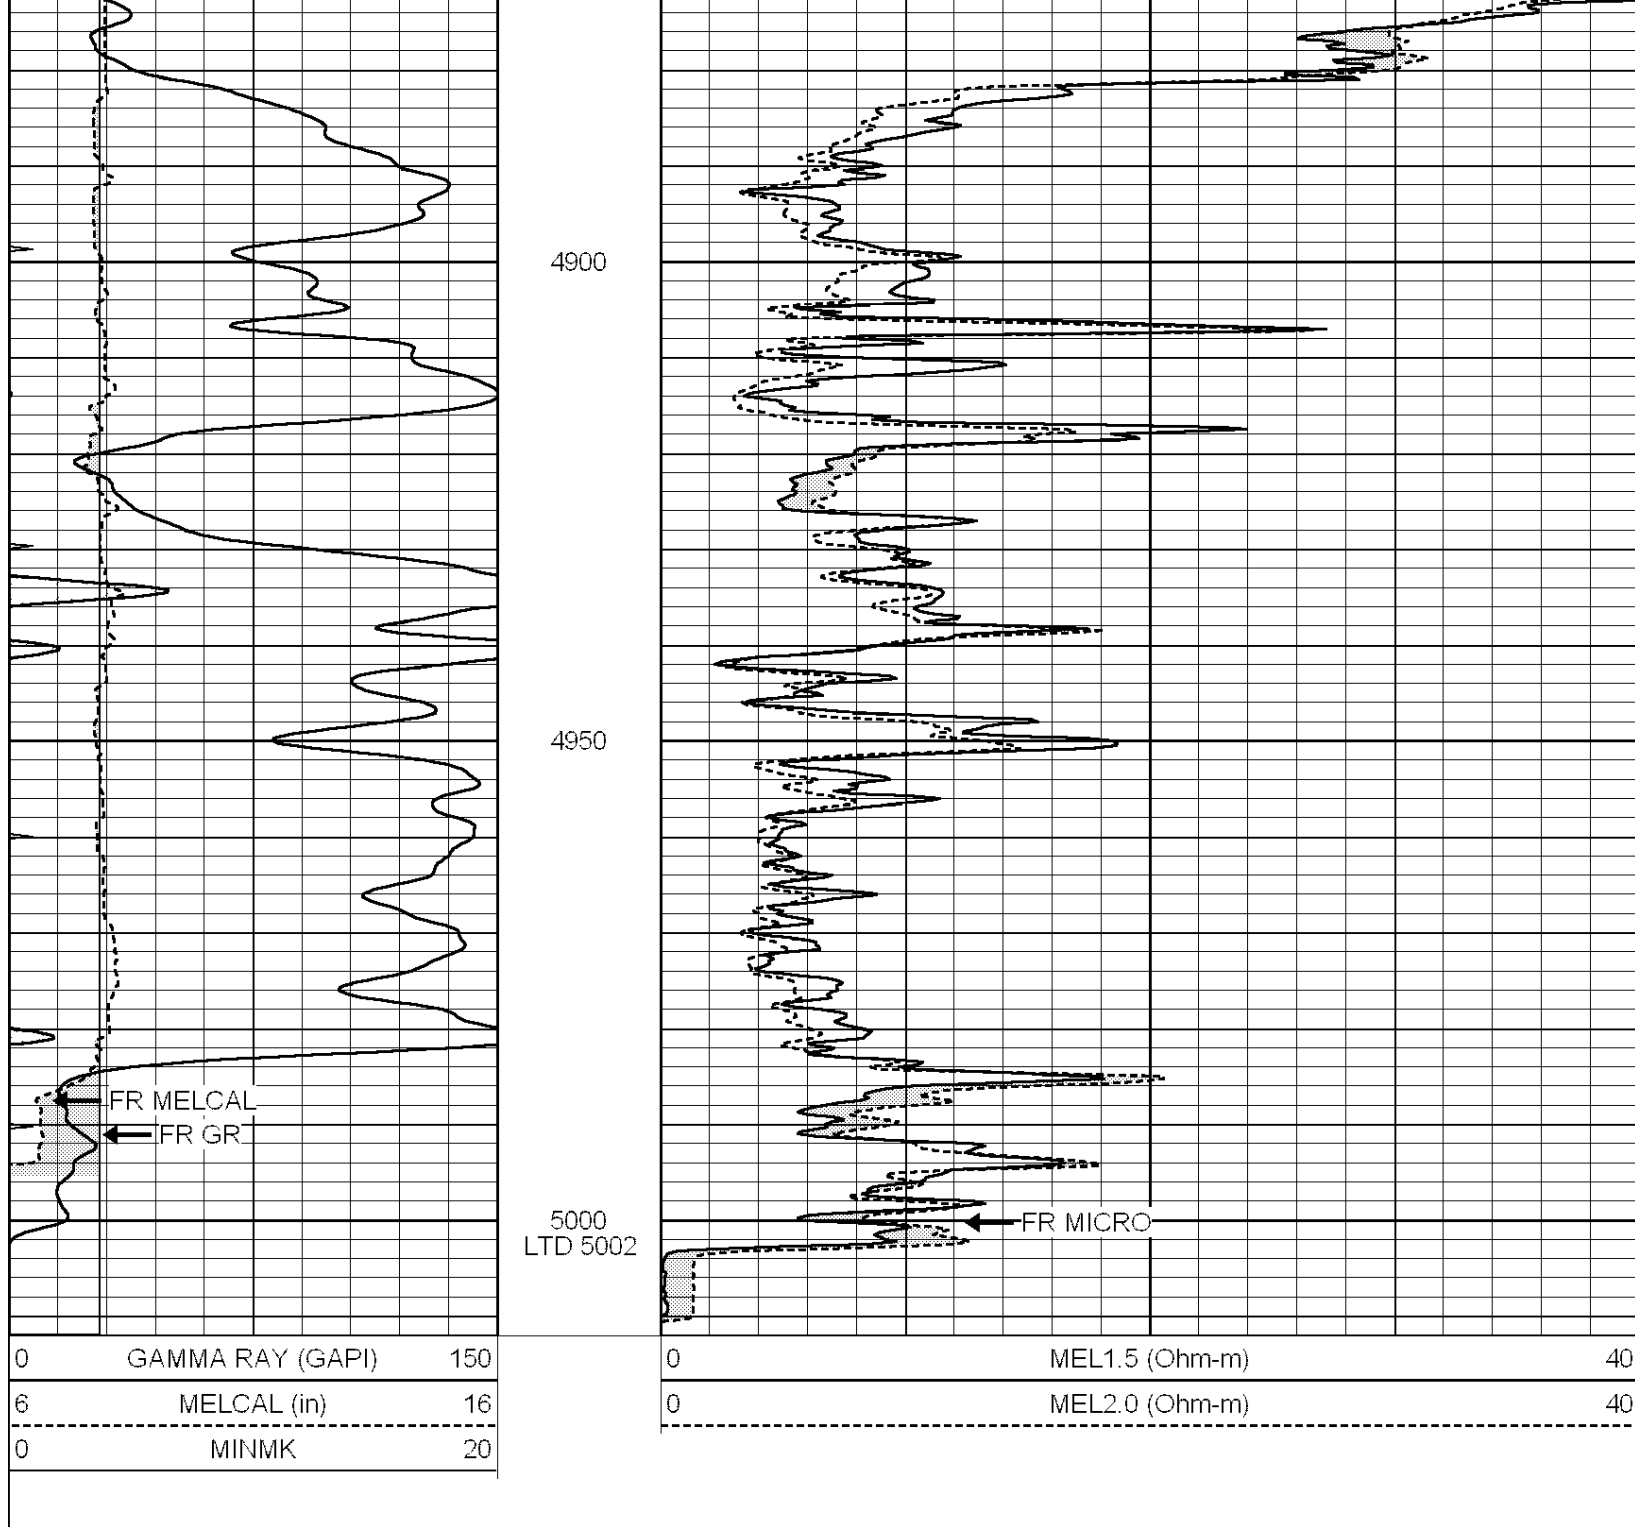

REPEAT SECTION

Database File: 011361pe.db
 Dataset Pathname: pass9.4
 Presentation Format: _micro
 Dataset Creation: Sat Jul 13 19:21:42 2013
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0	MEL1.5 (Ohm-m)	40
6	MELCAL (in)	16	0	MEL2.0 (Ohm-m)	40
0	MINMK	20			

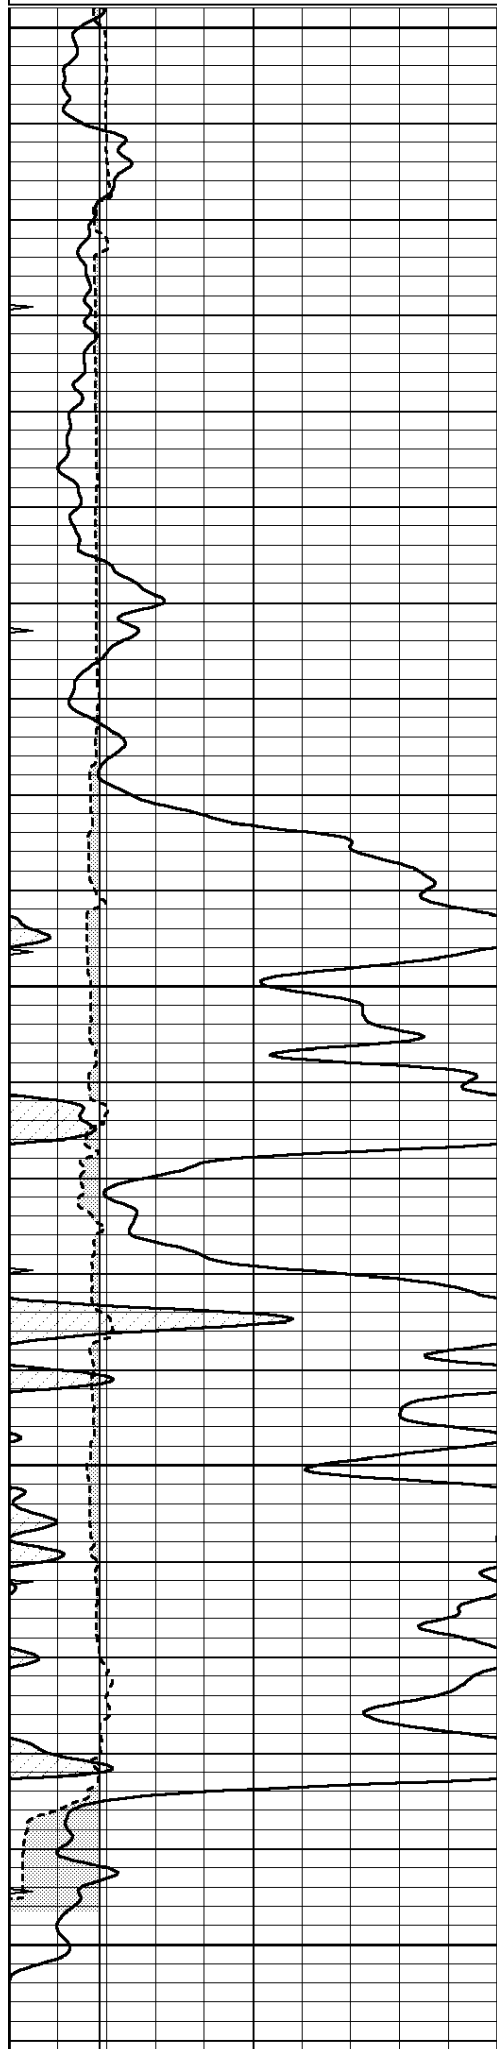


4800

4850

4900

4950

5000

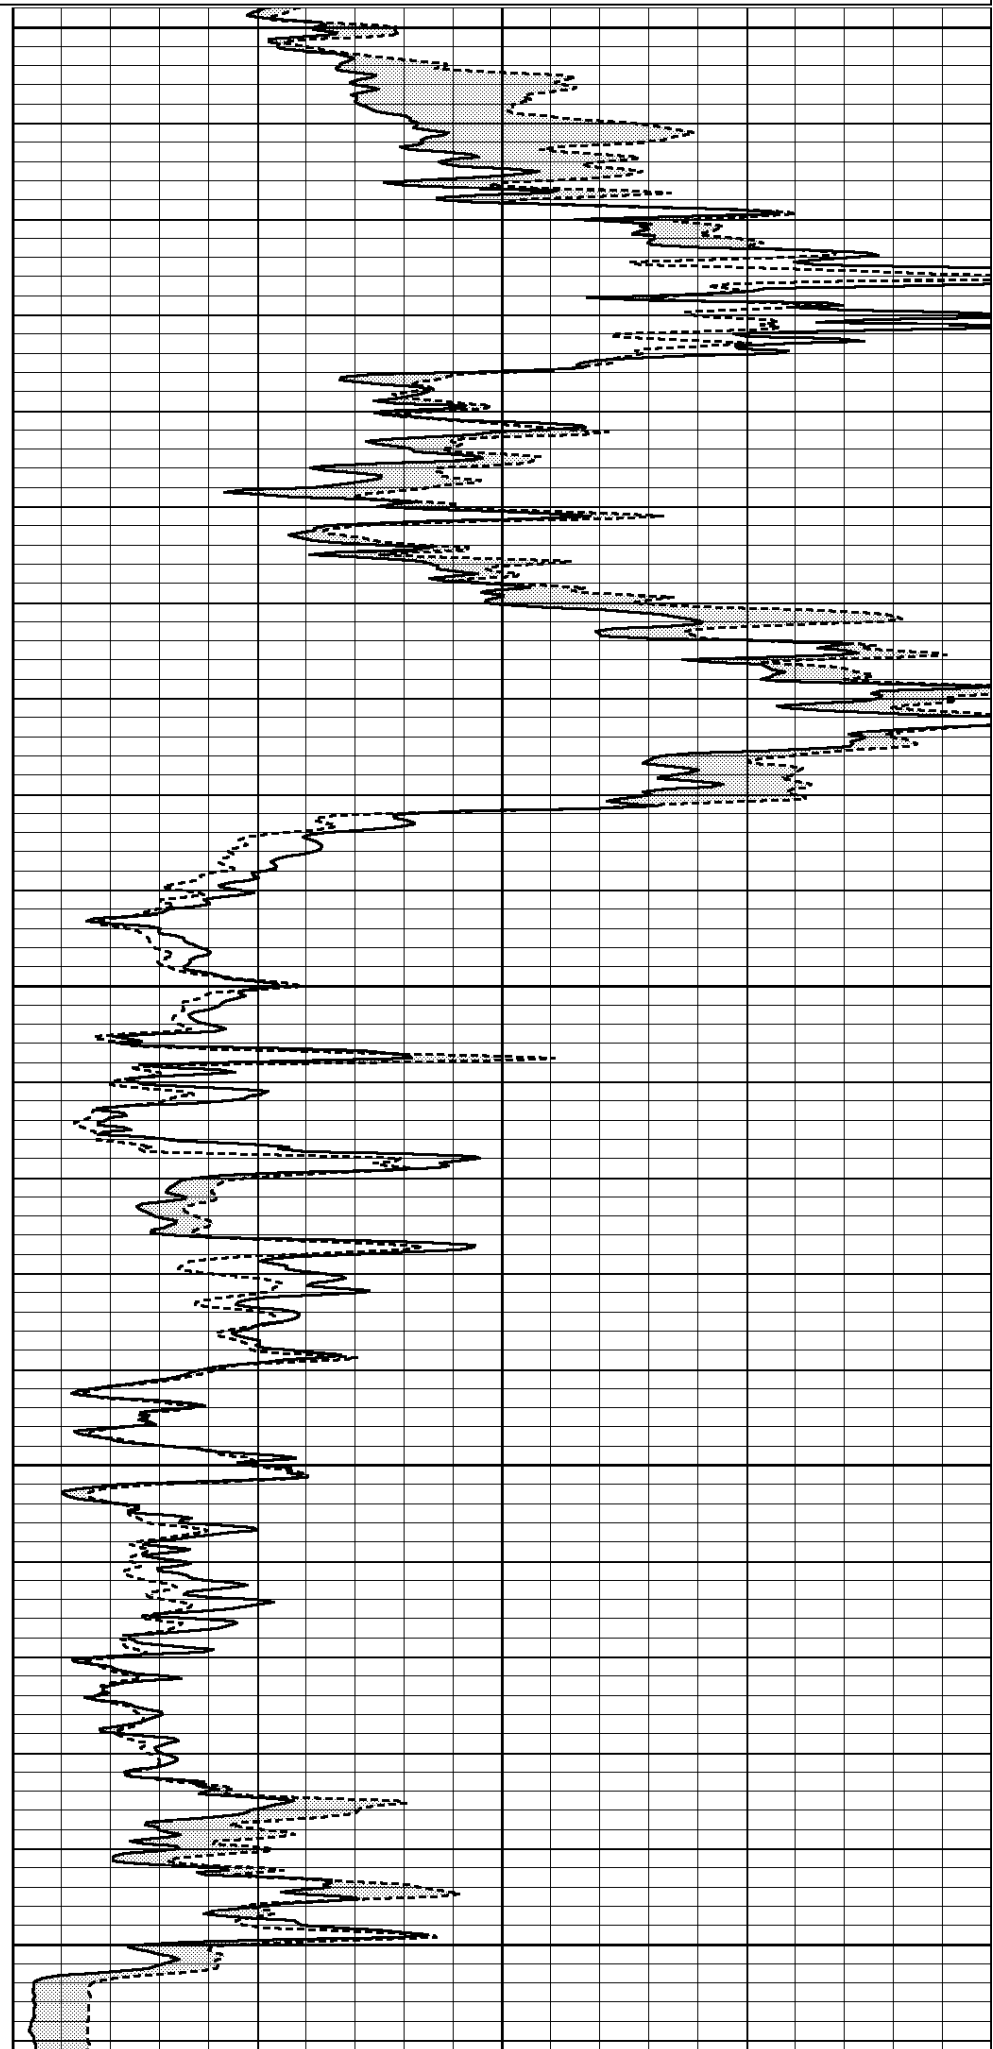

0	GAMMA RAY (GAPI)	150	0	MEL1.5 (Ohm-m)	40
6	MELCAL (in)	16	0	MEL2.0 (Ohm-m)	40
0	MINMK	20			

Calibration Report			
Database File:	011361pe.db		
Dataset Pathname:	pass10.2		
Dataset Creation:	Sat Jul 13 19:55:12 2013		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Mon Jul 01 10:55:17 2013		
Caliper Calibration:	Gain=2.606	Offset=-6.000	
References	Low Cal	High Cal	
Readings	7.400	12.000	
	3.327	5.092	
1.5" Calibration:	Gain=165.000	Offset=-3.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.010	0.717	
2" Calibration:	Gain=70.000	Offset=-2.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.025	0.821	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Mon Jul 01 05:22:08 2013		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.8000	GAPI/cps	