



**Weatherford**

**ARRAY INDUCTION  
SHALLOW FOCUSED  
ELECTRIC LOG**

COMPANY	FIML NATURAL RESOURCES, LLC.		
WELL	MULVILLE #15B-18-2029		
FIELD	WILDCAT		
PROVINCE/COUNTY LANE	U.S.A. / KANSAS		
COUNTRY/STATE	900' FSL & 2280' FEL		
LOCATION			
SEC 18	TWP 20S	RGE 29W	Other Services
Latitude			MPD/MDN
Longitude			MML
API Number	15-101-22501		MSS
Permanent Datum GL, Elevation	2899 feet		Elevations:
Log Measured From KB			KB 2899.00
Drilling Measured From KB			DF 2897.00
			GL 2889.00
Date	01-APR-2014		
Run Number	ONE		
Service Order	4558-83548386		
Depth Driller	4935.00	feet	
Depth Logger	4938.00	feet	
First Reading	4935.00	feet	
Last Reading	438.00	feet	
Casing Driller	435.00	feet	
Casing Logger	438.00	feet	
Bit Size	7.875	inches	
Hole Fluid Type	CHEMICAL		
Density / Viscosity	9.40 lb/USg	68.00 CP	
PH / Fluid Loss	10.00	8.00 ml/30Min	
Sample Source	FLOWLINE		
Rm @ Measured Temp	0.81 @ 95.0	ohm-m	
Rmf @ Measured Temp	0.65 @ 95.0	ohm-m	
Rmc @ Measured Temp	0.97 @ 95.0	ohm-m	
Source Rmf / Rmc	CALC	CALC	
Rm @ BHT	0.64 @121.0	ohm-m	
Time Since Circulation	4 HOURS		
Max Recorded Temp	121.00	deg F	
Equipment / Base	13244	LIB	
Recorded By	ADAM SILL		
Witnessed By	JIM MUSGROVE		
JOB #	LB14-098		

BOREHOLE RECORD			Last Edited: 01-APR-2014 12:37	
Bit Size inches	Depth From feet	Depth To feet		
7.875	435.00	4935.00		
CASING RECORD				
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	435.00	24.00

**REMARKS**

- SOFTWARE ISSUE: WLS 13.08.2113.
- RUN ONE: MCG, MML, MDN, MPD, MFE, MSS, MAI RUN IN COMBINATION.
  - HARDWARE: DUAL BOWSPRING USED ON MDN.
  - 0.5 INCH STANDOFF USED ON MFE.
  - TWO 0.5 INCH STANDOFFS USED ON MSS.
  - 0.5 INCH STANDOFF USED ON MAI.
- 2.71 G/CC LIMESTONE DENSITY MATRIX USED TO CALCULATE POROSITY.
- BOREHOLE RUGOSITY, TIGHT PULLS, AND WASHOUTS WILL AFFECT DATA QUALITY.
- ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.
- TOTAL HOLE VOLUME FROM TD TO SURFACE CASING: 1745 CU.FT.
- ANNULAR HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING: 1005 CU.FT.

- RIG: H2 DRILLING #1.


- ENGINEER: A. SILL.


- OPERATOR: J. LaPOINT.


In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.


**2 INCH MAIN**


Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 01-APR-2014 18:35  
 Filename: C:\Minimus 13.08.2113\Log\...FIML ...FIML Natural Resources Mulville #15B-18-2029\_002.dta Recorded on 01-APR-2014 15:18  
 System Versions: Logged with 13.08.2113 Plotted with 13.08.2113

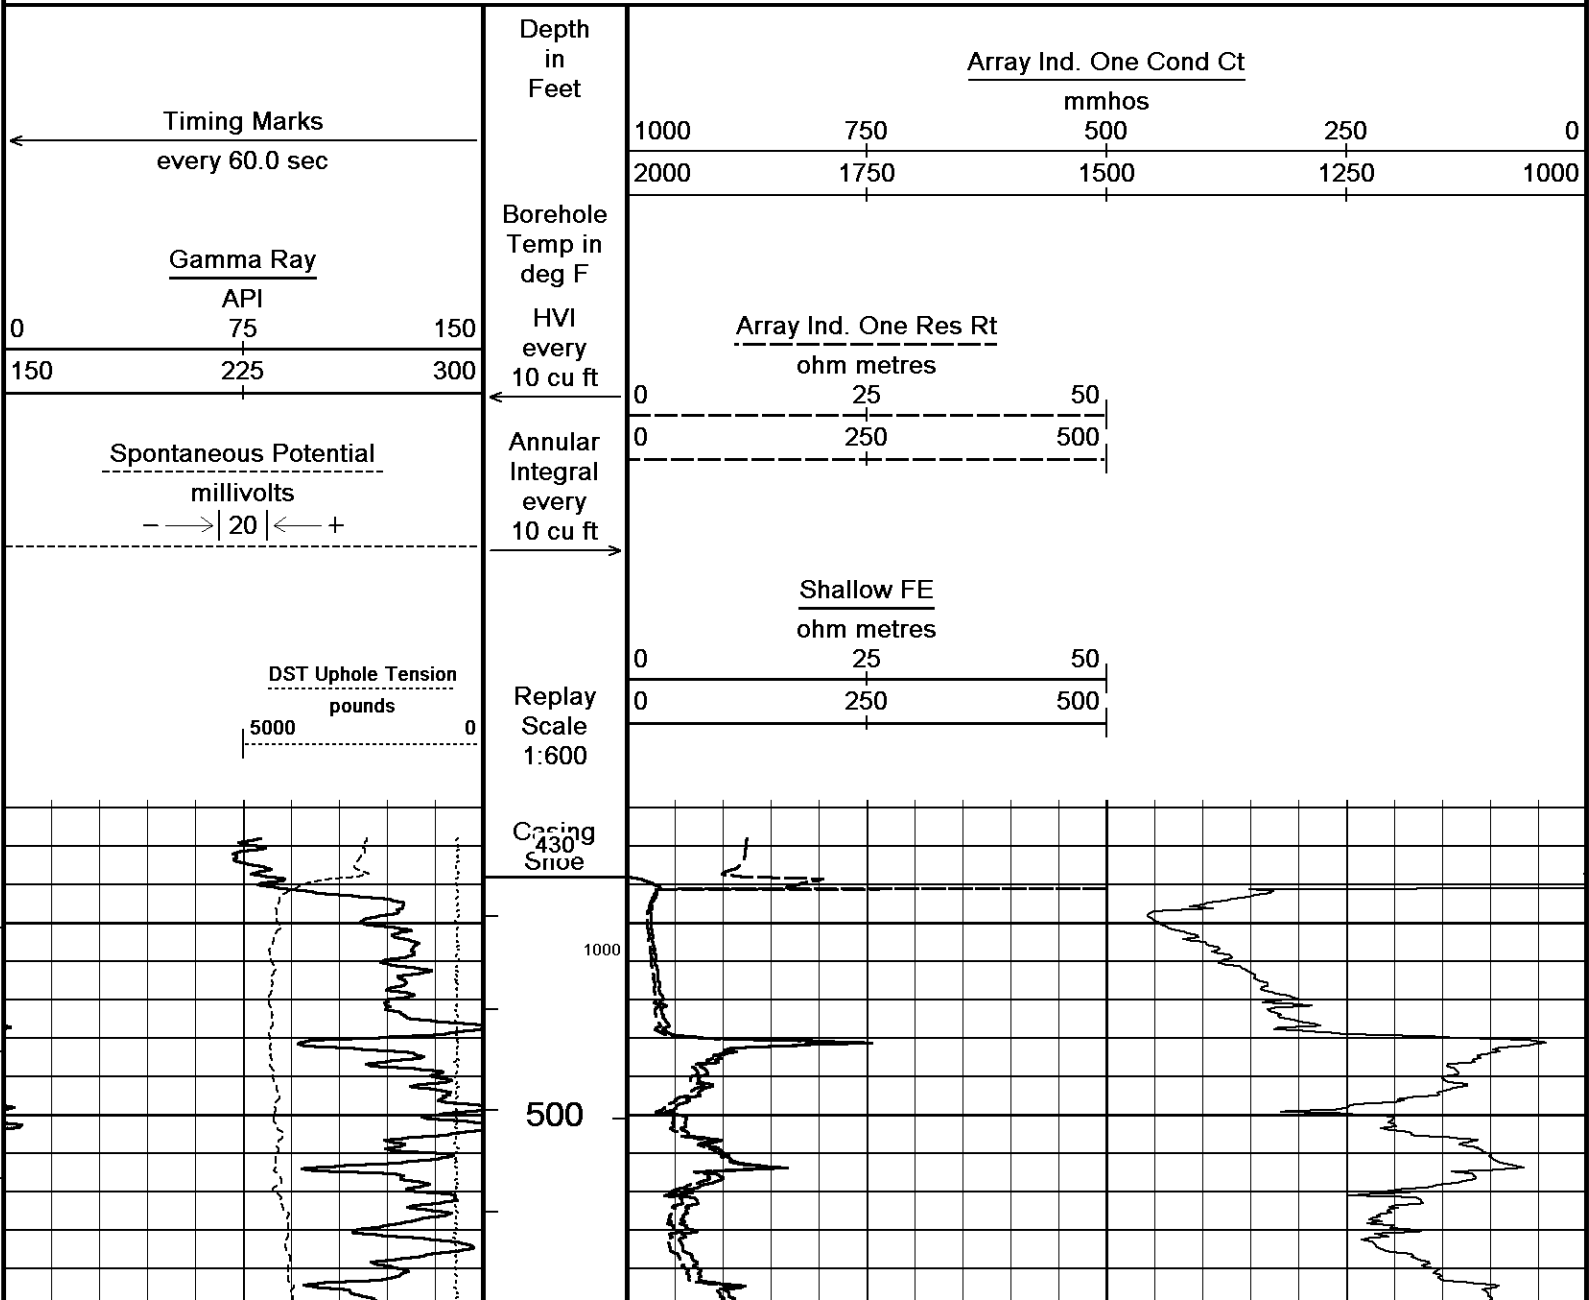


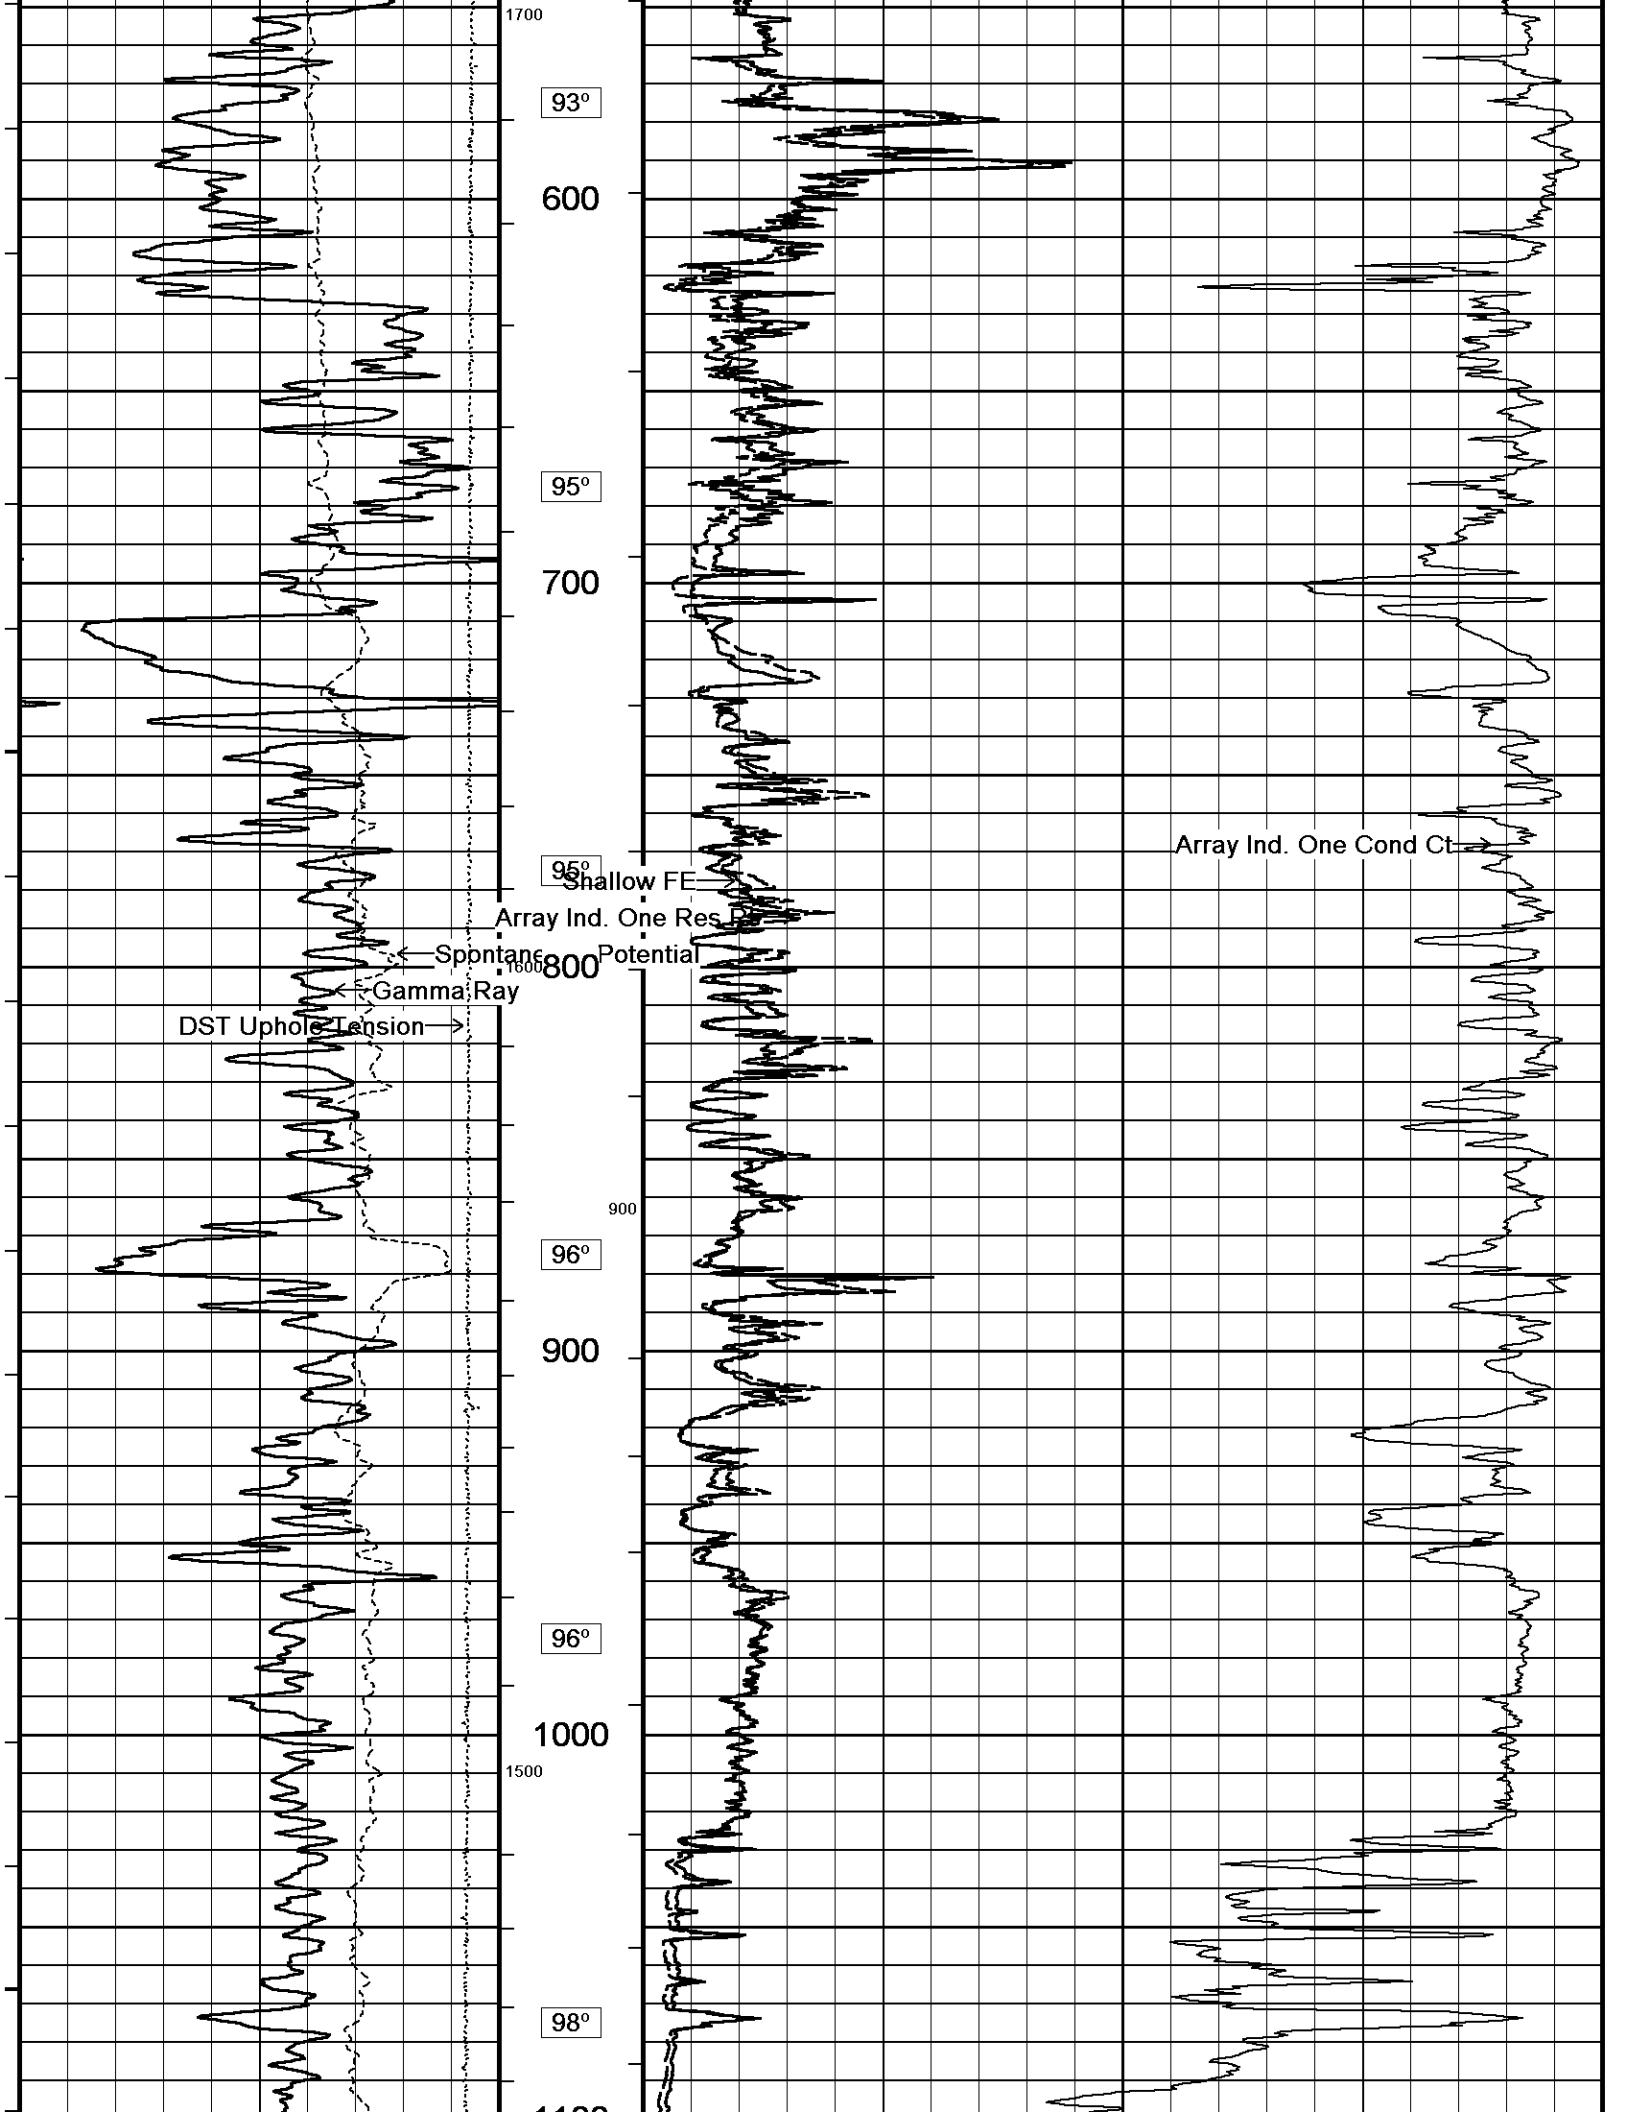


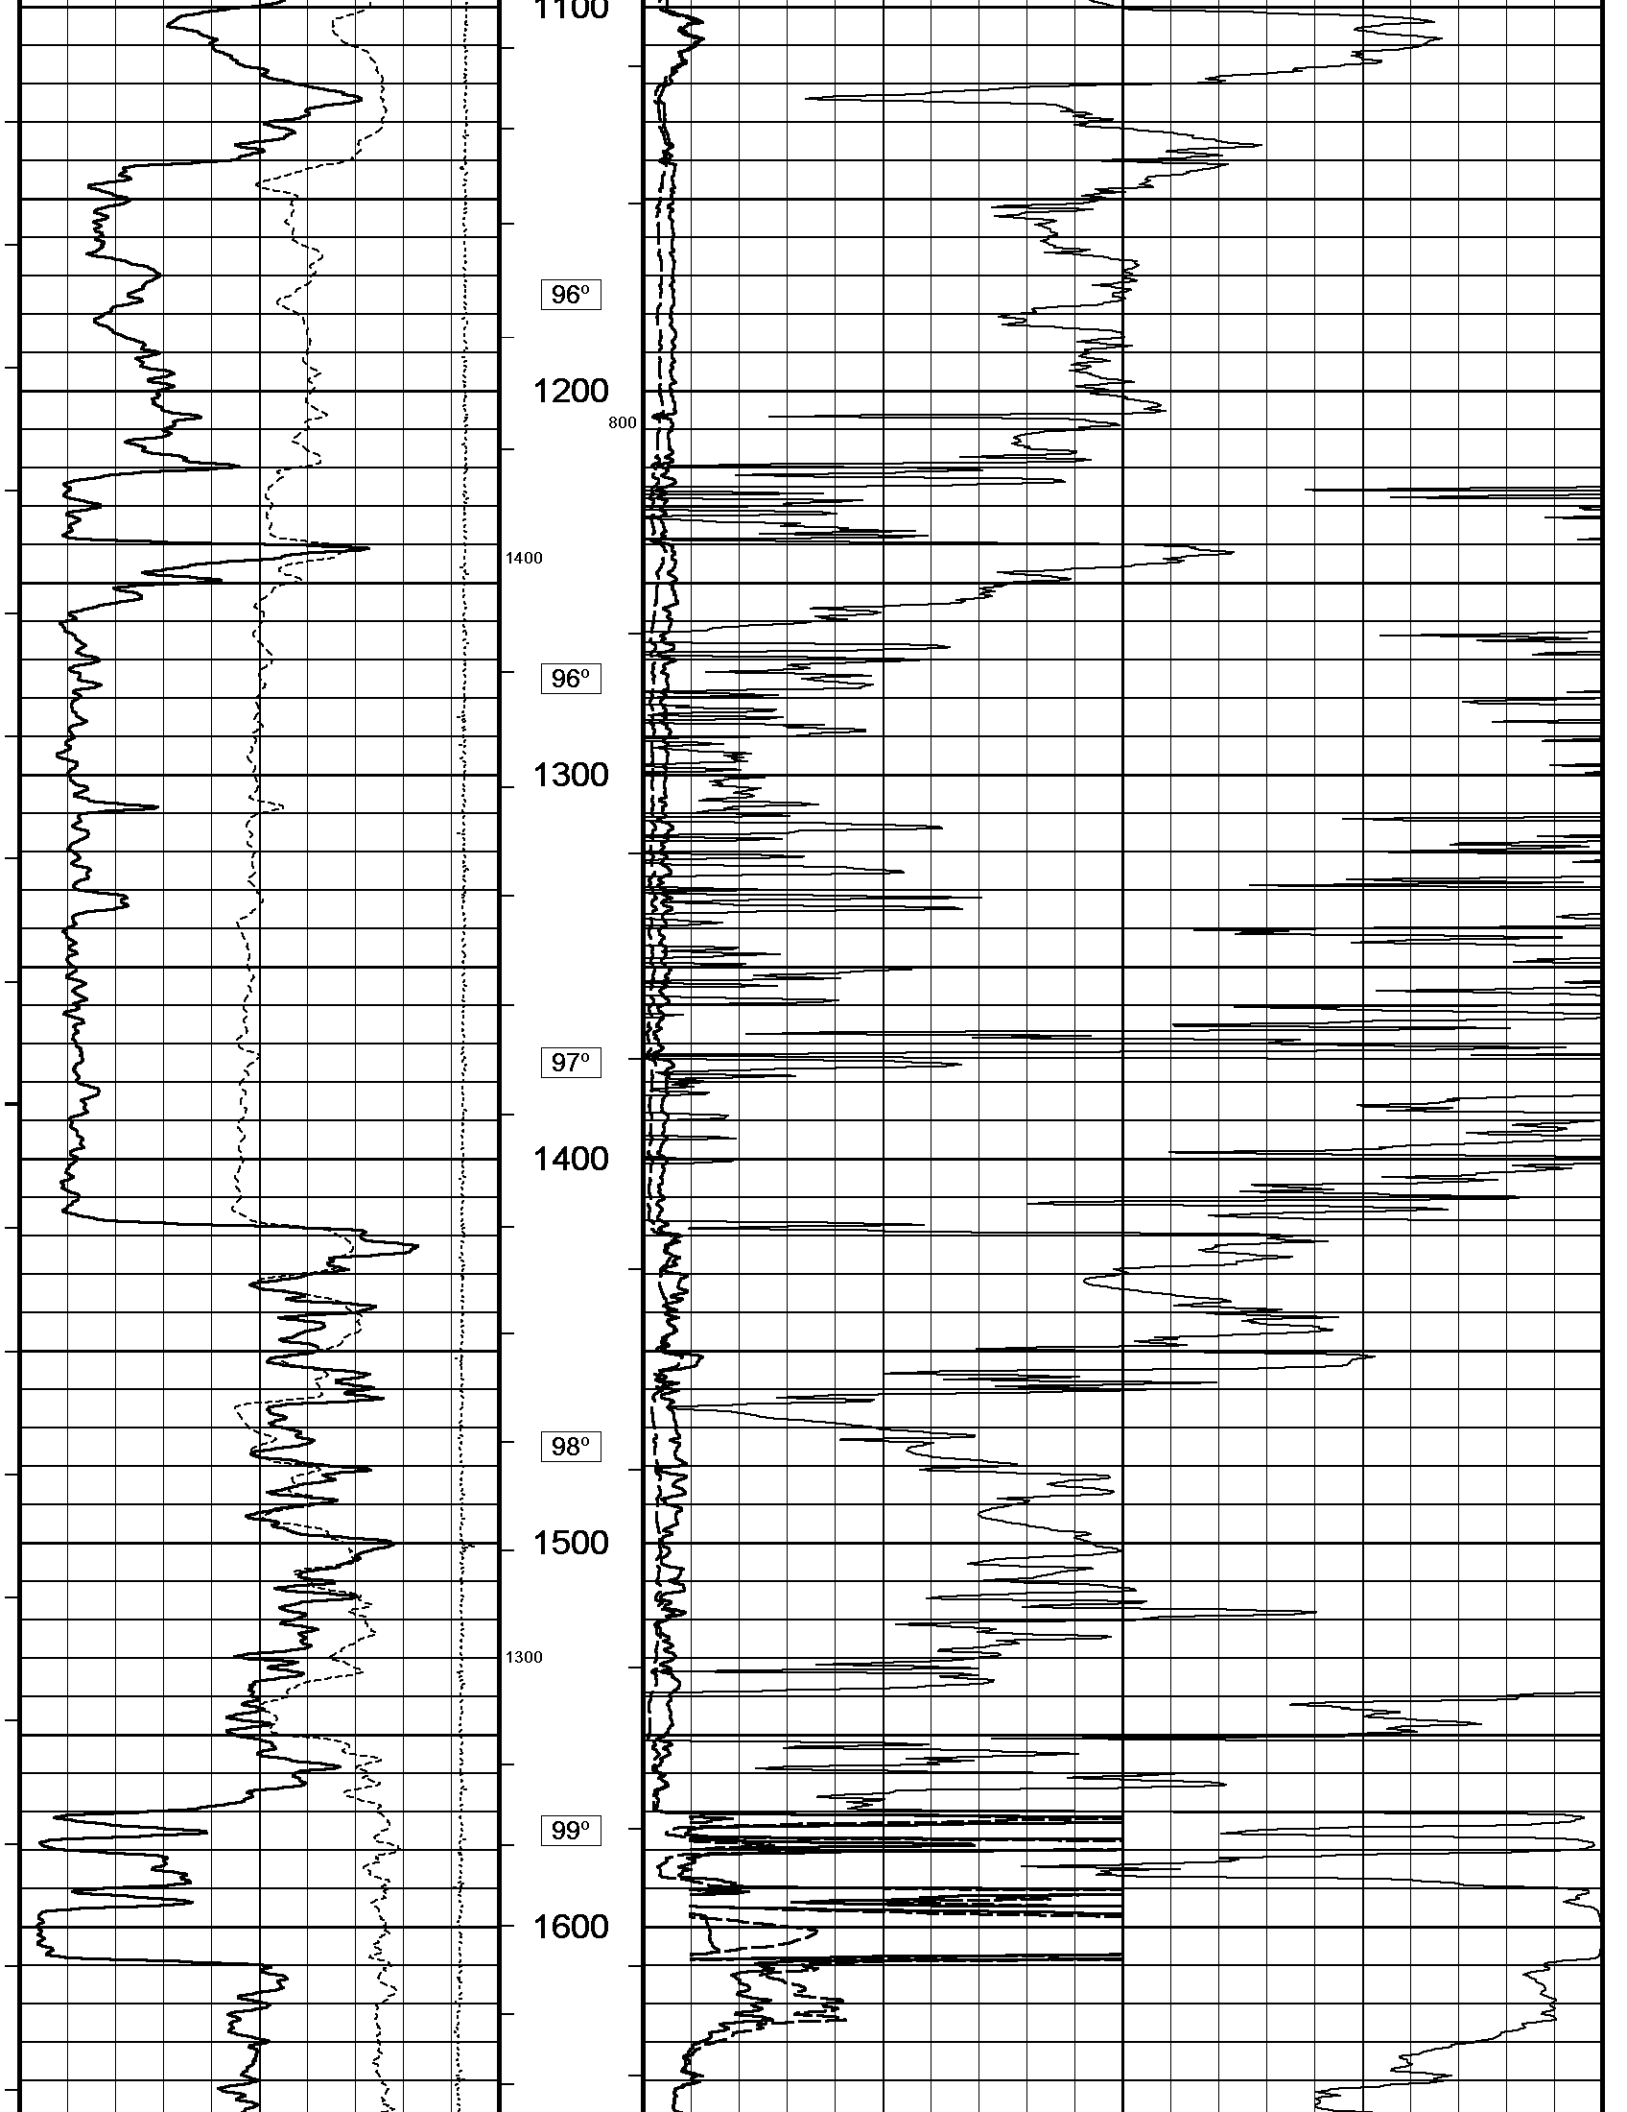


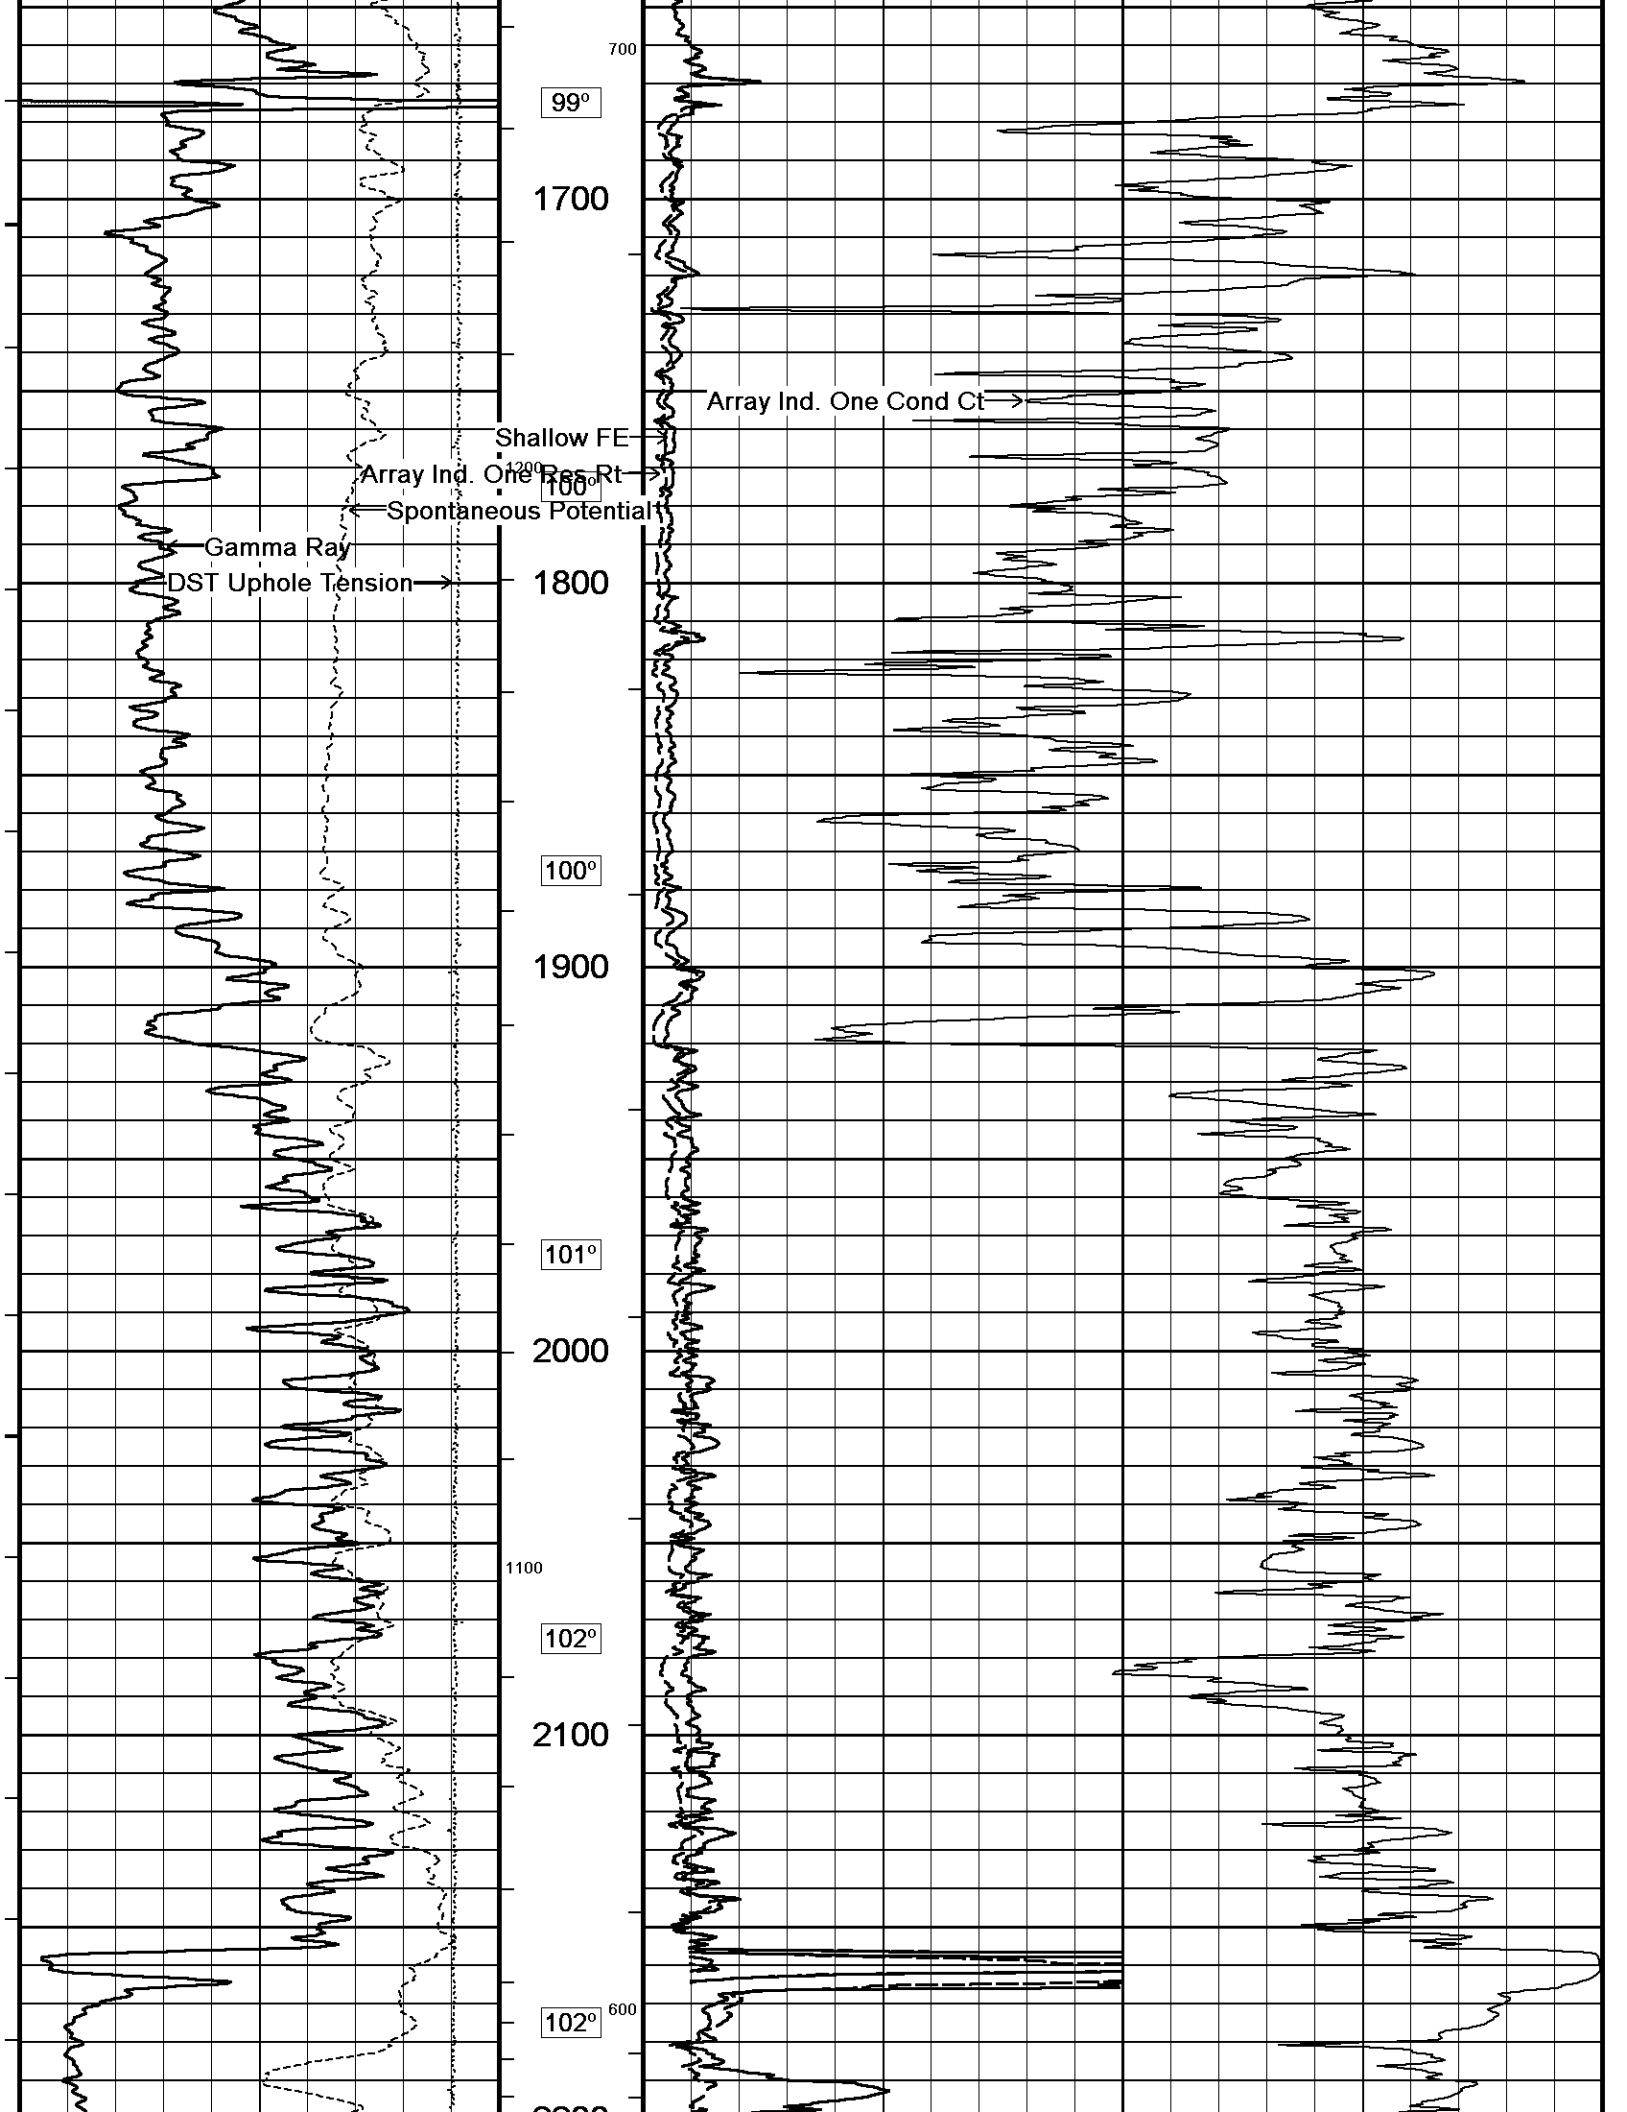


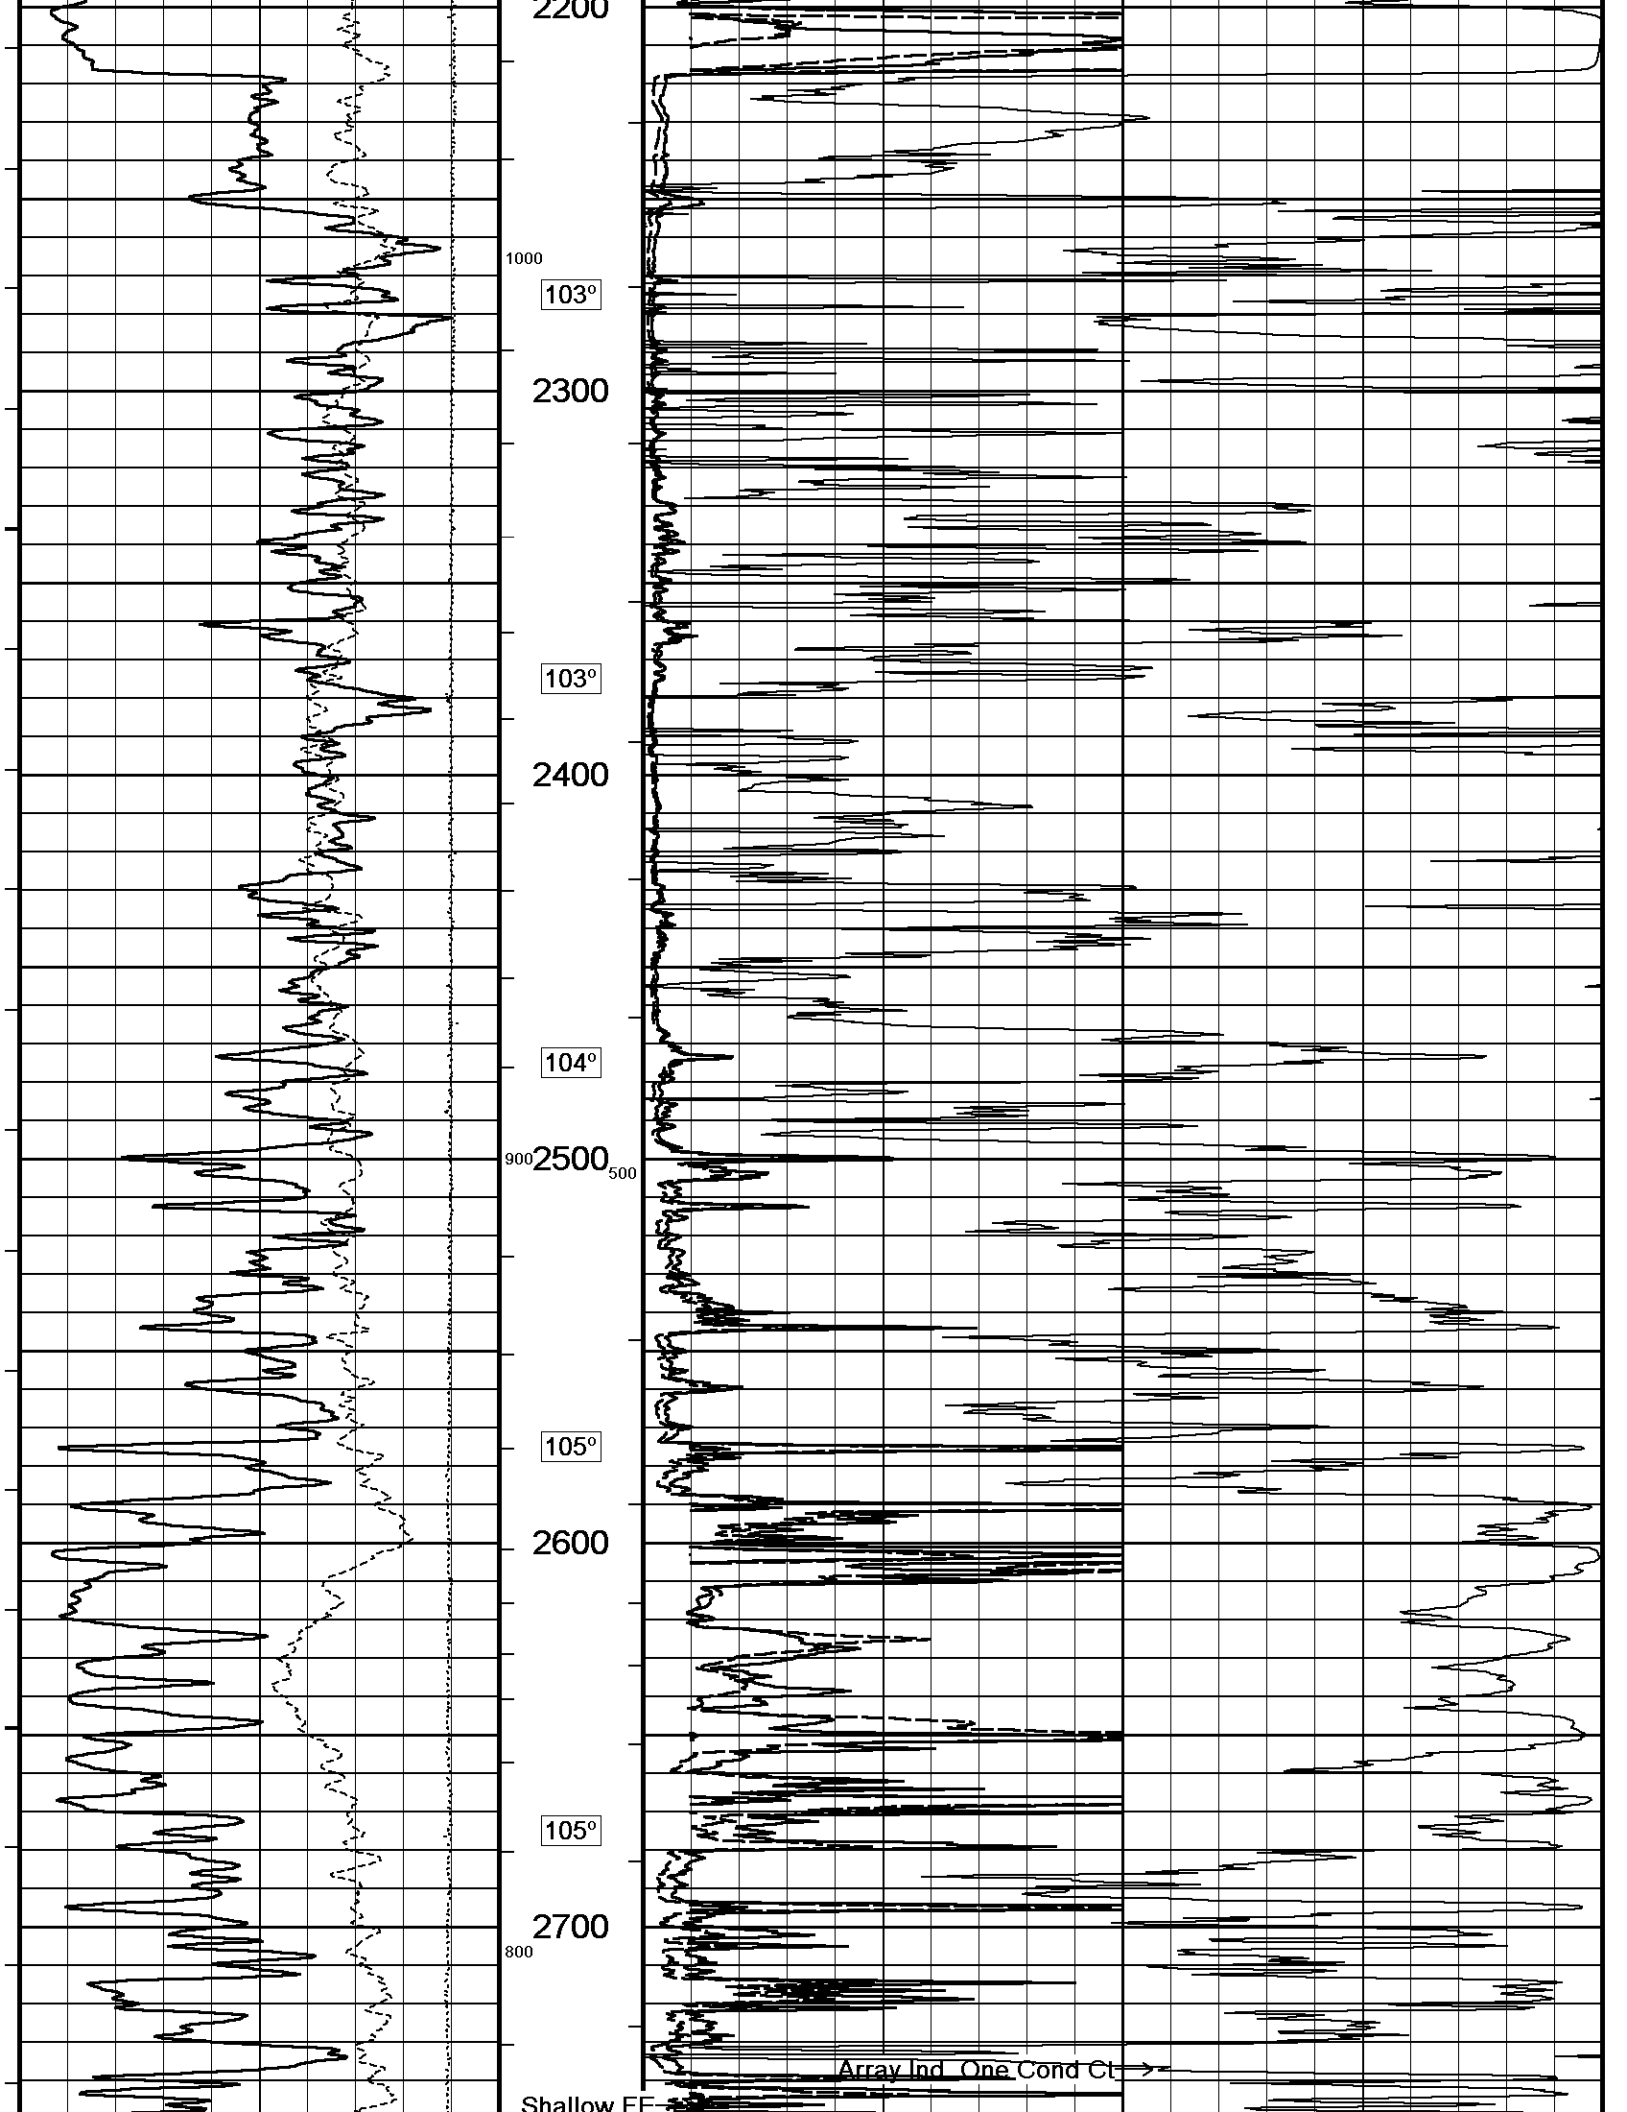


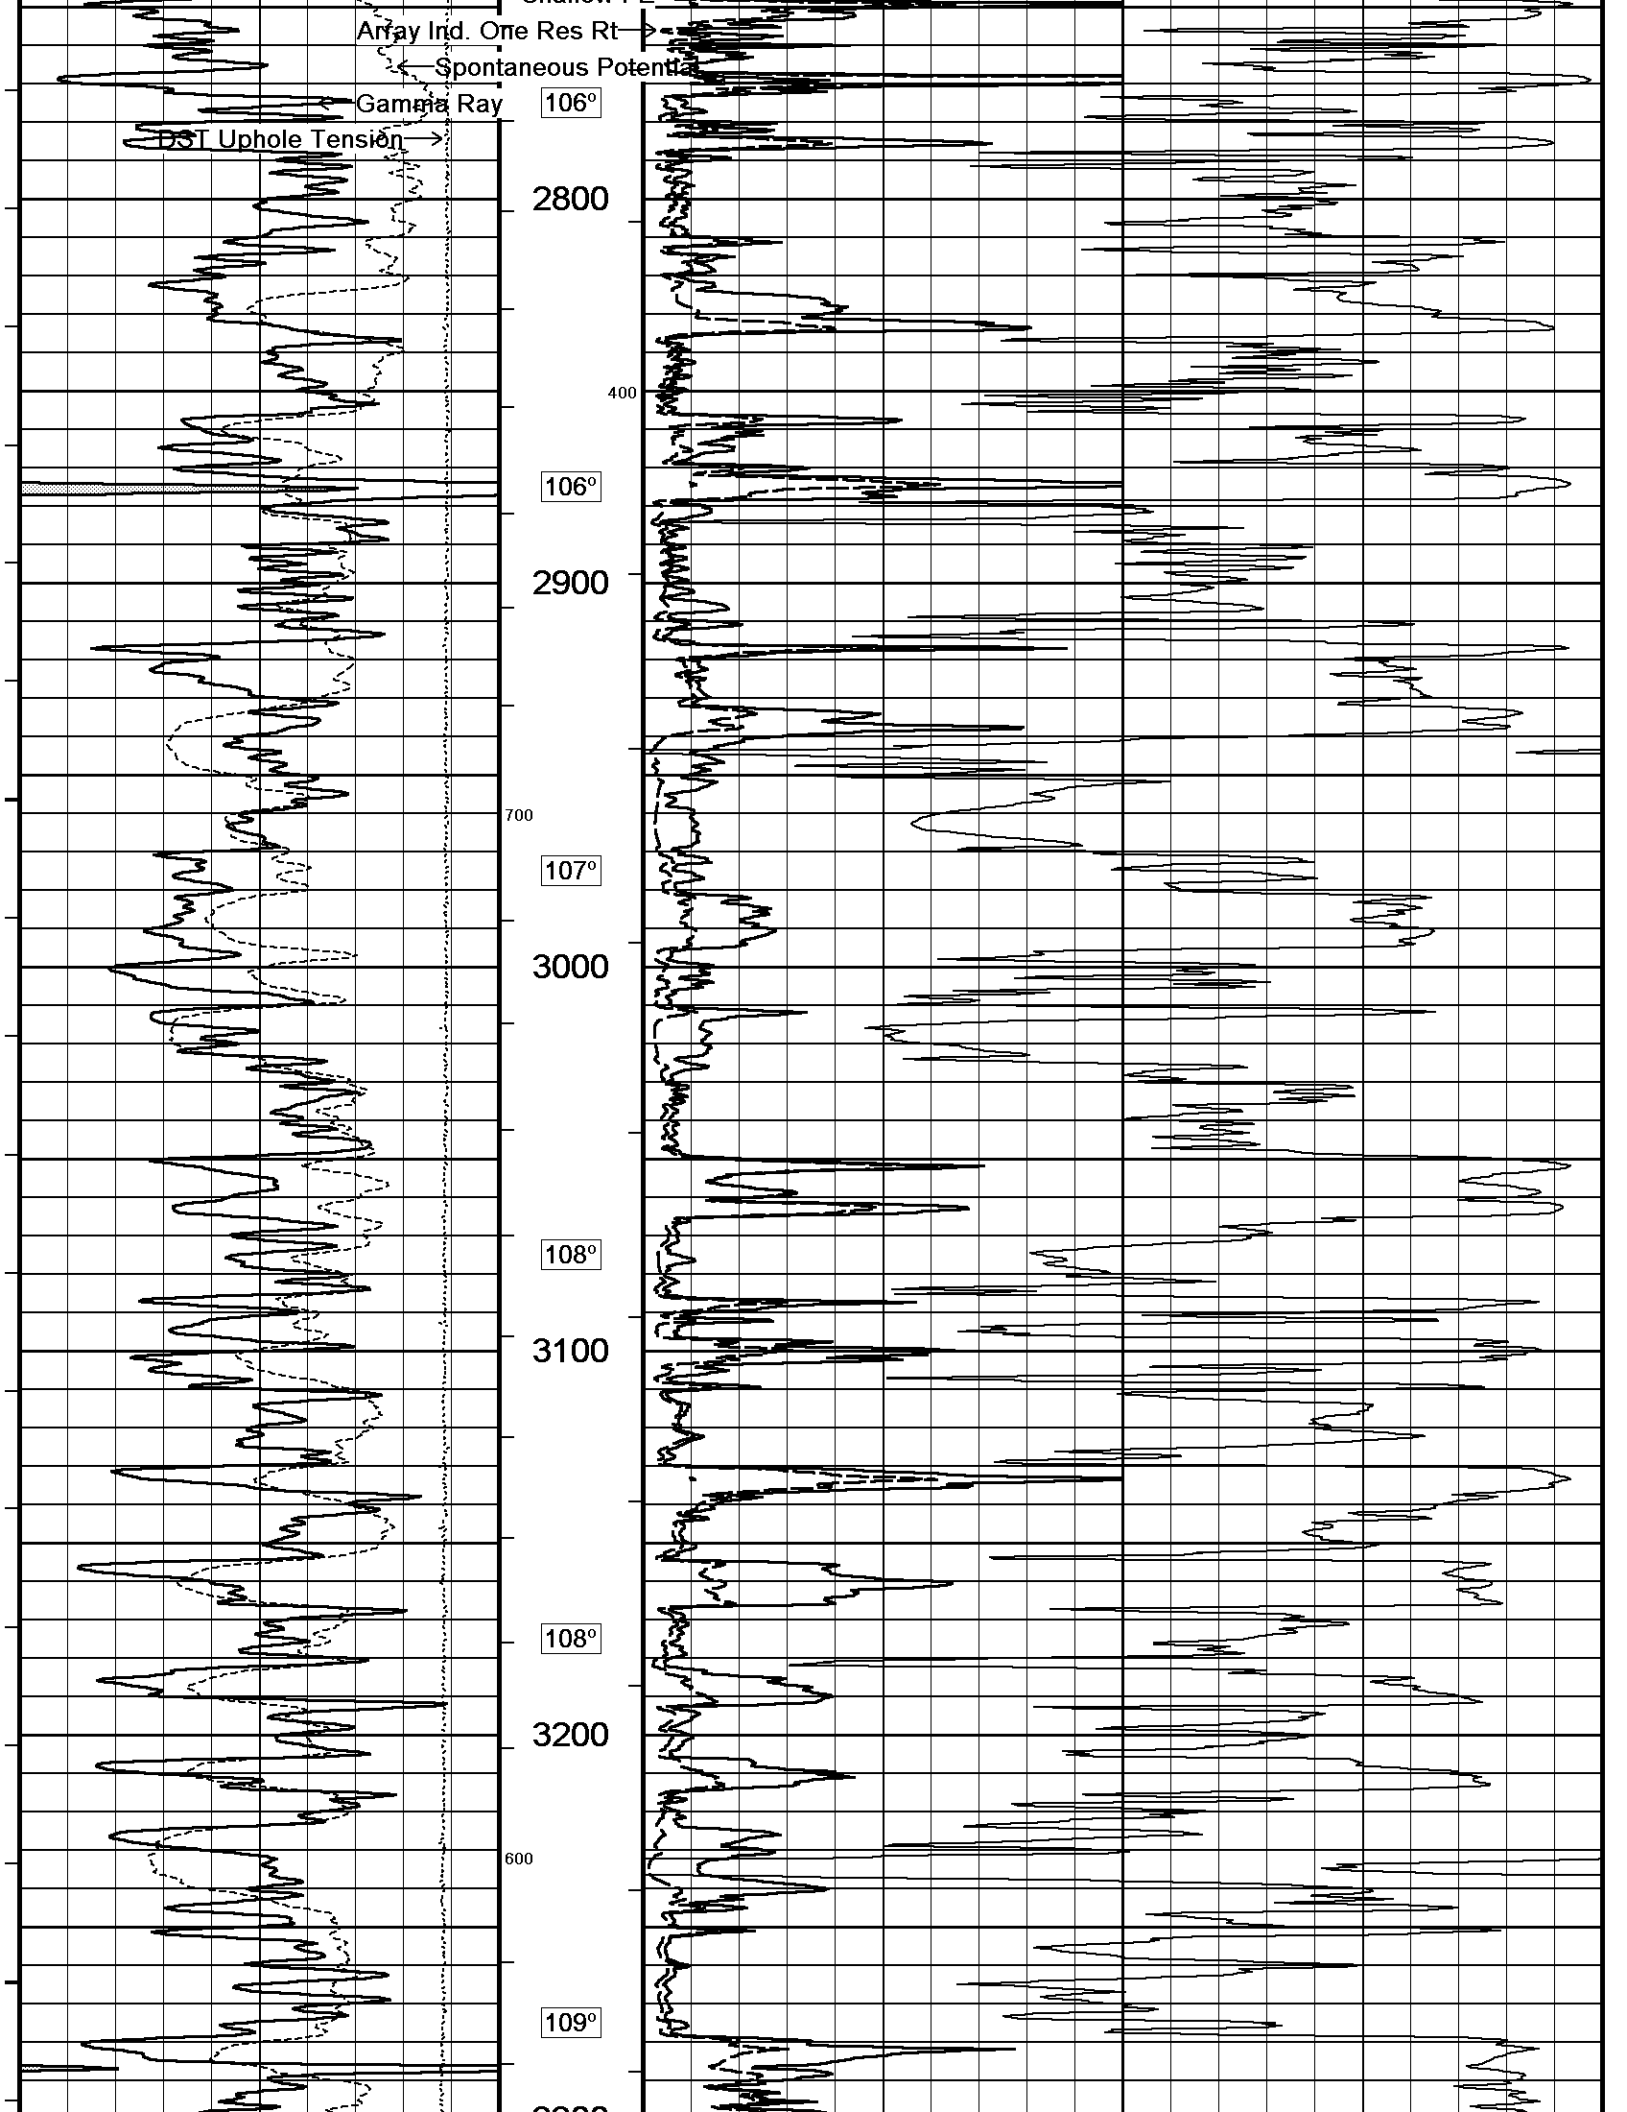

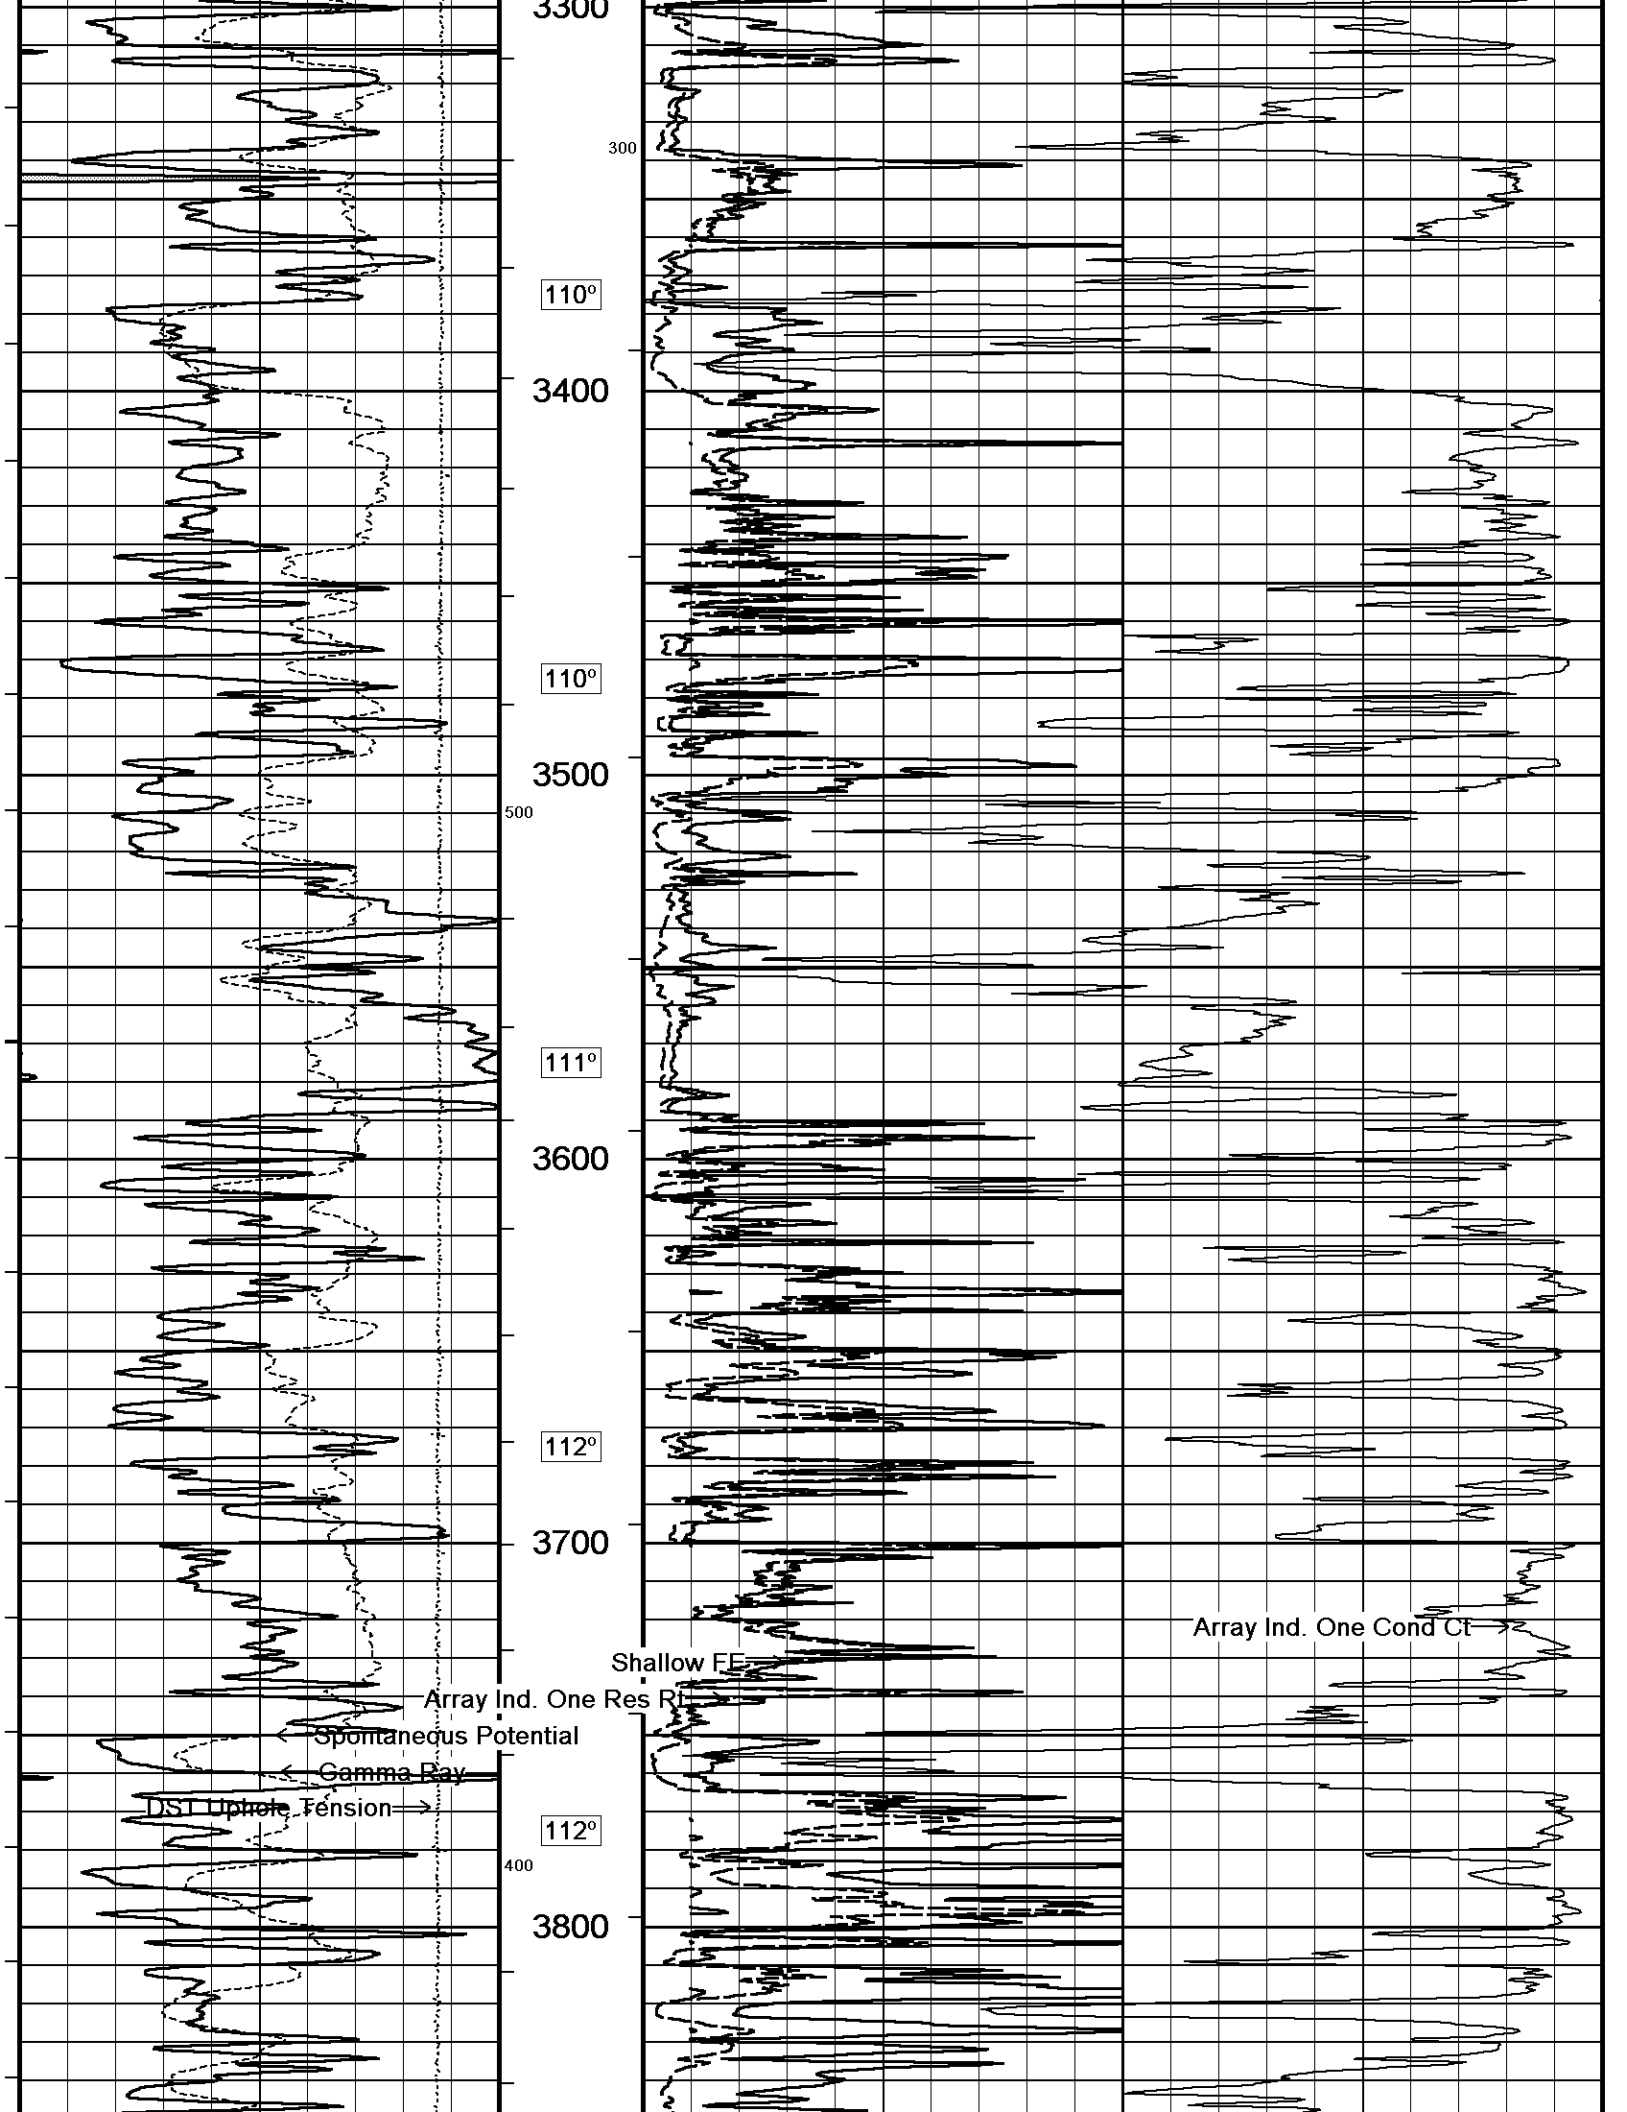

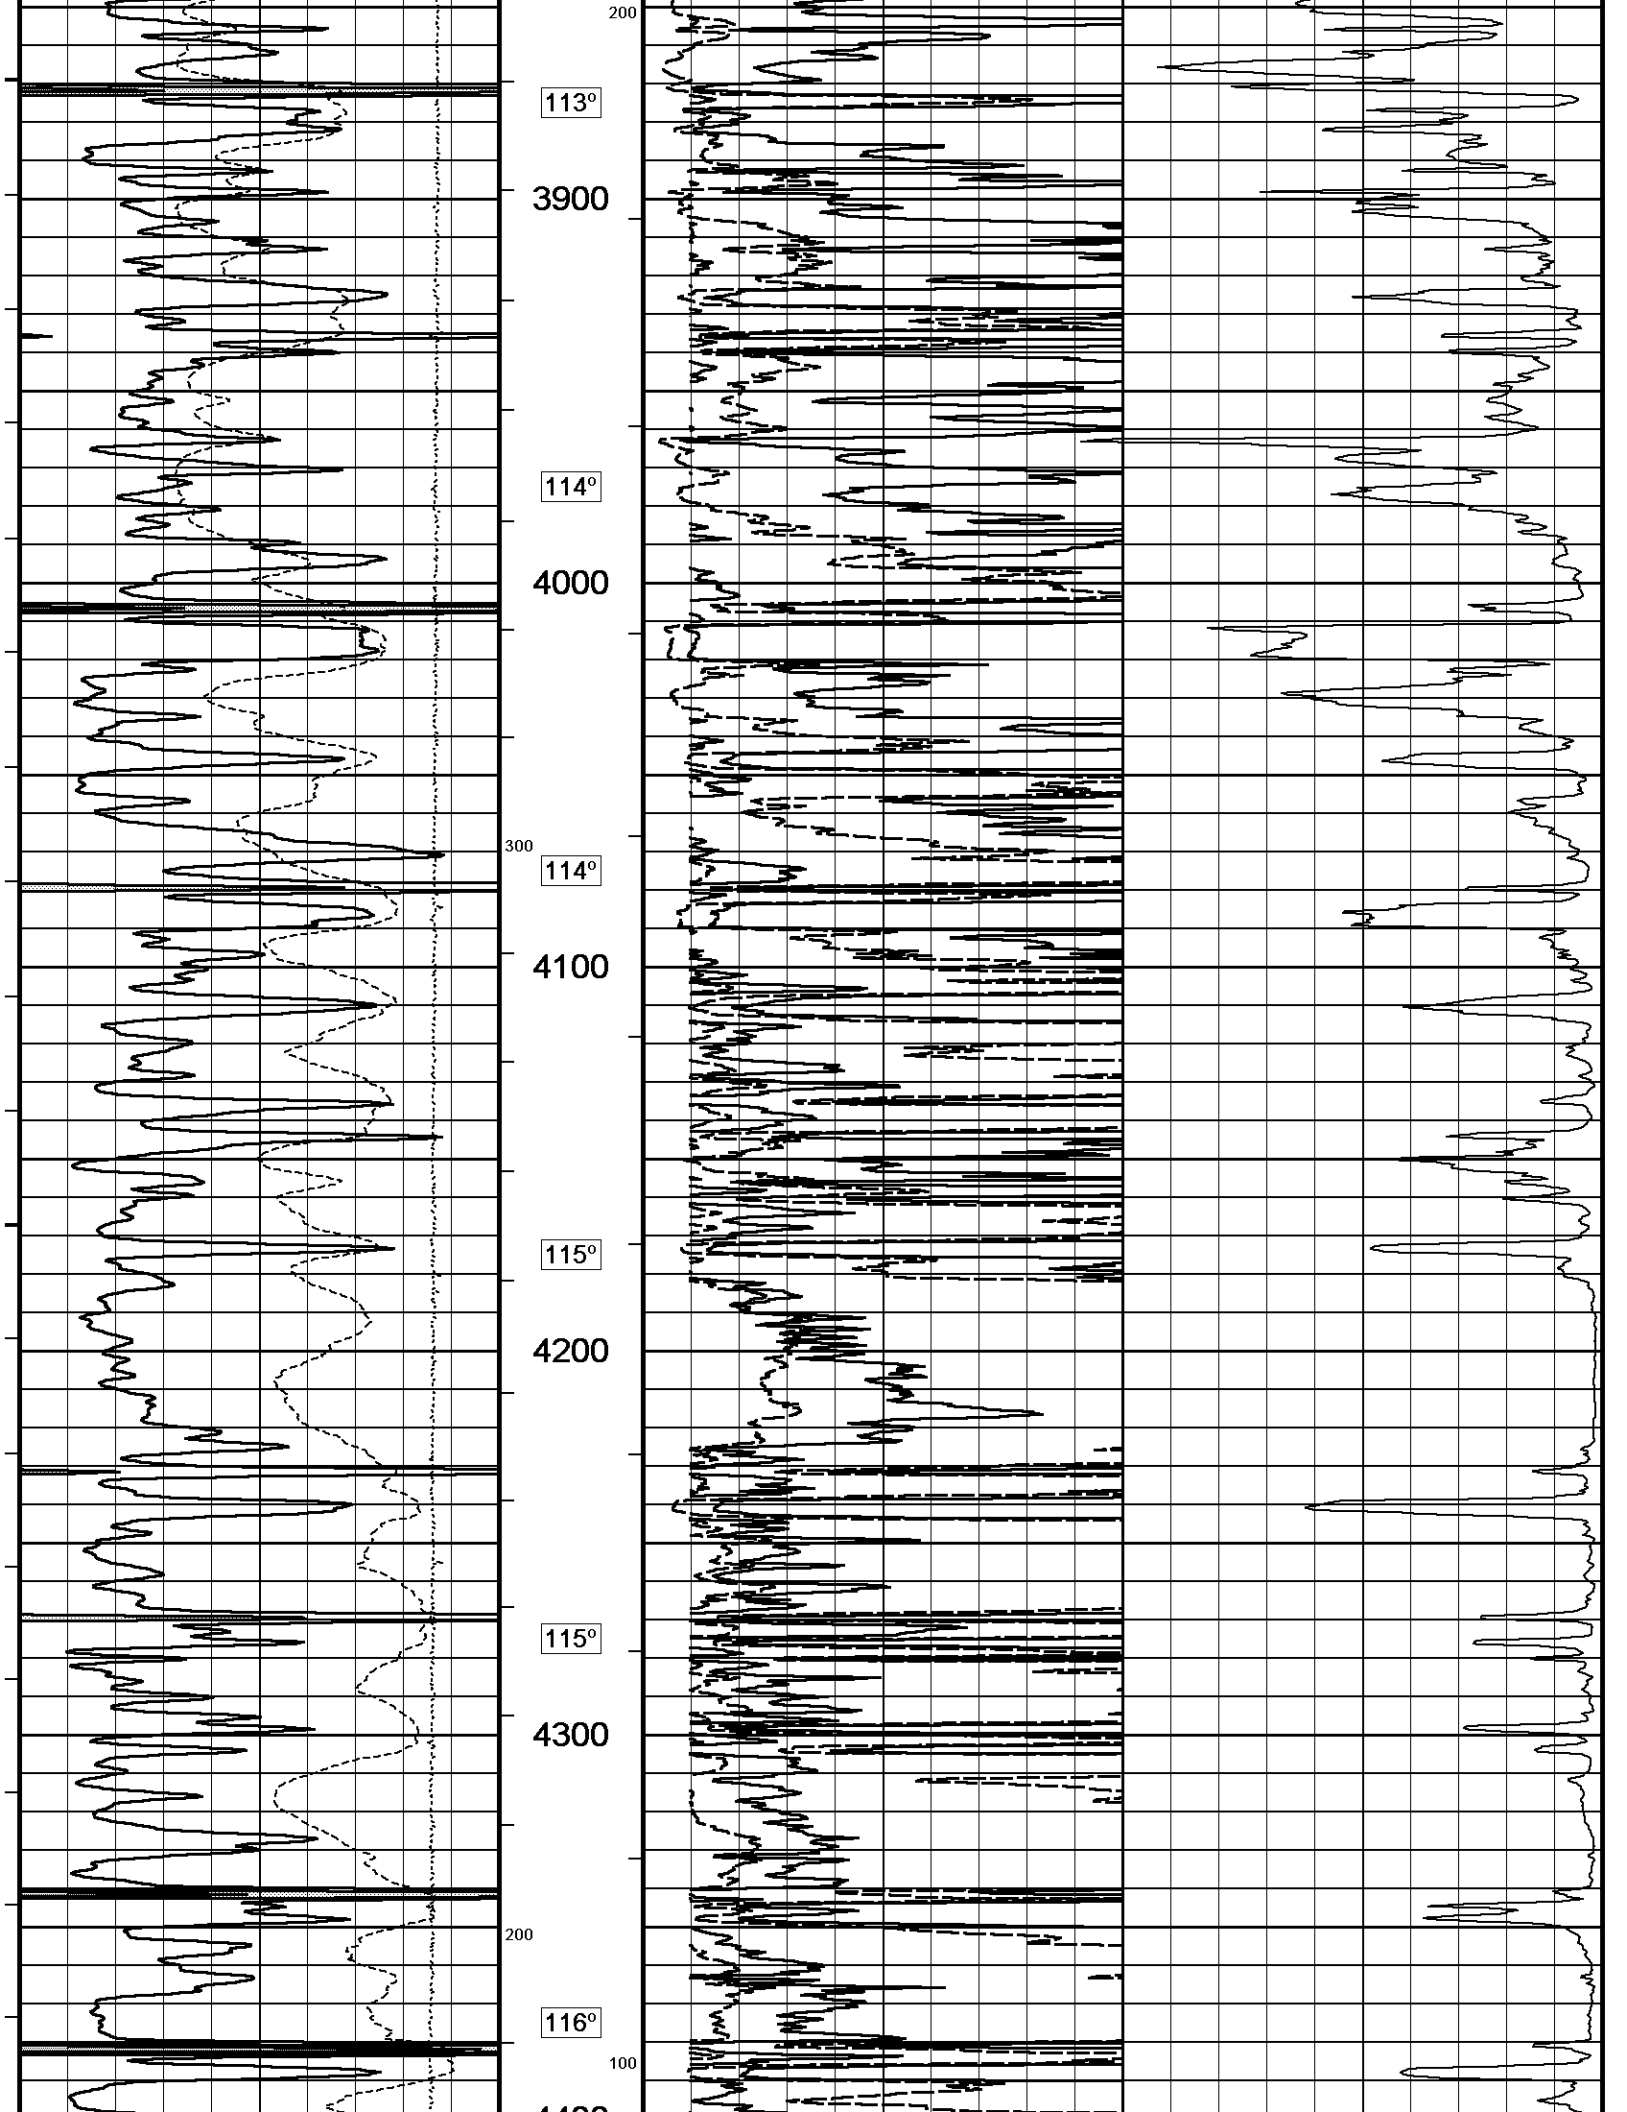

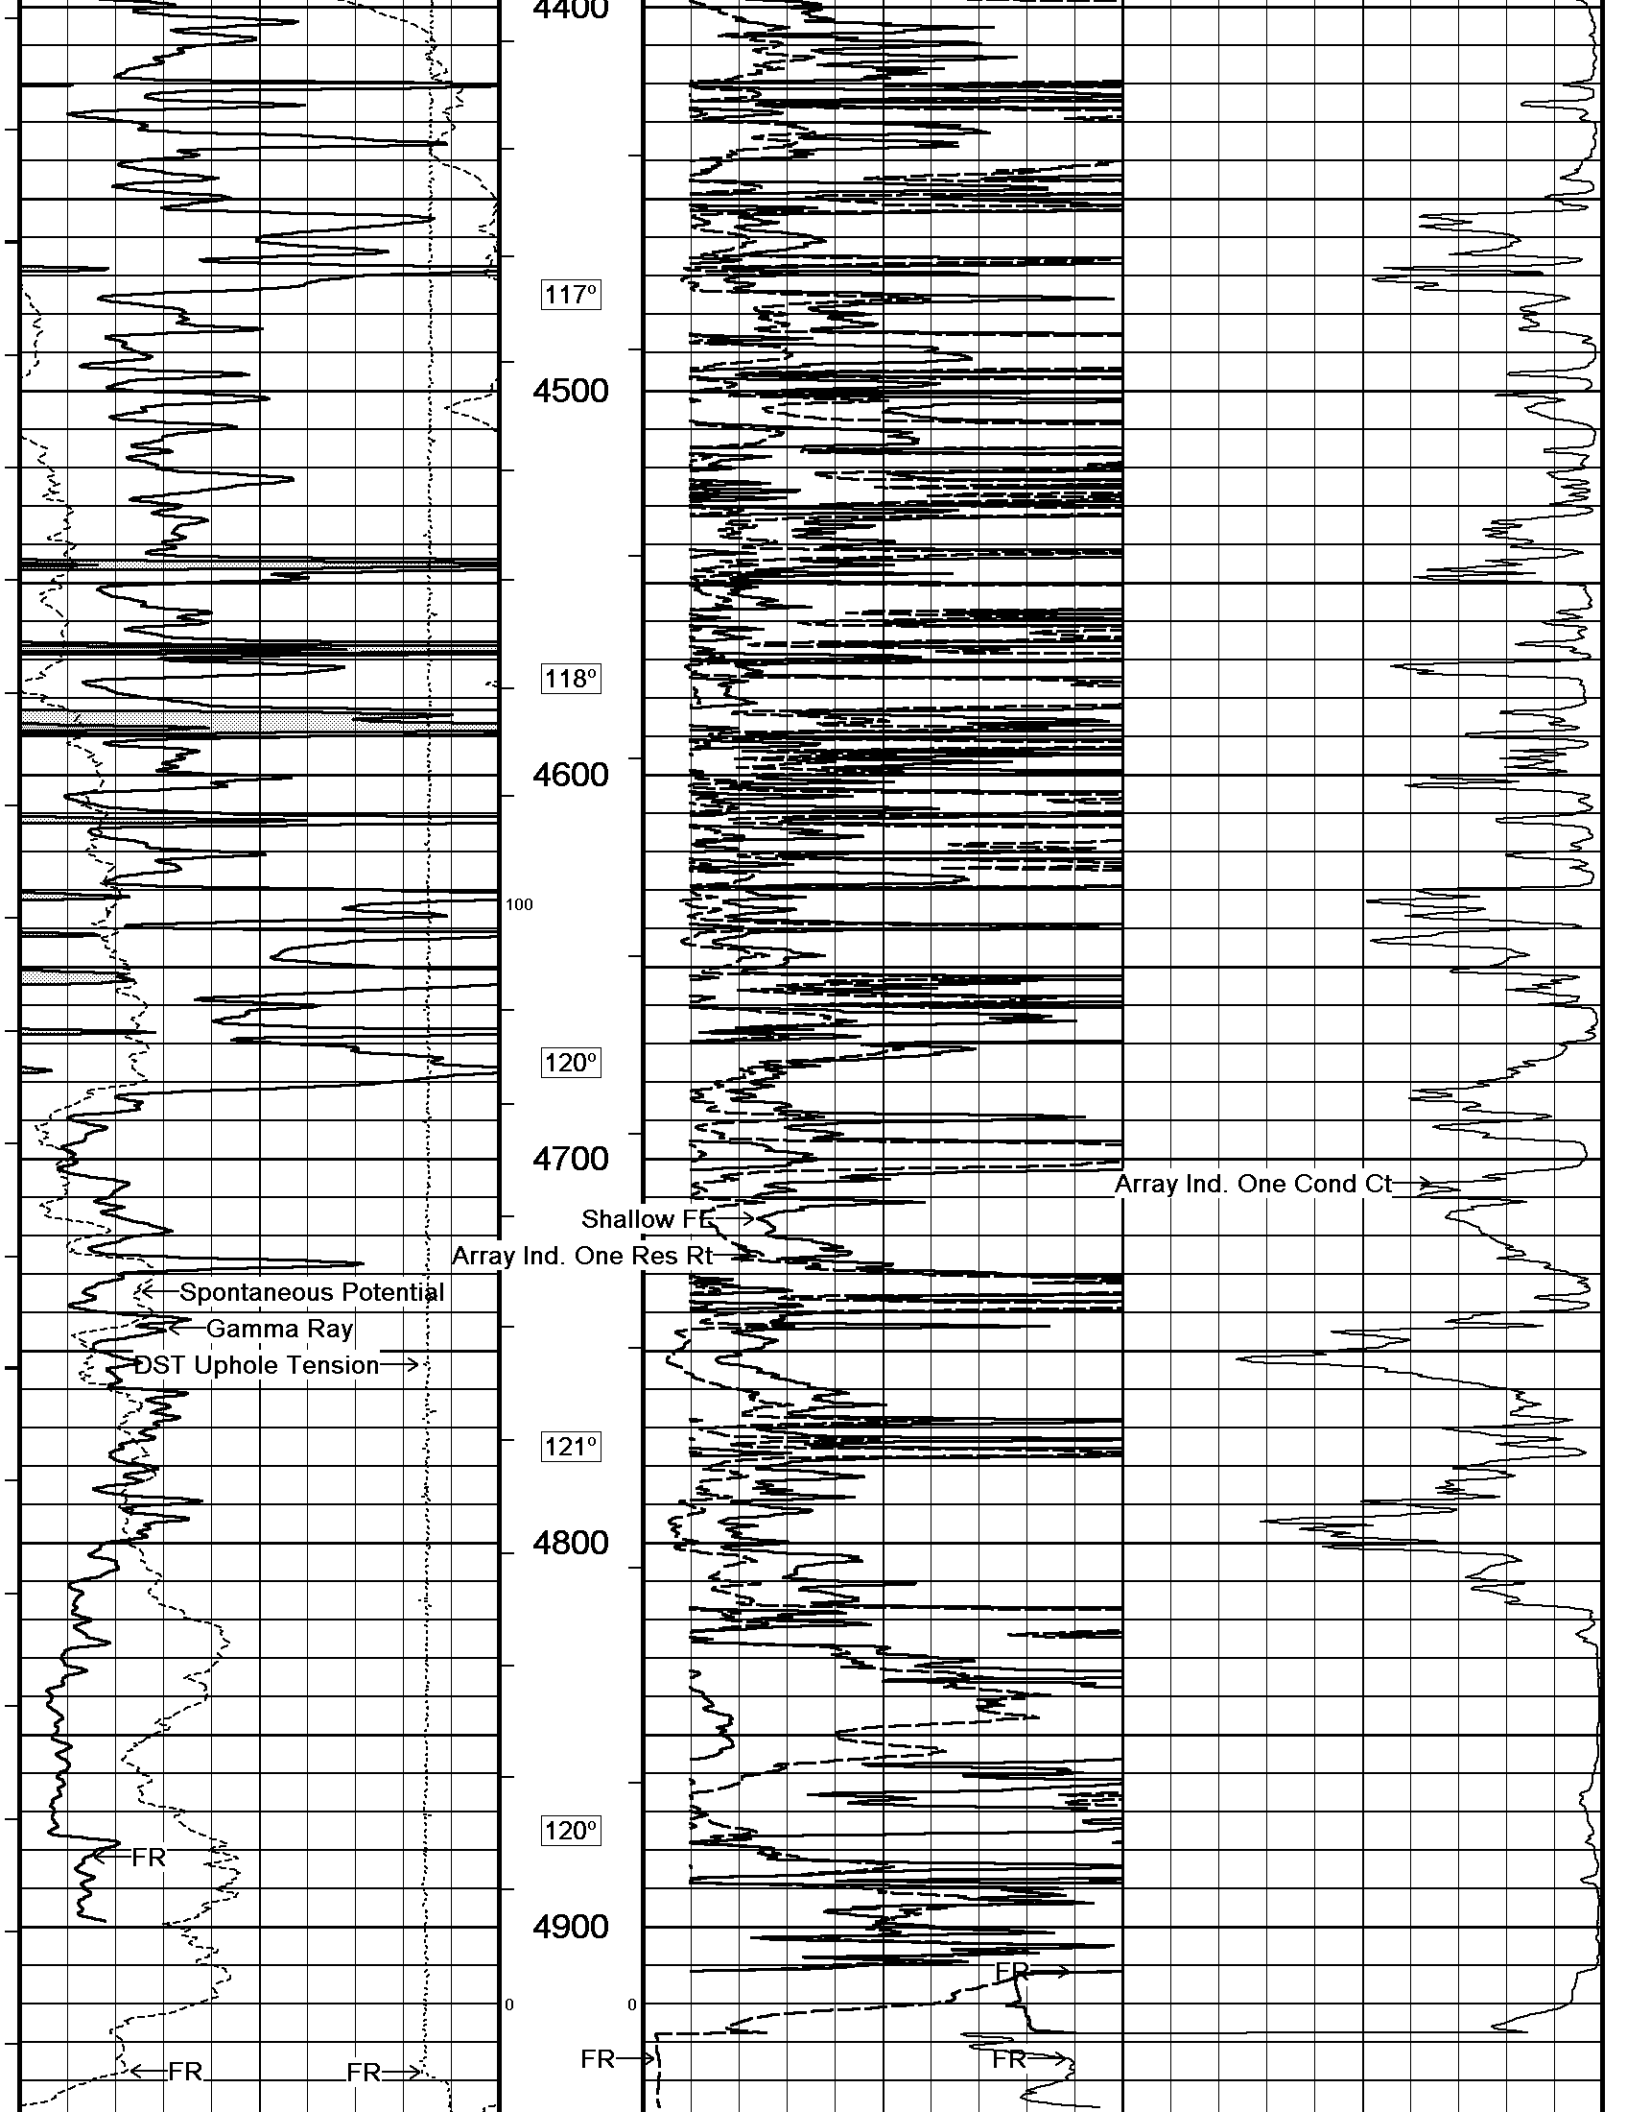

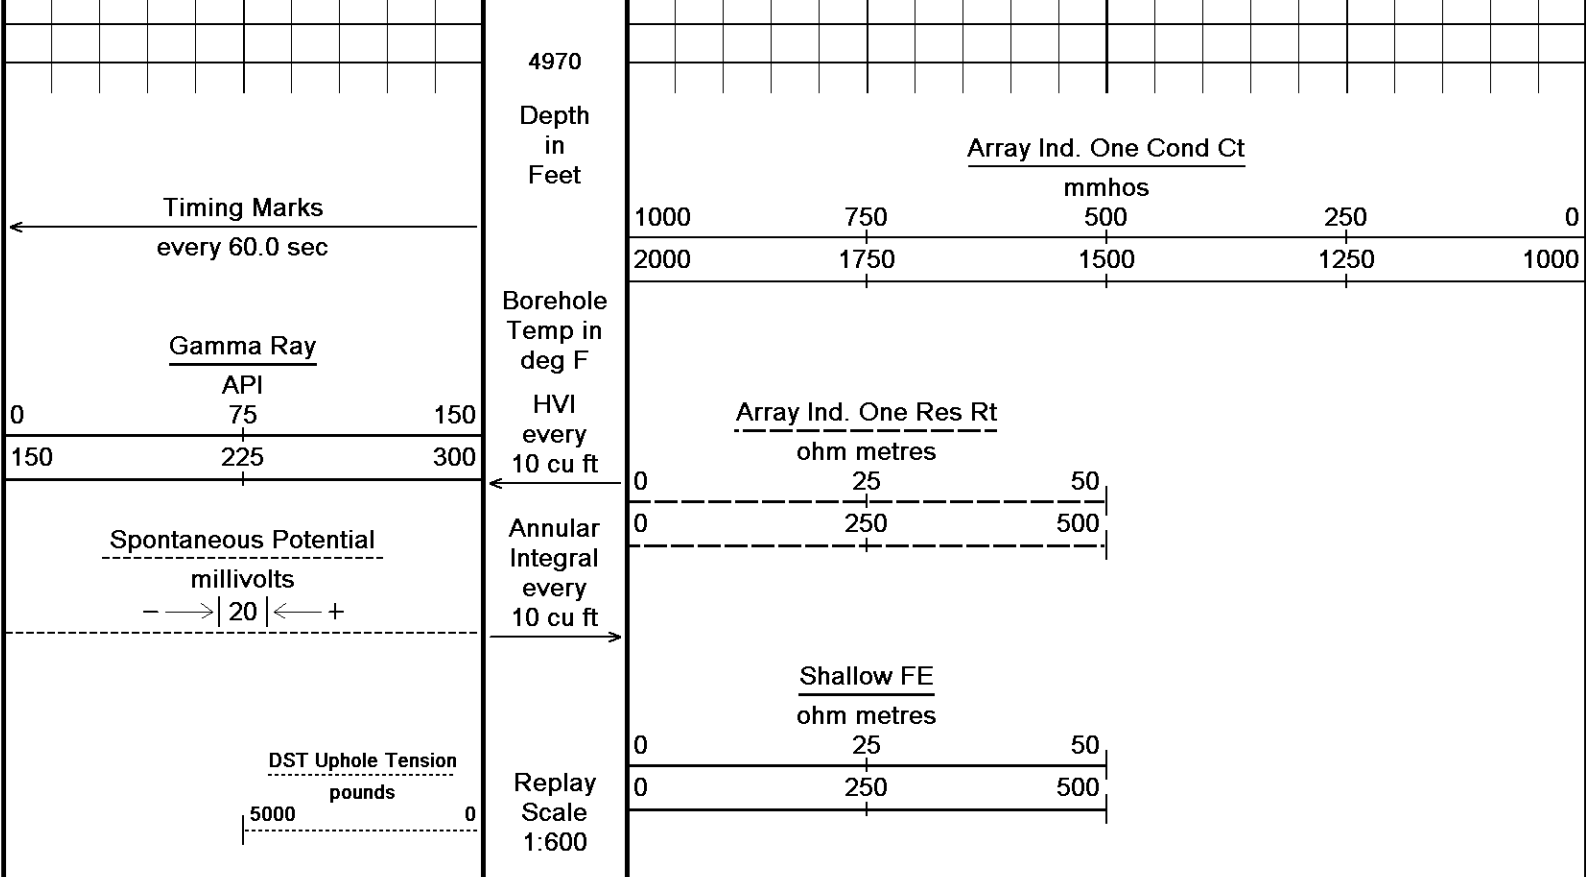



Depth Based Data - Maximum Sampling Increment 10.0cm  
 Filename: C:\Minimus 13.08.2113\Logs\FIML ...FIML Natural Resources Mulville #15B-18-2029\_002.dta  
 System Versions: Logged with 13.08.2113 Plotted with 13.08.2113  
 Plotted on 01-APR-2014 18:35  
 Recorded on 01-APR-2014 15:18



↑ 2 INCH MAIN ↑



↓ 5 INCH MAIN ↓


Depth Based Data - Maximum Sampling Increment 10.0cm  
 Filename: C:\Minimus 13.08.2113\Logs\FIML ...FIML Natural Resources Mulville #15B-18-2029\_002.dta  
 System Versions: Logged with 13.08.2113 Plotted with 13.08.2113  
 Plotted on 01-APR-2014 18:35  
 Recorded on 01-APR-2014 15:18

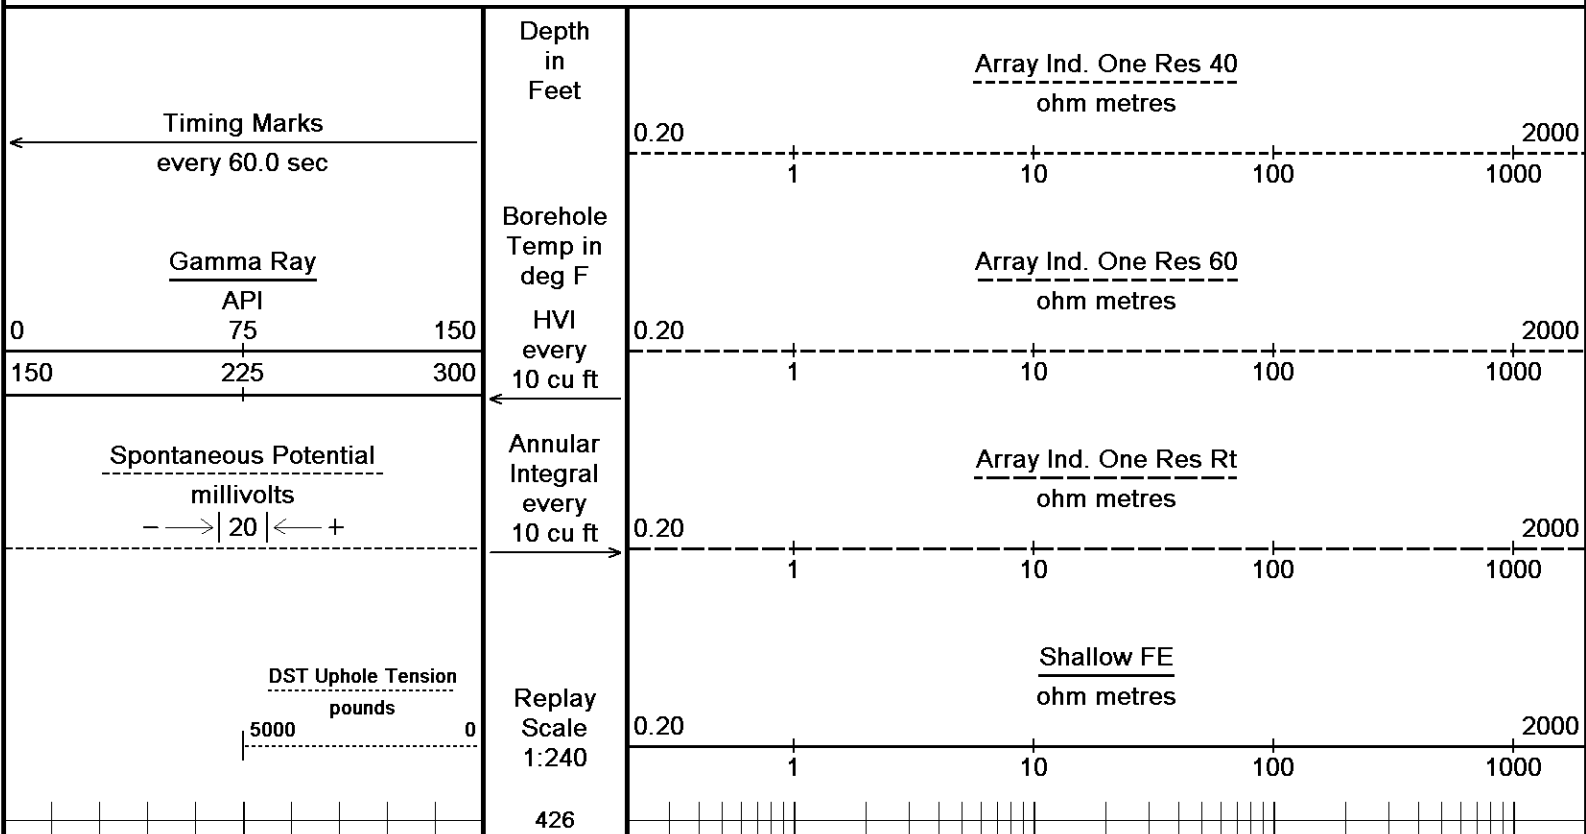

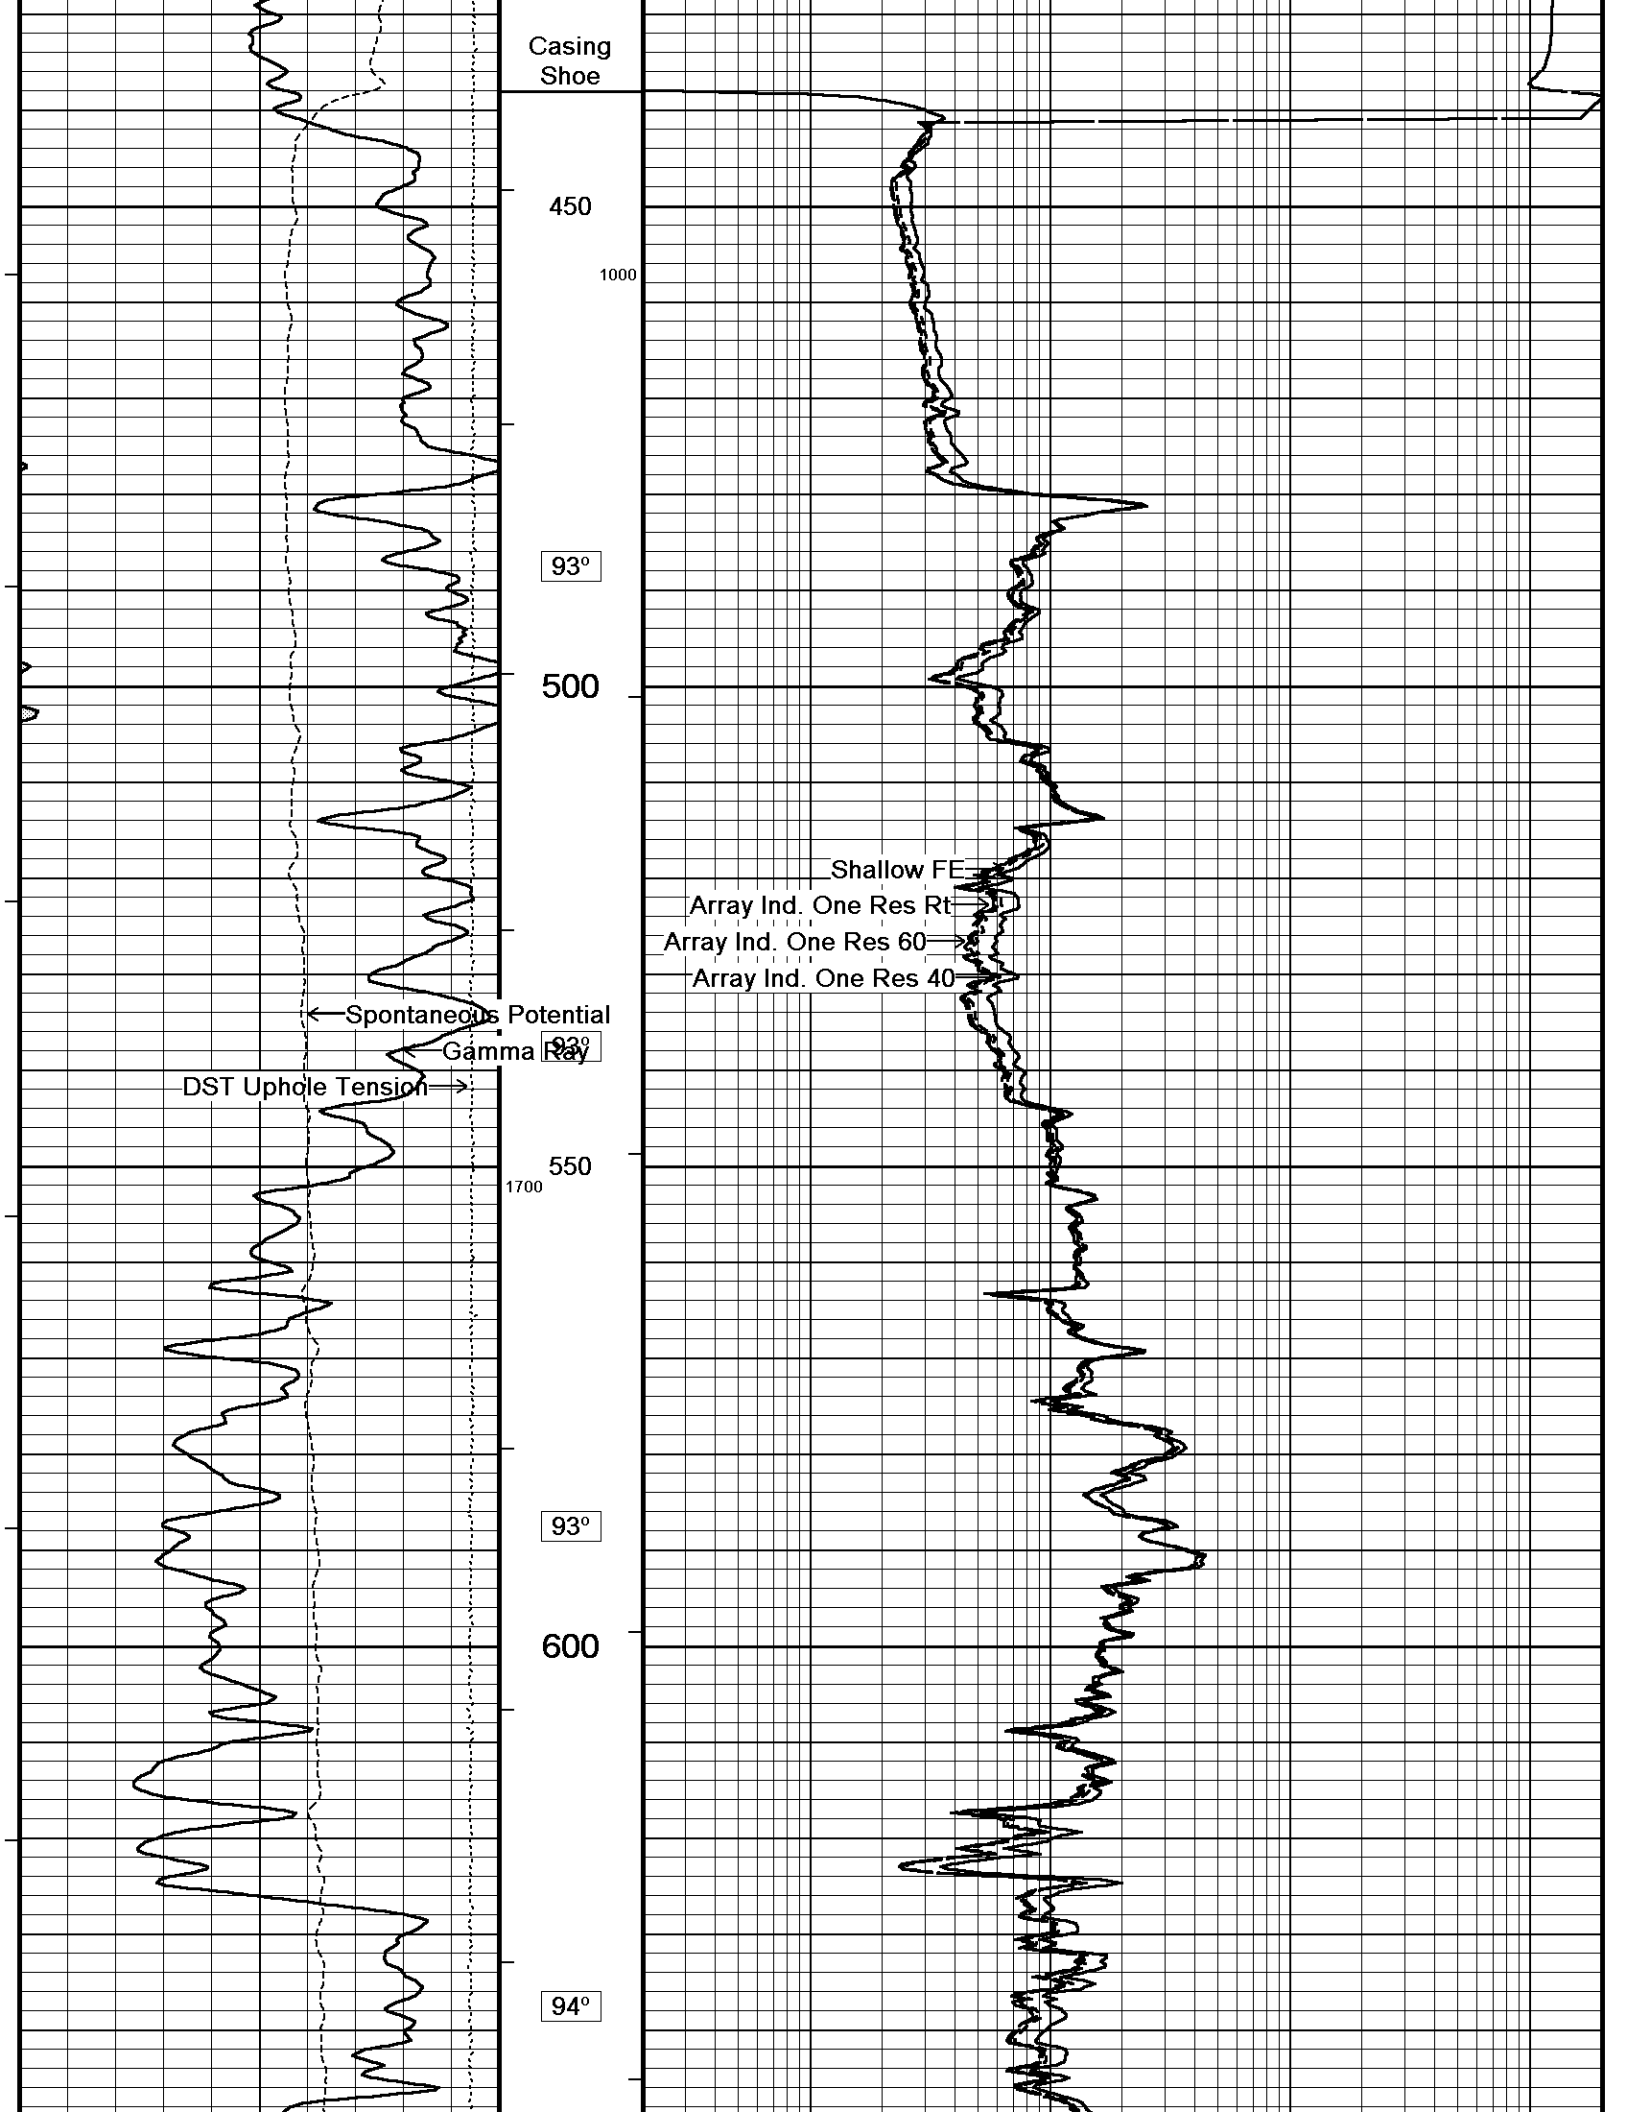

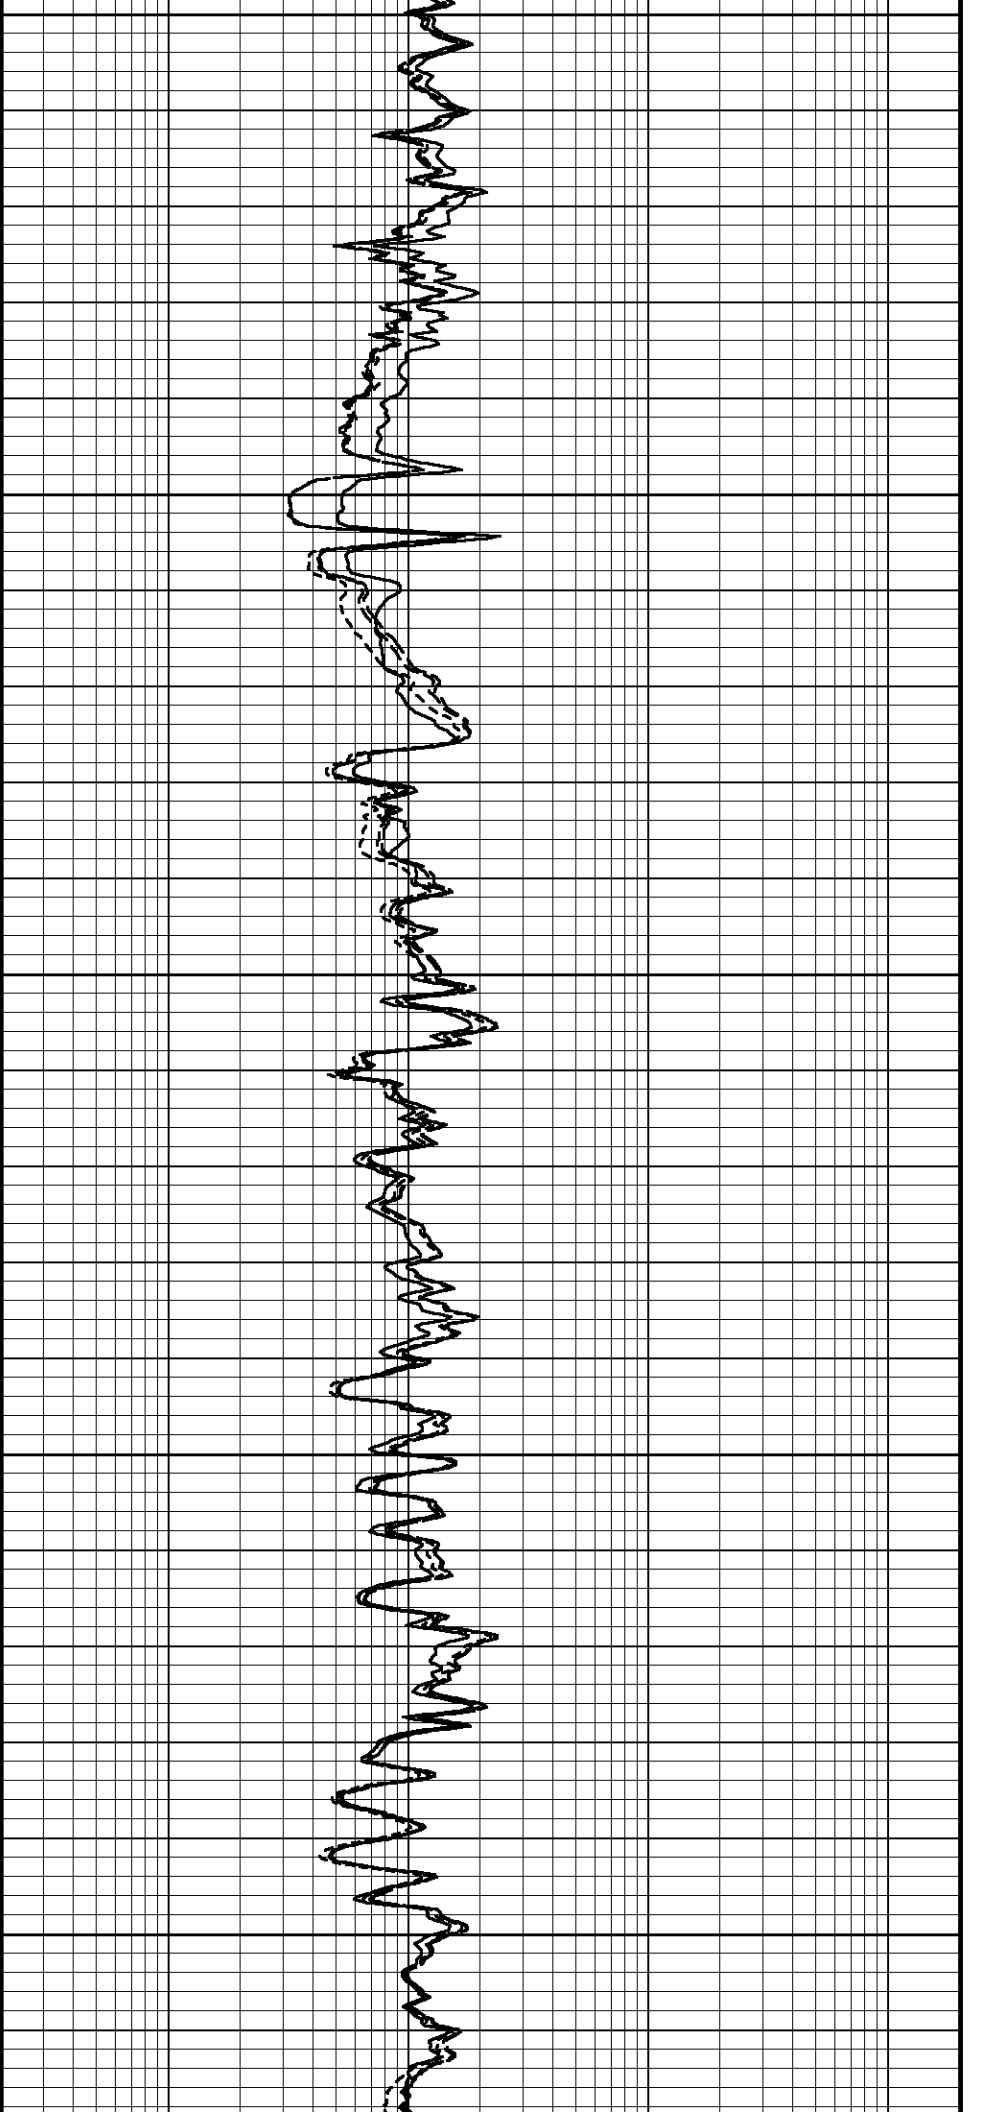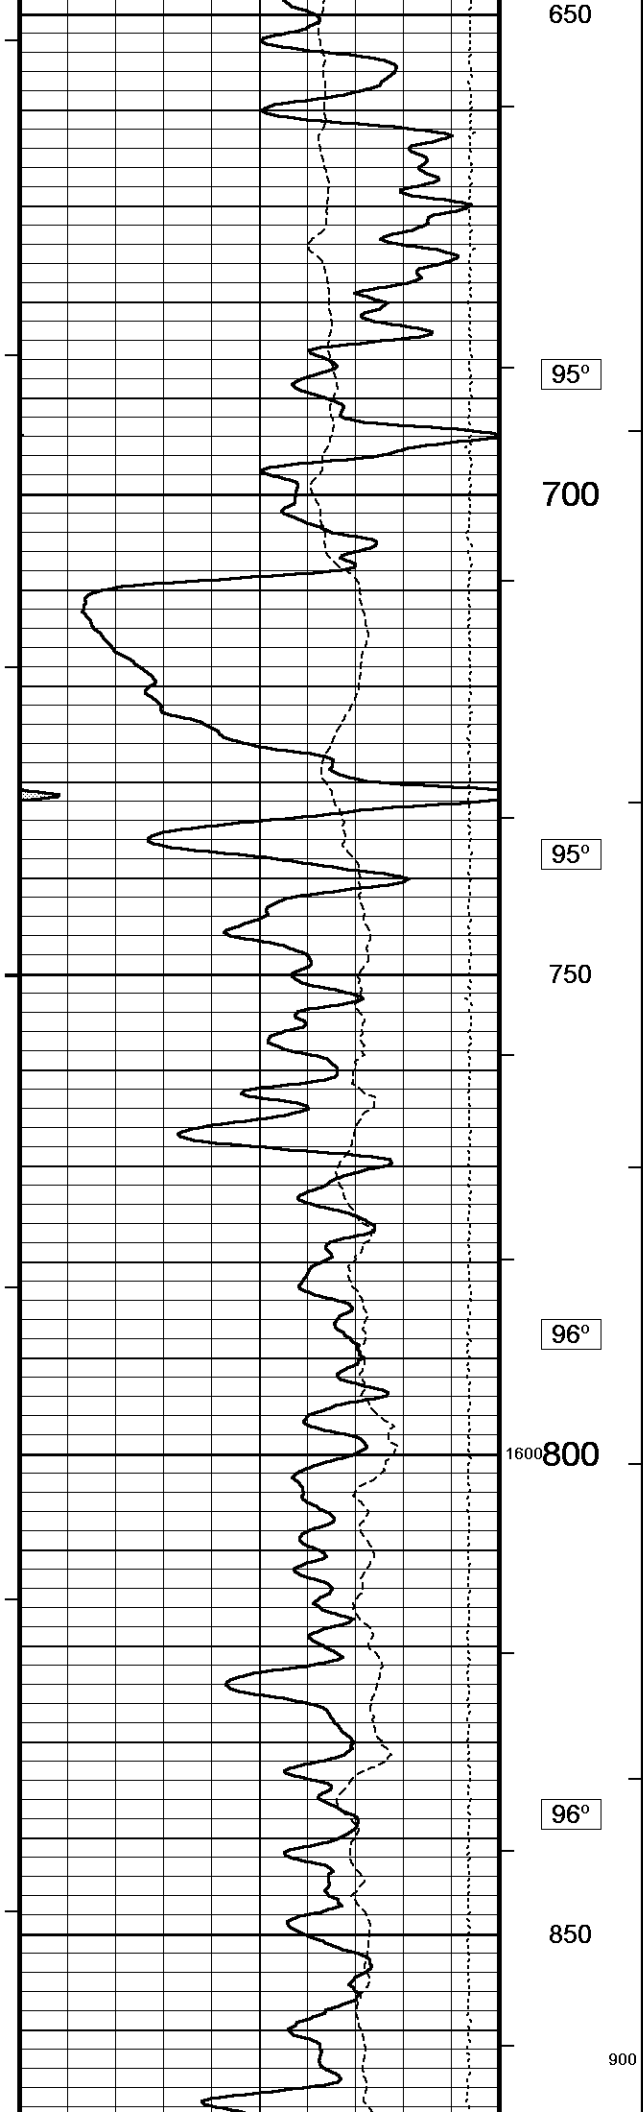

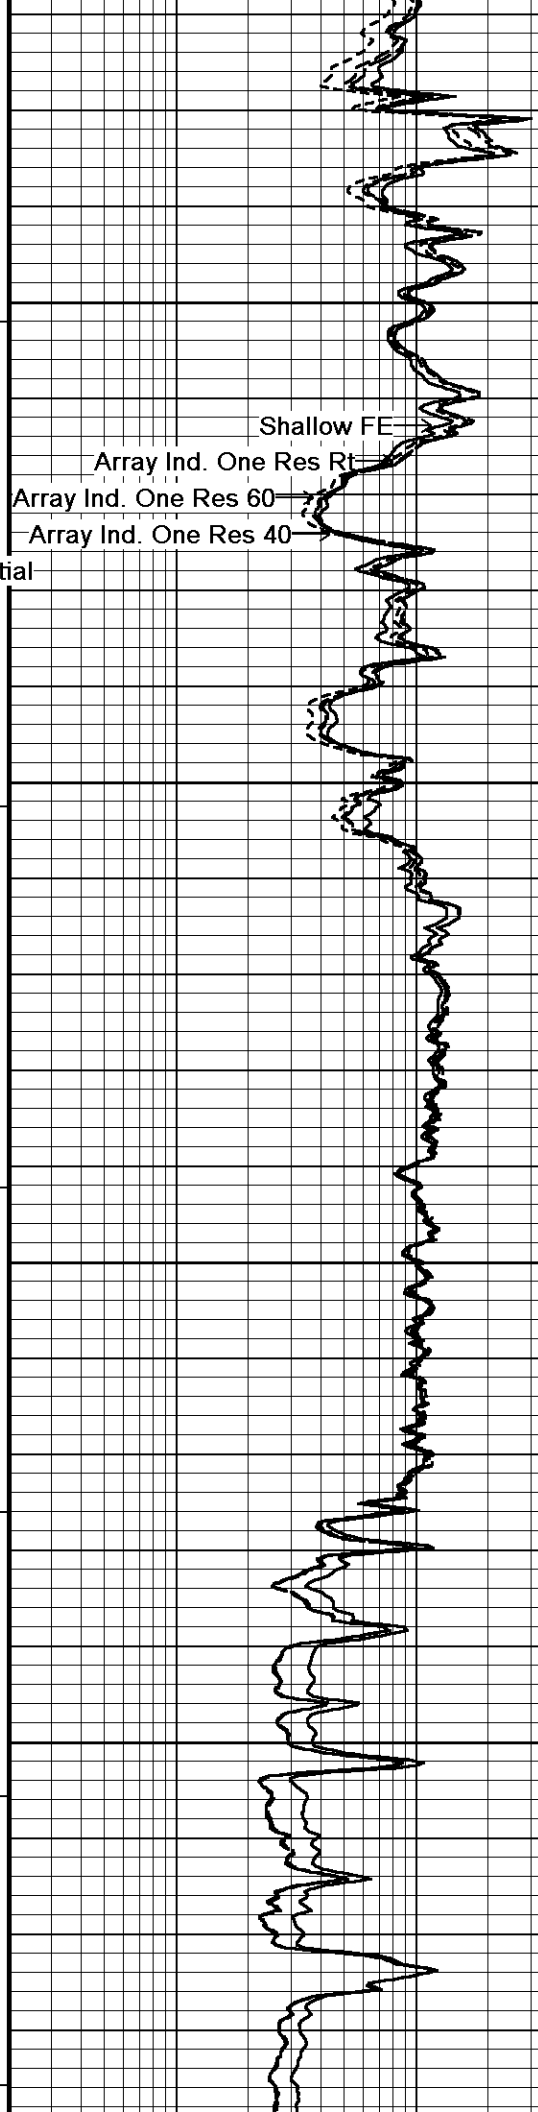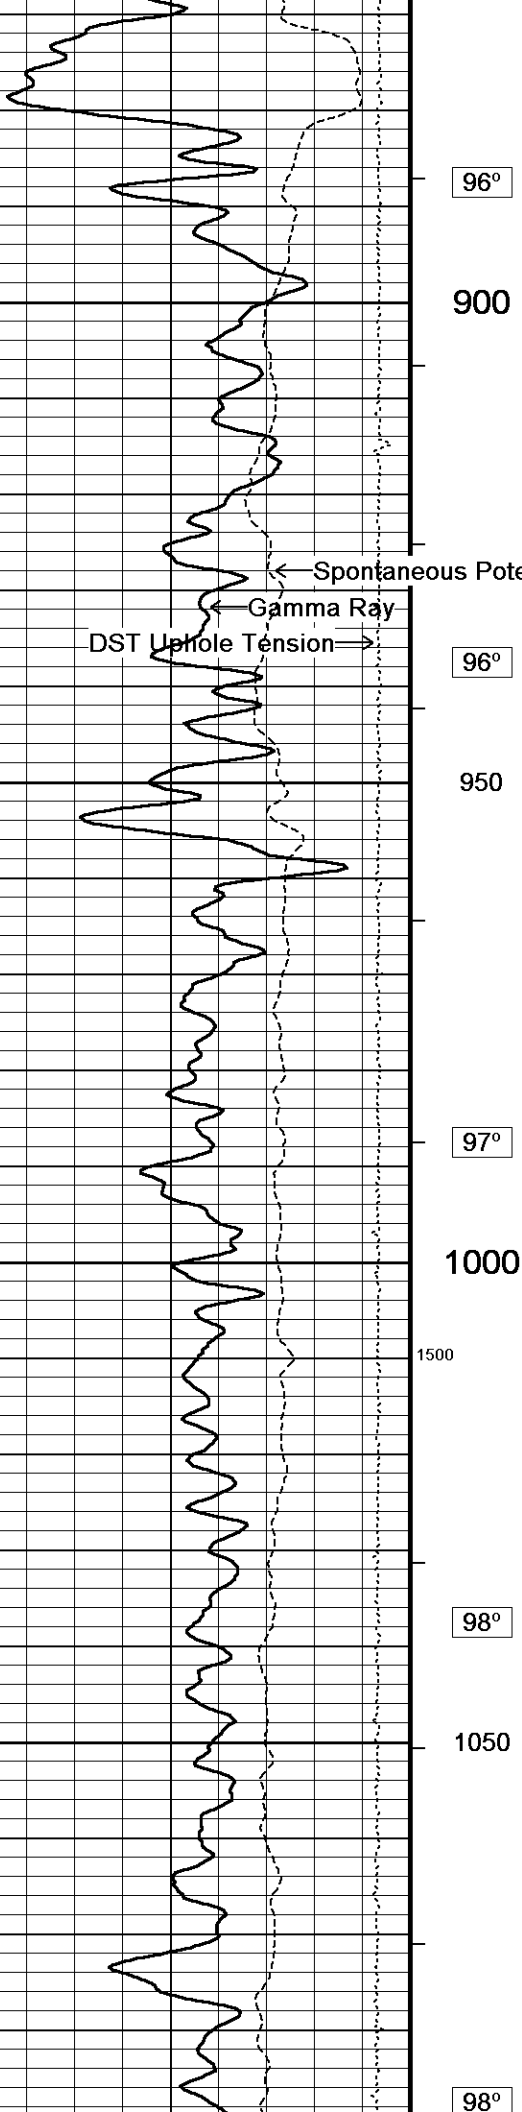

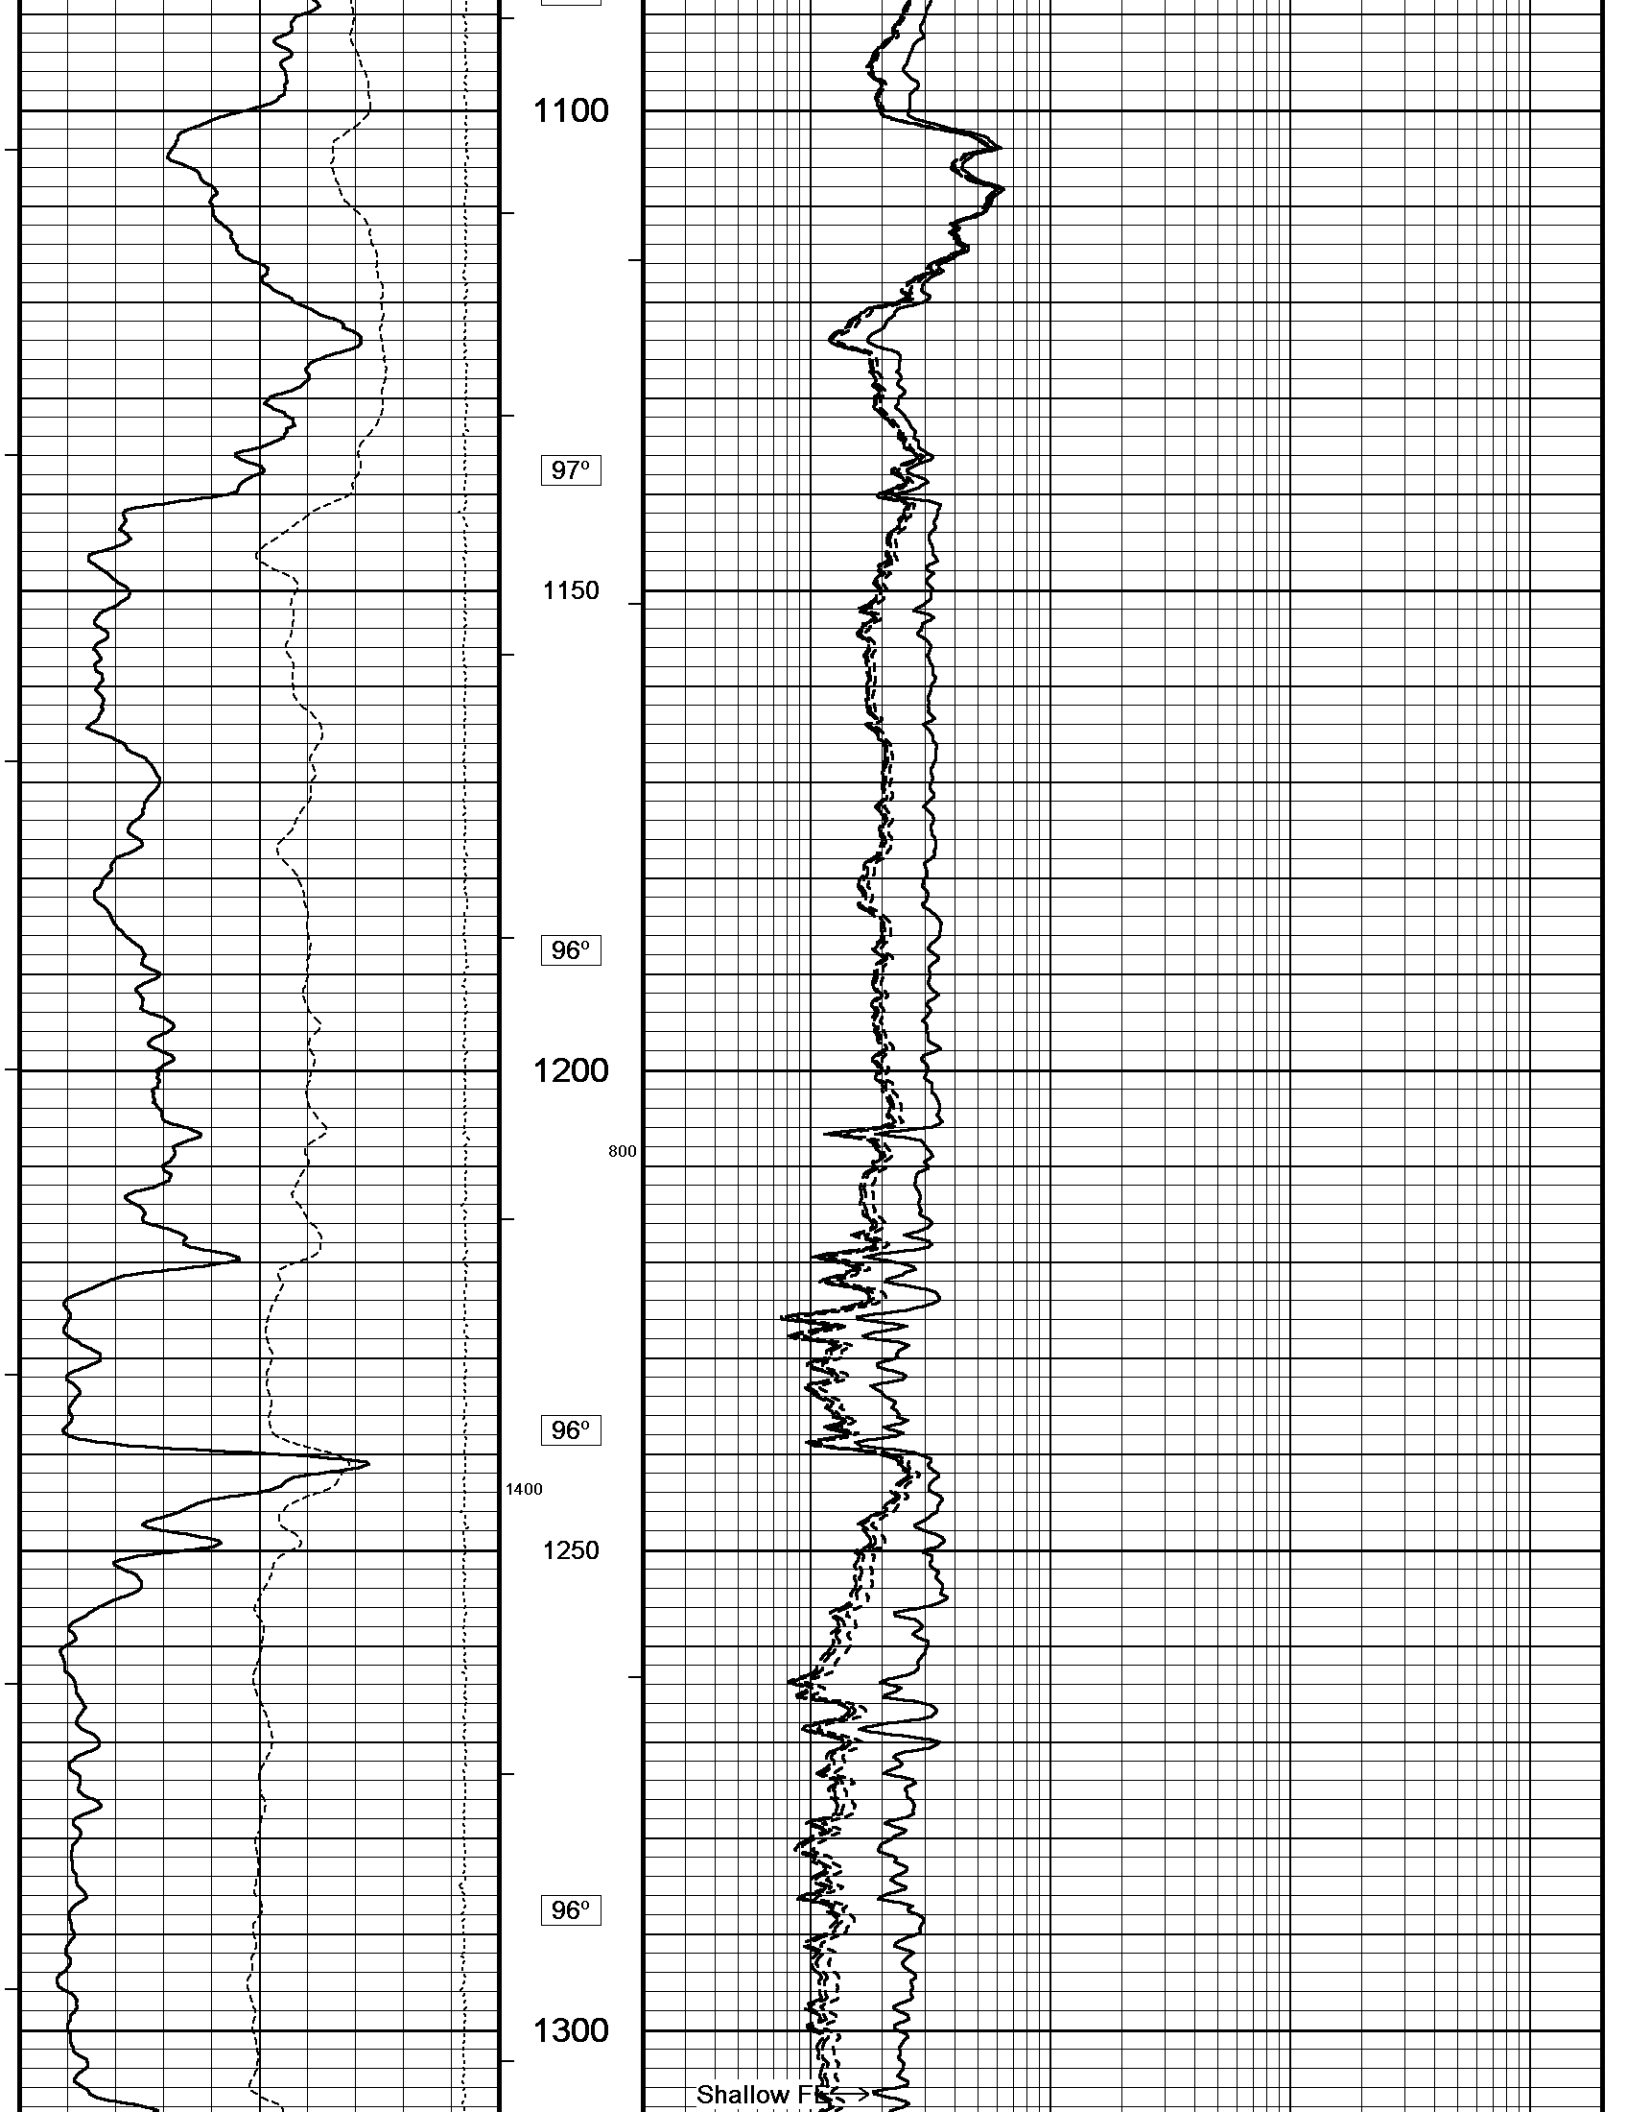

Array Ind. One Res Rt  
Array Ind. One Res 60  
Array Ind. One Res 40

← Spontaneous Potential

← Gamma Ray

DST Uphole Tension →

97°

1350

97°


1400


98°



1450


98°


1500


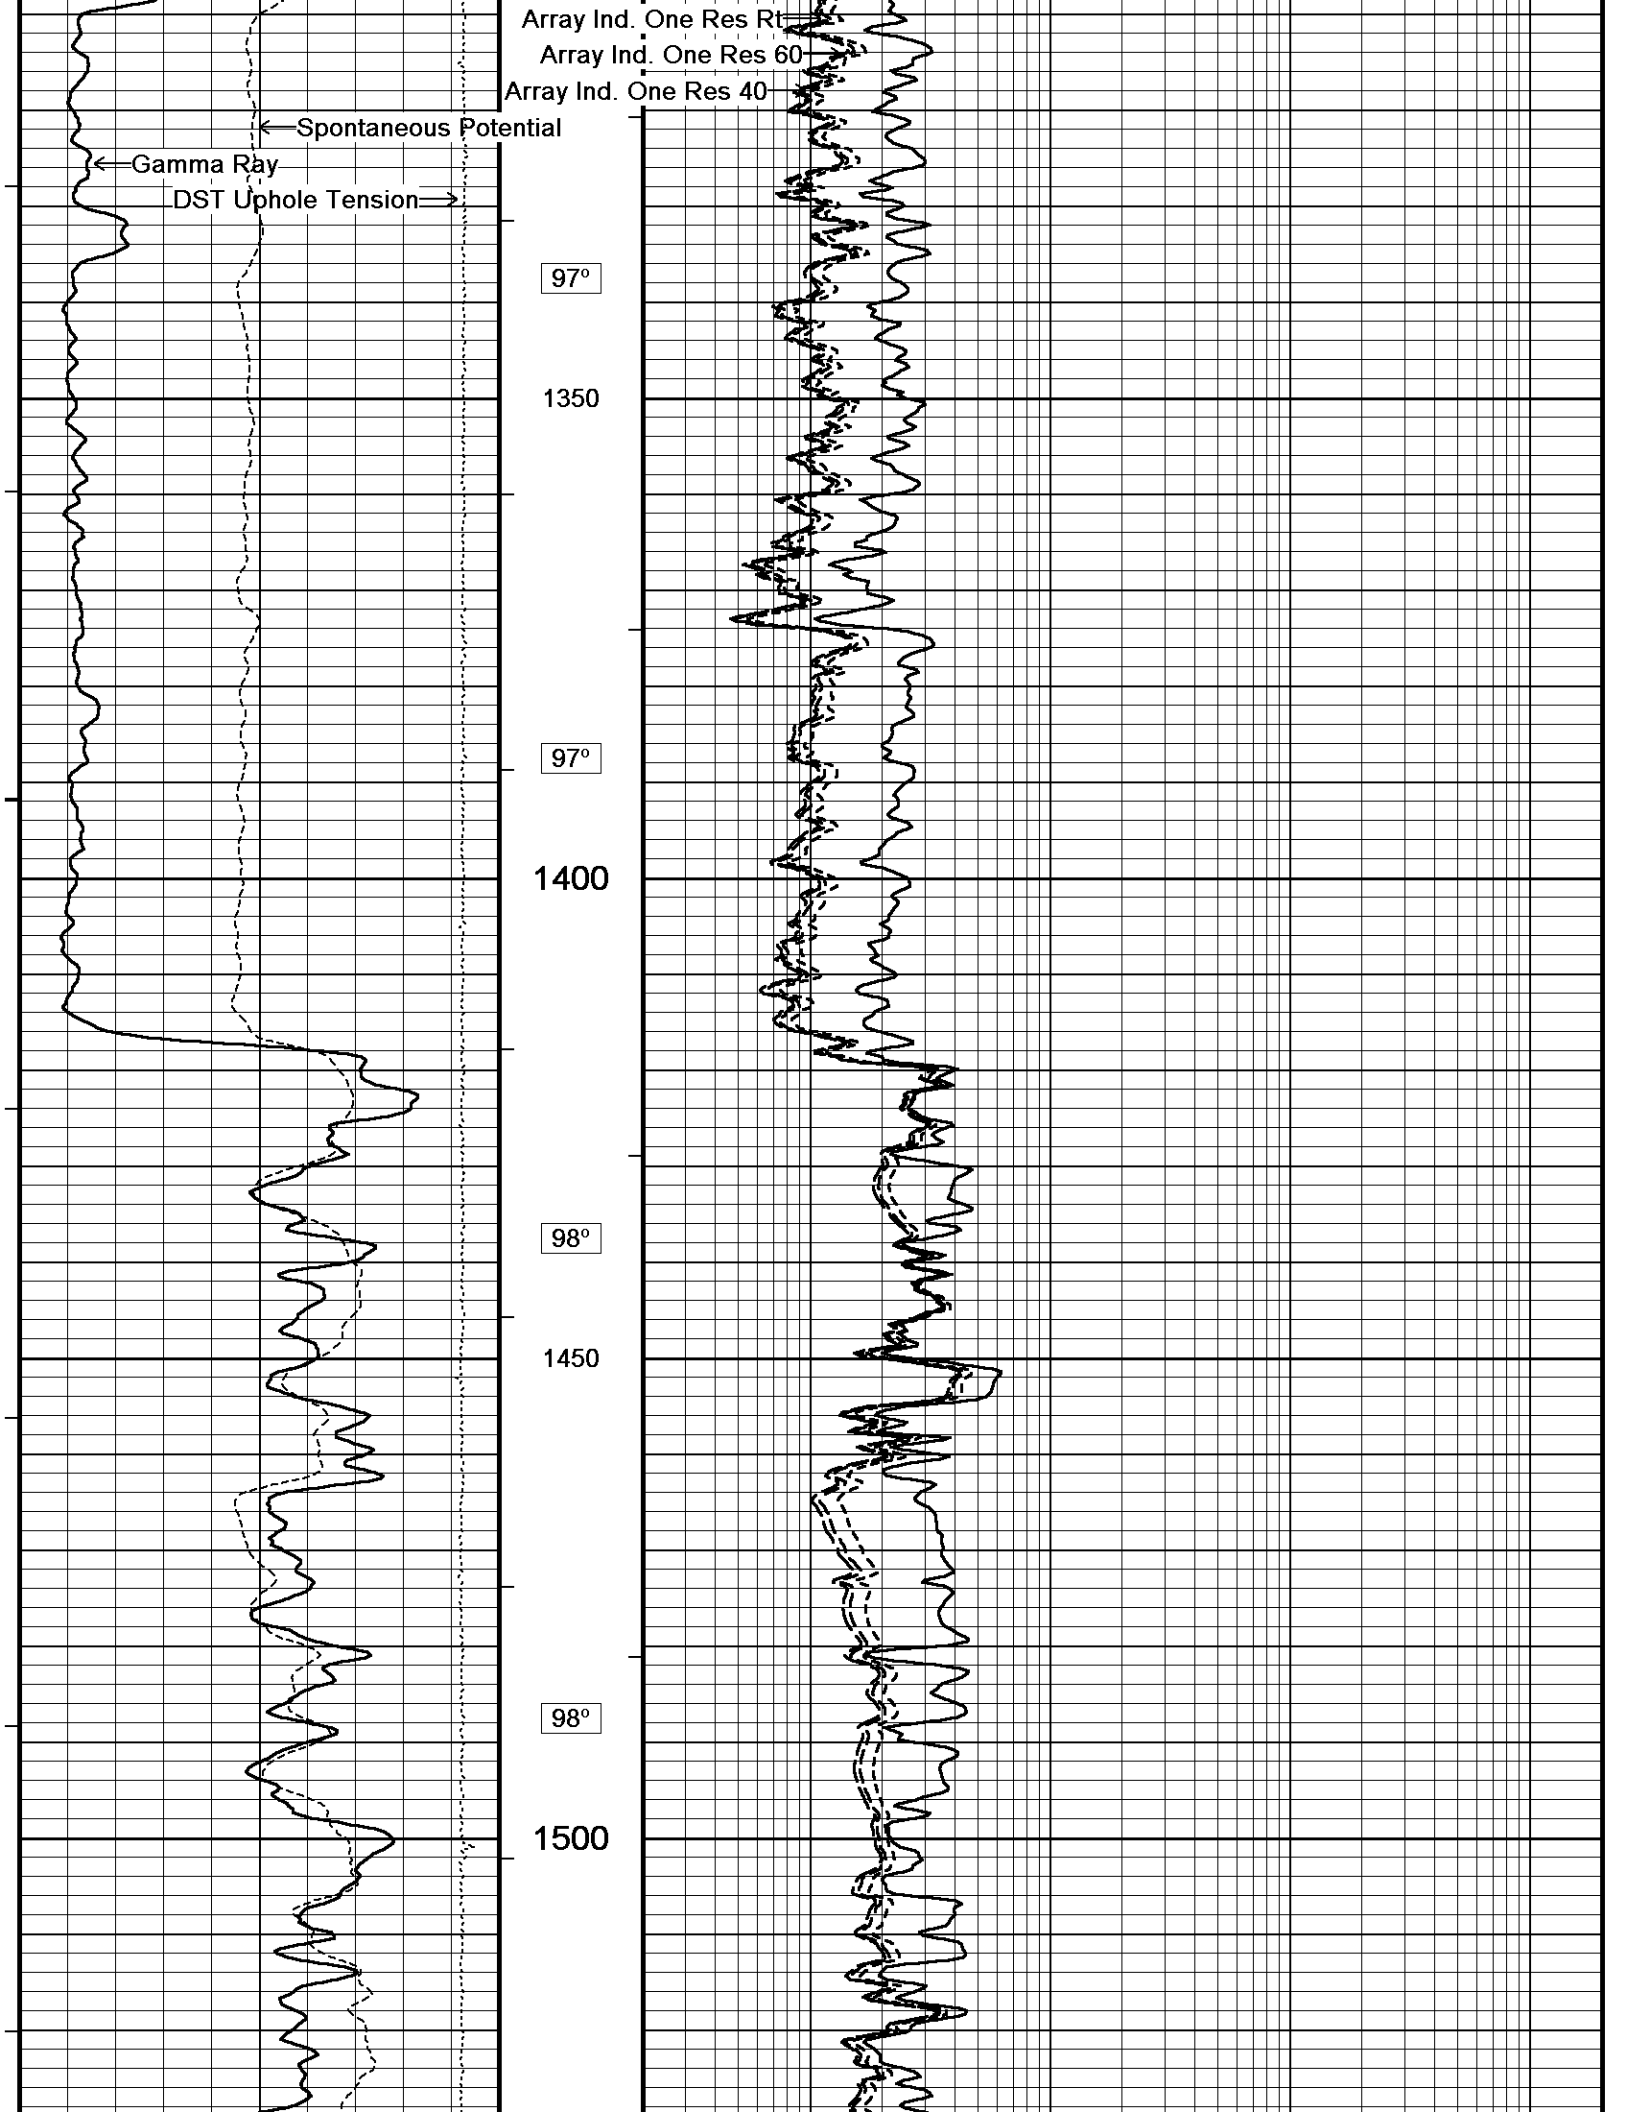


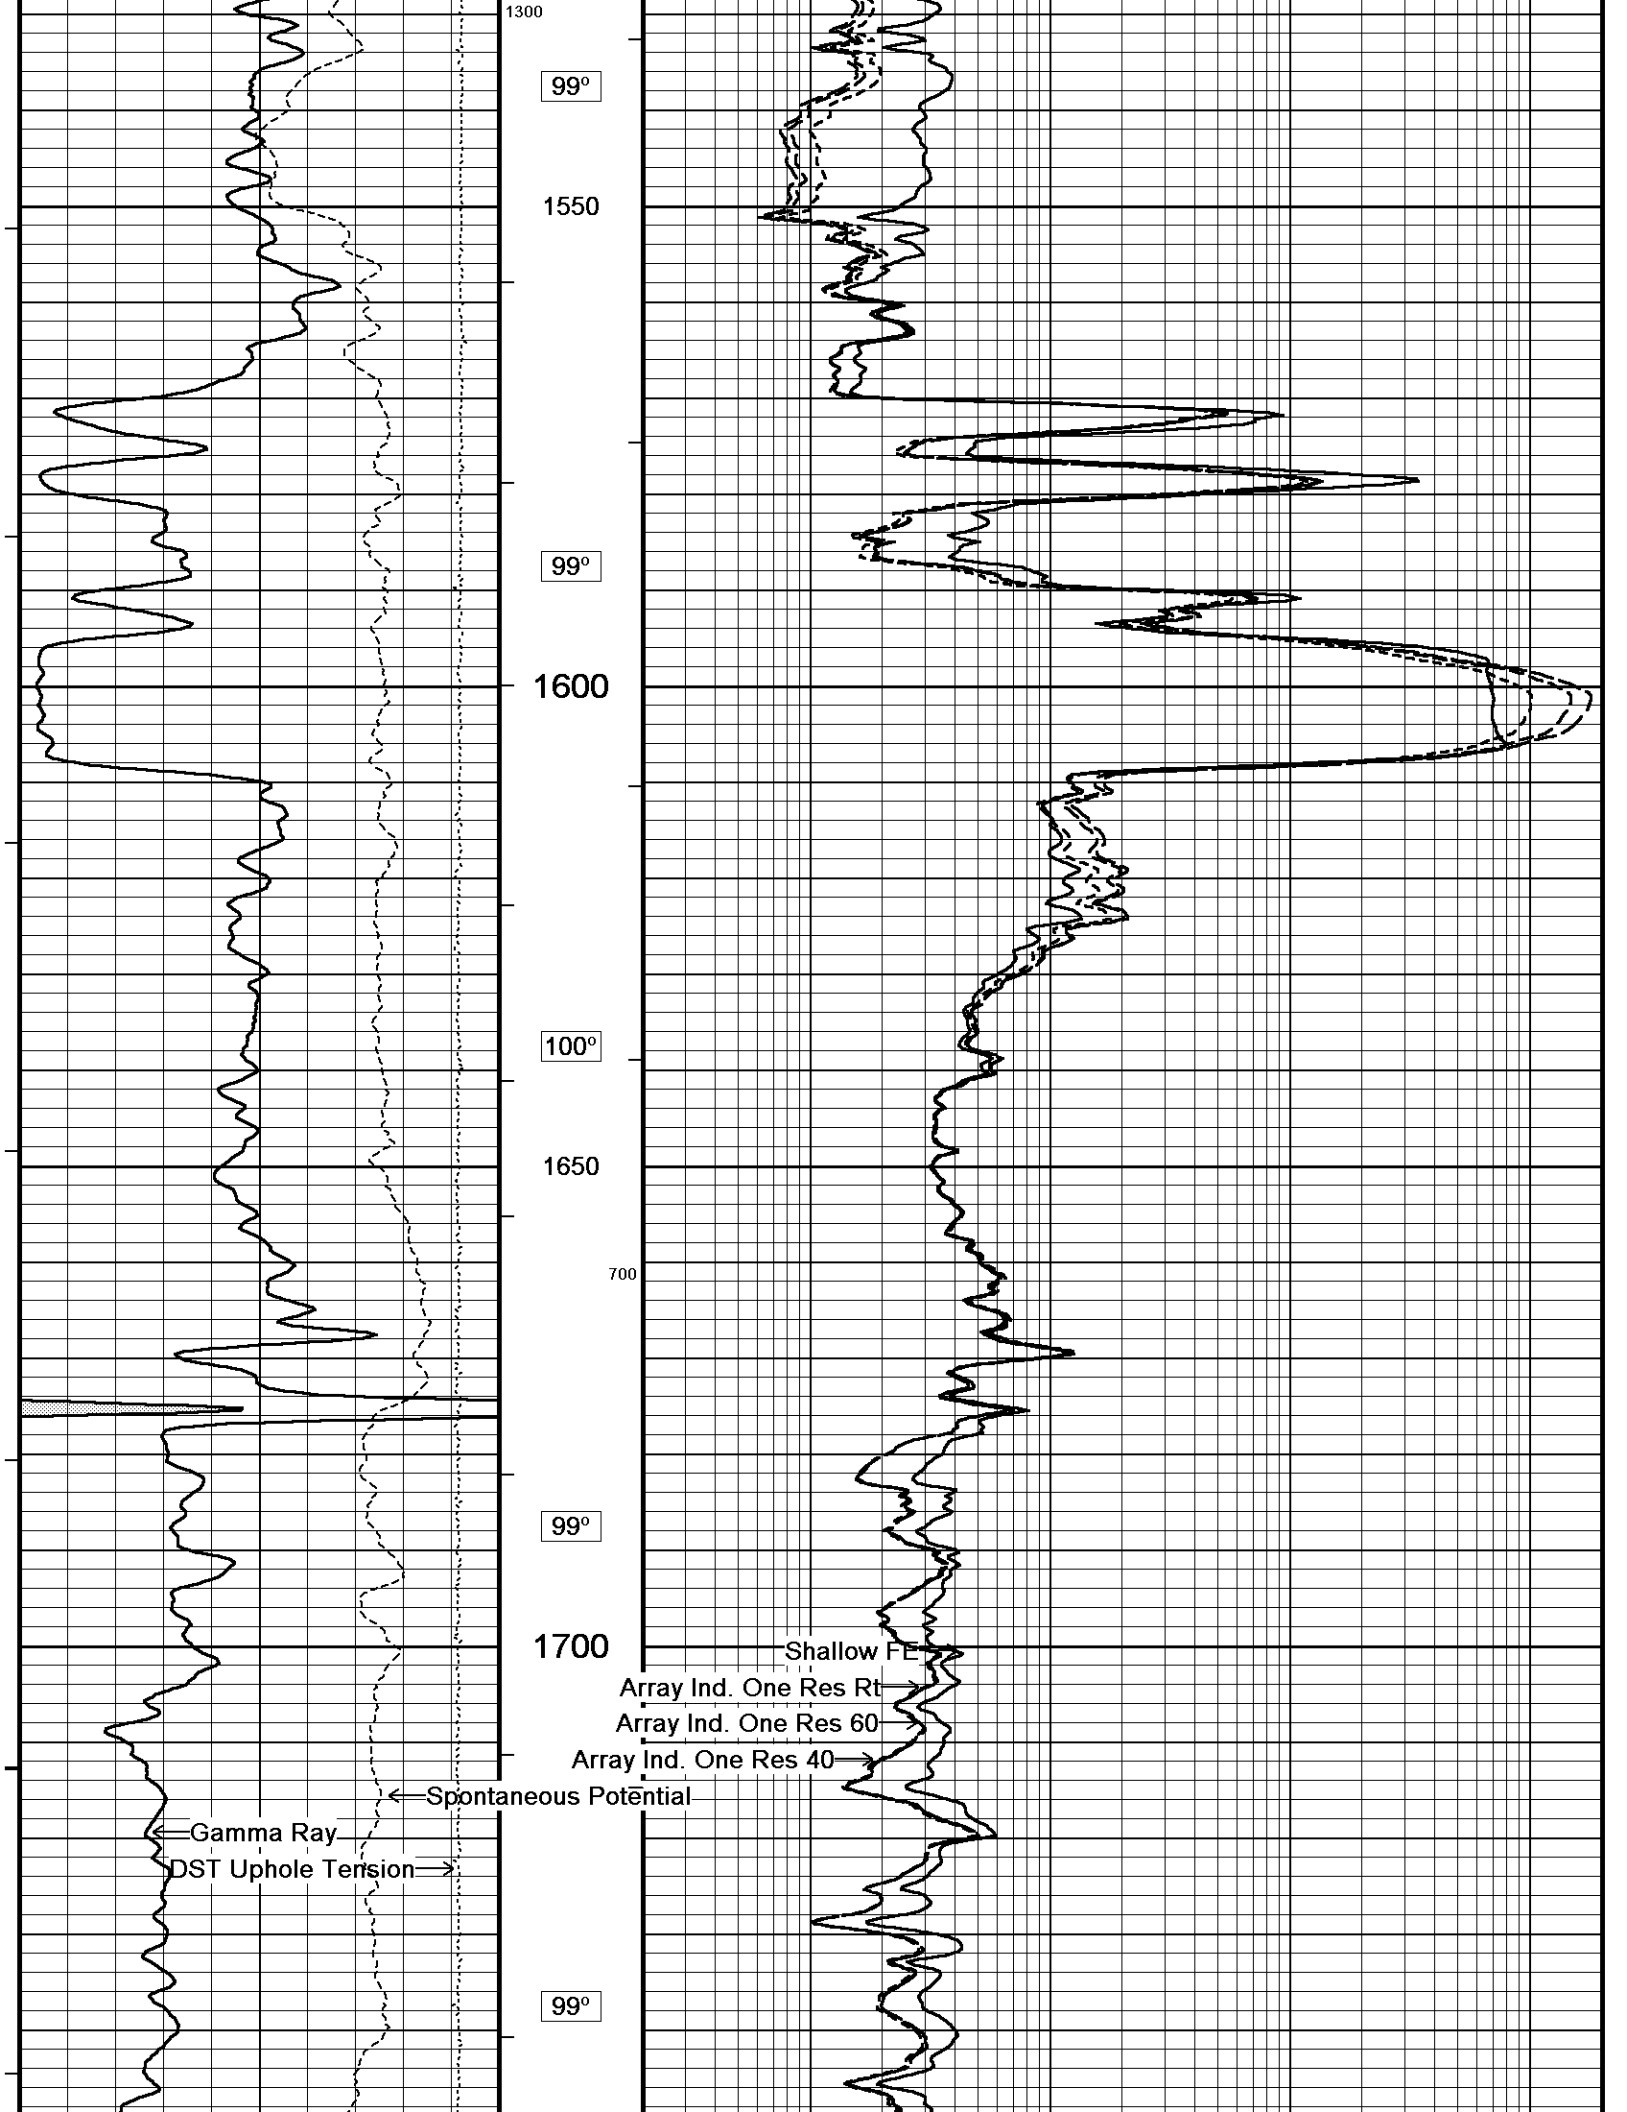

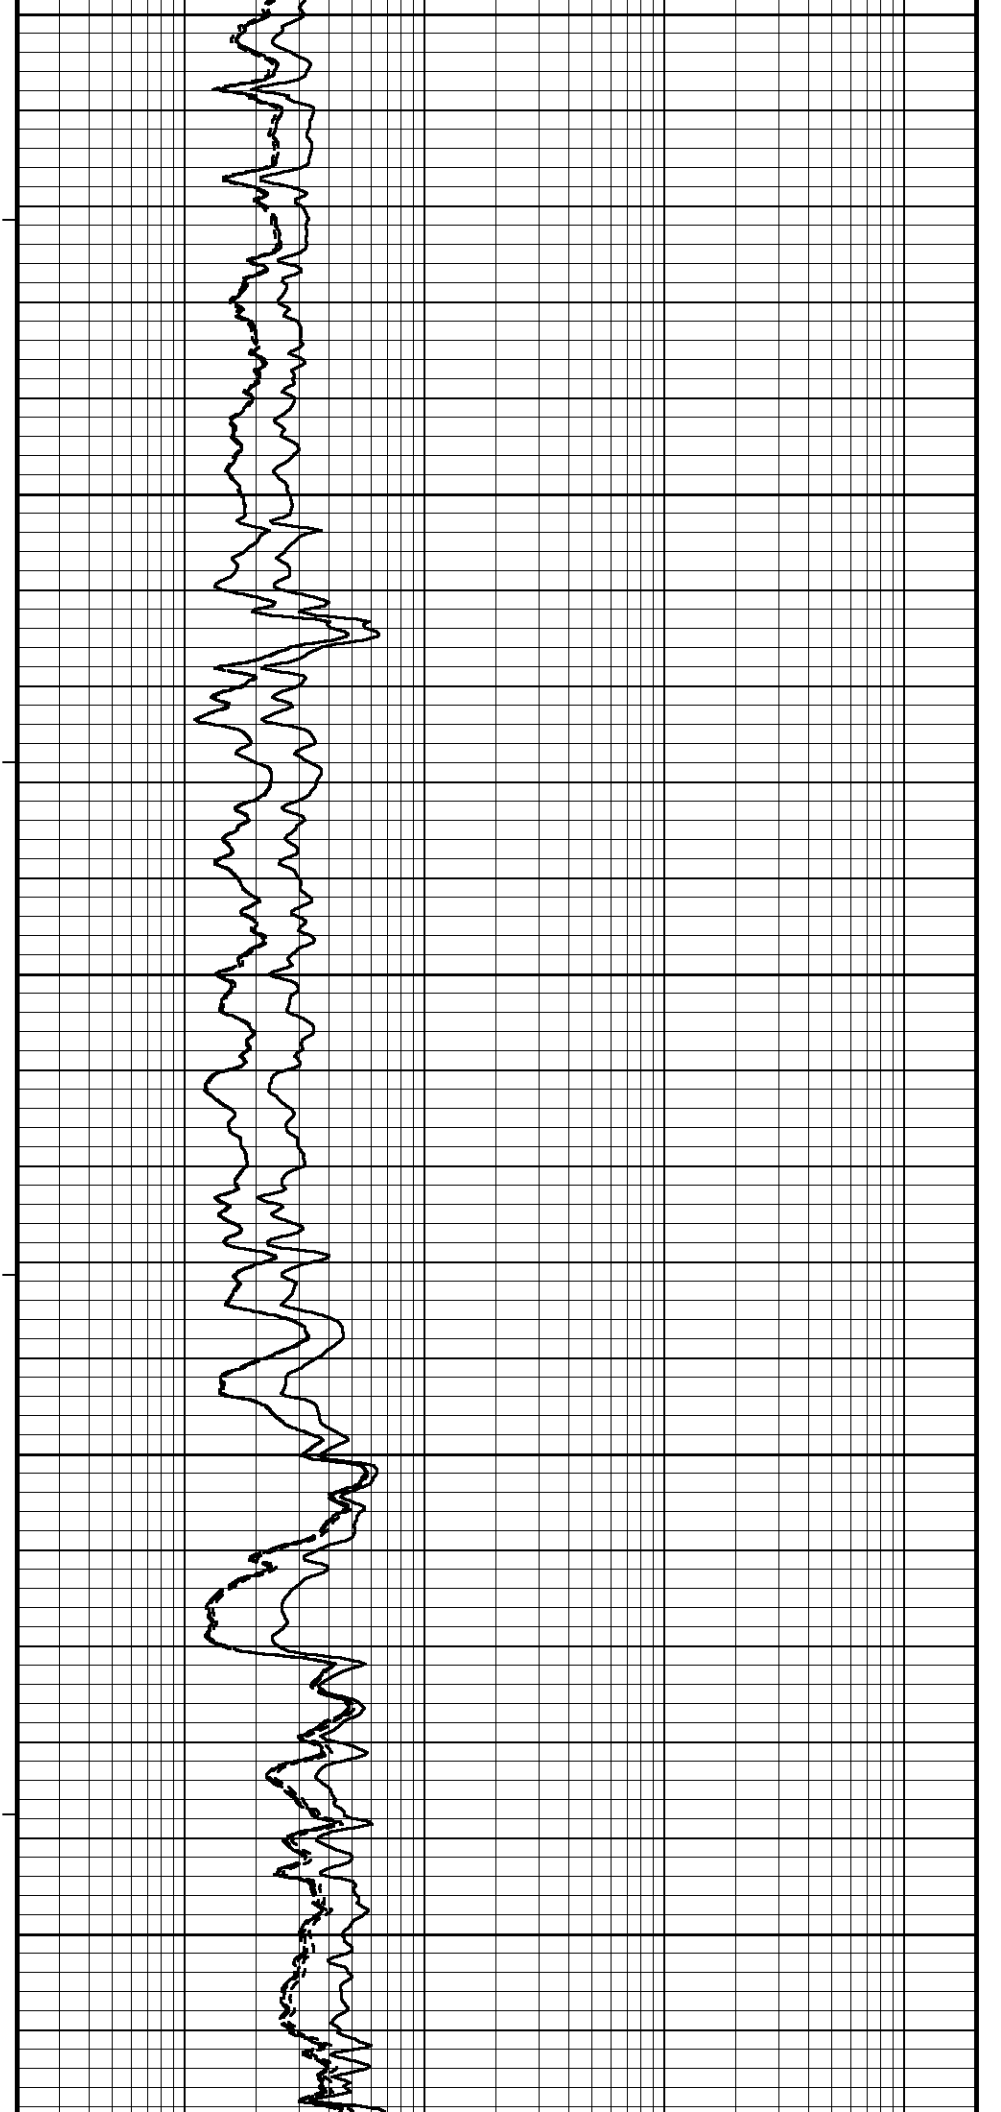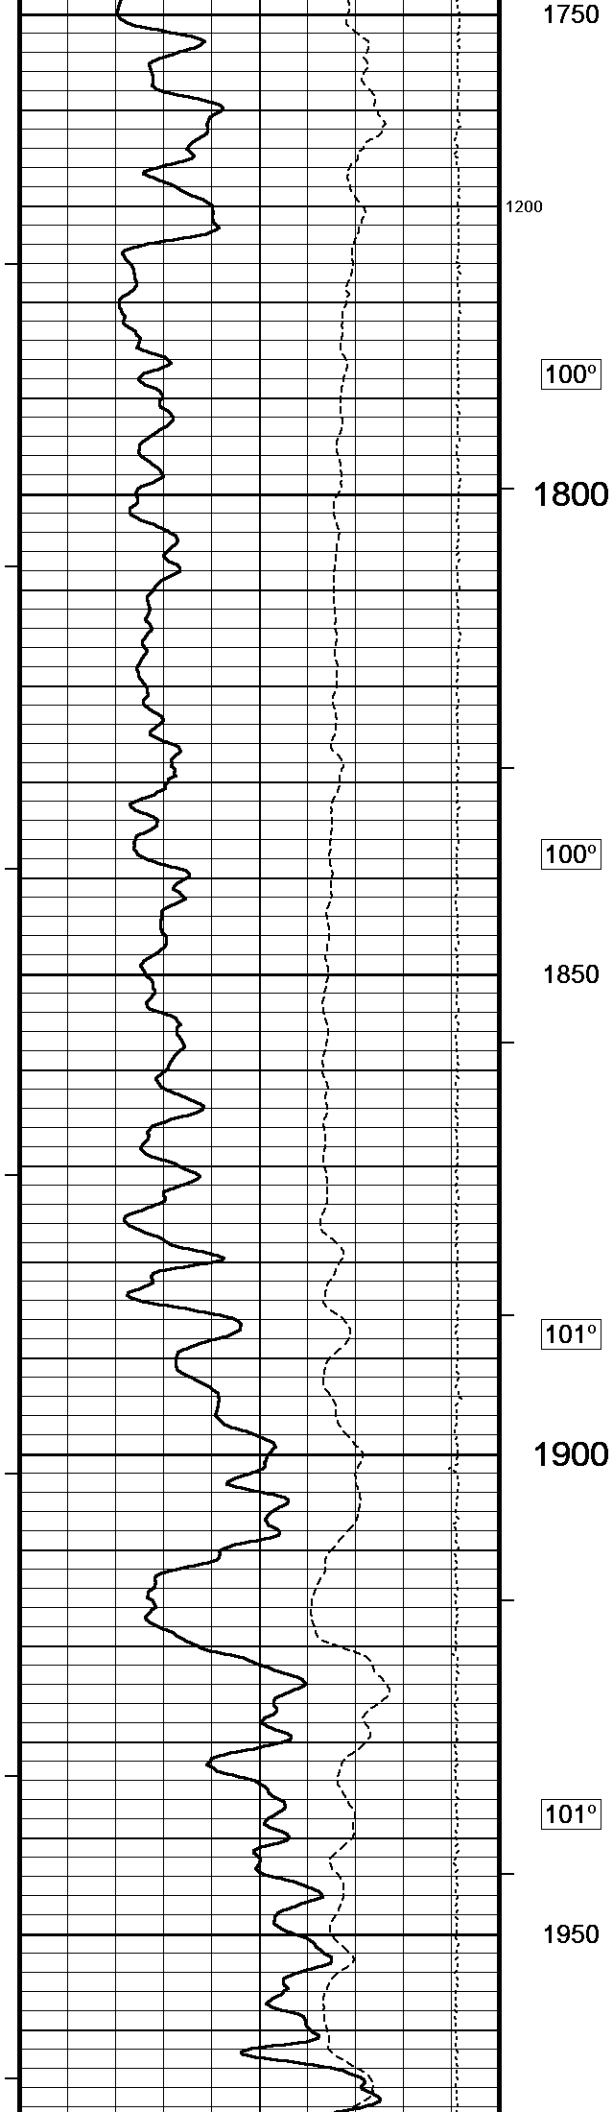

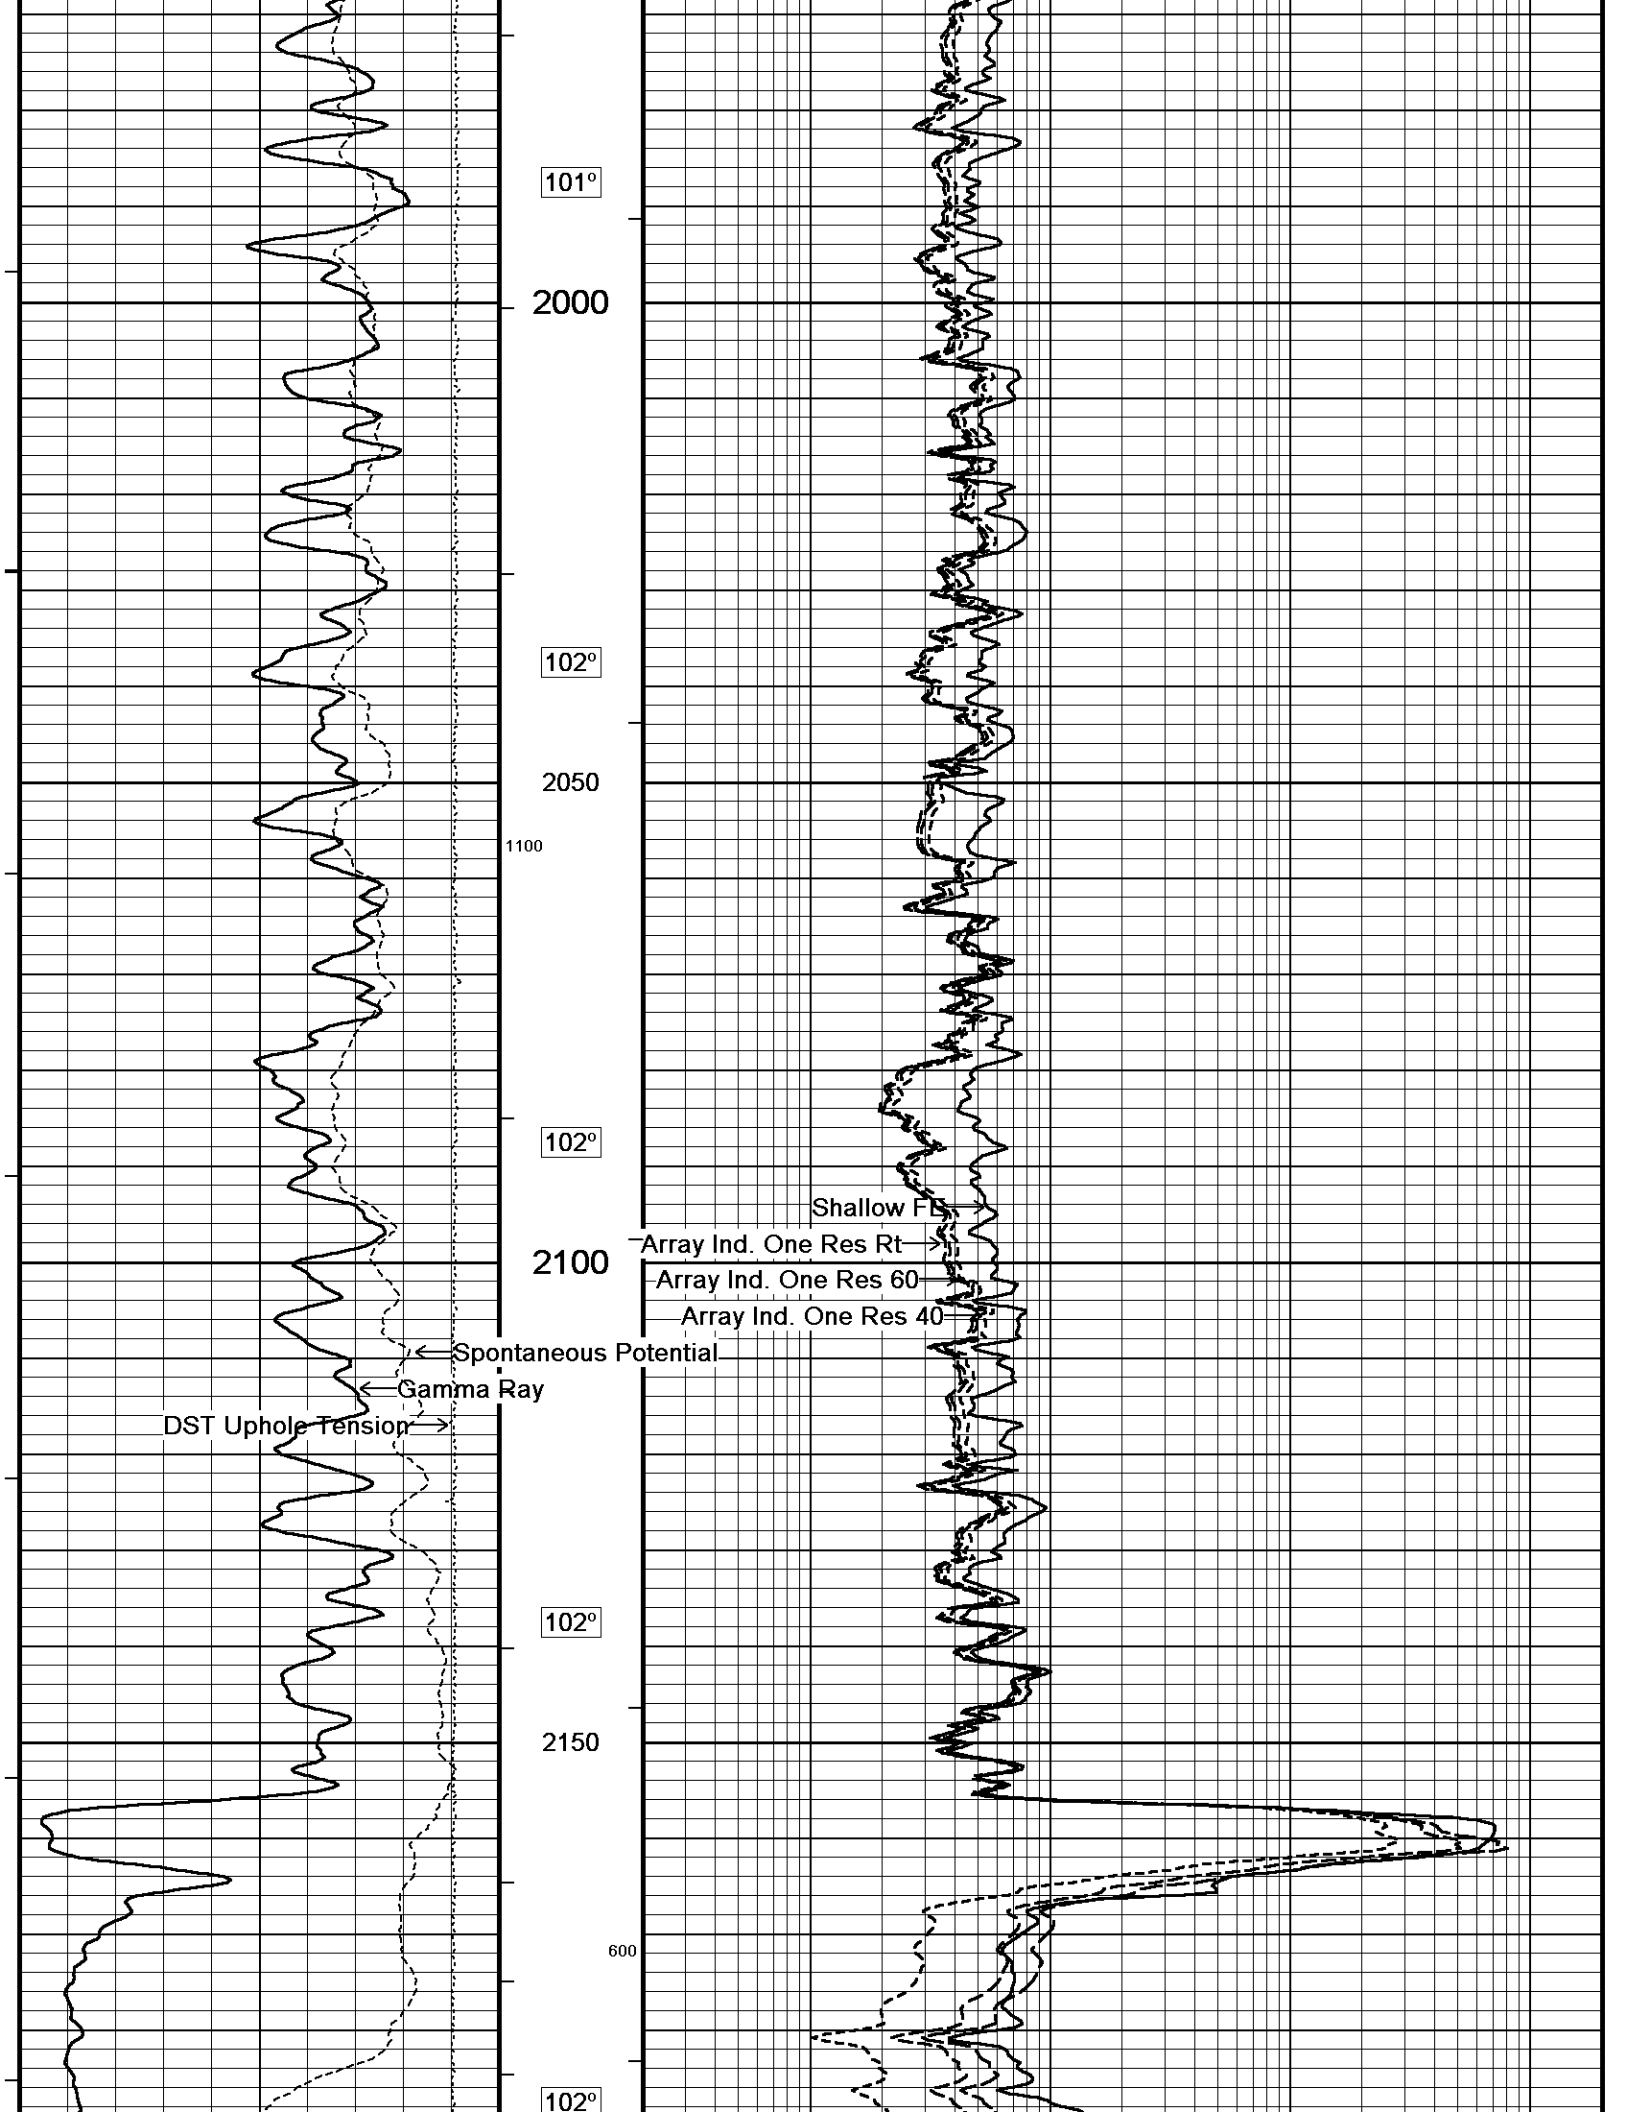

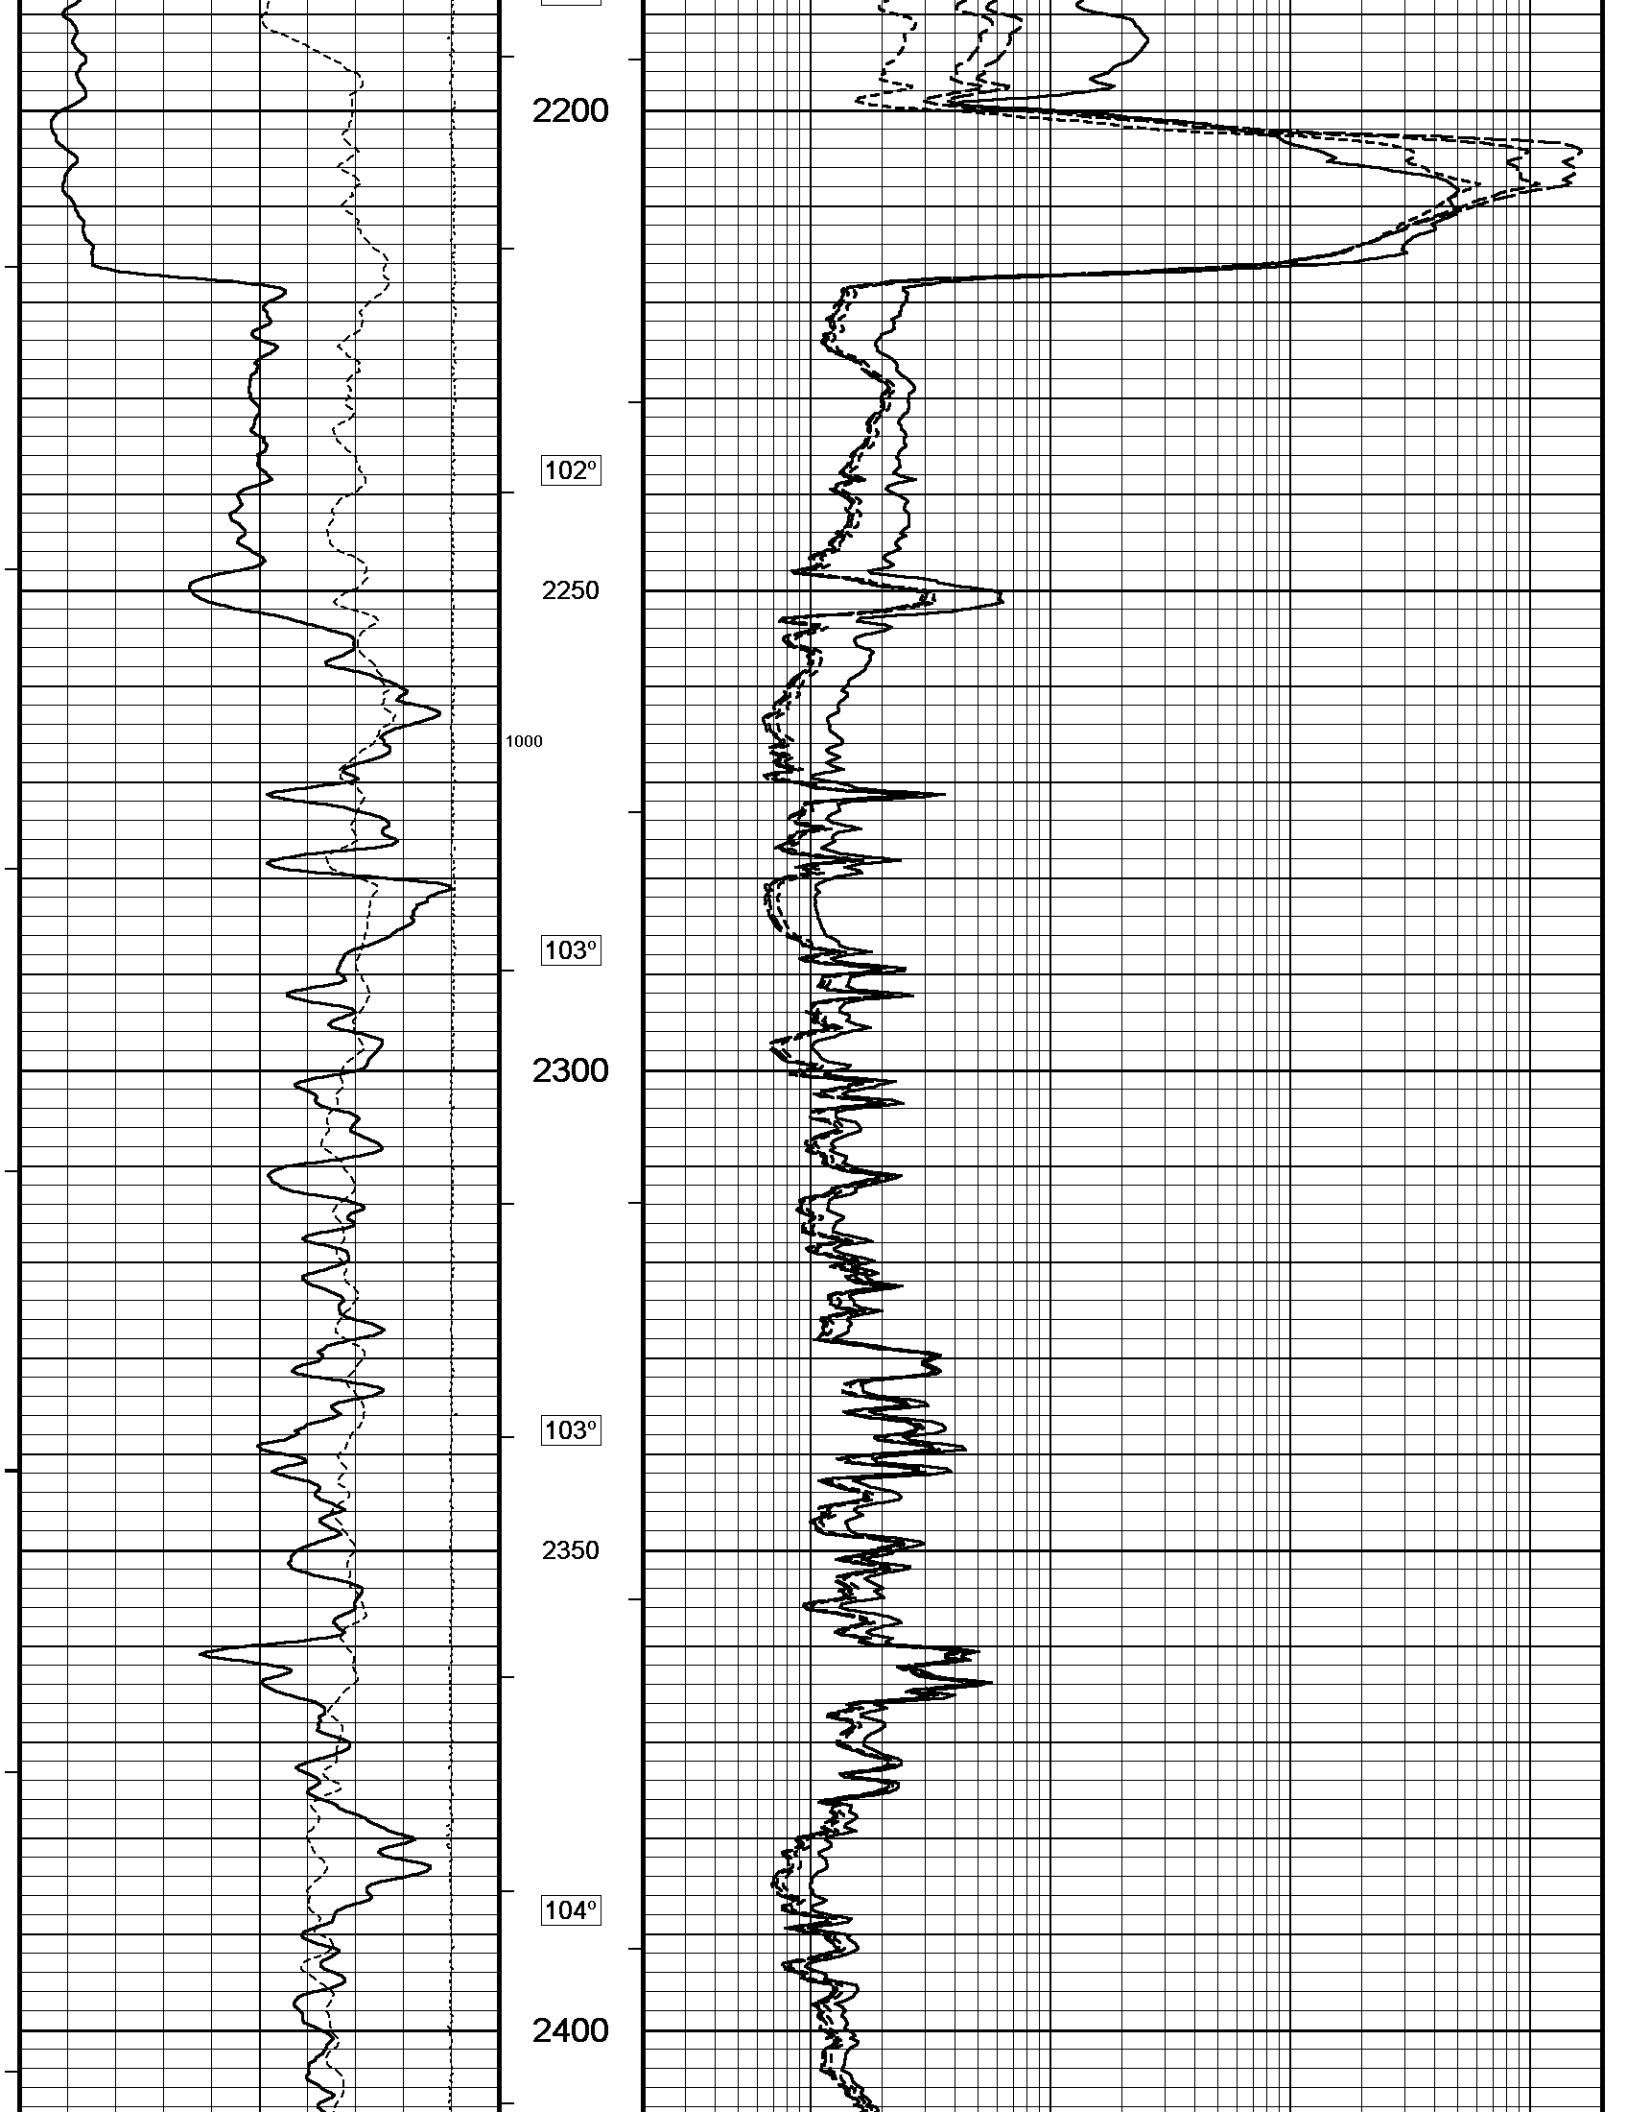

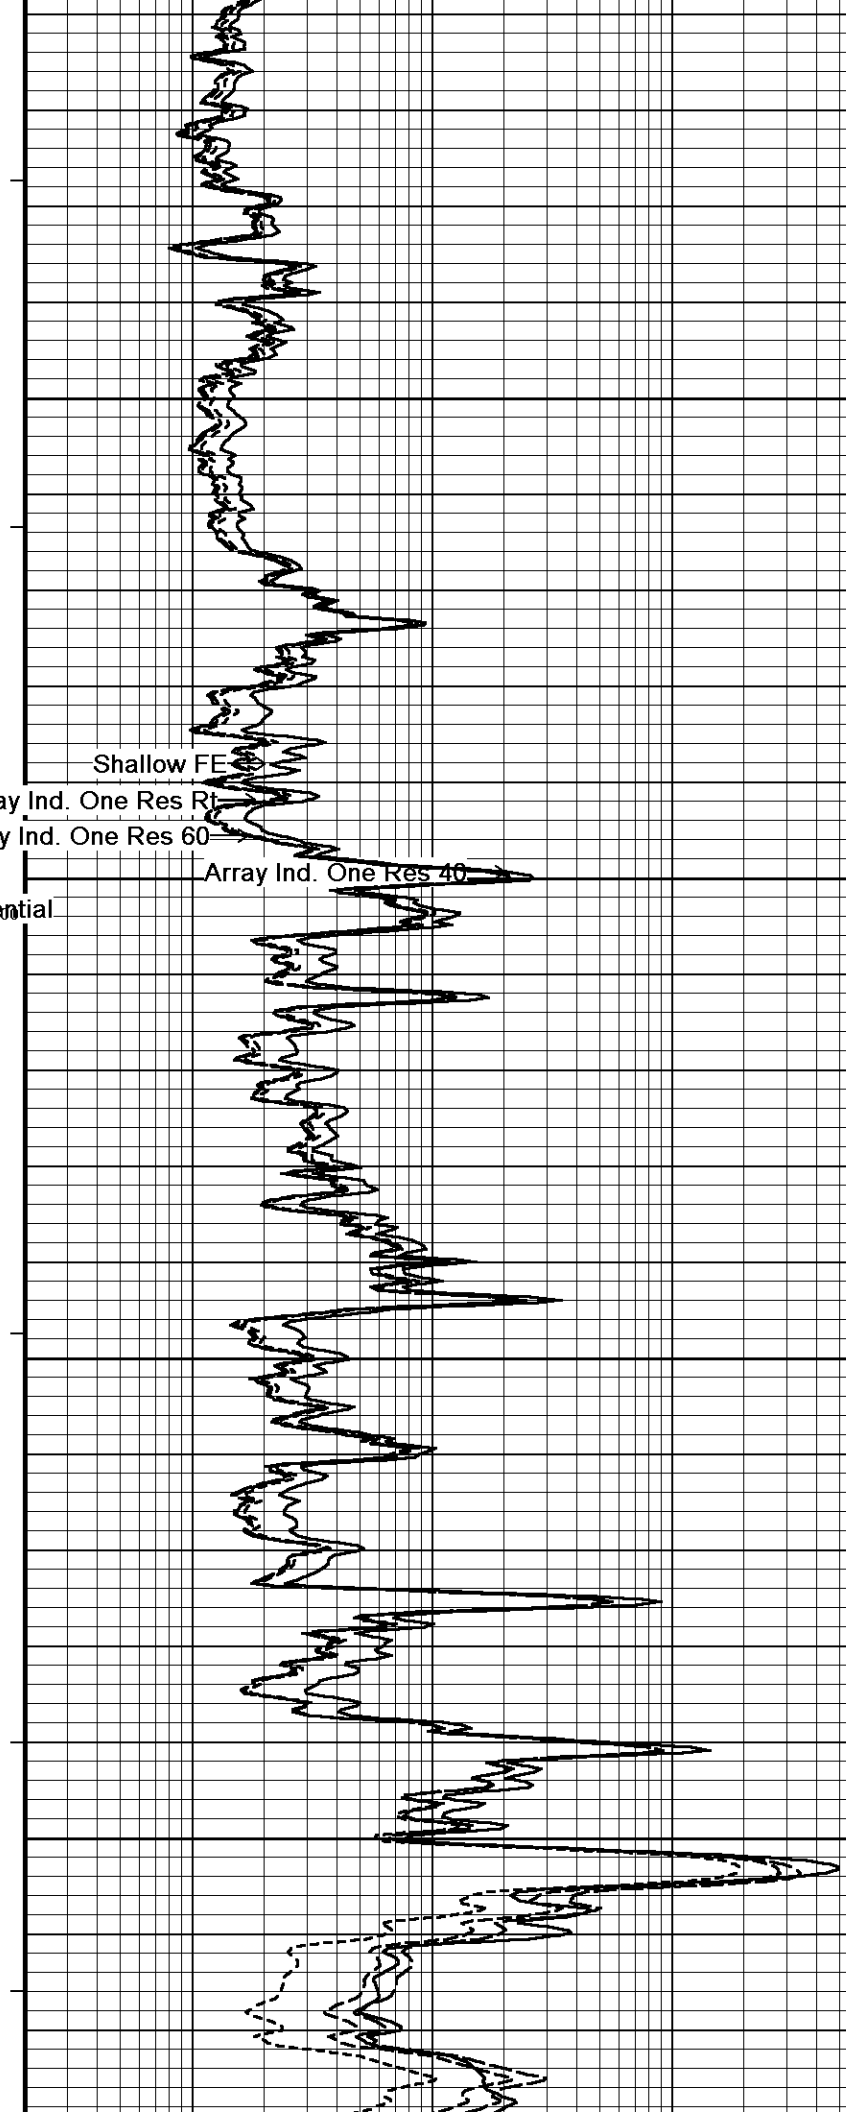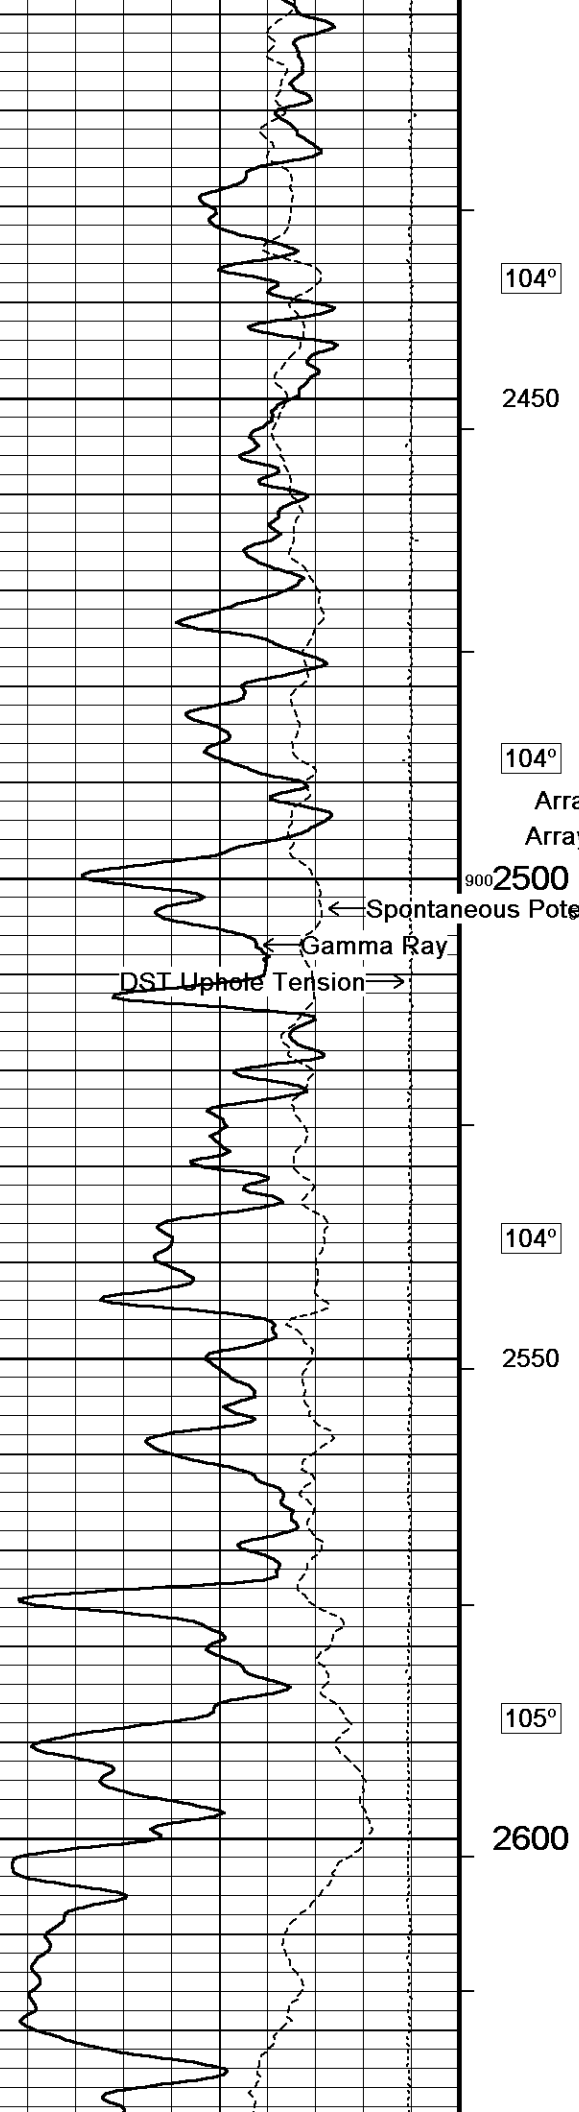

104°

2450

104°

Shallow FE

Array Ind. One Res Rt

Array Ind. One Res 60

900 2500

Array Ind. One Res 40

← Spontaneous Potential

← Gamma Ray



DST Up →


104°


2550


105°


2600

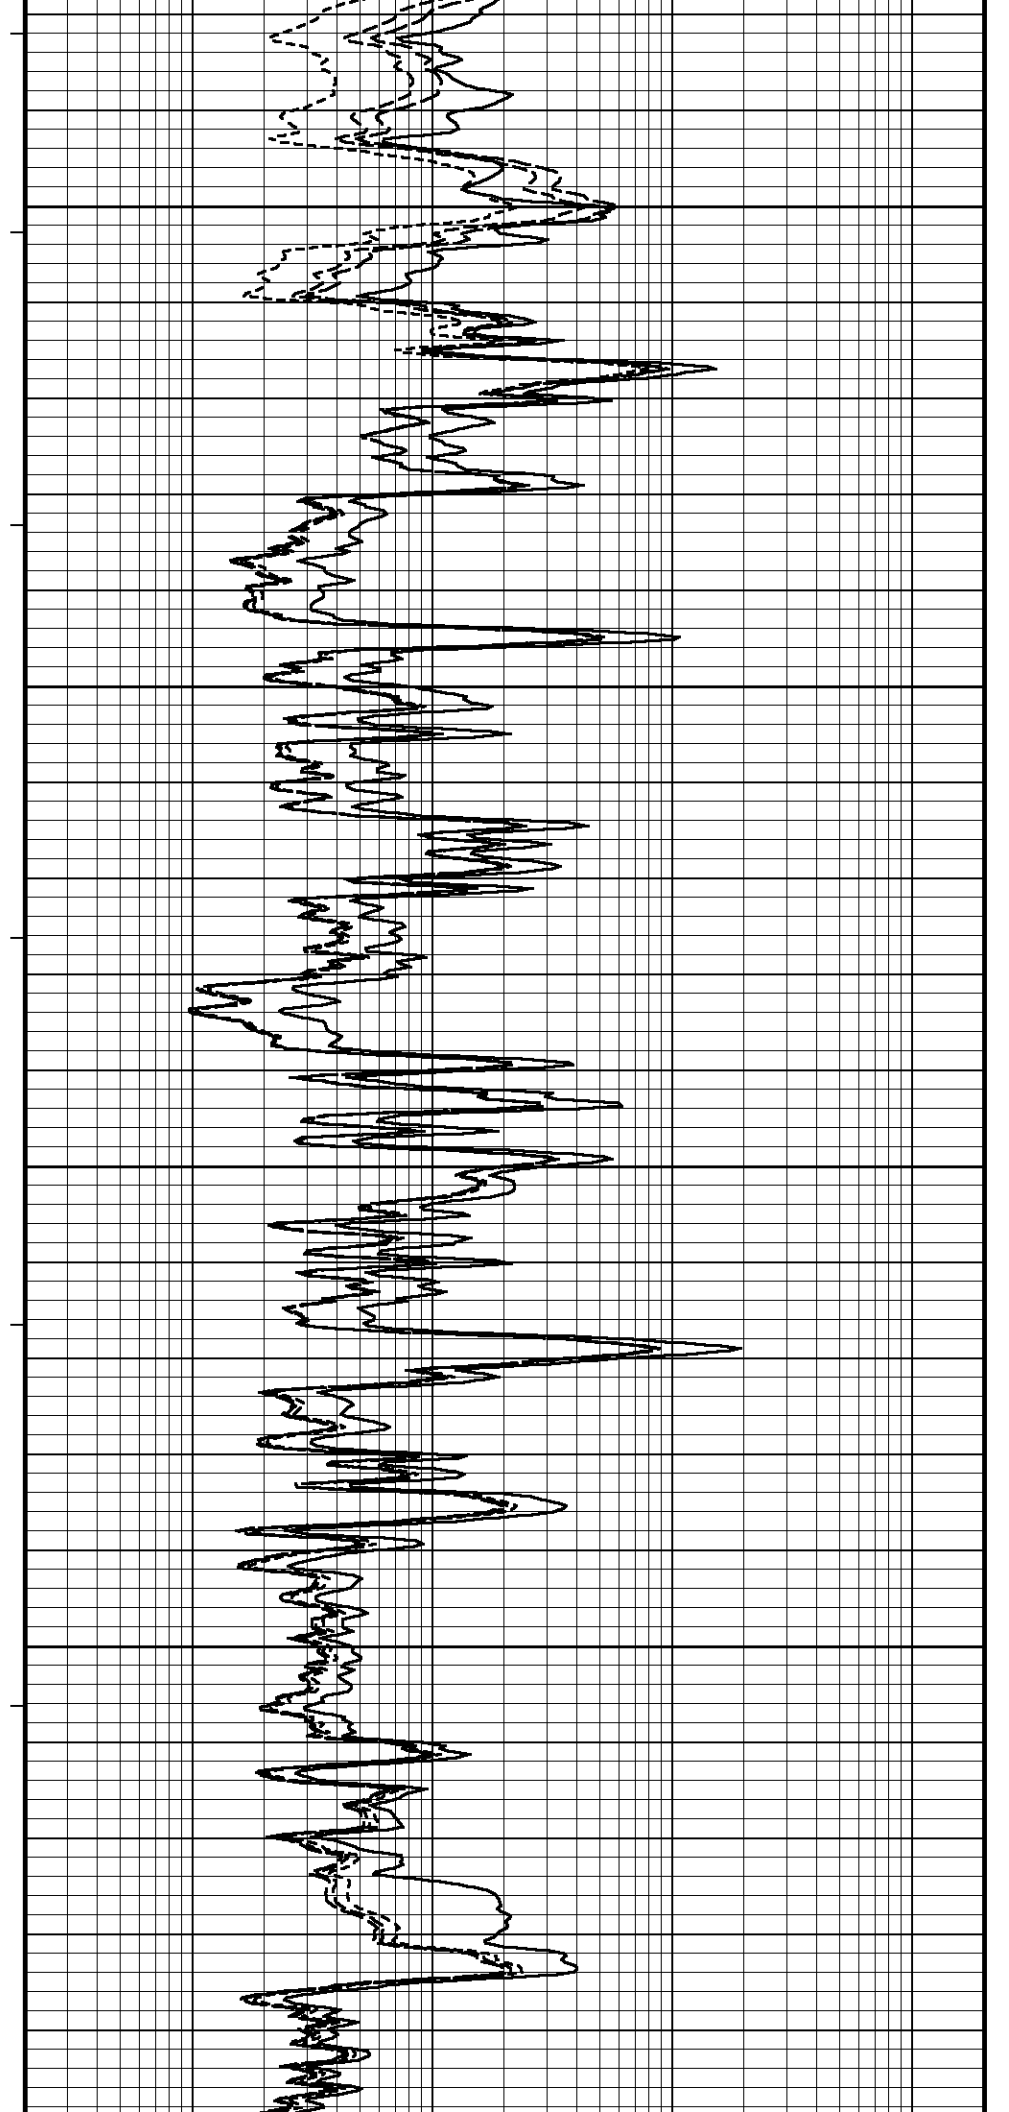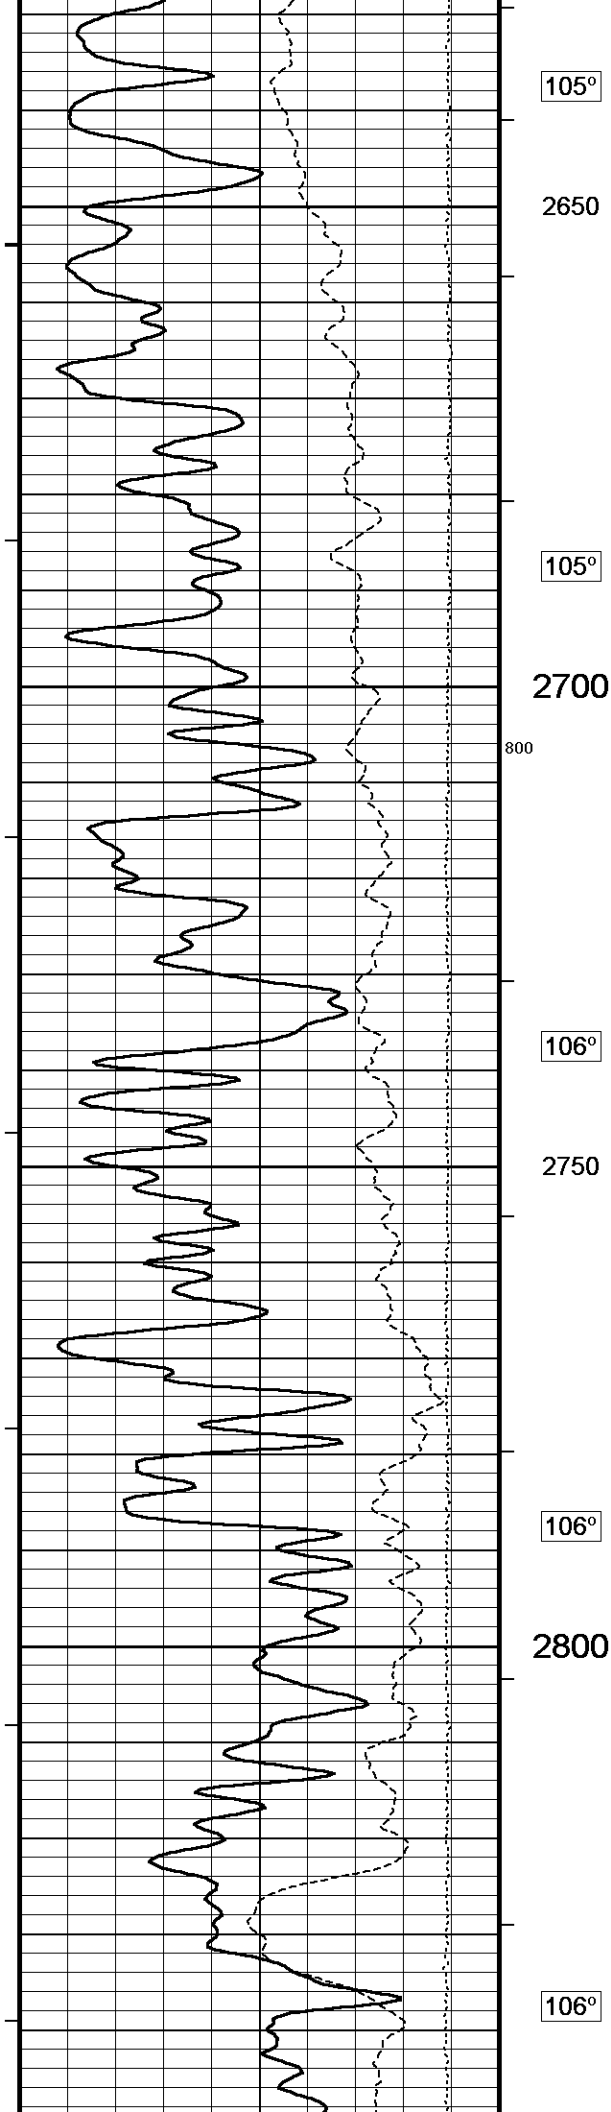


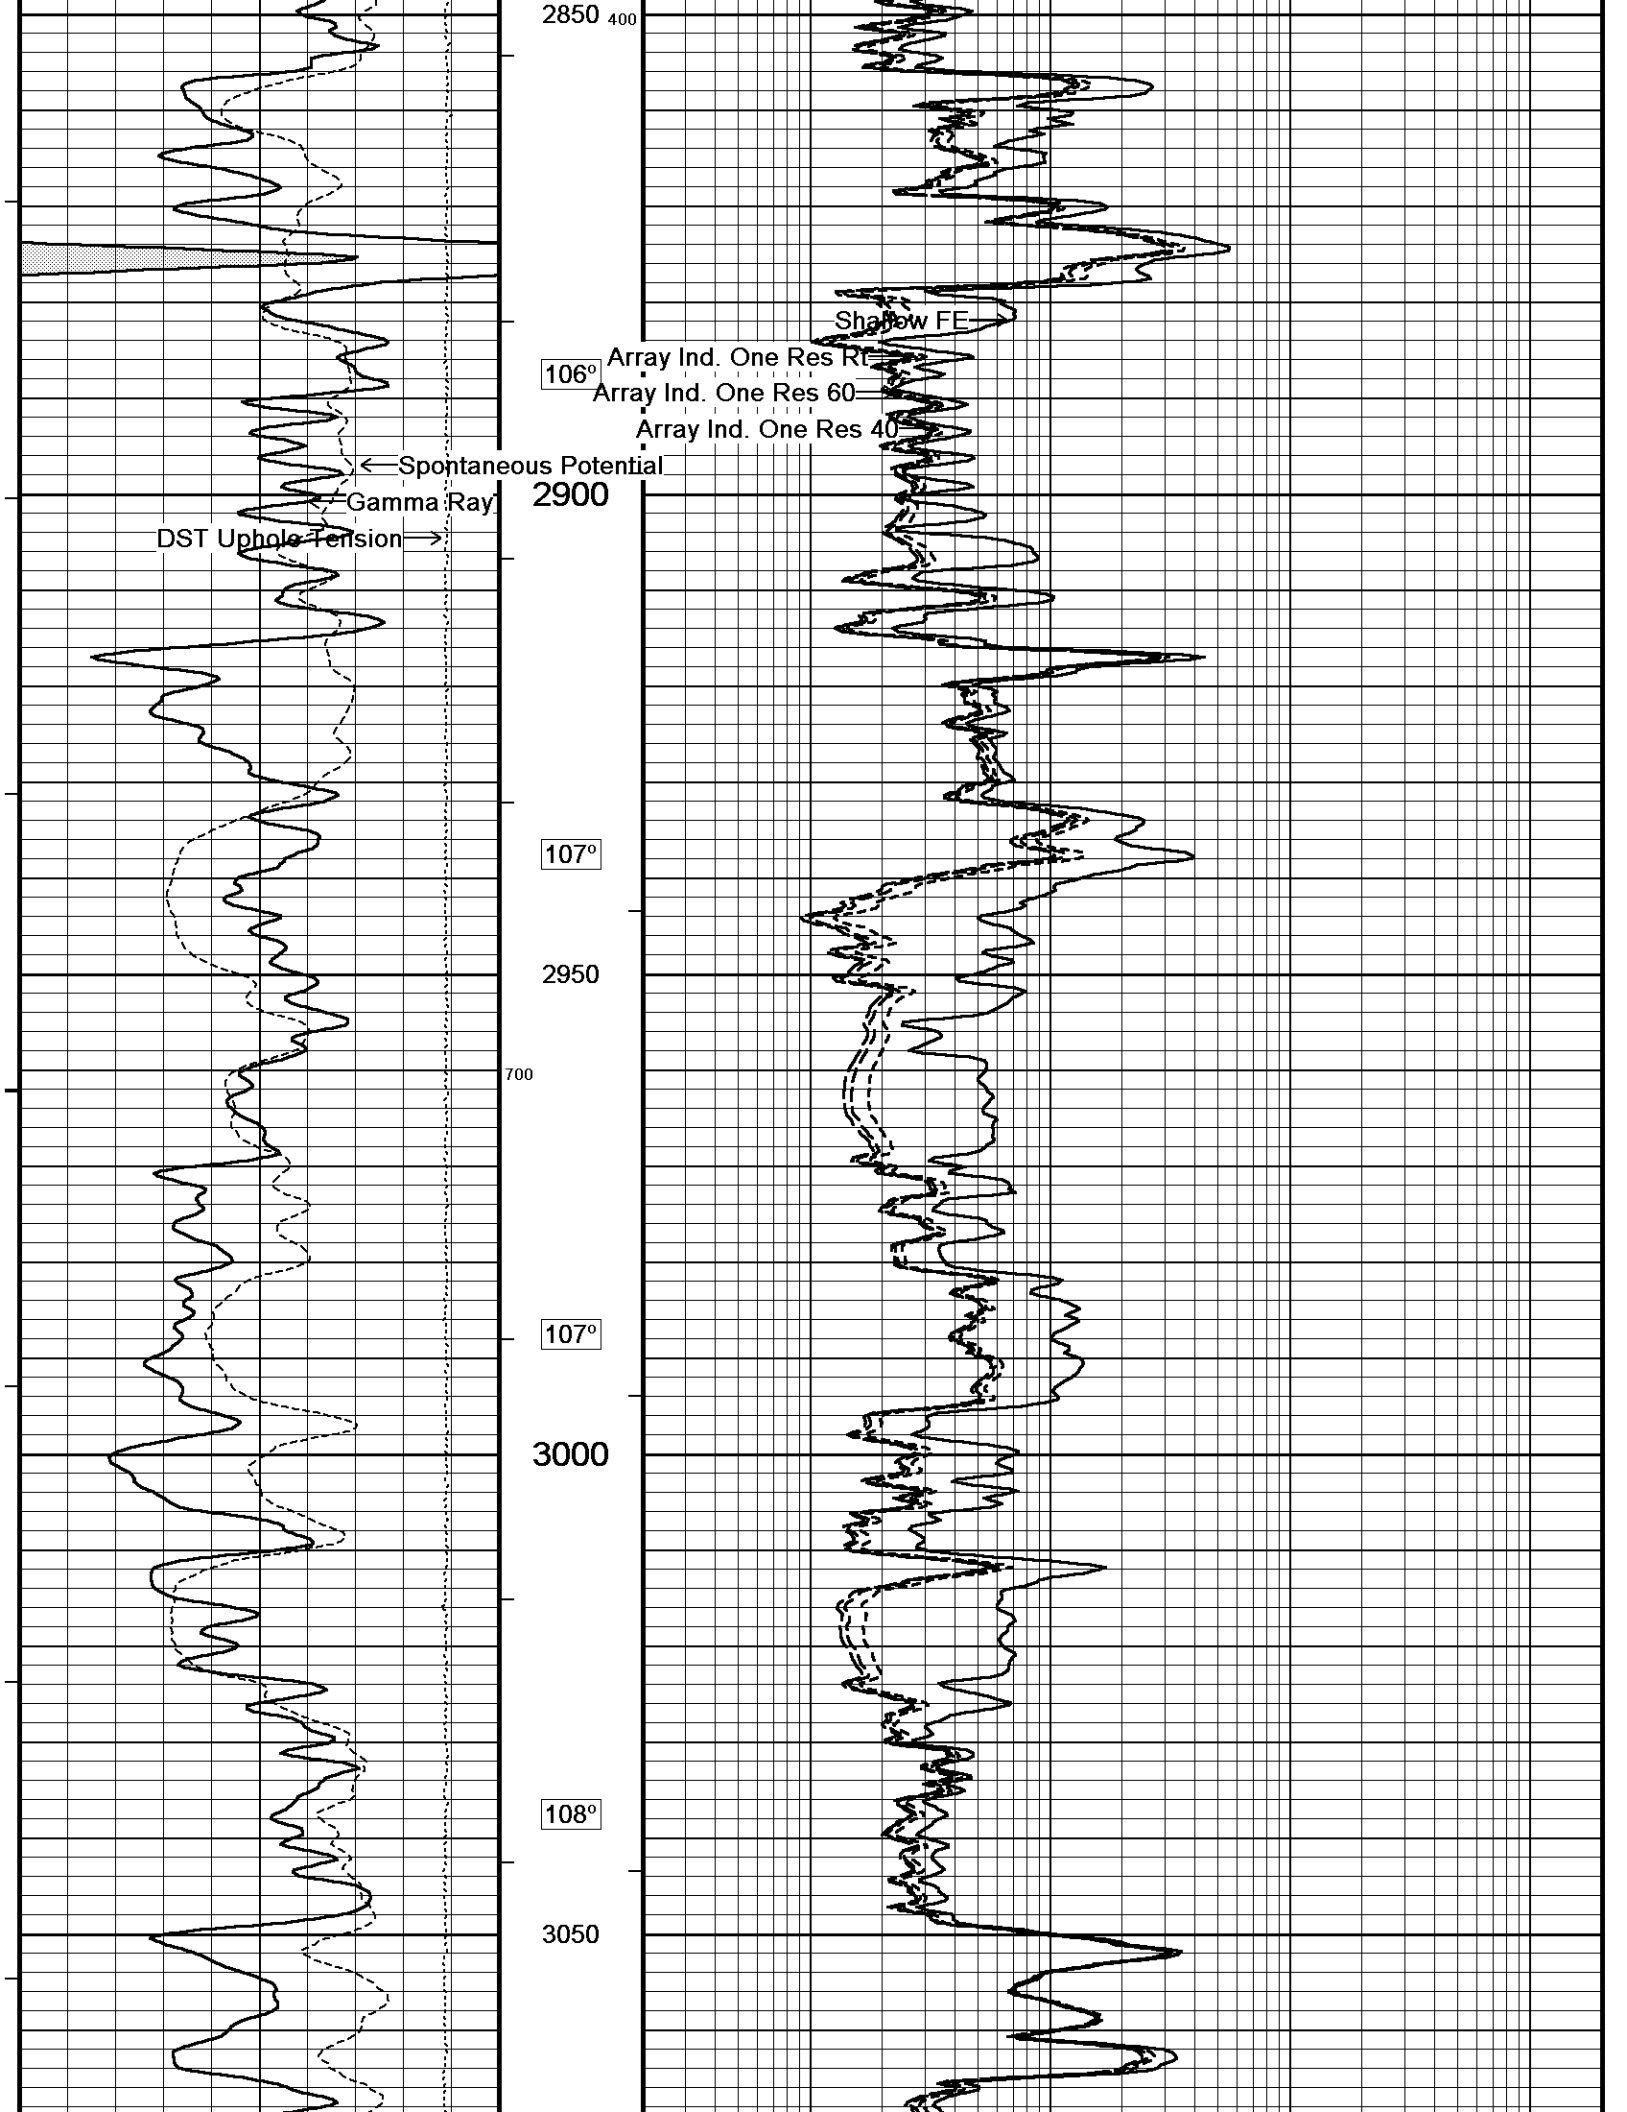

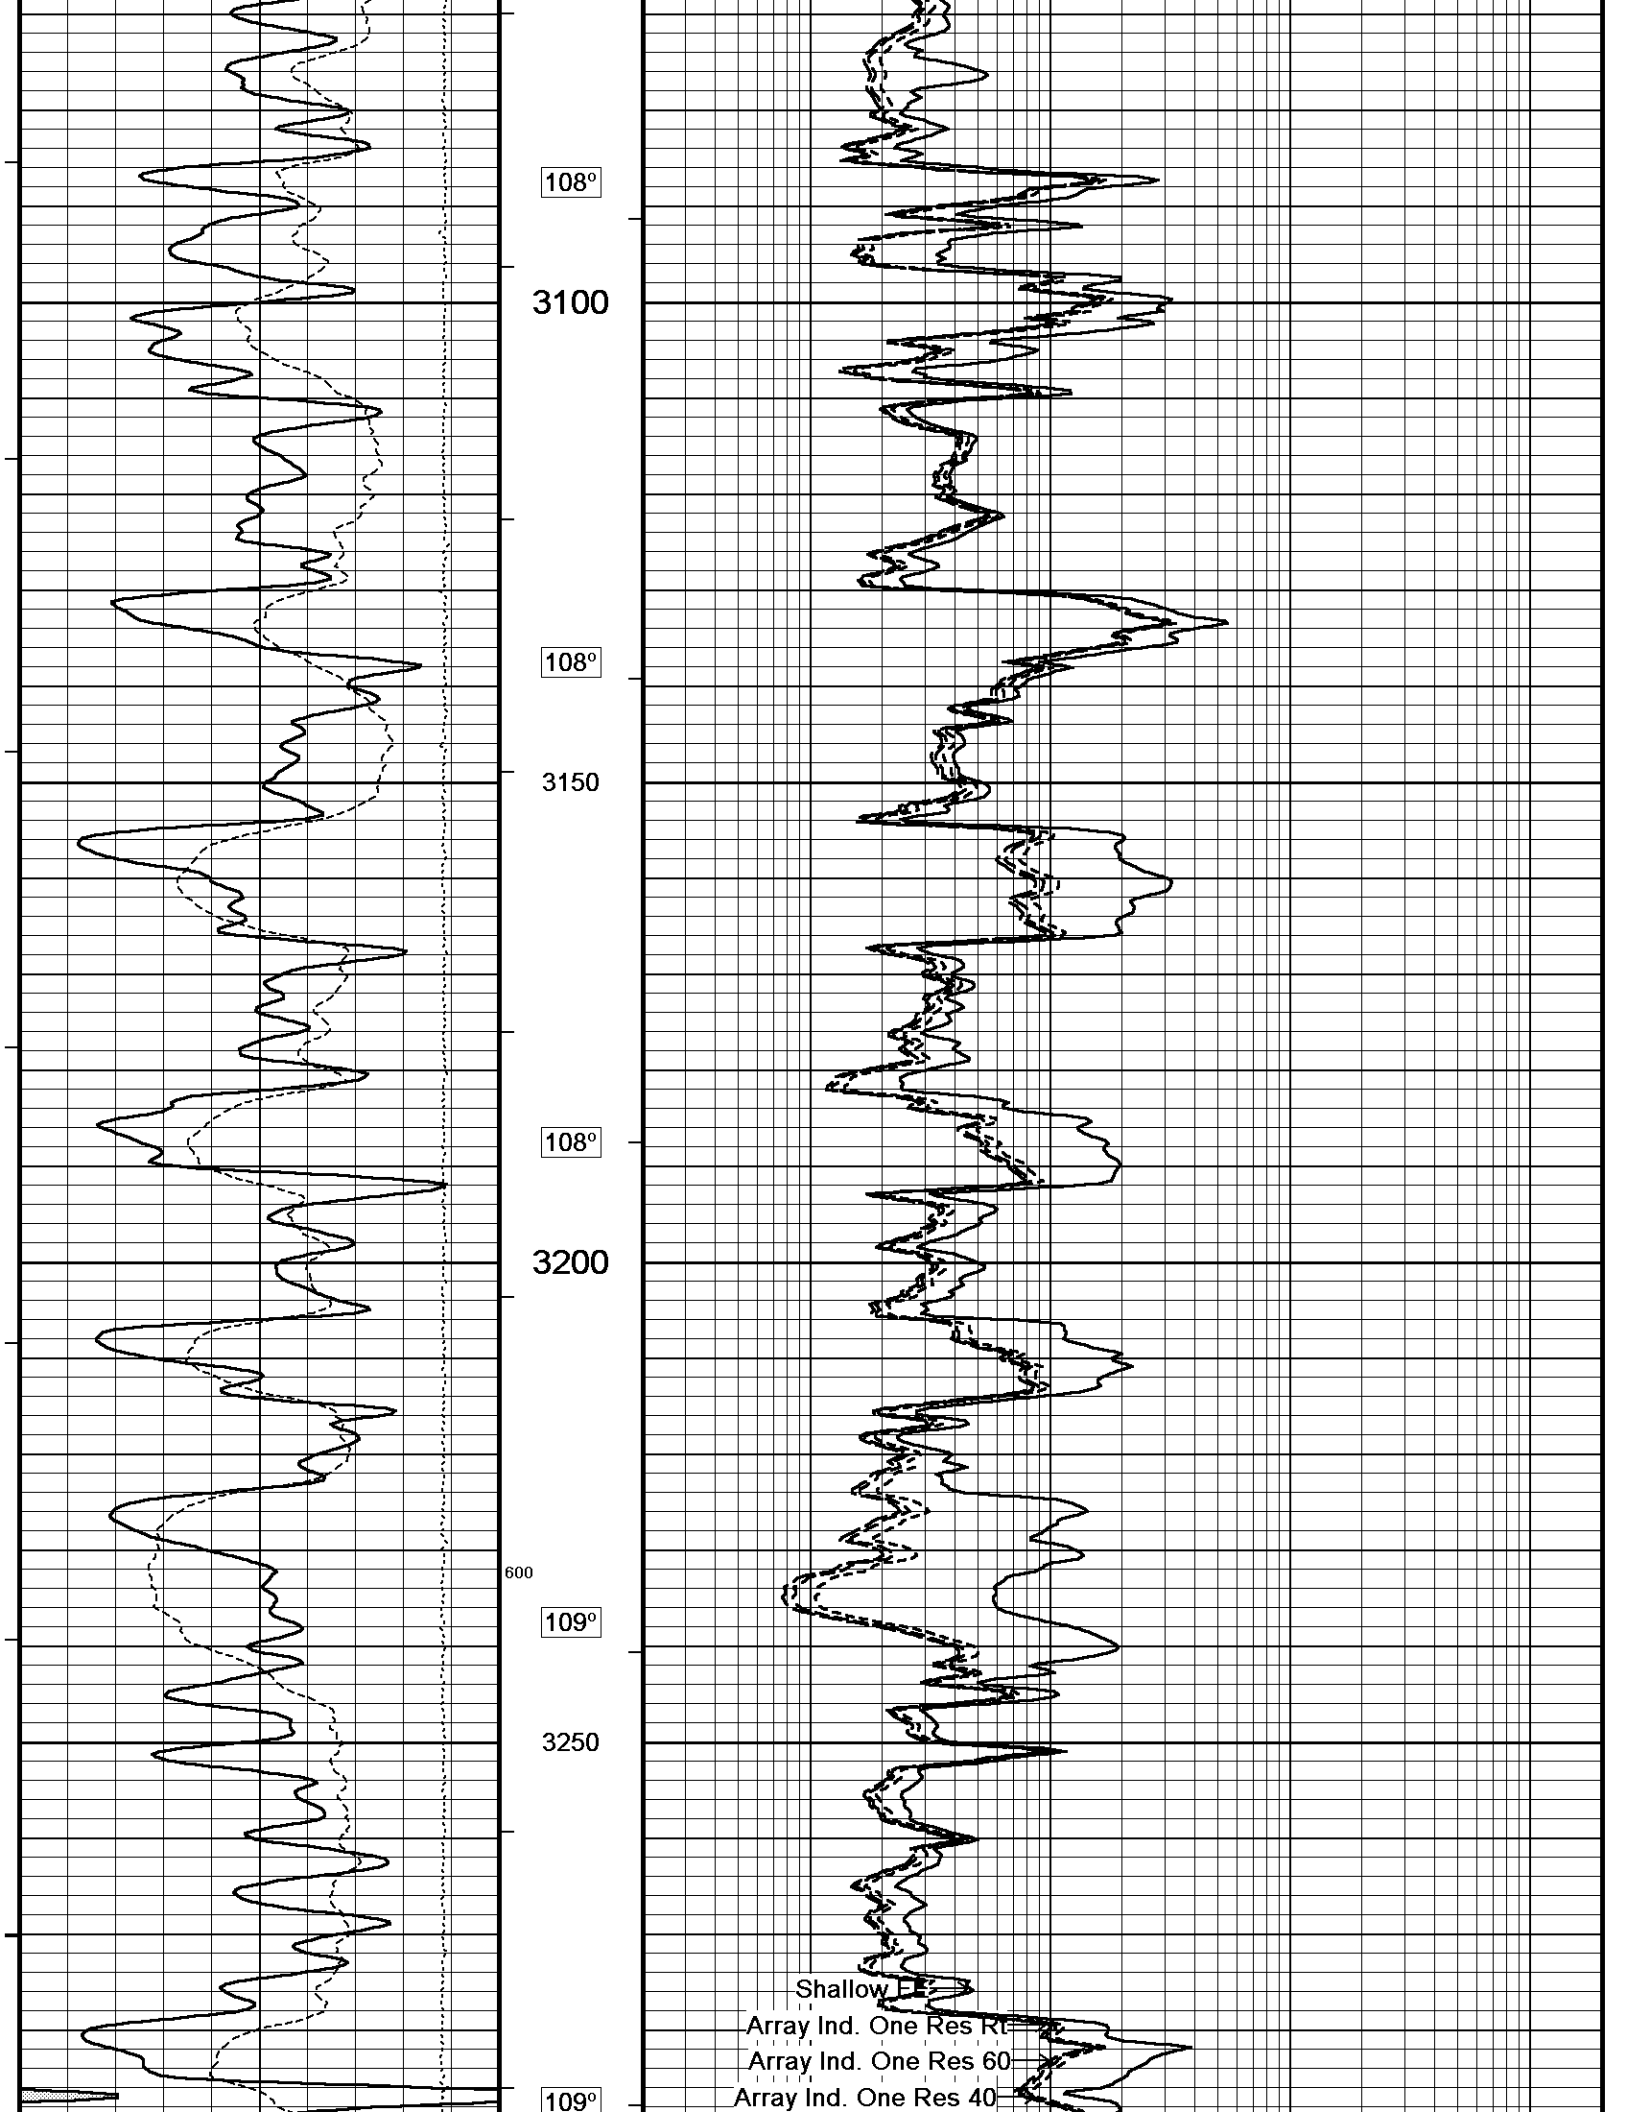

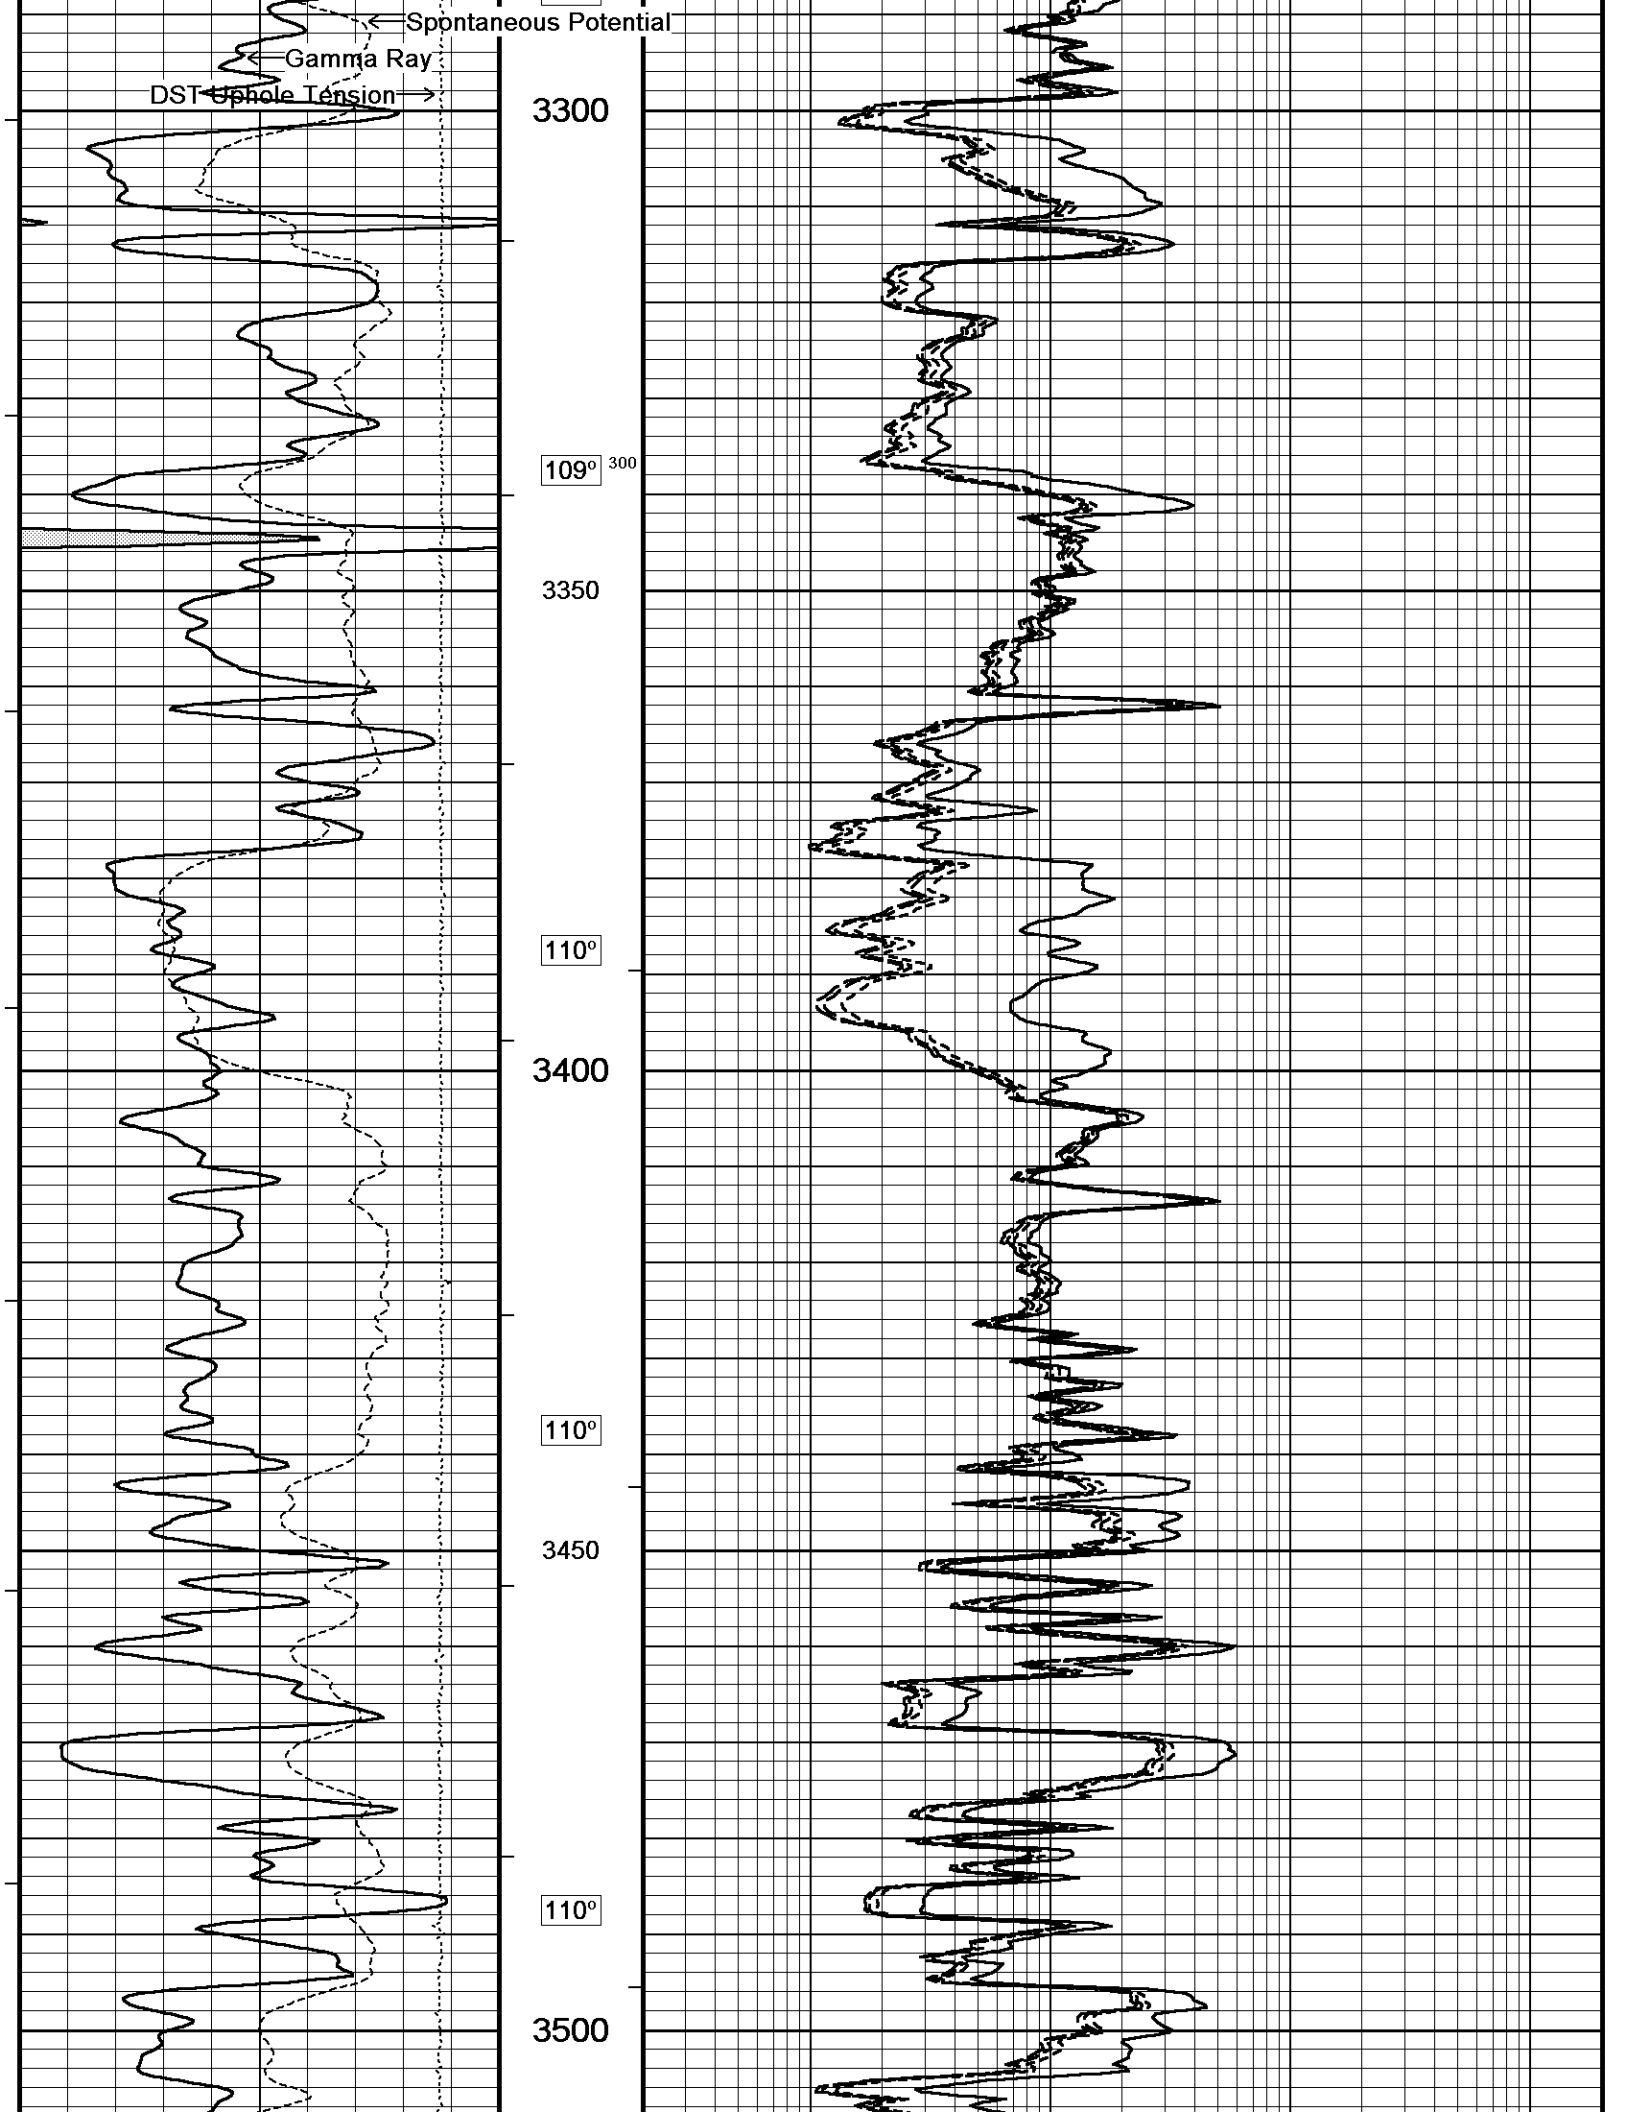

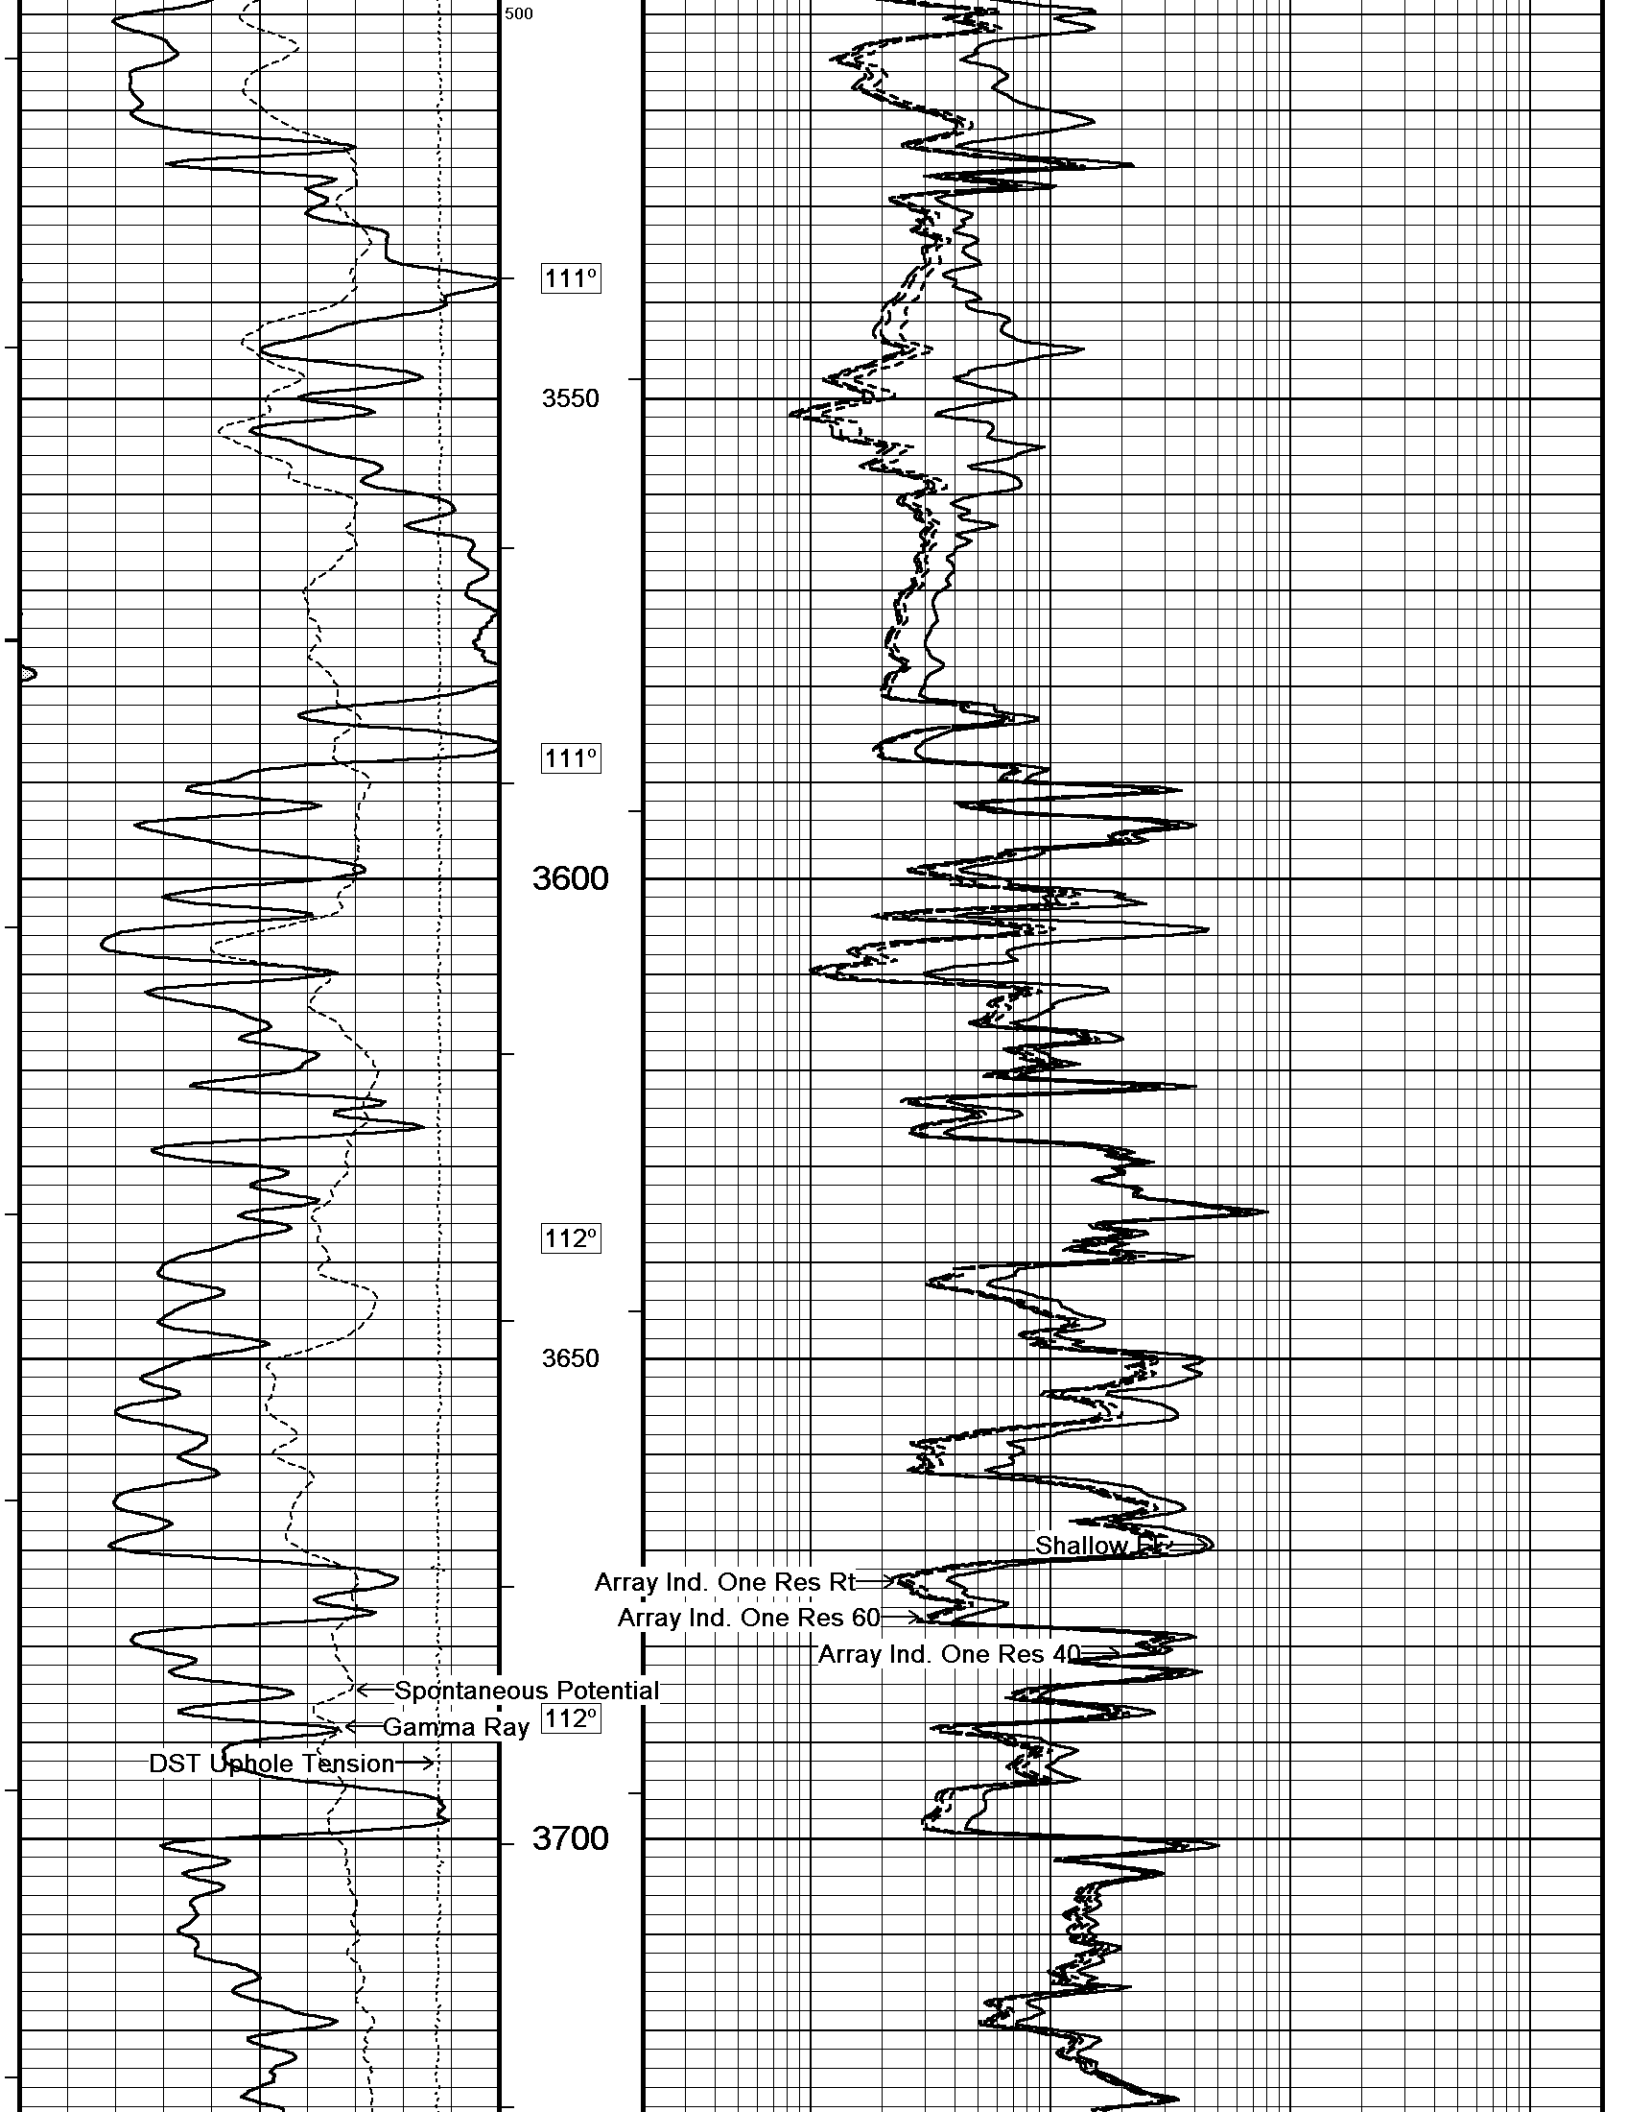

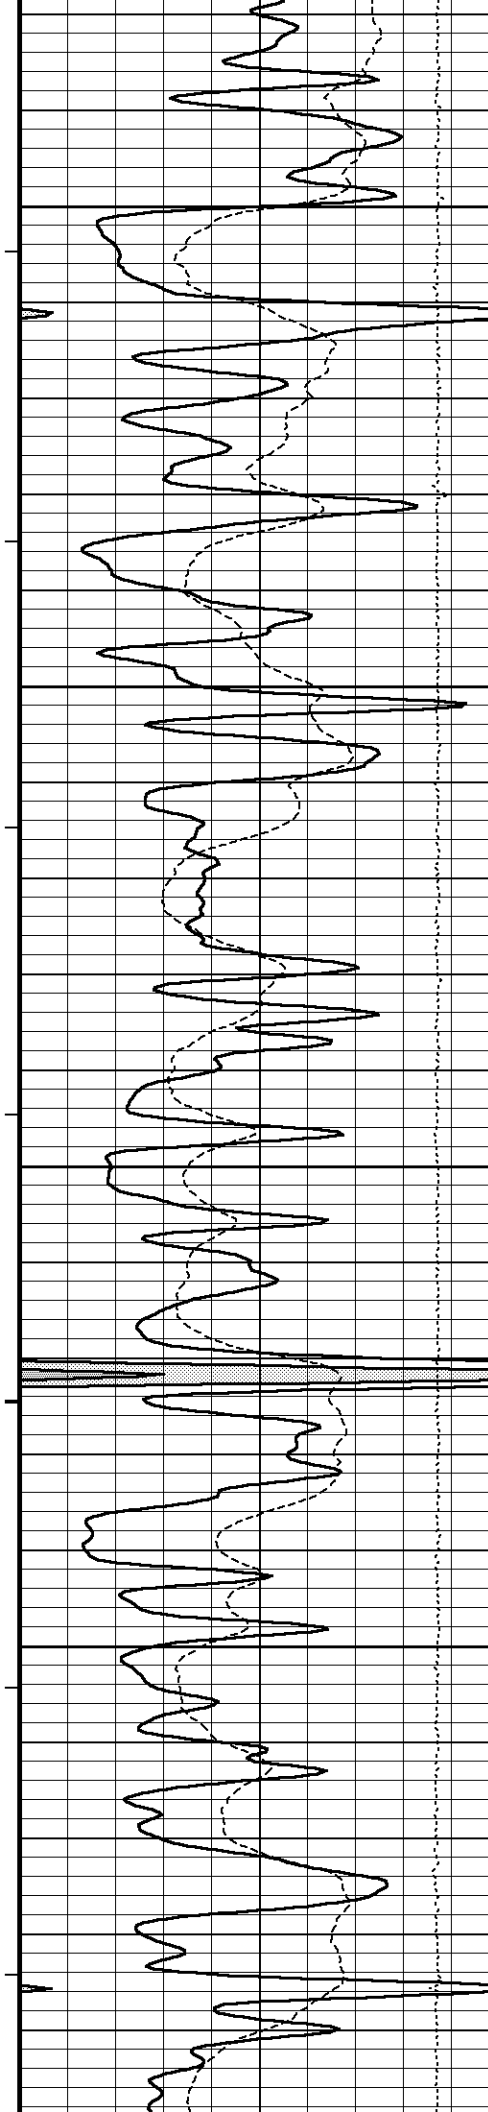

112°

3750

400

113°

3800

113°


3850


200

113°


3900

113°


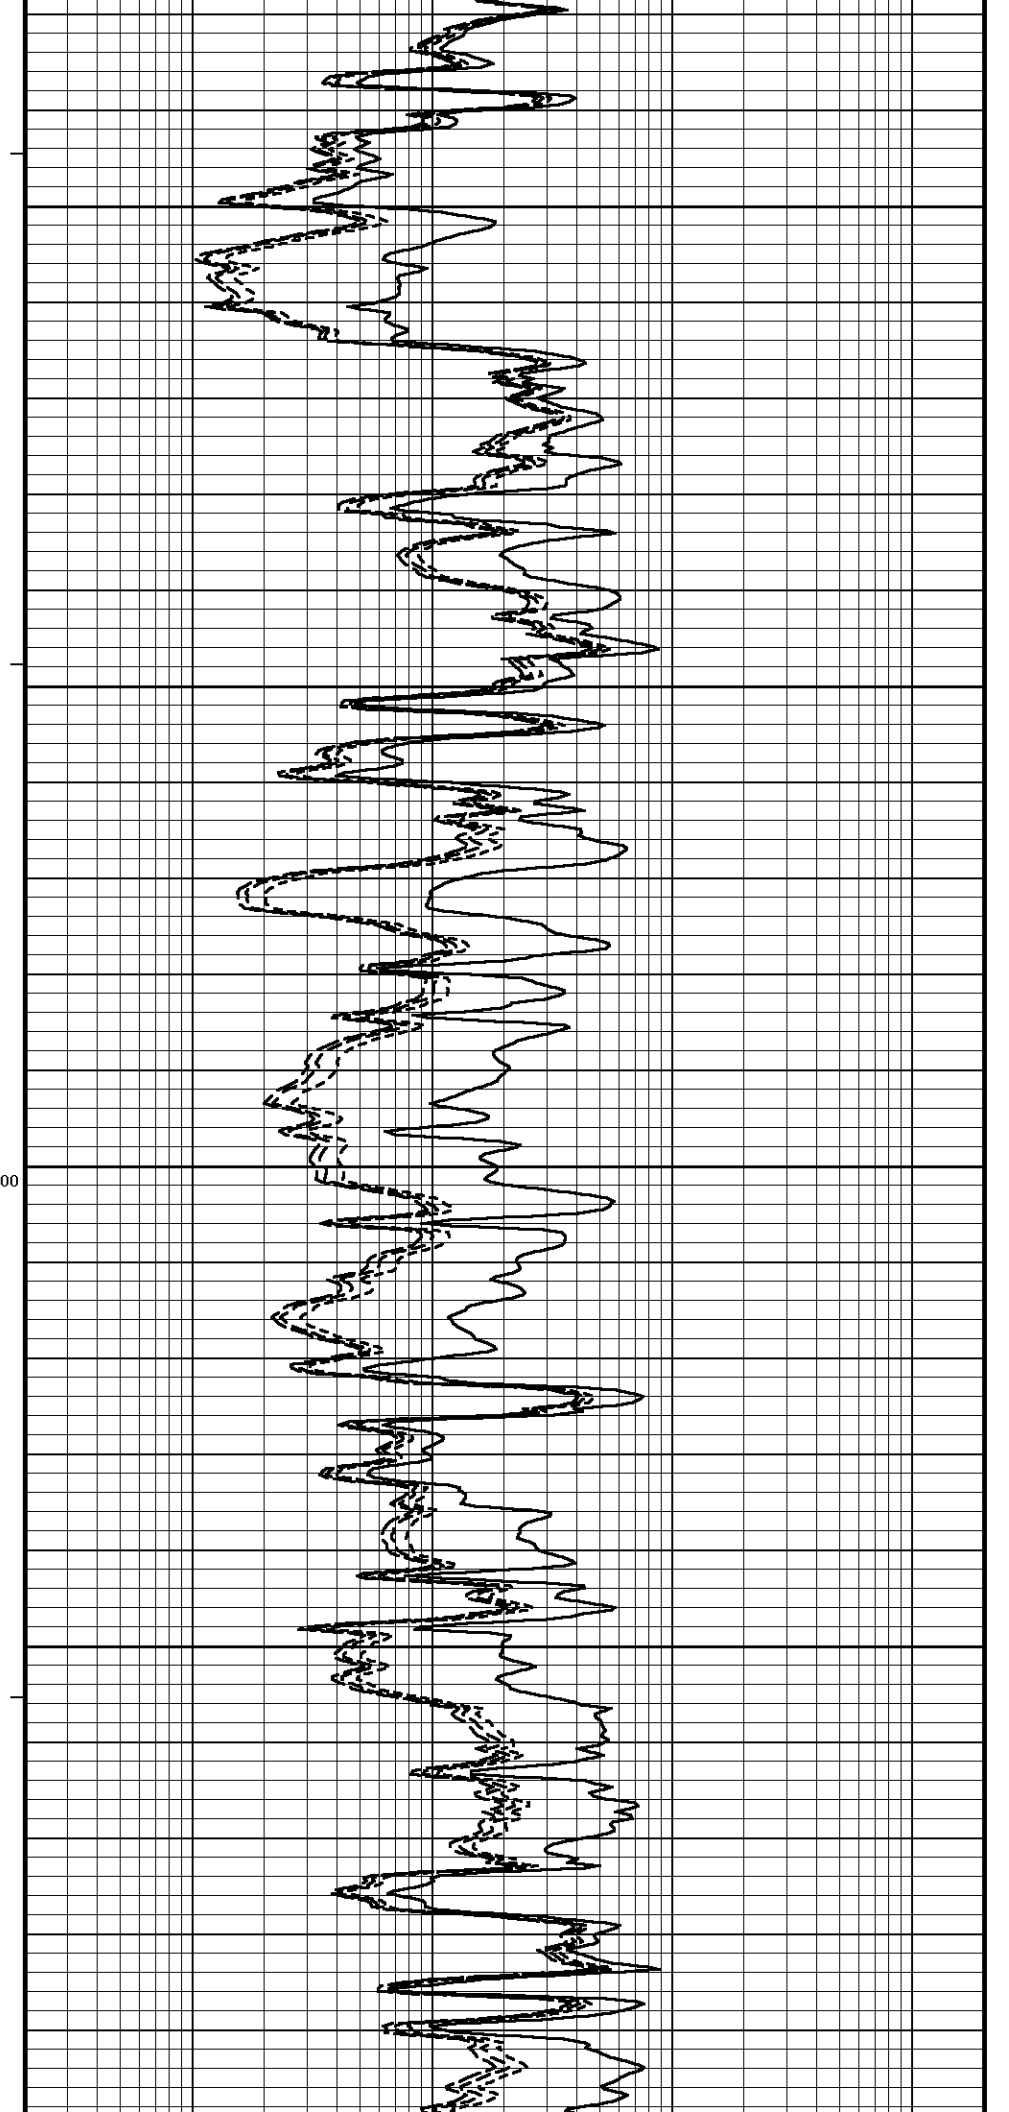


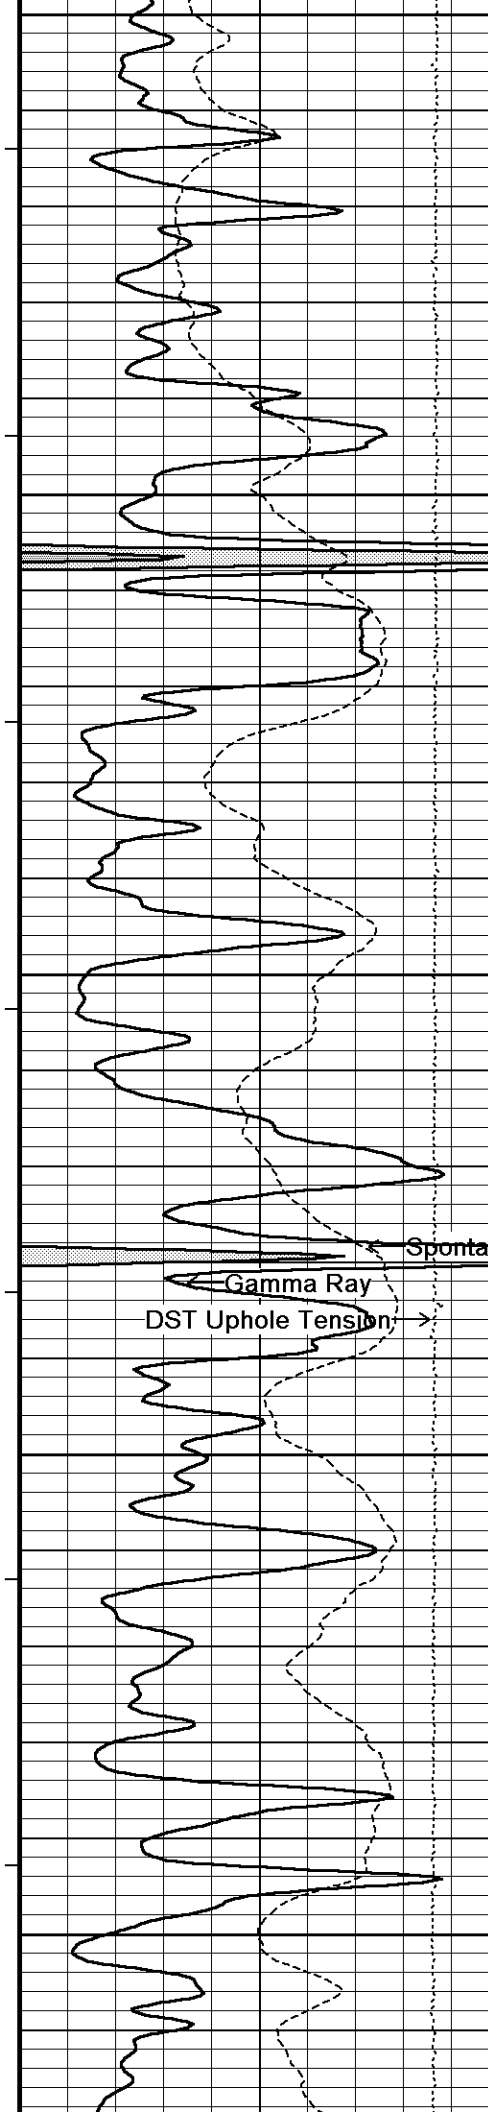


3950  
114°  
4000  
114°  
4050  
300  
Spontaneous Potential  
Gamma Ray  
DST Uphole Tension  
114°  
4100  
115°  
4150

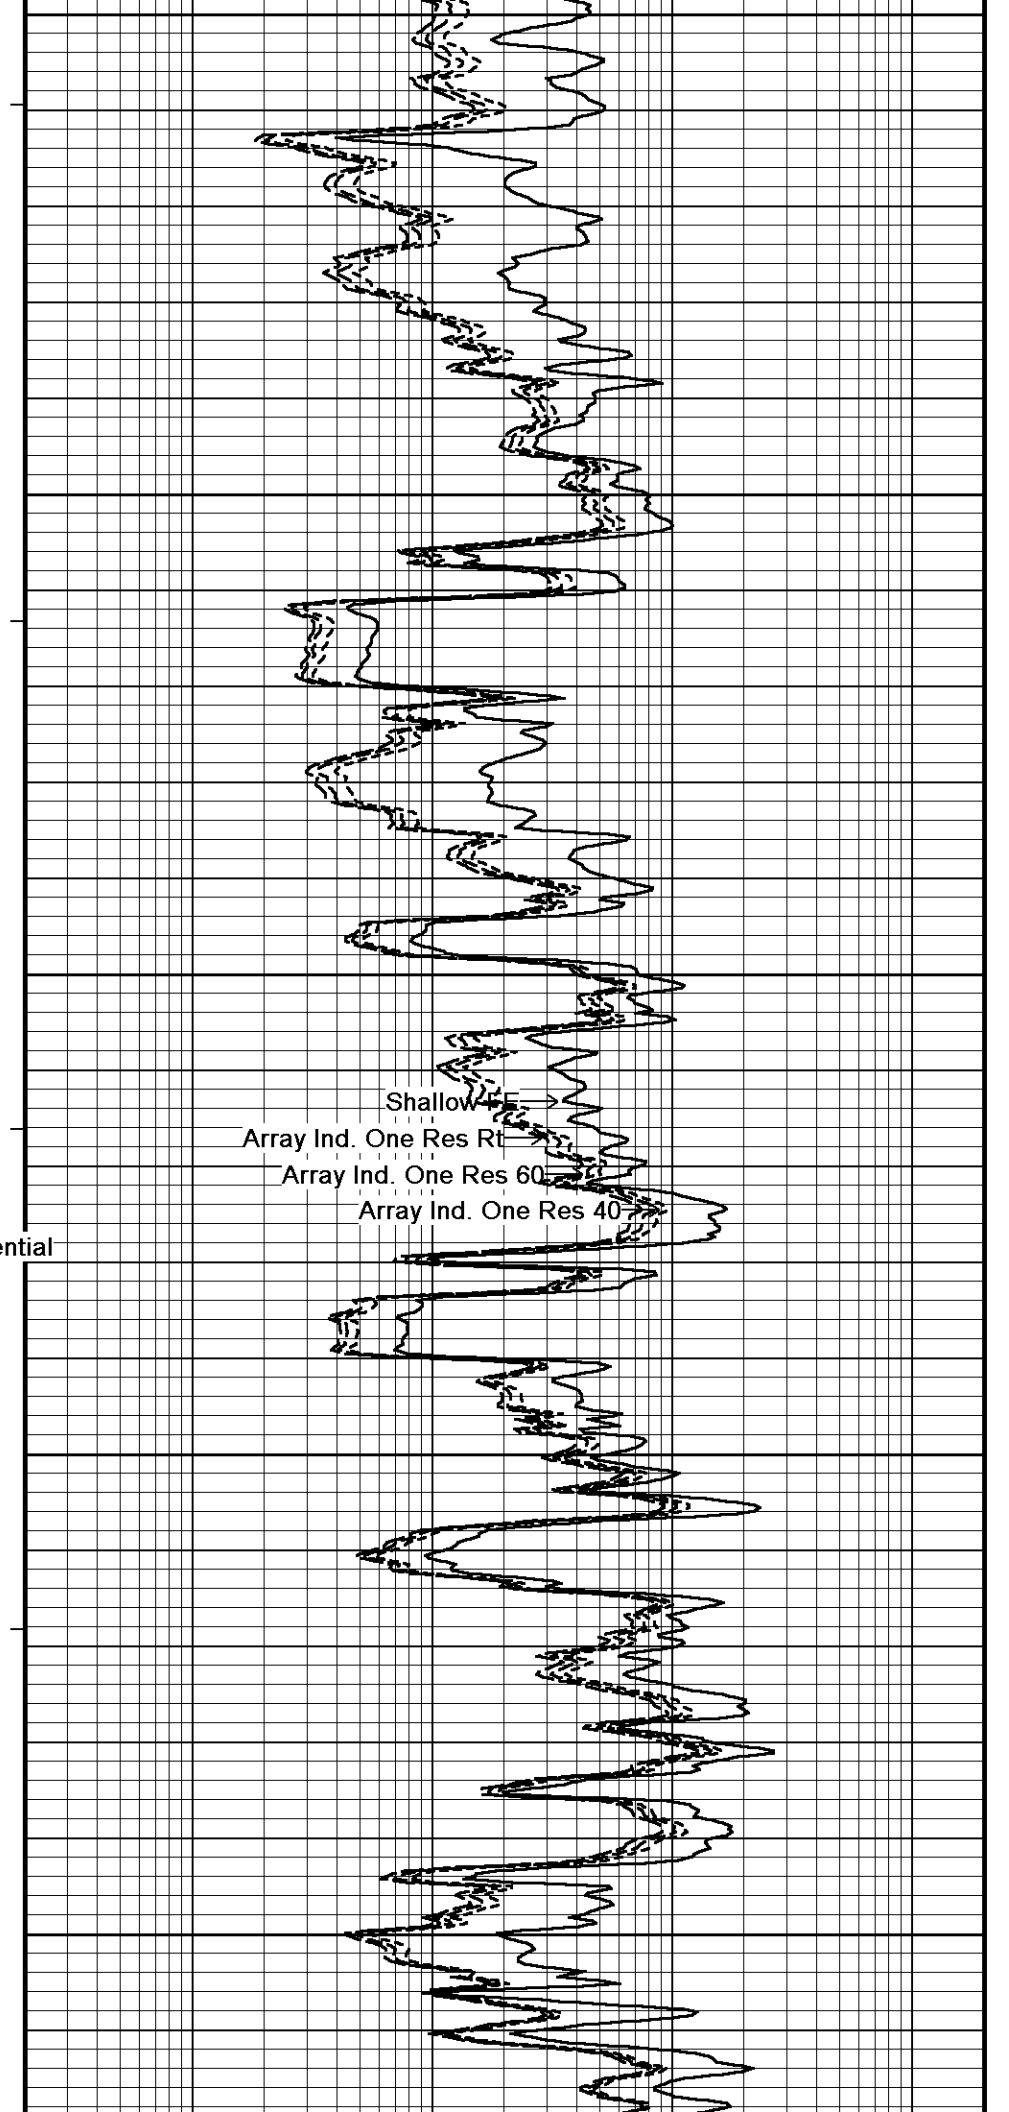

Shallow  
Array Ind. One Res 60  
Array Ind. One Res 40

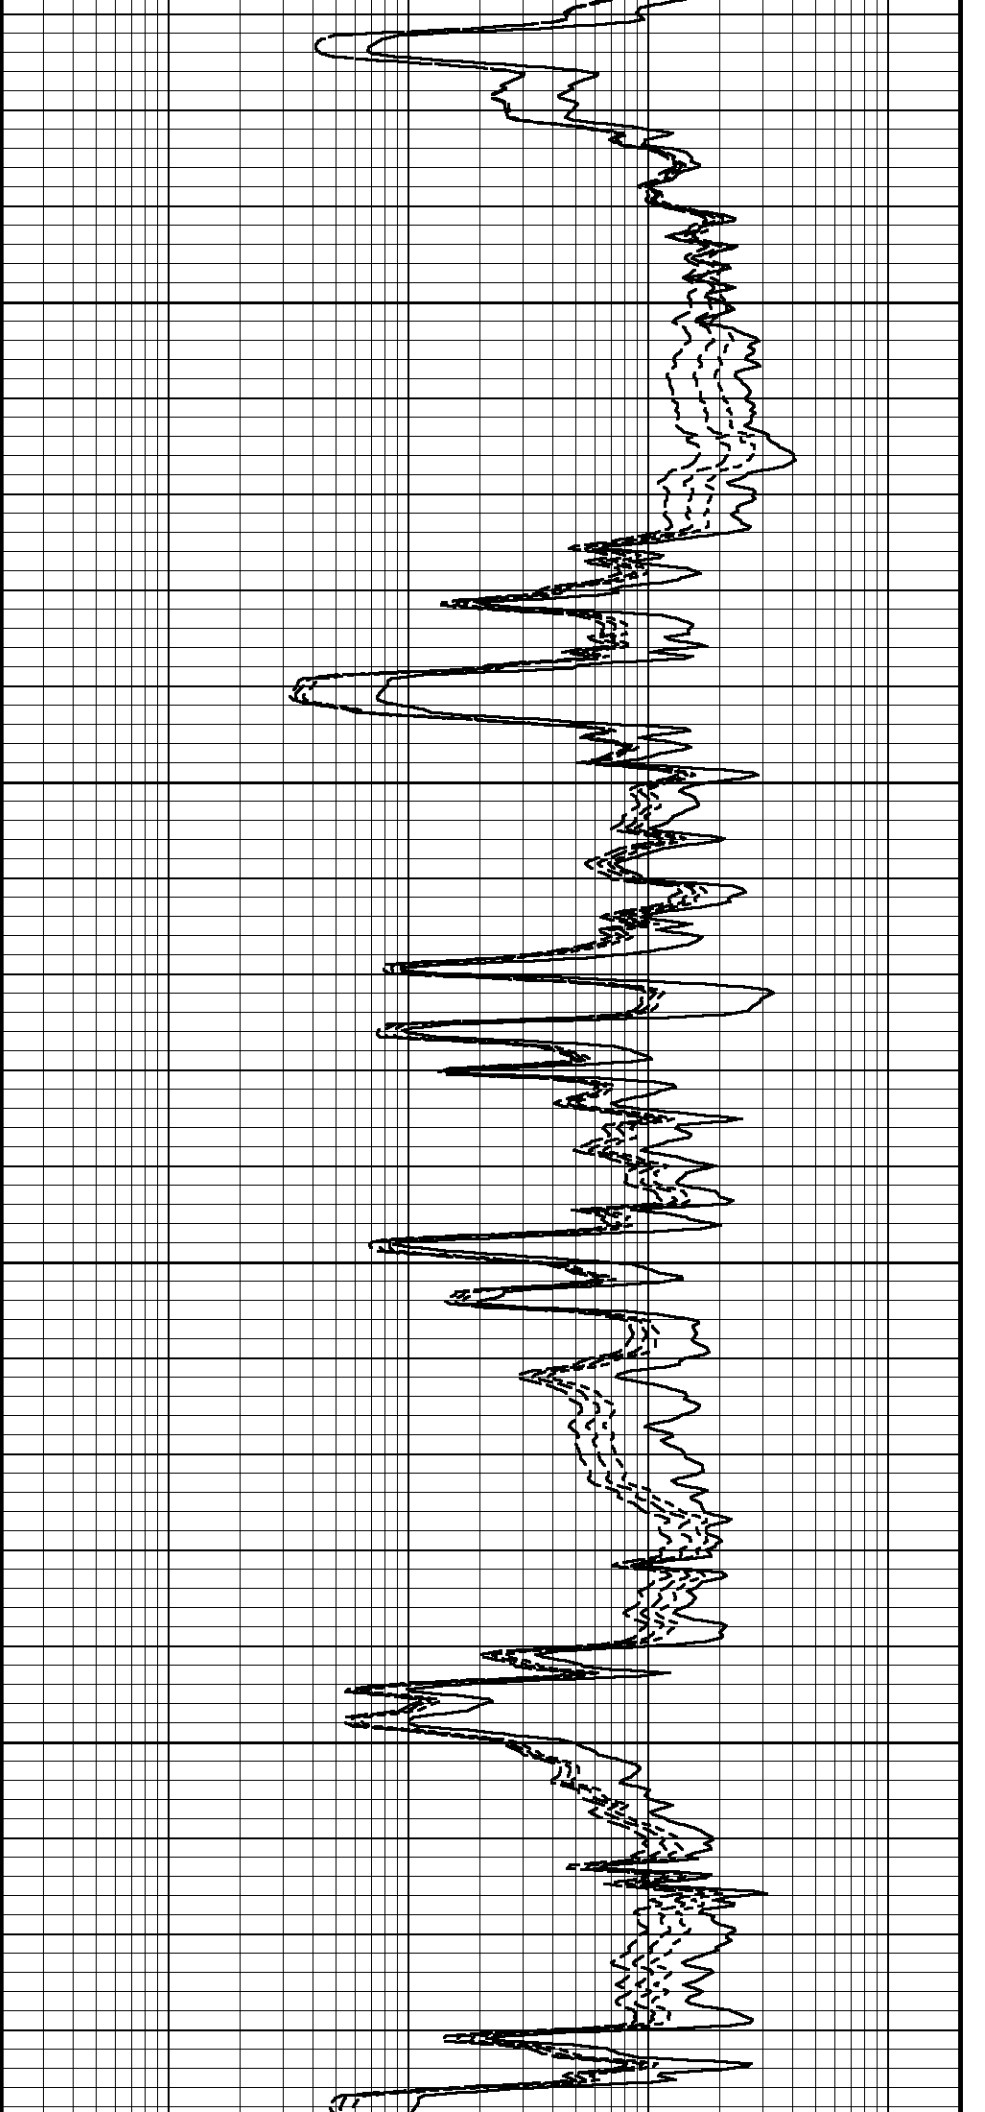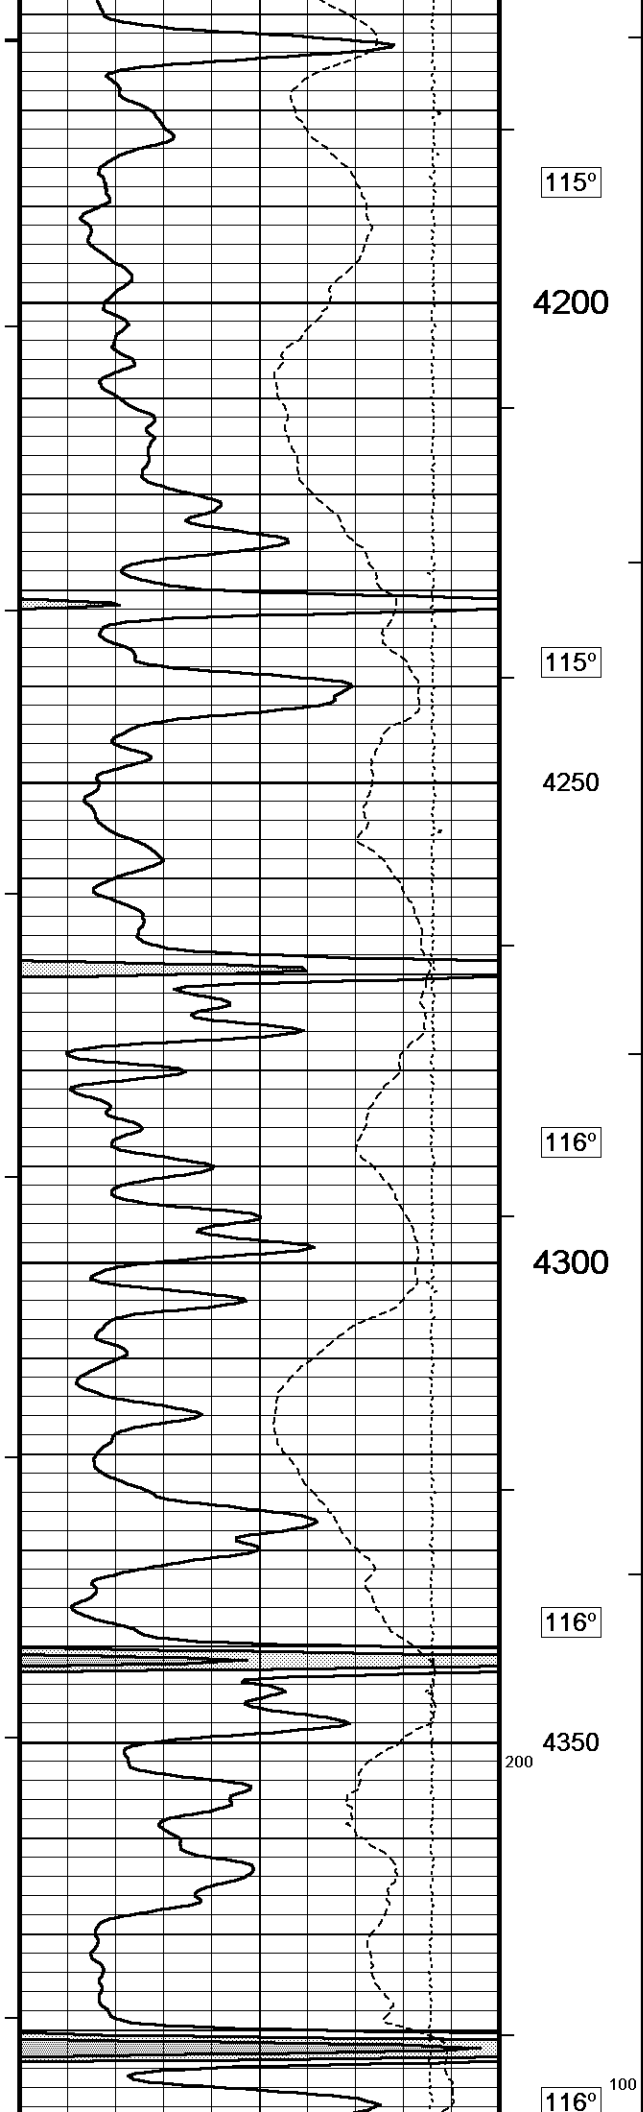

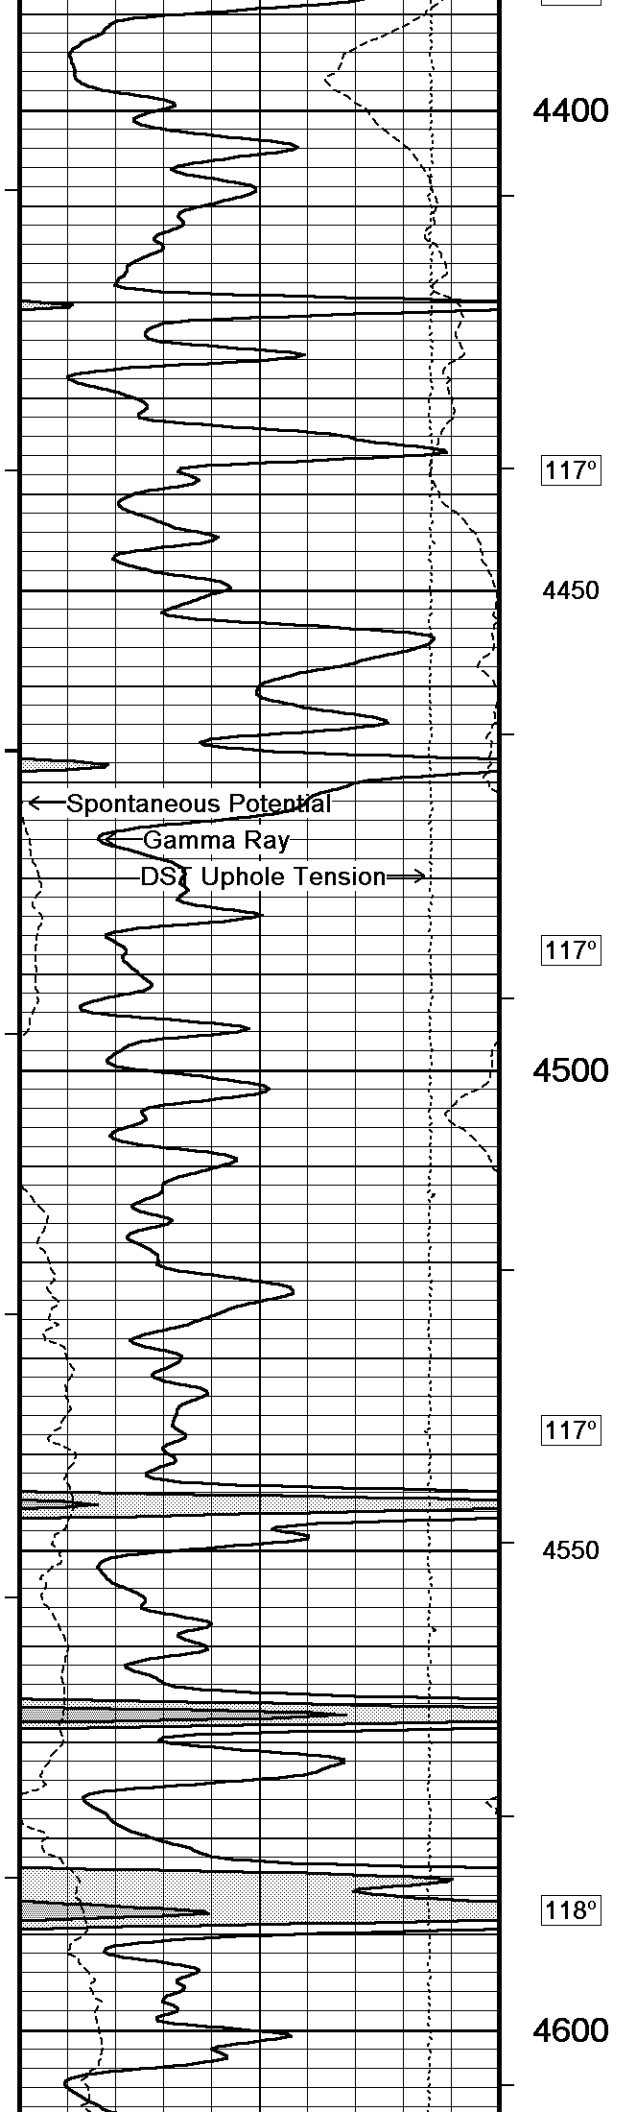

4400

117°

4450

117°


4500

117°



4550

118°

4600

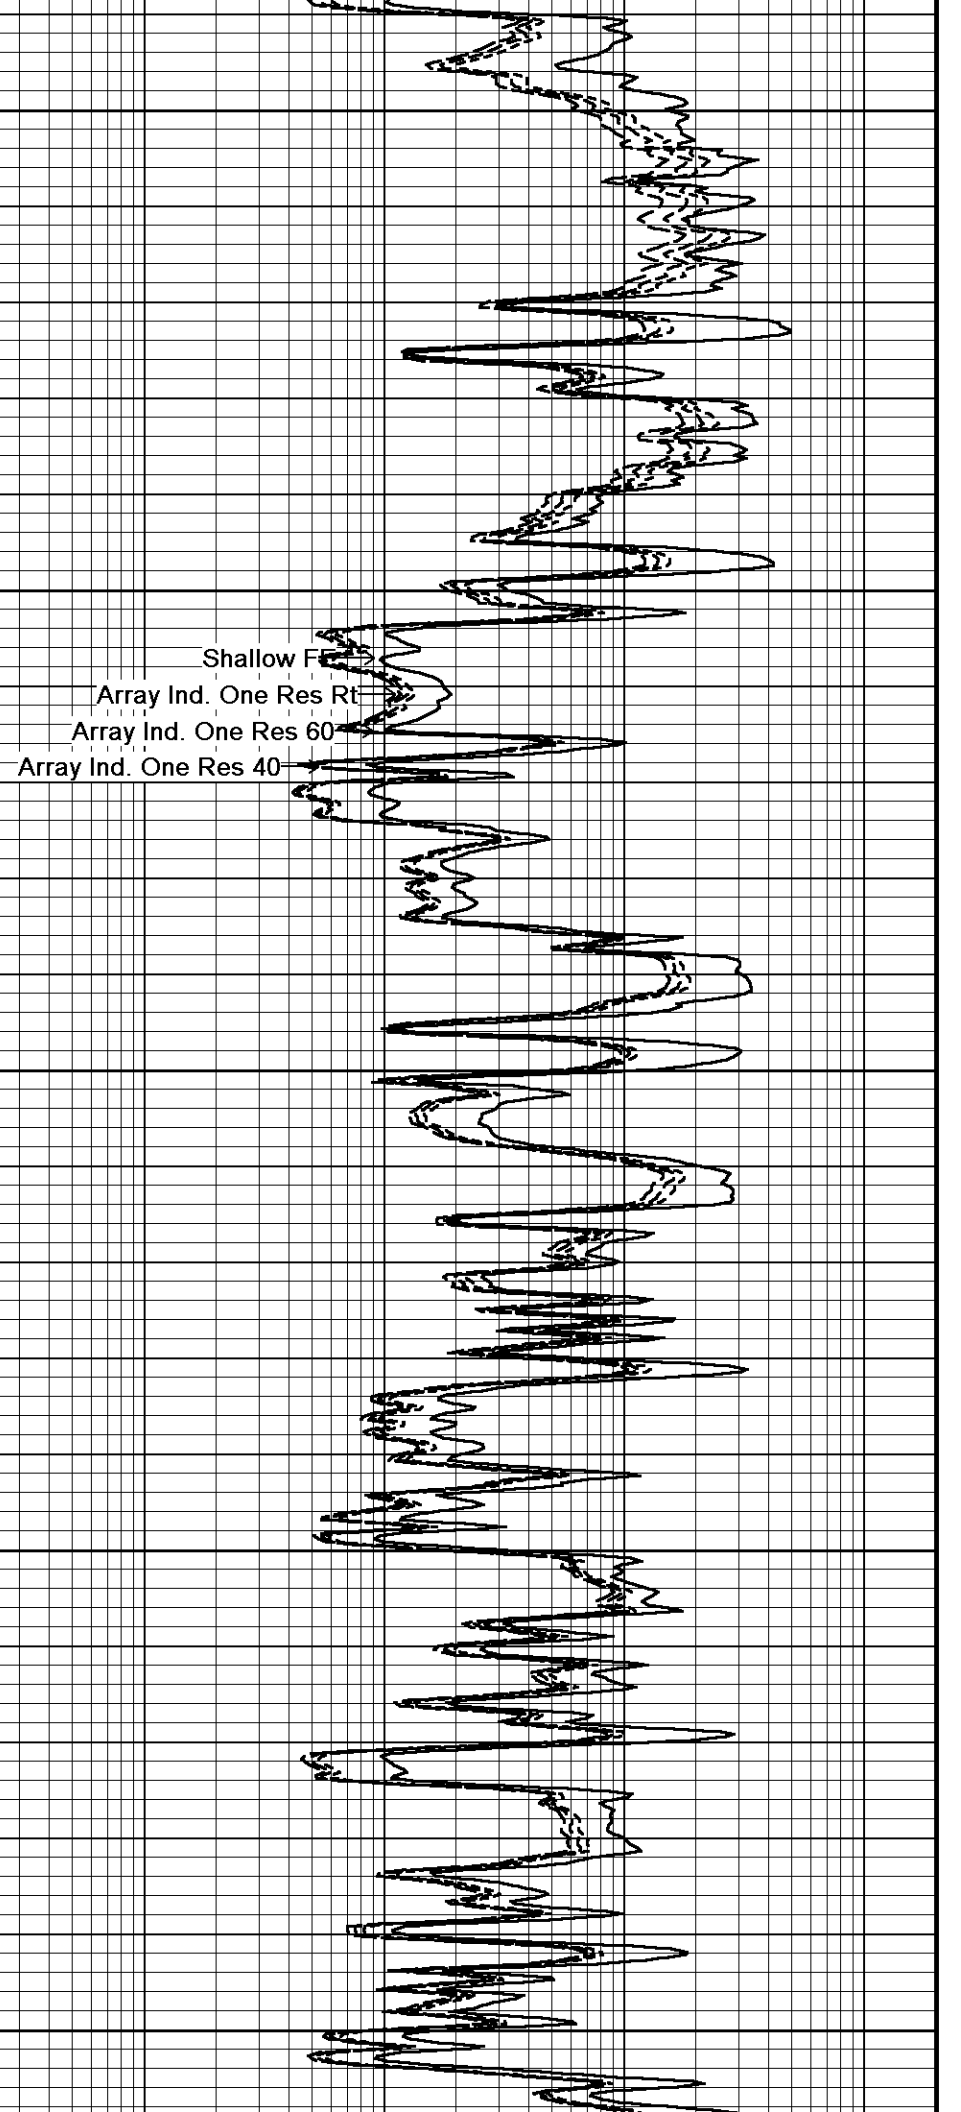

Shallow F  
Array Ind. One Res Rt  
Array Ind. One Res 60  
Array Ind. One Res 40

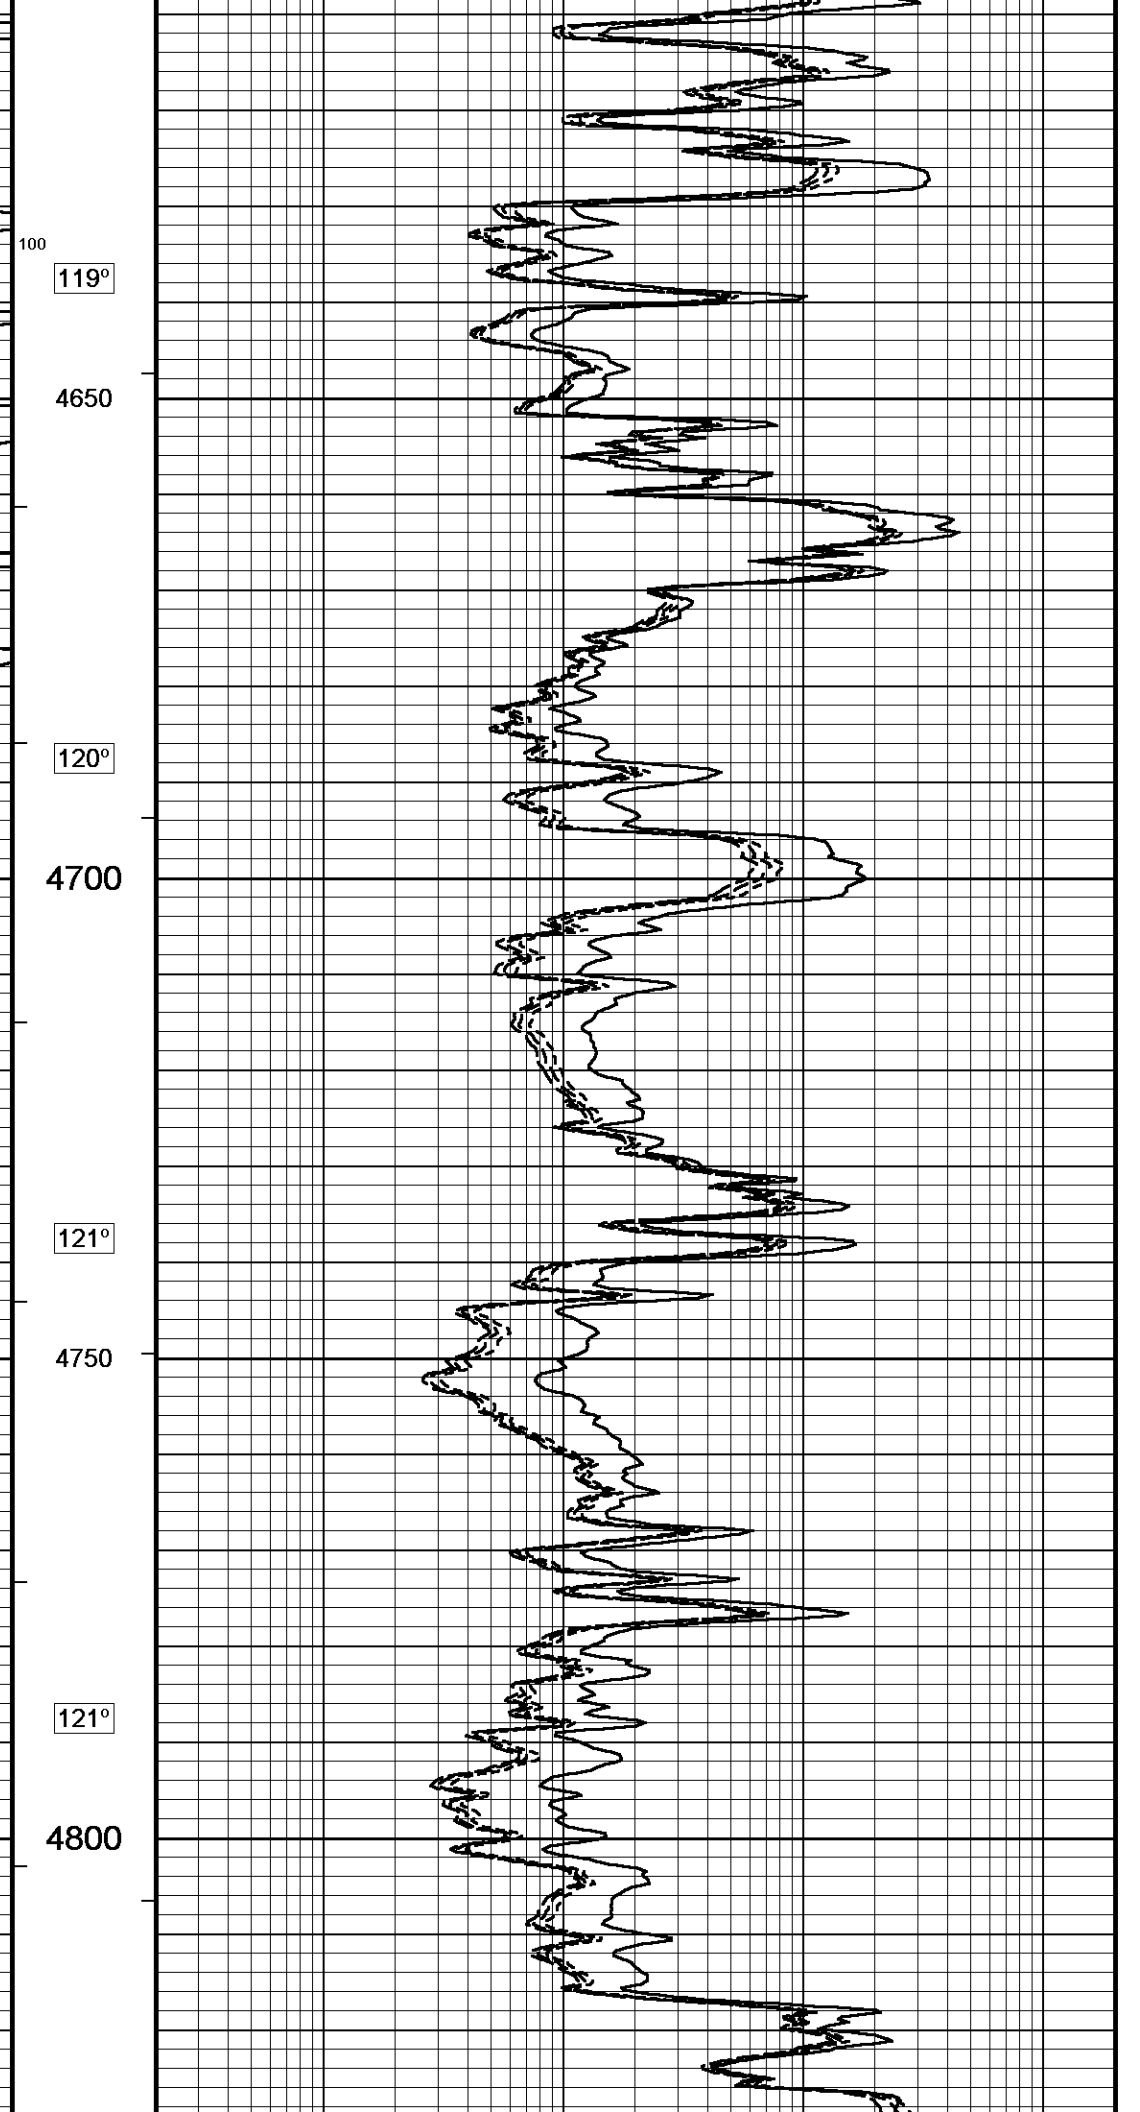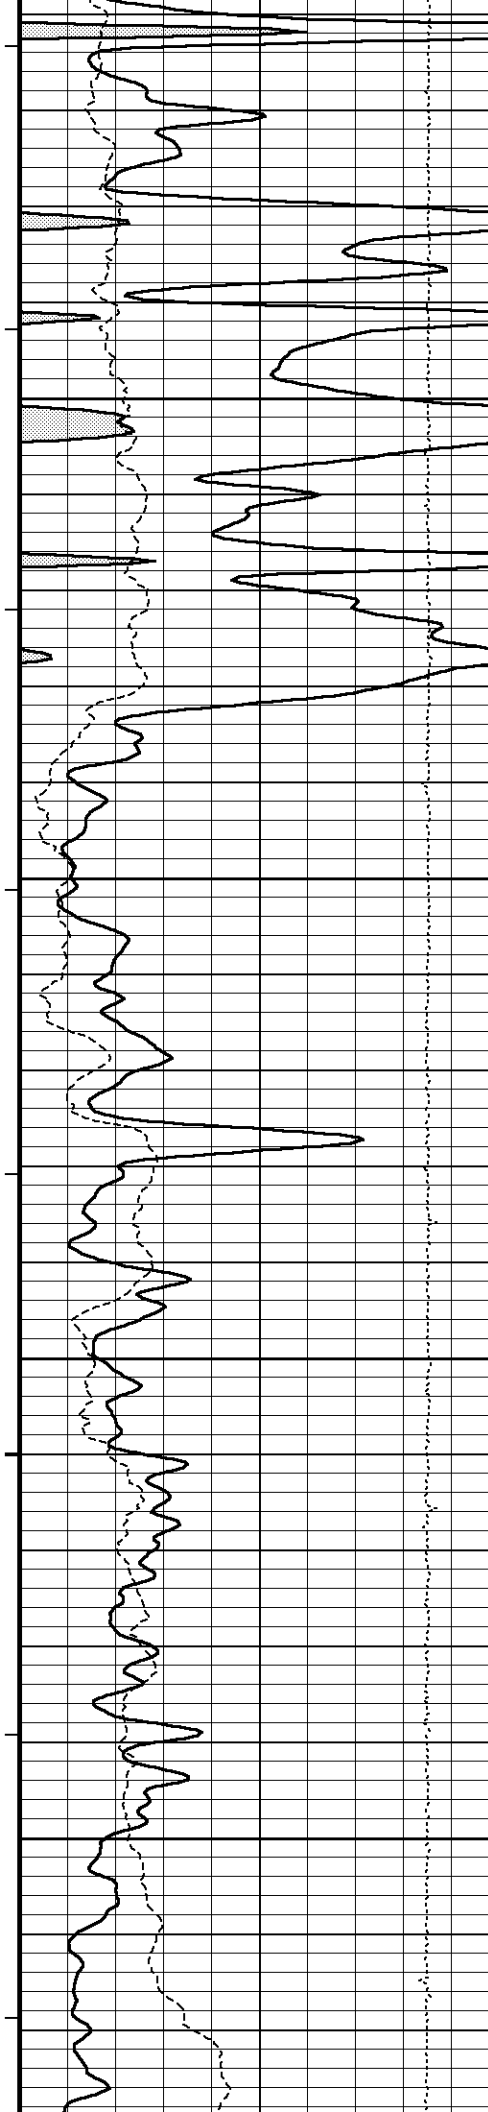

119°

120°

121°

121°





100

4650

4700

4750

4800

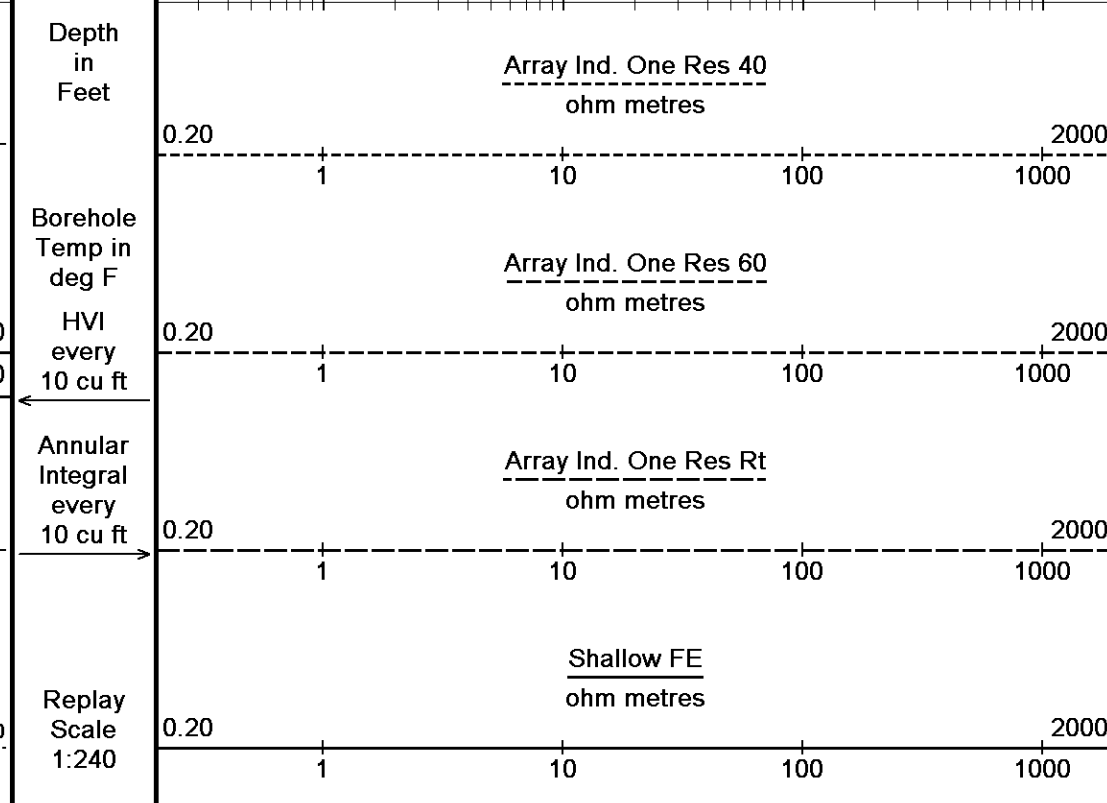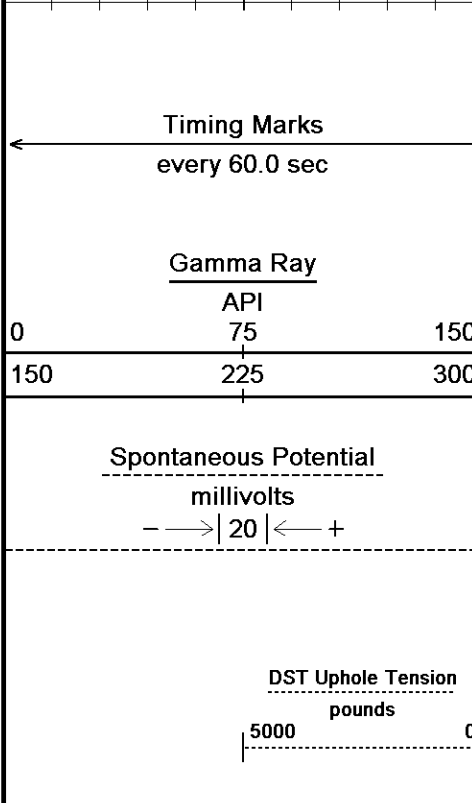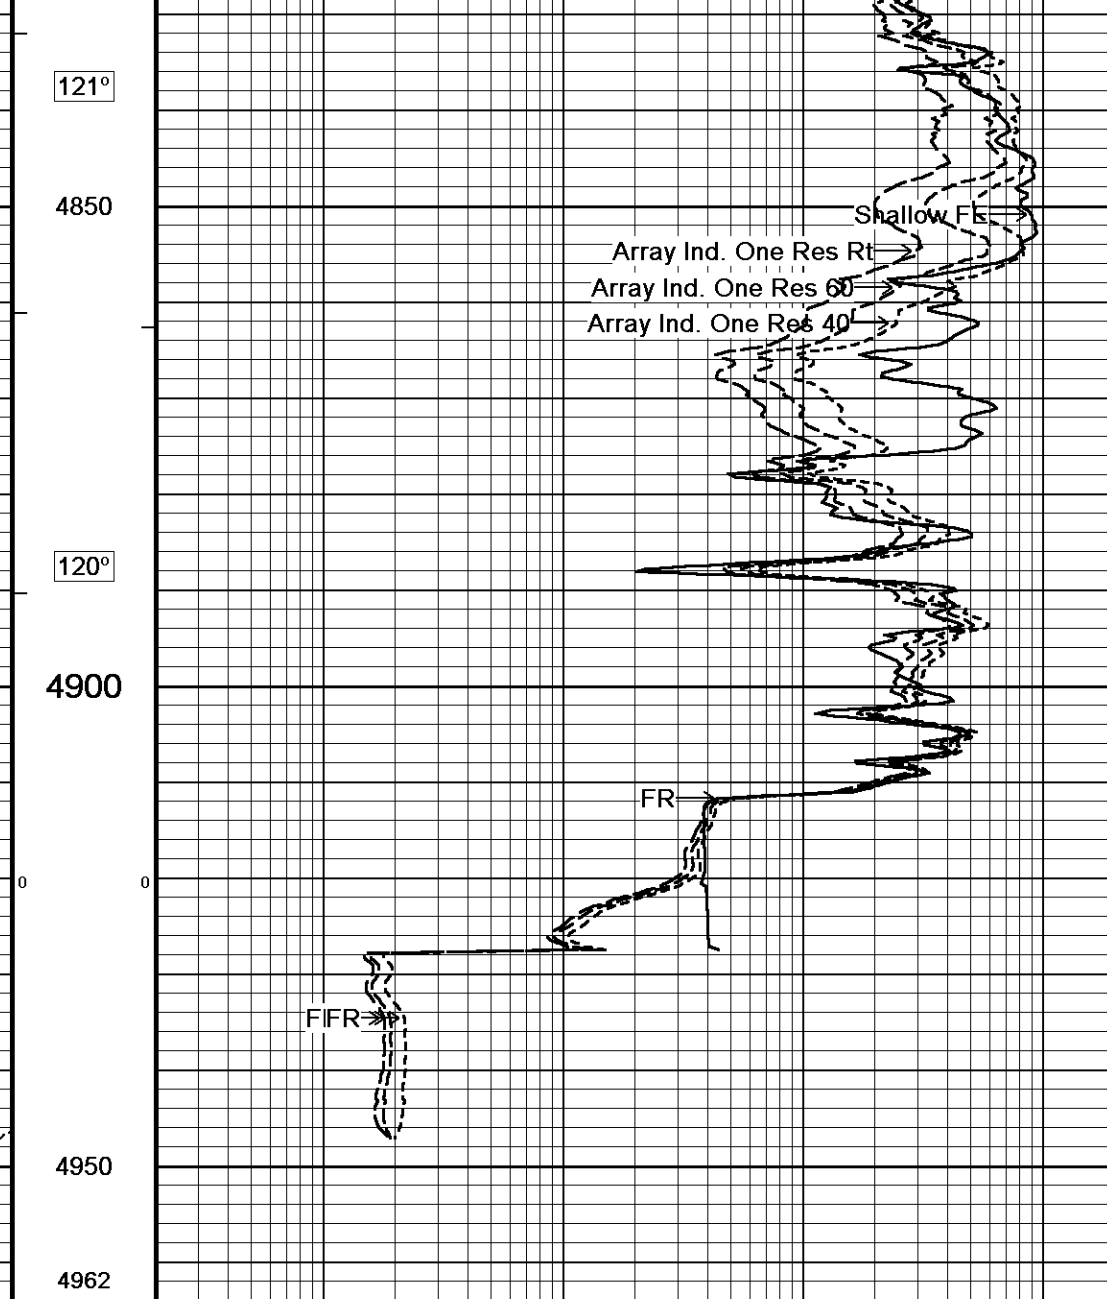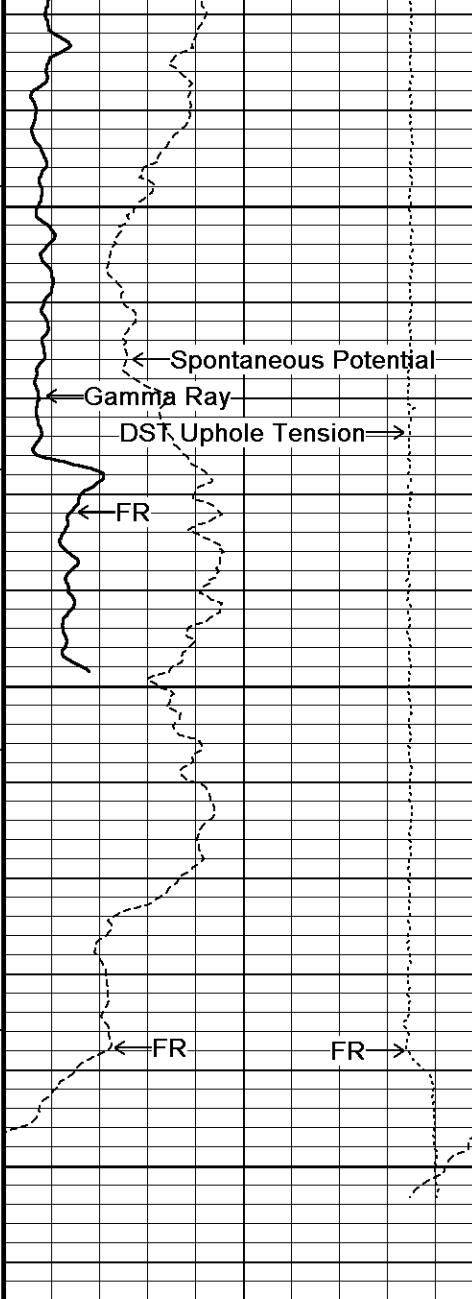

5 INCH MAIN

REPEAT SECTION


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 01-APR-2014 18:35

Filename: C:\Minimus 13.08.2113\Log\FIML ...\FIML Natural Resources Mulville #15B-18-2029\_001.dta


Recorded on 01-APR-2014 14:29

System Versions: Logged with 13.08.2113 Plotted with 13.08.2113


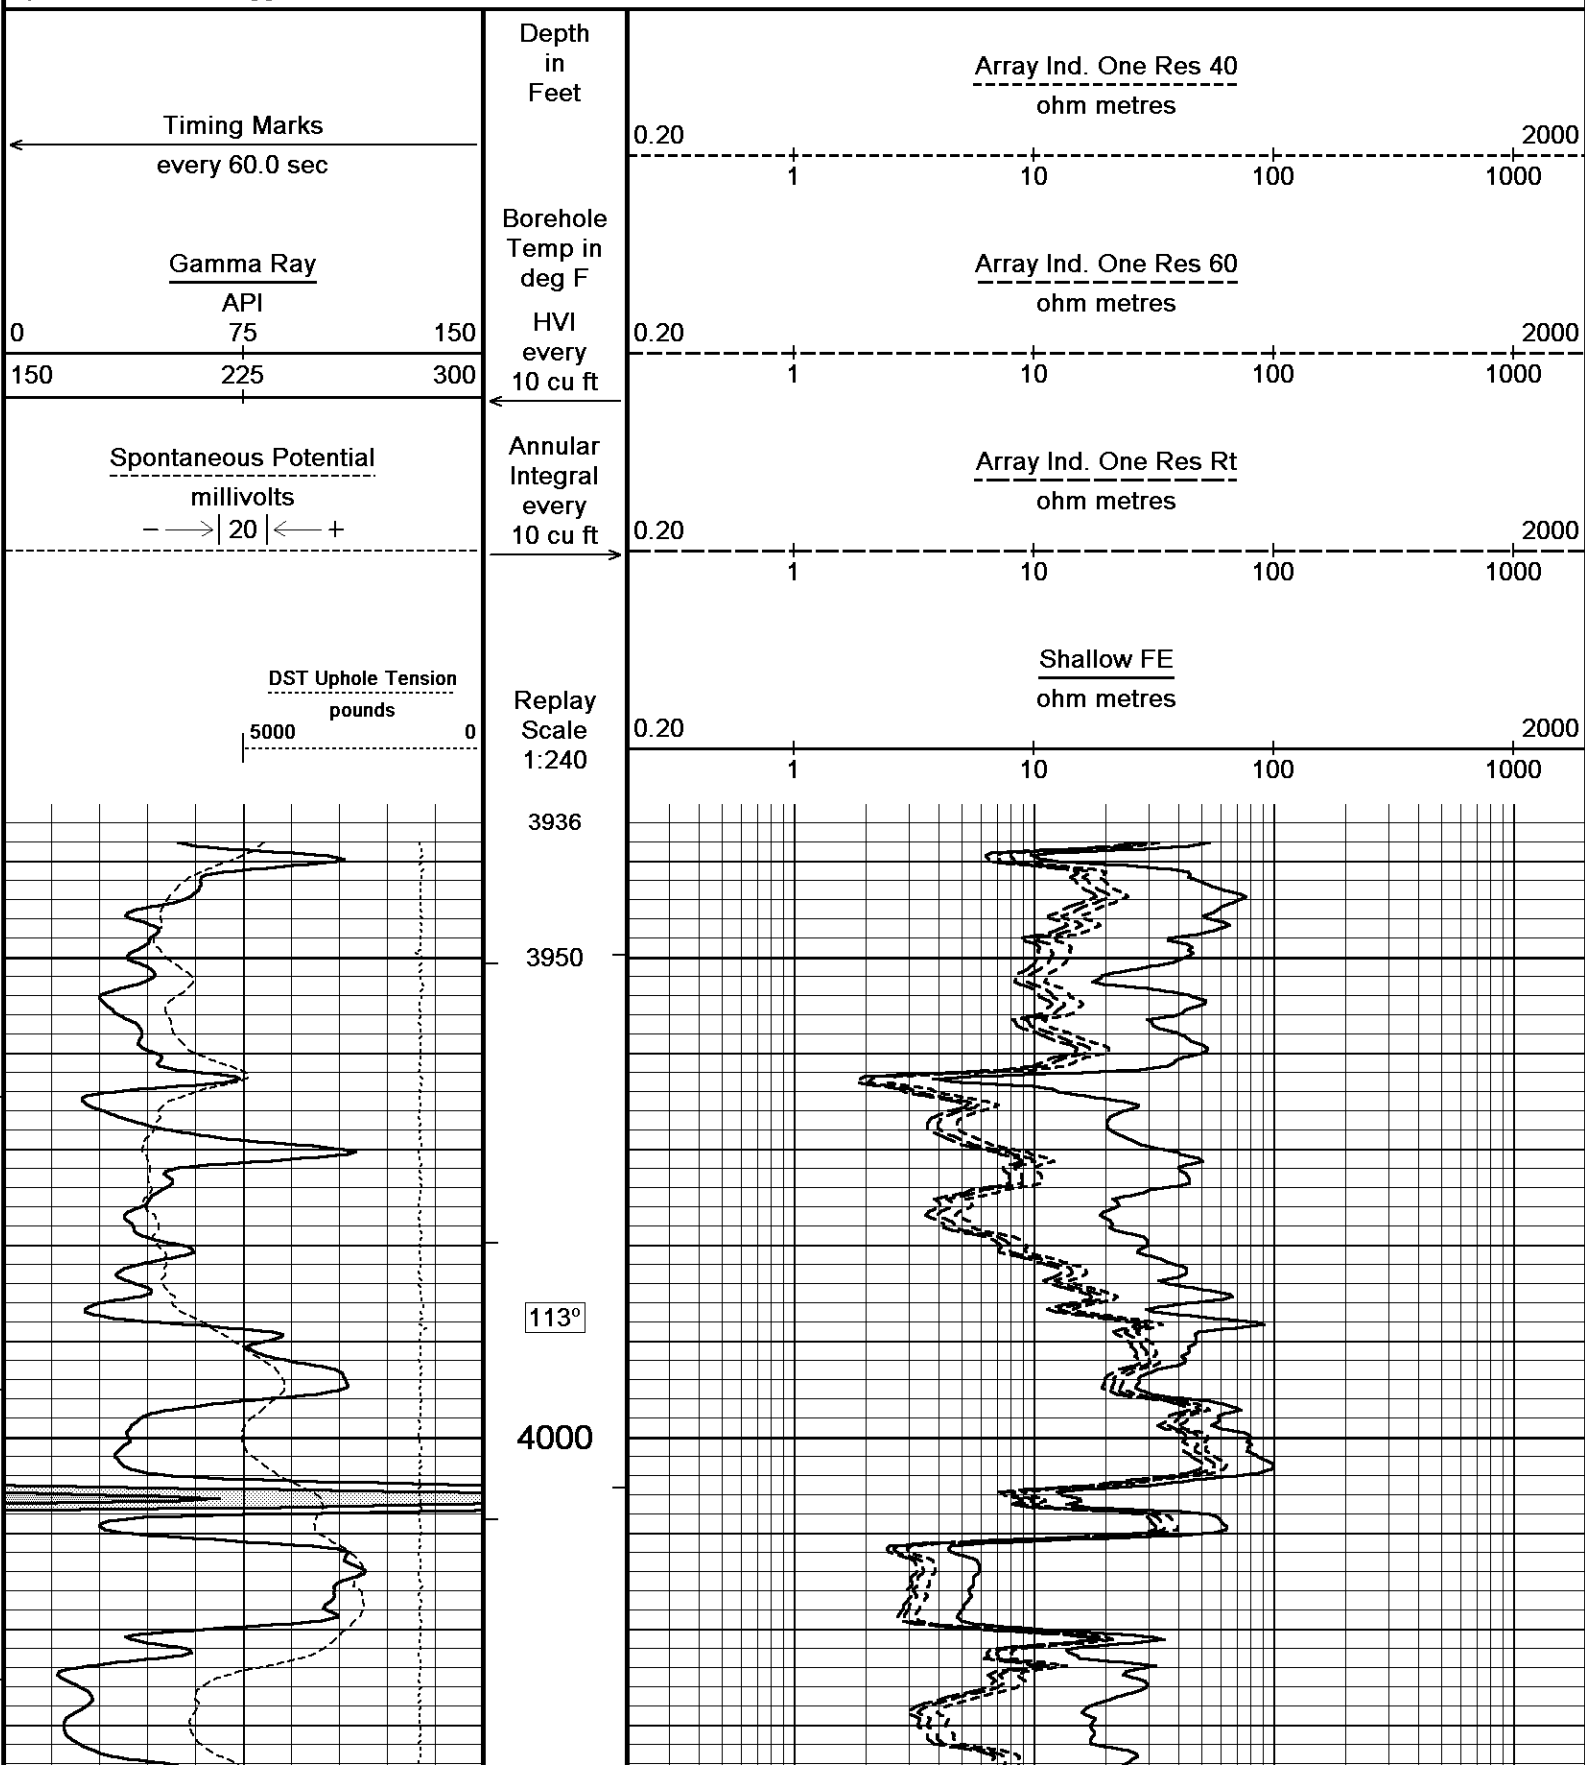


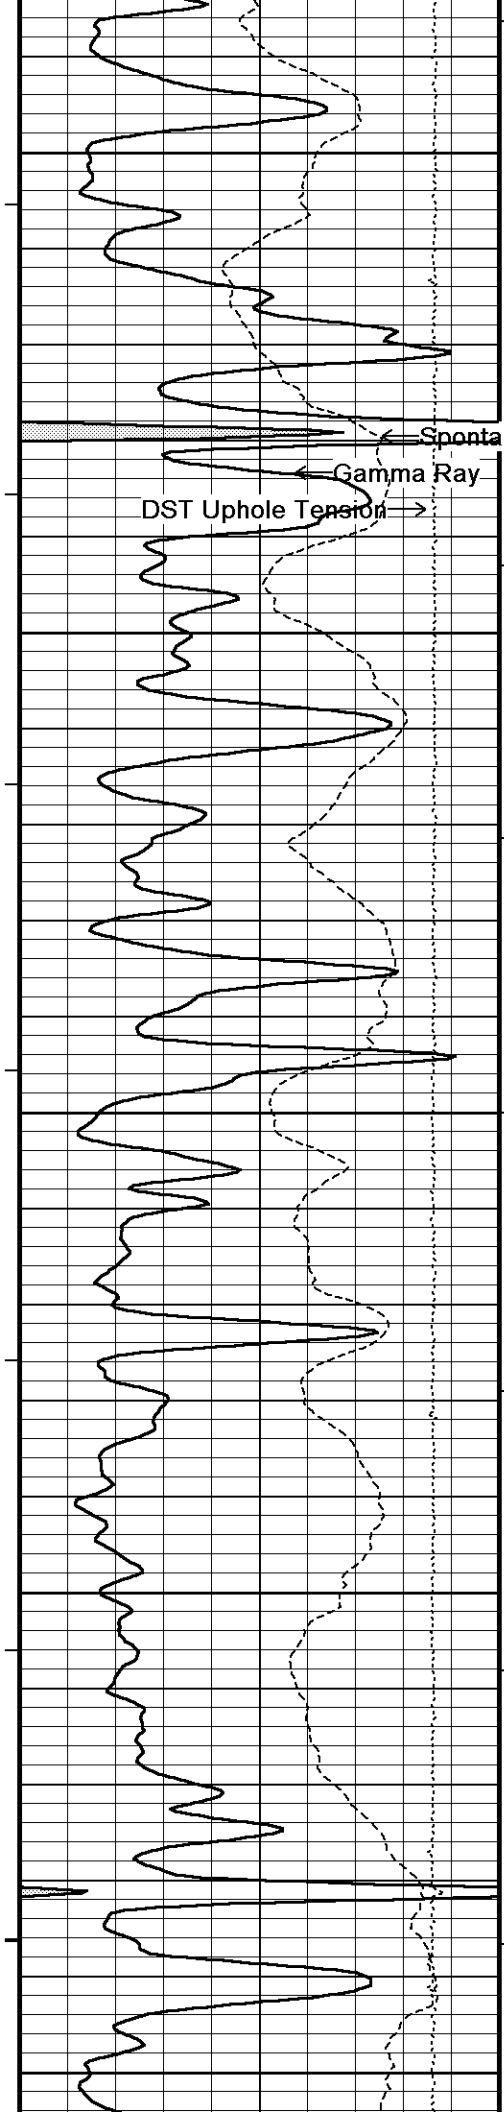

113°  
4050  
300  
114°  
4100  
114°  
4150  
114°  
4200  
115°  
4250

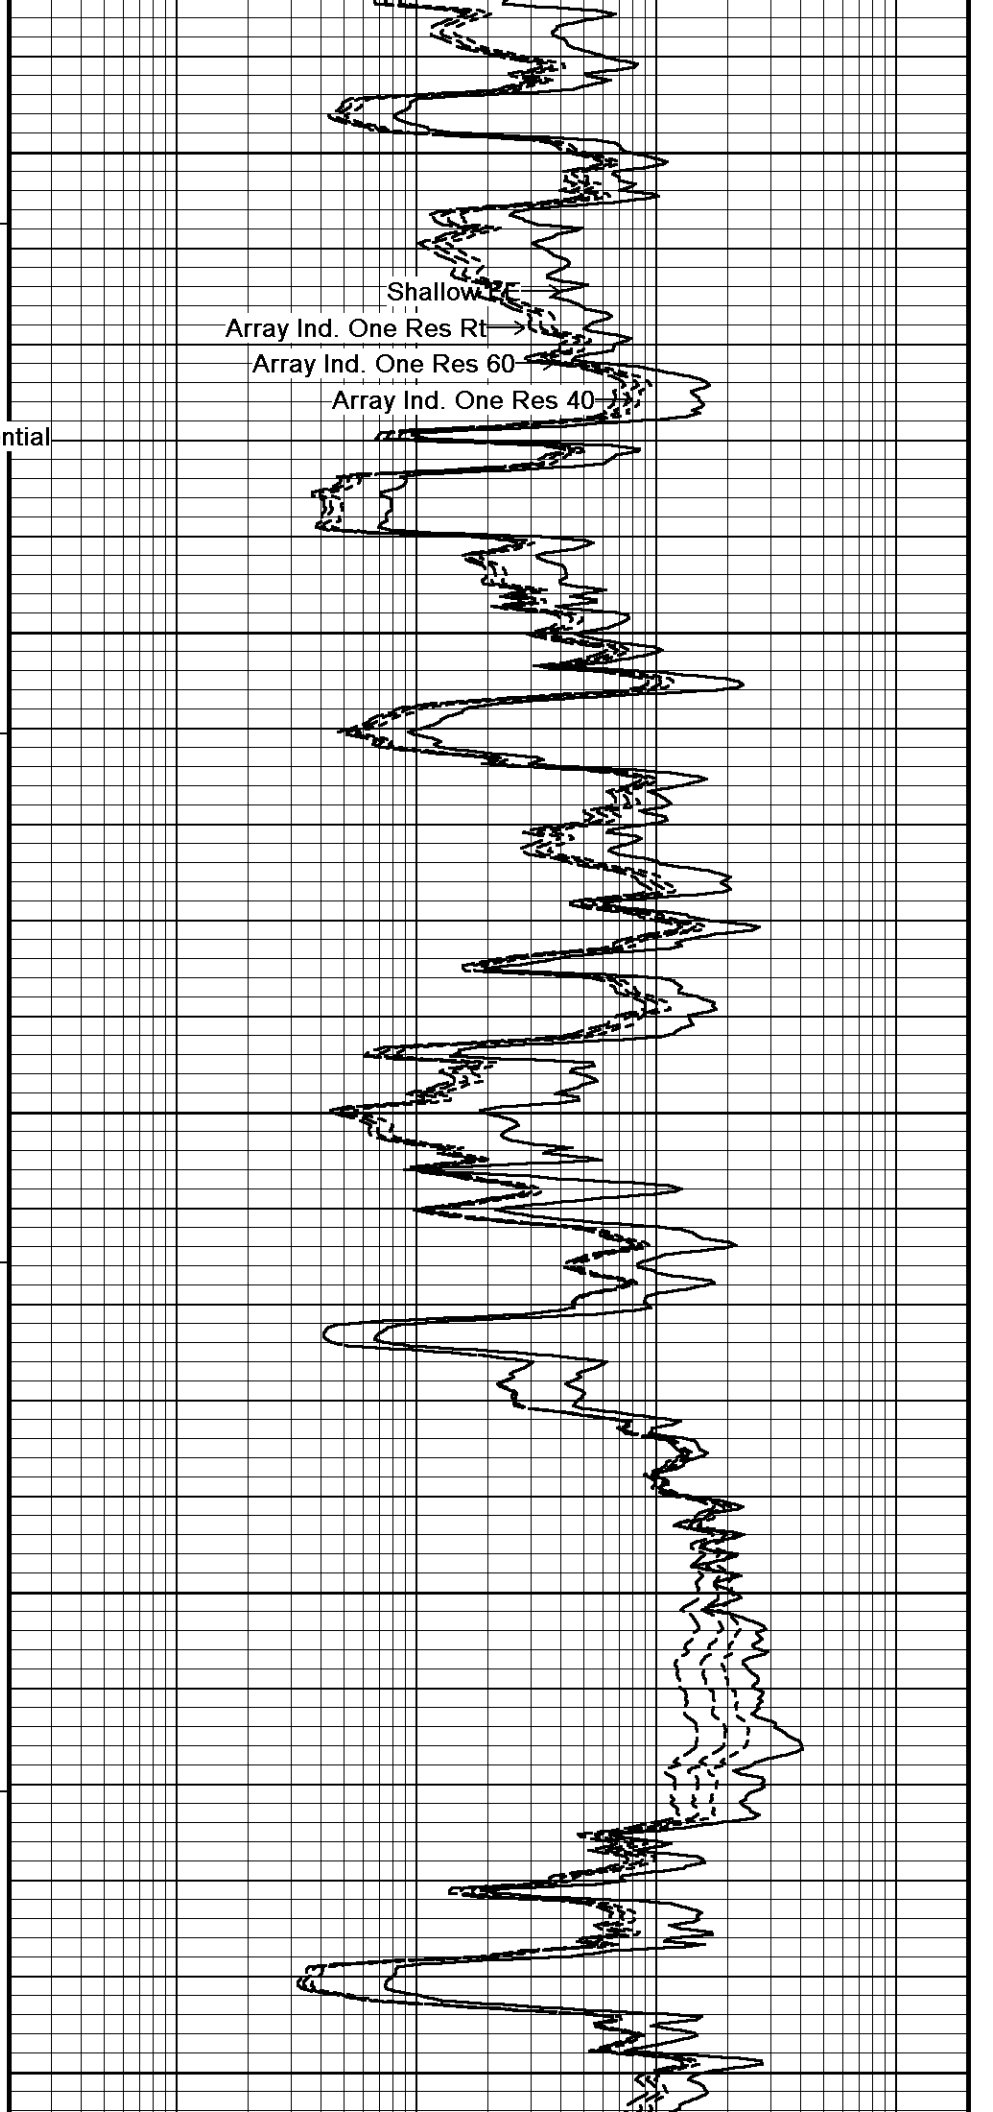

Shallow  
Array Ind. One Res Rt  
Array Ind. One Res 60  
Array Ind. One Res 40

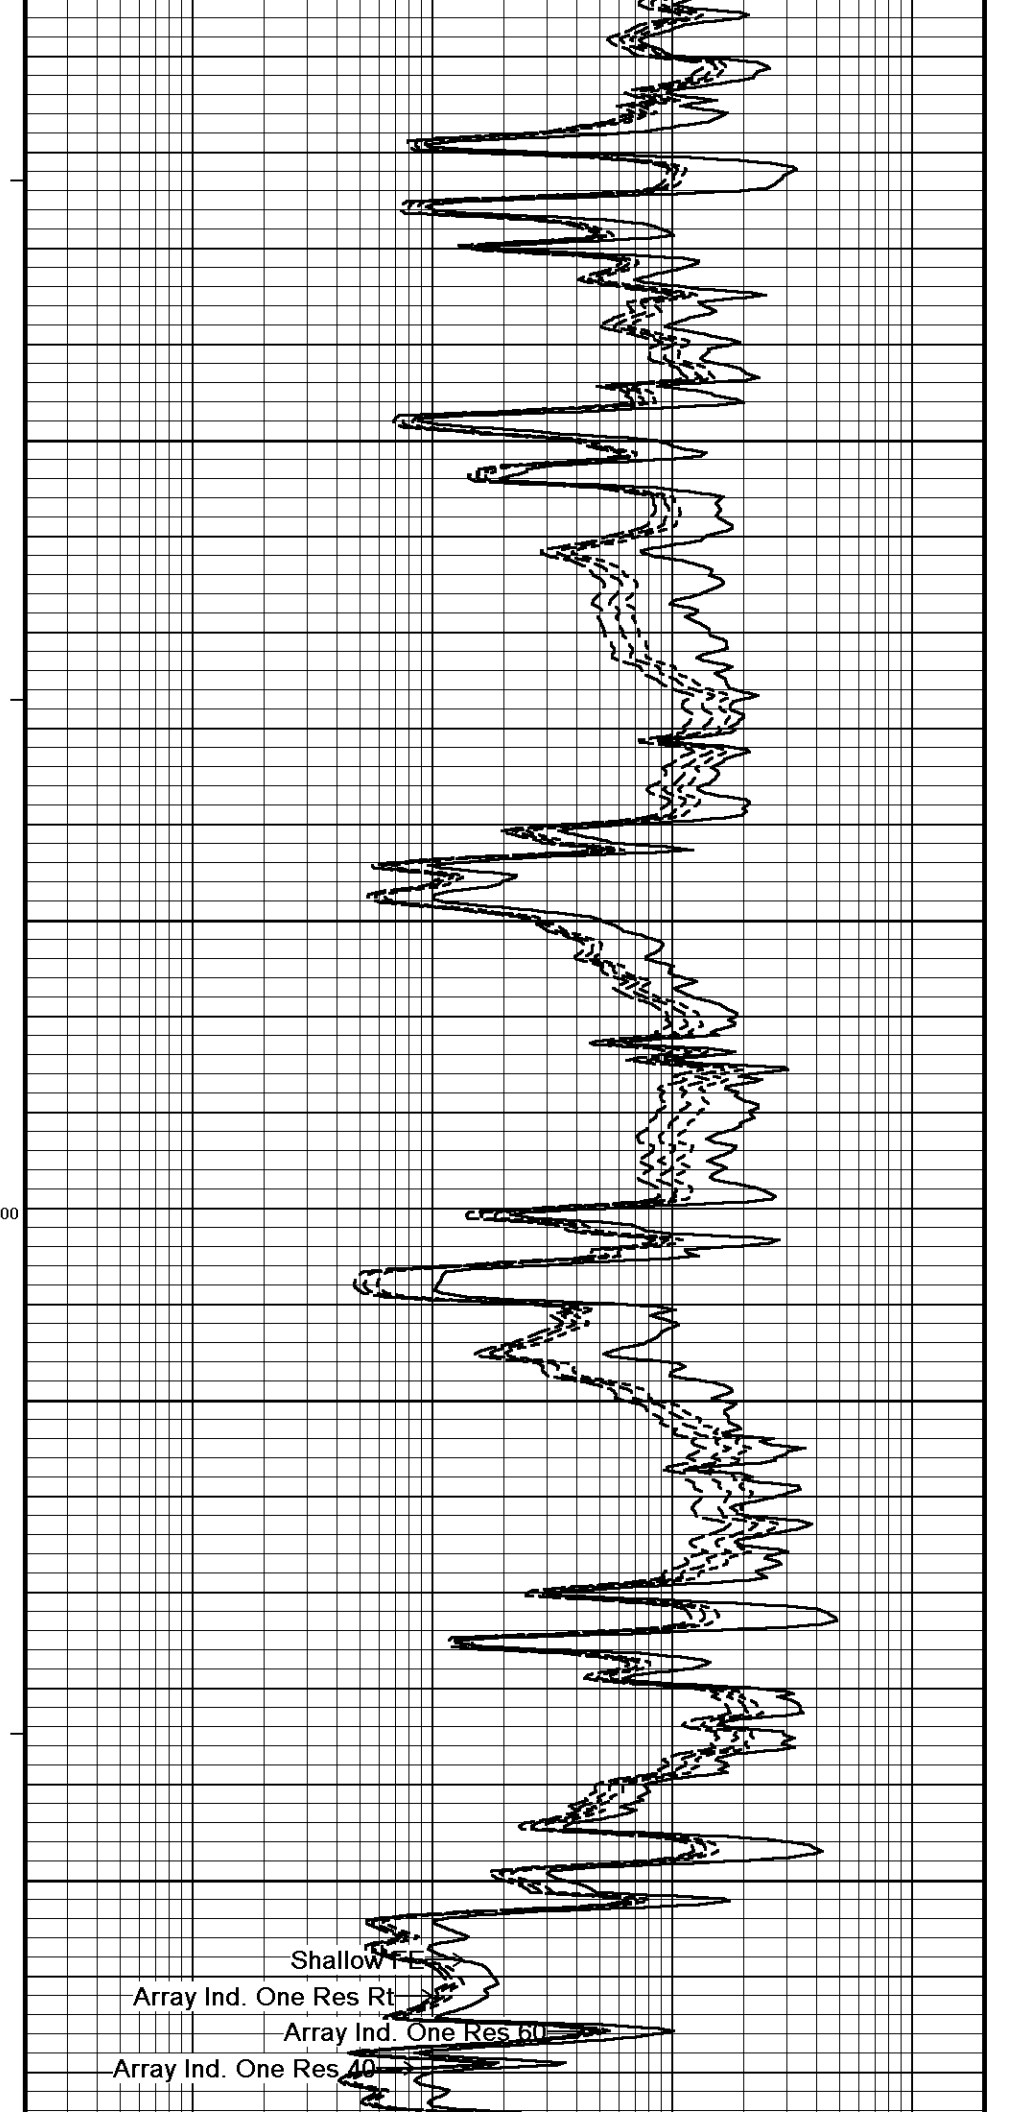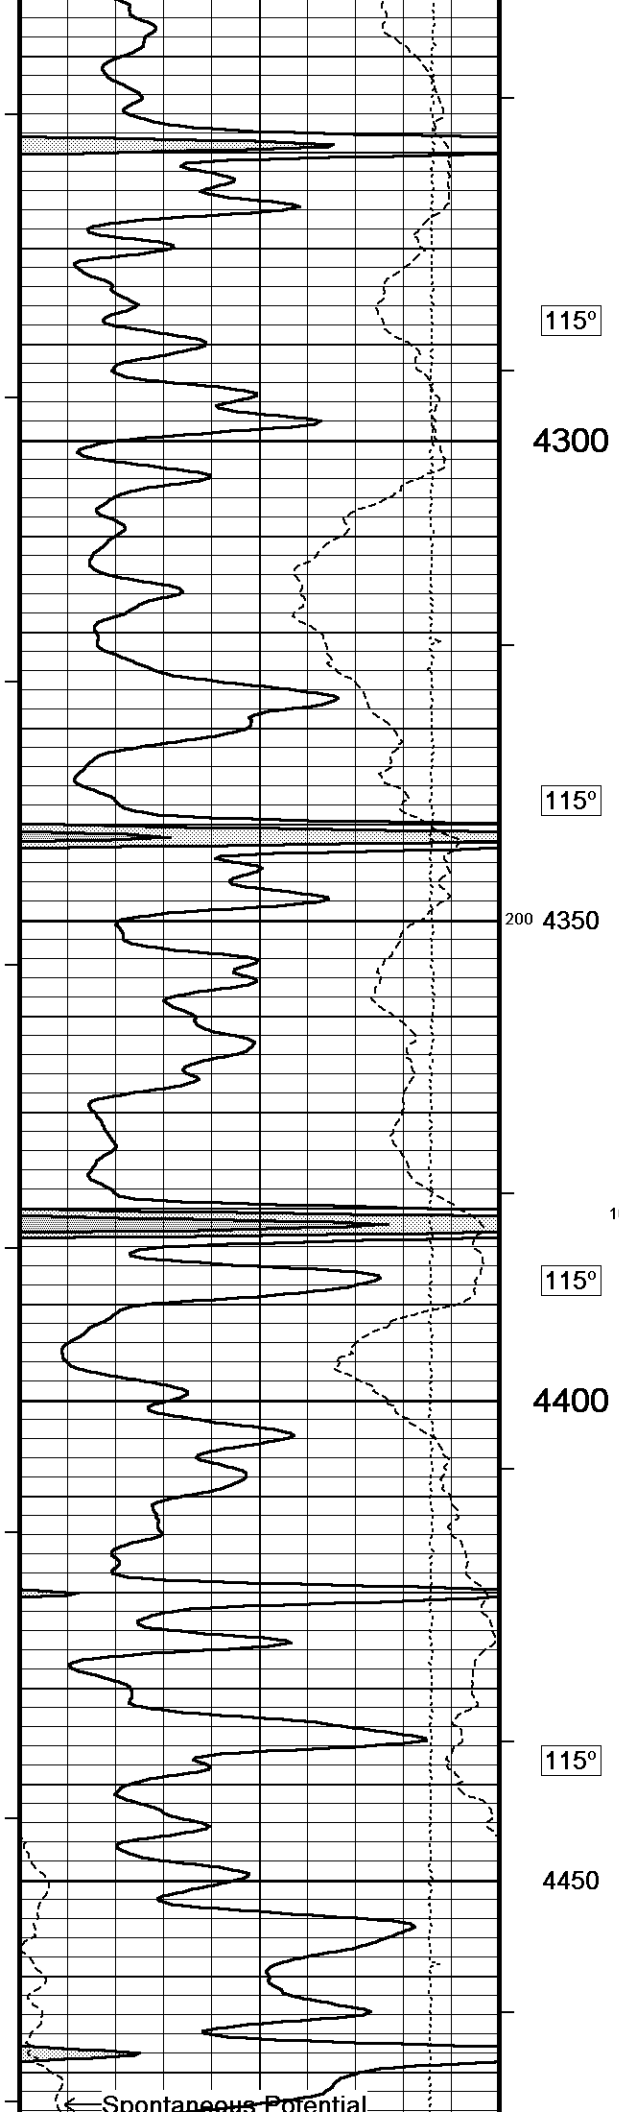

115°

4300

115°

200 4350

100

115°

4400

115°

4450


Shallow FE

Array Ind. One Res Rt

Array Ind. One Res 60

Array Ind. One Res 40

← Spontaneous Potential

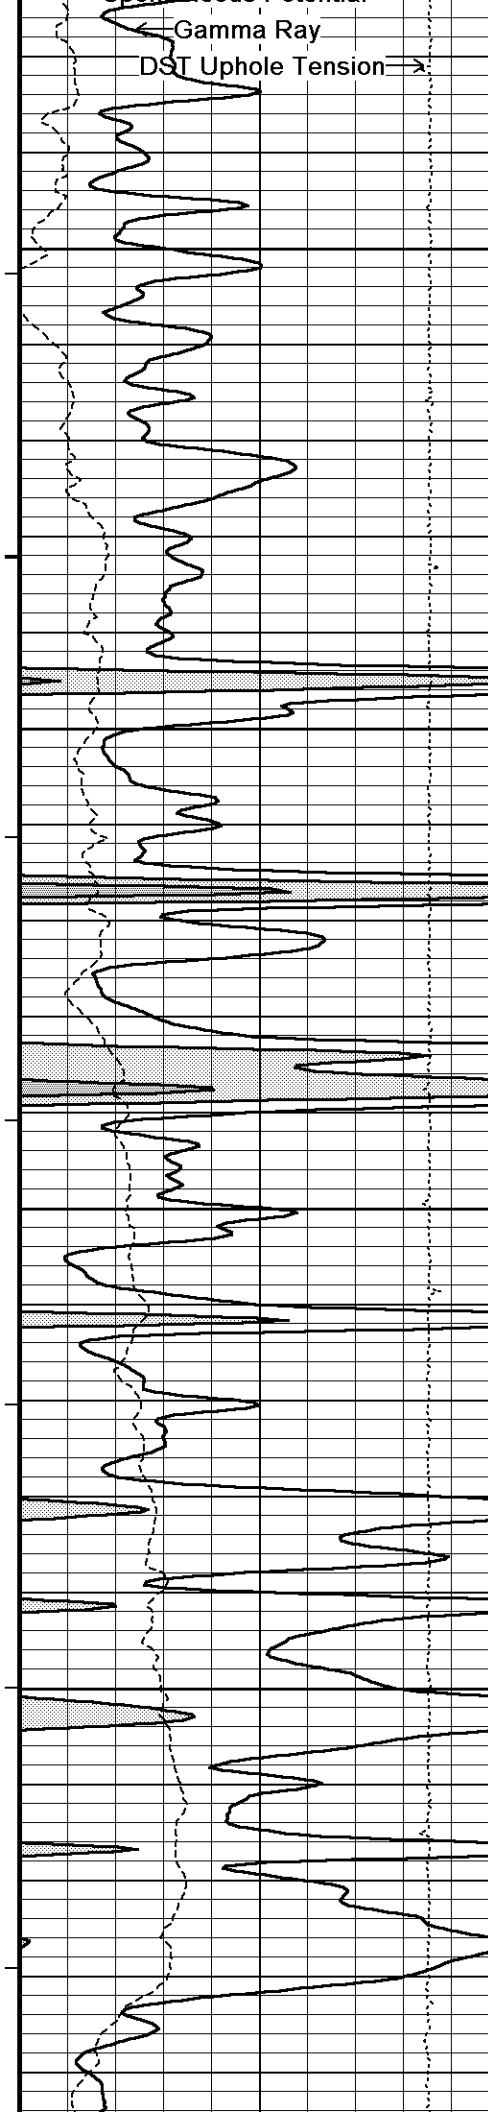

116°

4500

116°

4550

117°


4600



100


118°

4650

119°

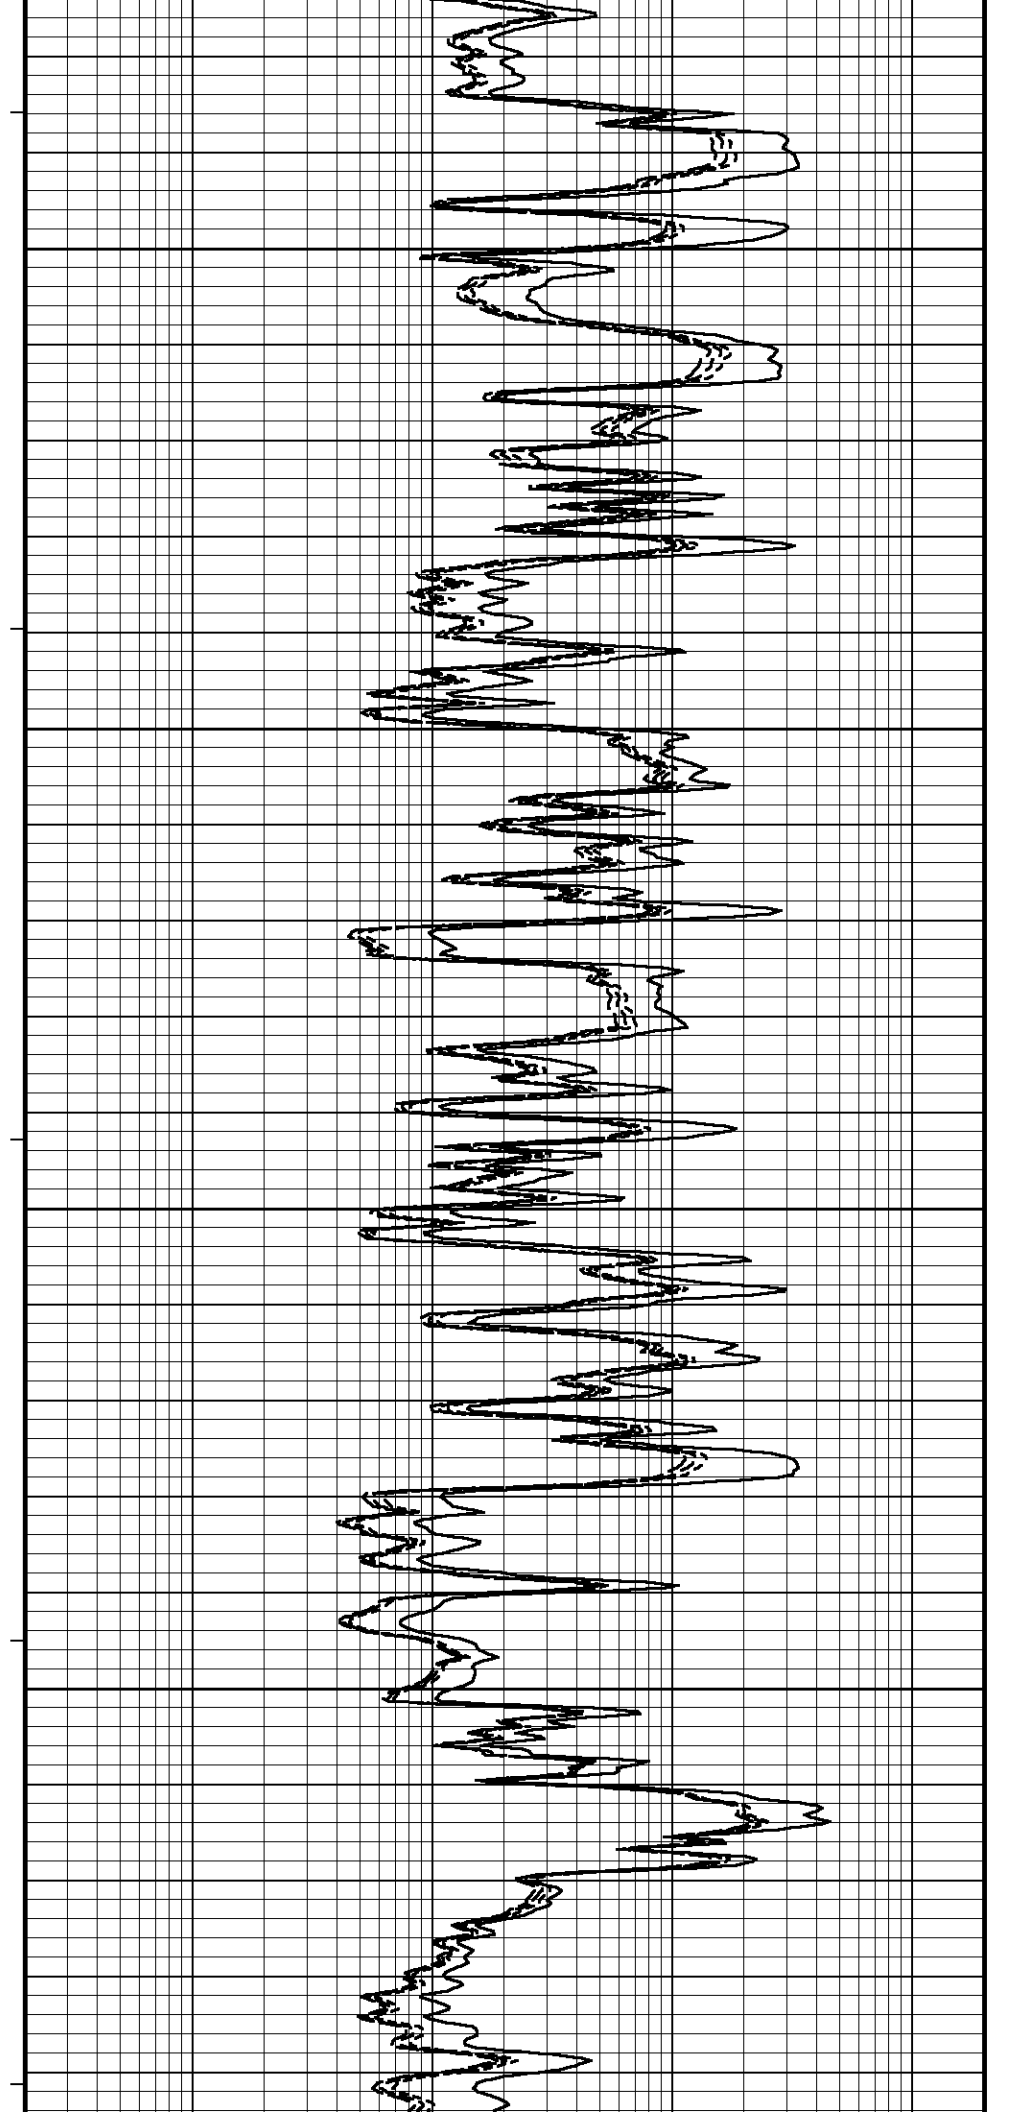

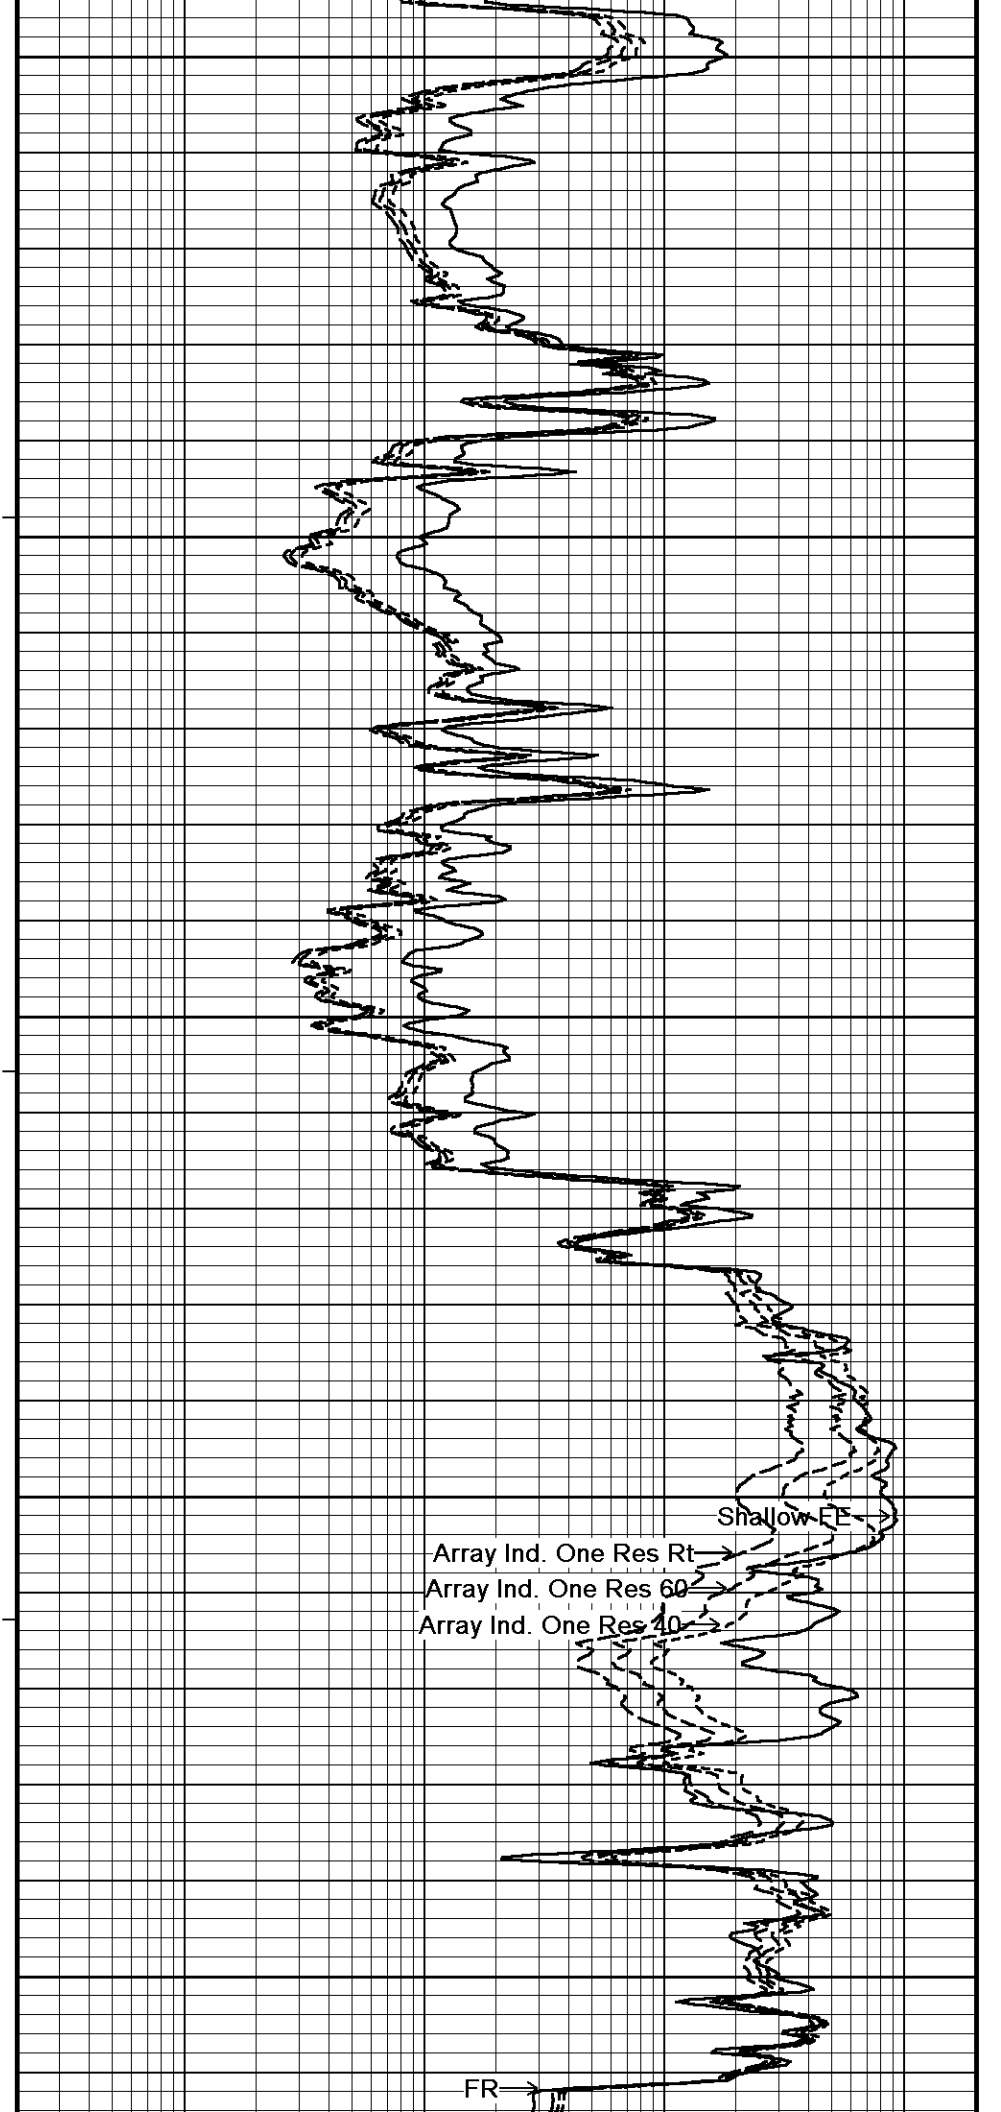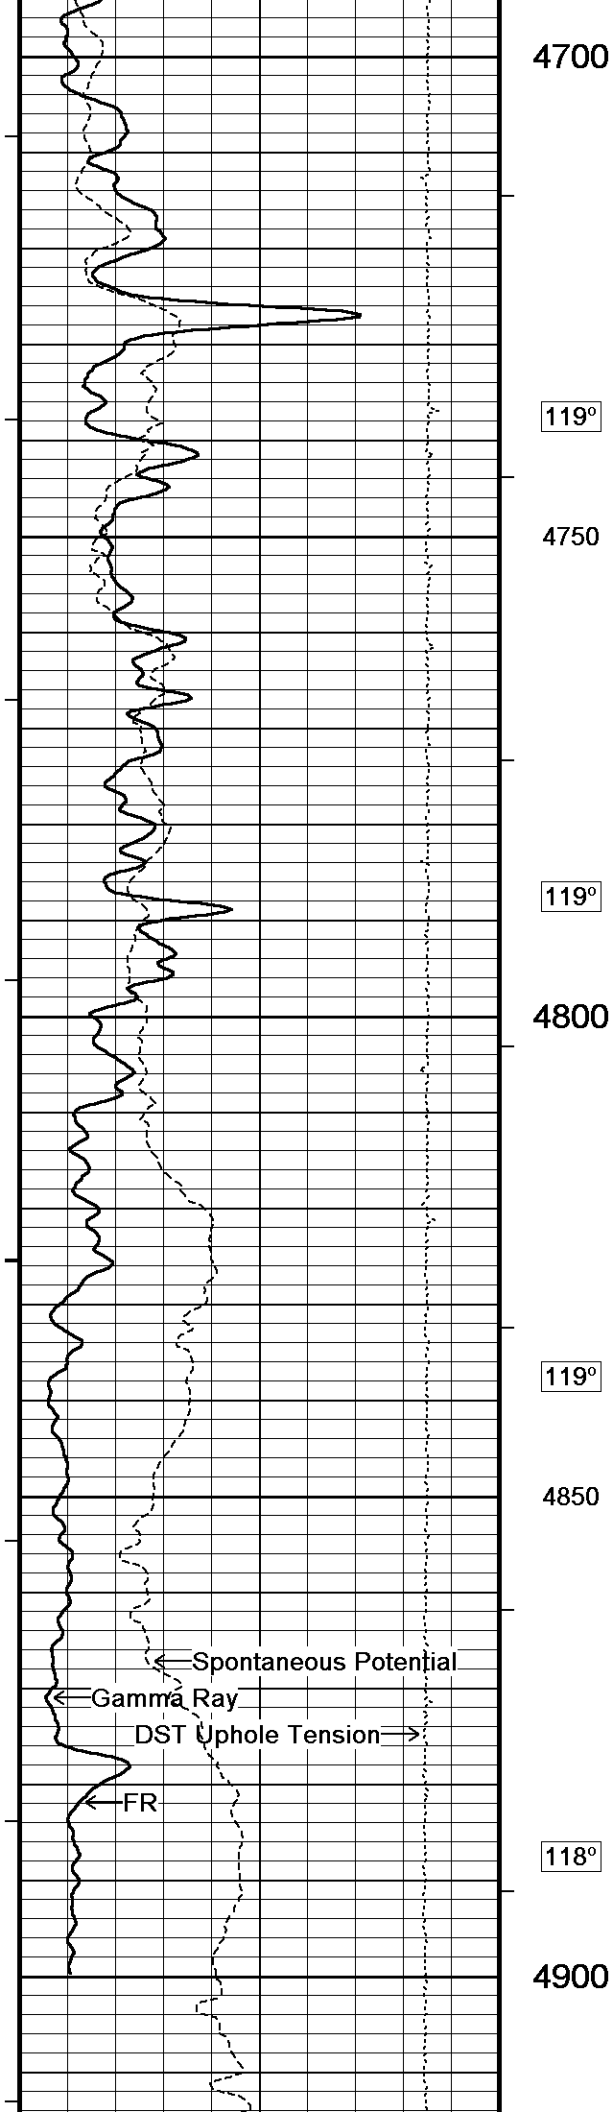

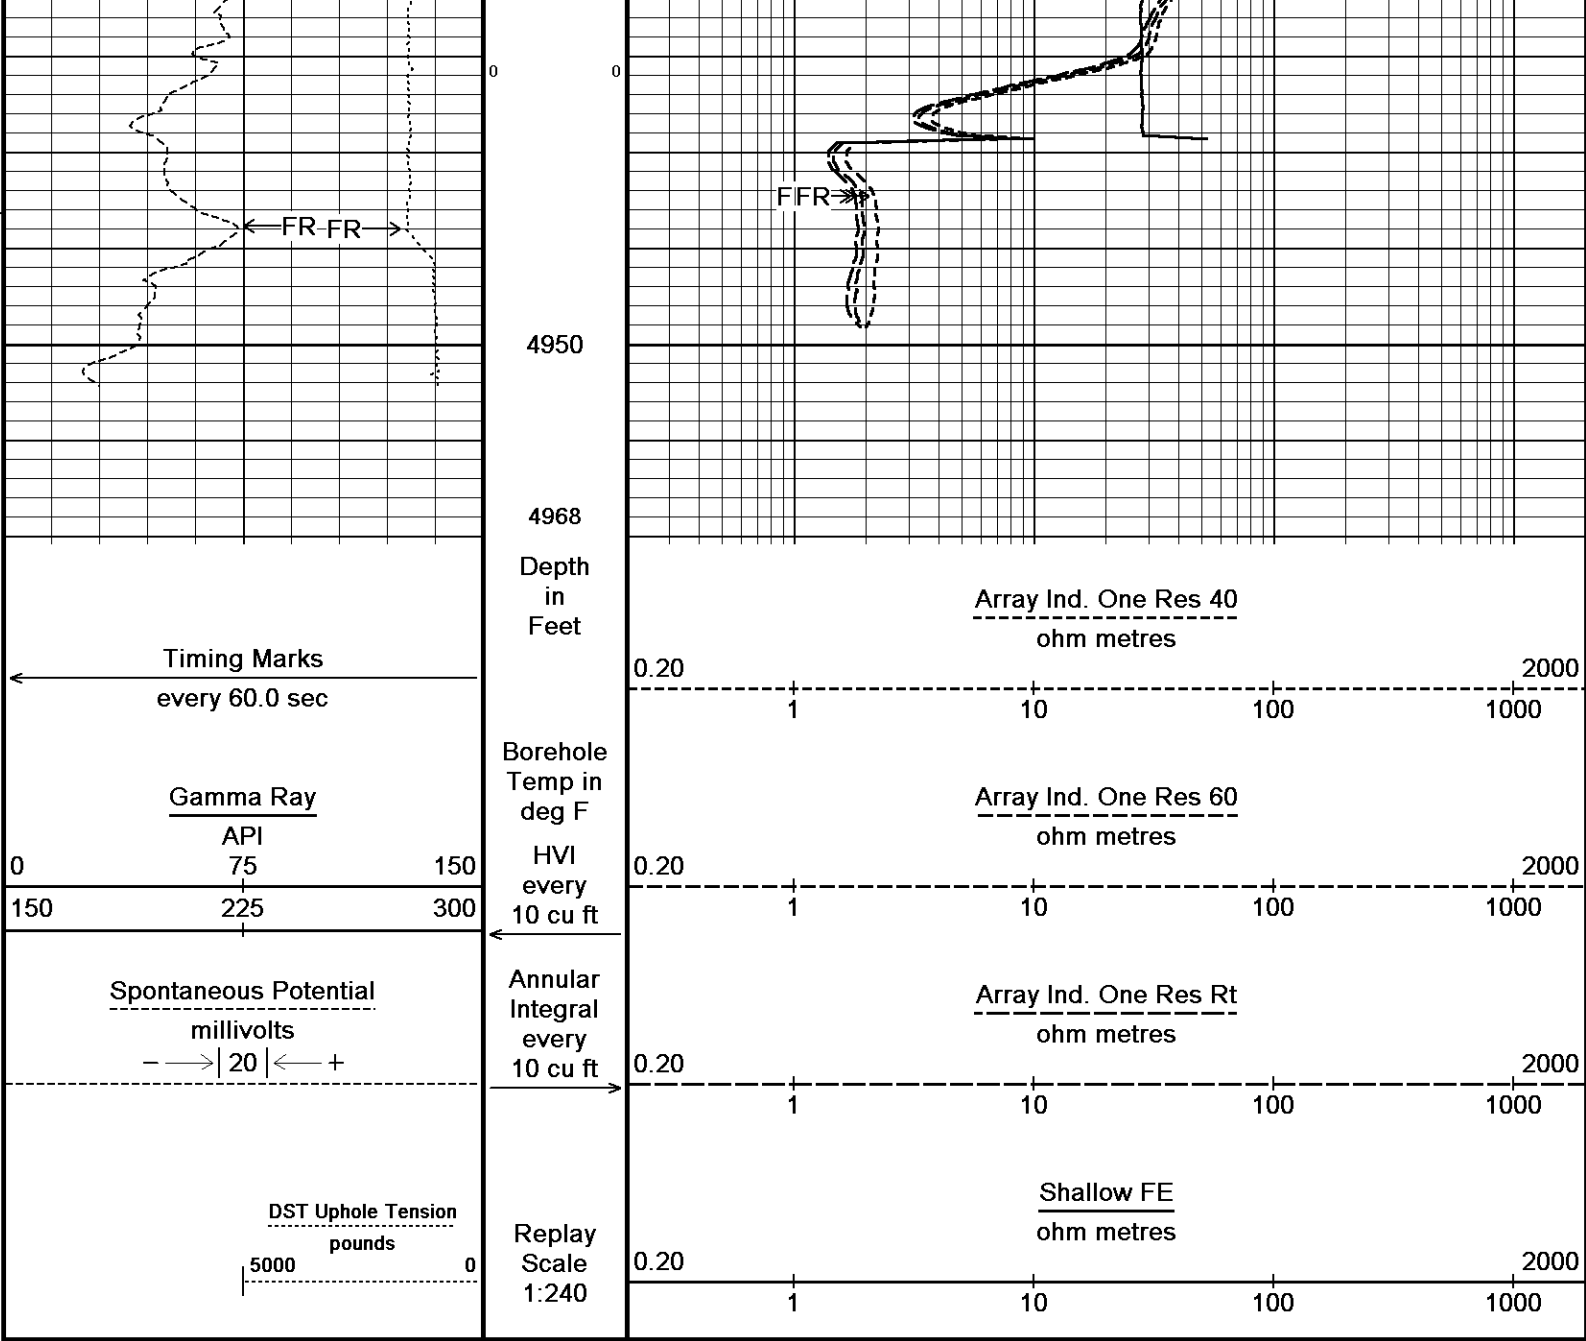

Depth Based Data - Maximum Sampling Increment 10.0cm  
 Plotted on 01-APR-2014 18:35  
 Filename: C:\Minimus 13.08.2113\Log\FIML ...\FIML Natural Resources Mulville #15B-18-2029\_001.dta  
 Recorded on 01-APR-2014 14:29  
 System Versions: Logged with 13.08.2113 Plotted with 13.08.2113

↑ REPEAT SECTION ↑

### BEFORE SURVEY CALIBRATION

C:\Minimus 13.08.2113\Log\FIML Natural Resources Mulville #15B-18-2...\FIML Natural Resources Mulville #15B-18-2029\_002.dta

General Constants All 000

Last Edited on 01-APR-2014,14:04

**General Parameters**

Mud Resistivity	0.810	ohm-metres
Mud Resistivity Temperature	95.000	degrees F
Water Level	0.000	feet
Borehole Fluid Processing	Wet Hole	

**Hole/Annular Volume and Differential Caliper Parameters**

HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches
Caliper for Differential Caliper	Density Caliper	

Rwa Parameters	Base Density Porosity
Porosity used	Array Ind. One Res Rt
Resistivity used	0.610
RWA Constant A	2.150
RWA Constant M	0.000
SW/APOR Tool Source	

Down-hole Tension Calibration SMS 0

Field Calibration on 18-MAR-2014 09:04

Reading No	Measured	Calibrated (lbs)
1	15374.81	0.00
2	15847.36	399.00

Gamma Calibration MCG-C 150

Field Calibration on 01-APR-2014 09:38

	Measured	Calibrated (API)
Background	70	48
Calibrator (Gross)	1142	773
Calibrator (Net)	1072	725

Gamma Constants MCG-C 150

Last Edited on 01-APR-2014,12:39

Gamma Calibrator Number	GRC038	
Mud Density	1.13	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl		kppm
K Mud Type	Chloride	
K Mud Concentration	0.00	%

SP Calibration MCG-C 150

Field Calibration on 10-MAR-2014 13:42

	Measured	Calibrated (mV)
Reference 1	99.9	99.0
Reference 2	-97.7	-98.8

High Resolution Temperature Calibration MCG-C 150

Field Calibration on 08-MAR-2014,10:59

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-C 150

Last Edited on 19-MAR-2014,20:39

Pre-filter Length 11

Caliper Calibration MMR-C.A 248

Base Calibration on 24-MAR-2014 11:12  
Field Calibration on 01-APR-2014 09:23

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	13253	5.96
2	16528	7.97
3	19726	9.95
4	23473	11.91
5	0	0.00
6	N/A	N/A

Field Calibration	Measured Caliper (in)	Actual Caliper (in)
	8.00	7.97

Micro Normal and Micro Inverse Calibration MMR-C.A 248

Base Calibration on 24-MAR-2014 11:03  
Field Check on 01-APR-2014 09:24

Base Calibration		Measured	Calibrated (ohm-m)
Channel	Resistor 1	Resistor 2	Resistor 1 Resistor 2
Micro Normal	10.1	49.8	5.1 25.6
Micro Inverse	9.9	49.5	3.4 16.9
Channel	Base Check (ohm-m)	Field Check (ohm-m)	
Micro Normal	93.6	93.6	
Micro Inverse	62.2	62.2	

Micro Normal and Micro Inverse Constants MMR-C.A 248

Last Edited on 23-JAN-2014,17:04

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159		
Micro Normal K Factor	0.5110		
Micro Inverse K Factor	0.3380		
Standoff Offset	0.0000	inches	

Neutron Calibration MDN-B.J 387

Base Calibration on 21-JAN-2014 13:56

Field Check on 01-APR-2014 09:42

Base Calibration

	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	2848	86	3714	110
Ratio	32.942		33.764	

Field Calibrator at Base

	Calibrated (cps)	
	1737	2564
Ratio	0.677	

Field Check

	Calibrated (cps)	
	1718	2552
Ratio	0.668	

Neutron Constants MDN-B.J 387

Last Edited on 01-APR-2014,12:39

Neutron Source Id	P58125B		
Neutron Jig Number	5824NE		
Epithermal Neutron			
Caliper Source for Processing	Density Caliper		
Stand-off	0.00	inches	
Mud Density	1.00	gm/cc	
Limestone Sigma	7.10	cu	
Sandstone Sigma	4.26	cu	
Dolomite Sigma	4.70	cu	
Formation Pressure Source	None		
Formation Pressure	N/A	kpsi	
Temperature Source	Constant Value		
Temperature	68.00	degrees F	
Mud Salinity	0.00	kppm	
Salinity Correction	Not Applied		
Formation Fluid Salinity Source	None		
Formation Fluid Salinity	N/A	kppm	
Barite Mud Correction	Not Applied		

FE Calibration MFE-A.A 55

Base Calibration on 24-MAR-2014 10:21

Field Check on 01-APR-2014 09:13

Base Calibration

	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	951.2	126.8

Base Check 281.7

Field Check 281.7

FE Constants MFE-A.A 55

Last Edited on 01-APR-2014,12:38

Running Mode	No Sleeve		
MFE K Factor	0.1268		
Caliper Source for FE correction	Density Caliper		
Caliper Value for FE correction	N/A	inches	
Rm Source for FE correction	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Stand-off	0.5	inches	

Sonic Constants MSS-A.A 73

Last Edited on 01-APR-2014,12:38

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated Sonic	
Correction for Sonde Skew	Applied	

Cycle Stretch Algorithm	Applied	
MN3FT	N/A	micro-sec
MX3FT	N/A	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	N/A	0.0000
Free Pipe	N/A	N/A
Peak Amplitude Source		N/A

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A		
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A

Full Waveform Parameters

Use 3' Waveform to derive TR	N/A
Use 4' Waveform to derive TR	N/A
Use 5' Waveform to derive TR	N/A
Use 6' Waveform to derive TR	N/A
3' Waveform Discriminator Level	N/A mV
4' Waveform Discriminator Level	N/A mV
5' Waveform Discriminator Level	N/A mV
6' Waveform Discriminator Level	N/A mV
3' Waveform Filter	N/A
4' Waveform Filter	N/A
5' Waveform Filter	N/A
6' Waveform Filter	N/A
Semblance Level	N/A
Semblance Window Width	N/A micro-sec
Sonic 1 Despiker	N/A
Sonic 2 Despiker	N/A

Induction Calibration MAI-A.A 5

Base Calibration on 21-JAN-2014,09:50  
Field Check on 01-APR-2014 09:12

Base Calibration

Test Loop Calibration Channel	Measured		Calibrated (mmho/m)	
	Low	High	Low	High
1	16.3	470.8	9.3	966.2
2	5.6	376.1	7.6	821.4
3	2.6	266.1	5.2	566.0
4	1.6	130.0	2.6	279.2

Array Temperature	71.1	Deg F
-------------------	------	-------

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			14.4	3862.9
2			31.7	3592.6
3			29.9	2973.5
4			20.8	2127.8
Deep			18.5	1913.8
Medium			43.2	3864.1
Shallow			47.2	5374.9

## Induction Constants MAI-A.A 5

Last Edited on 01-APR-2014,12:38

Induction Model		RtAP-WBM	
Caliper for Borehole Corr.		Density Caliper	
Hole Size for Borehole Correction		N/A	inches
Tool Centred		No	
Stand-off Type		Fins	
Stand-off		0.50	inches
Number of Fins on Stand-off		8.0000	
Stand-off Fin Angle		45.00	degrees
Stand-off Fin Width		0.5000	inches
Borehole Corr. Rm Source		Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start		0.0020	mhos/metre
Squasher Offset		N/A	mhos/metre
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

## Calibration Site Corrections

Channel 1		0.00	mmhos/metre
Channel 2		0.00	mmhos/metre
Channel 3		0.00	mmhos/metre
Channel 4		0.00	mmhos/metre

## Apparent Porosity and Water Saturation Constants

Archie Constant (A)		1.00	
Cementation Exponent (M)		2.00	
Saturation Exponent (N)		2.00	
Saturation of Water for Apor		100.00	percent
Resistivity of Water for Apor and Sw		0.05	ohm-m
Resistivity of Mud Filtrate for Sw		0.00	ohm-m
Source for Rt		0.00	
Source for Rxo		0.00	

## High Resolution Temperature Calibration MAI-A.A 5

Field Calibration on 21-JAN-2014,15:43

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

## High Resolution Temperature Constants MAI-A.A 5

Last Edited on 12-MAR-2014,16:38

Pre-filter Length 11

## Photo Density Calibration MPD-B 64

Base Calibration on 21-JAN-2014 13:19

Field Check on 01-APR-2014 09:21

Density Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Base Calibration				
Background	1151	1332		
Reference 1	54413	28212	59556	30836
Reference 2	21794	2569	24941	2541

## Field Check at Base

1151.0 1331.7

## Field Check

1136.0 1330.1

## PE Calibration

Base Calibration	Measured		Calibrated
	WS	WH	Ratio
Background	207	1021	

Reference 1	20693	54218	0.385	0.371
Reference 2	5952	21660	0.278	0.272

Field Check at Base  
206.5      1020.6

Field Check  
206.1      1008.0

Density Constants MPD-B 64

Last Edited on 01-APR-2014,12:39

Density Source Id	P50557B	
Nylon Calibrator Number	DNCE695	
Aluminium Calibrator Number	DACD698	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.13	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	
0.00	0.00	

Caliper Calibration MPD-B 64

Base Calibration on 13-FEB-2014 15:49  
Field Calibration on 01-APR-2014 09:14

Base Calibration	Measured	Calibrator Size (in)
Reading No		
1	16976	3.99
2	26016	5.98
3	34528	7.97
4	42943	9.86
5	52224	11.92
6	N/A	N/A

Field Calibration	Measured Caliper (in)	Actual Caliper (in)
	7.94	7.97

DOWNHOLE EQUIPMENT


C:\Minimus 13.08.2113\Log\FIML Natural Resources Mulville #15B-18-2...\FIML Natural Resources Mulville #15B-18-2029\_002.dta

CBH-C, Cablehead, 11 pin  
CBH-C 0 LG: 2.40 ft WT: 24.3 lb OD: 2.244 in

Compact Comms Gamma  
MCG-C 150 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-Resistivity  
MMR-C.A 248 LG: 8.59 ft WT: 81.6 lb OD: 4.882 in

Compact Neutron  
MDN-L 1287 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in

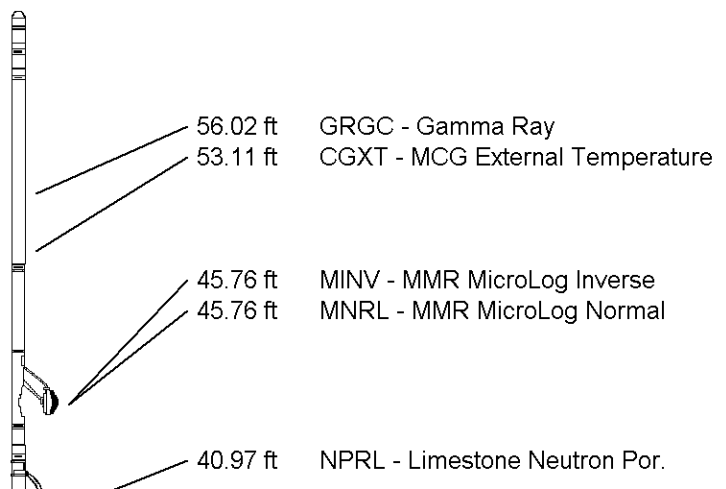


Compact Density/Caliper  
 MPD-B 64 LG: 9.59 ft WT: 90.4 lb OD: 2.449 in

Compact Focused Electric  
 MFE-A.A 55 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Sonic  
 MSS-A.A 73 LG: 12.52 ft WT: 72.8 lb OD: 2.240 in

Compact Induction  
 MAI-A.A 5 LG: 10.81 ft WT: 48.5 lb OD: 2.244 in

Total Length: 63.70 ft Weight: 480.6 lb

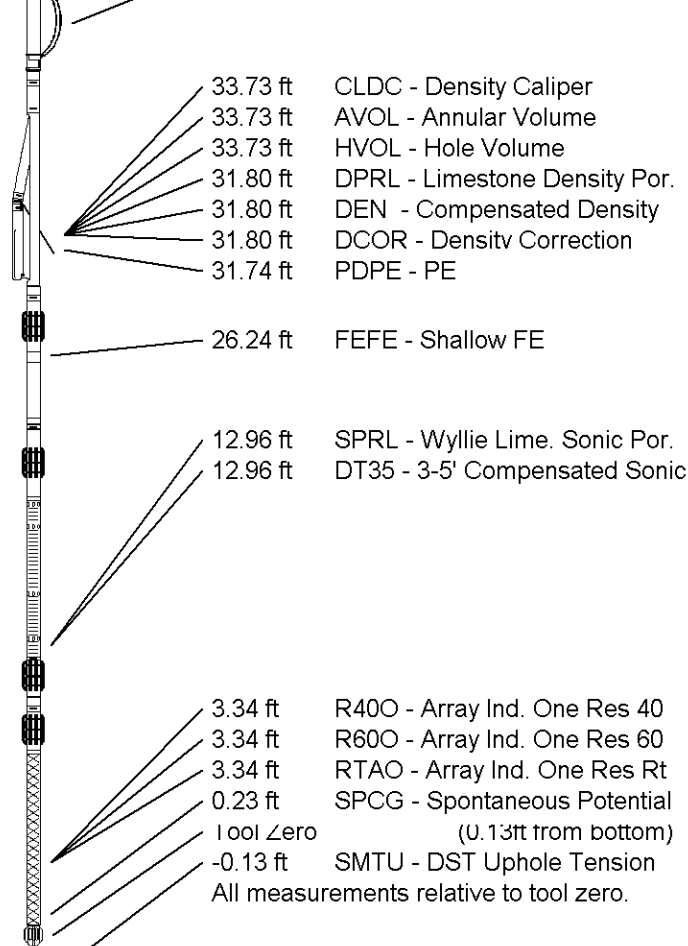

**COMPANY** FIML NATURAL RESOURCES, LLC.  
**WELL** MULVILLE #15B-18-2029  
**FIELD** WILDCAT  
**PROVINCE/COUNTY** LANE  
**COUNTRY/STATE** U.S.A. / KANSAS

Elevation Kelly Bushing	2899.00	feet	First Reading	4935.00	feet
Elevation Drill Floor	2897.00	feet	Depth Driller	4935.00	feet
Elevation Ground Level	2889.00	feet	Depth Logger	4938.00	feet



**ARRAY INDUCTION  
 SHALLOW FOCUSED  
 ELECTRIC LOG**

**Weatherford®**


		<b>ARRAY INDUCTION          SHALLOW FOCUSED          ELECTRIC LOG</b>	
<b>COMPANY</b> FIML NATURAL RESOURCES, LLC. <b>WELL</b> MULVILLE #15B-18-2029 <b>FIELD</b> WILDCAT <b>PROVINCE/COUNTY</b> LANE <b>COUNTRY/STATE</b> U.S.A. / KANSAS <b>LOCATION</b> 900' ESL & 2280' EEL <b>SEC. 18</b> <b>TWP. 20S</b> <b>R. 29W</b> <b>NE 29W</b> <b>NE 29W</b> <b>Latitude</b> 37.10122901 <b>Longitude</b> -101.22901 <b>Permanant Datum</b> Q.L. Elevation 2889 feet <b>Log Measured From</b> KB <b>Drilling Measured From</b> KB <b>Date</b> 01-APR-2014 <b>Run Number</b> ONE <b>Service Order</b> 4556-53548386 <b>Depth Driller</b> 4935.00 feet <b>Depth Logger</b> 4938.00 feet <b>First Reading</b> 4935.00 feet <b>Last Reading</b> 498.00 feet <b>Casing Driller</b> 435.00 feet <b>Casing Logger</b> 438.00 feet <b>Bit Size</b> 7.875 inches <b>Hole Fluid Type</b> CHEMICAL <b>Density/Viscosity</b> 9.40 lb/USG 86.00 CP <b>PH/FINUL LOSS</b> 10.00 8.00 ml/30min <b>Sample Source</b> FLOWLINE <b>RM @ Measured Temp</b> 0.81 @ 95.0 ohm-in <b>RM @ Measured Temp</b> 0.95 @ 95.0 ohm-in <b>RM @ Measured Temp</b> 0.97 @ 95.0 ohm-in <b>Source Rm / Rmc</b> CALC CALC <b>Rm @ BHT</b> 0.84 @ 171.0 ohm-in <b>Time Since Circulation</b> 4 HOURS deg F <b>Max Recorded Temp</b> 171.00 deg F <b>Equipment/Base</b> 113244 LIB <b>Recorded By</b> ADAM SILL <b>Assessed By</b> JIM MCGROOVE <b>DOB #</b> LHT4498		<b>REVISION</b> KF DF QL	
<b>MAI-A.A 5</b>		<b>SPRY DOVE</b>	


2889.00  
2887.00  
2889.00


1 INCH MAIN


Depth Based Data - Maximum Sampling Increment 10.0cm  
Plotted on 01-APR-2014 18:35  
Filename: C:\Minimus 13.08.2113\Log\FML Na..FML Natural Resources Muhille #15B-18-2029\_002.dta  
Recorded on 01-APR-2014 15:18  
System Versions: Logged with 13.08.2113 Plotted with 13.08.2113

<b>Timing Marks</b> every 60.0 sec	<b>Depth in Feet</b>	<b>Array Ind. One Cond Ct</b> mmhos
<b>Gamma Ray</b> API		1000 750 500 250 0
0 75 150	<b>Borehole Temp in deg F</b>	2000 1750 1500 1250 1000
150 225 300	<b>HVI every 10 cu ft</b>	
<b>Spontaneous Potential millivolts</b>	<b>Array Ind. One Res Rt</b> ohm metres	
- -> 20 <- +	0 25 50	
	<b>Annular Integral every 10 cu ft</b>	0 250 500
	<b>Shallow FE</b> ohm metres	
	0 25 50	
<b>DST Uphole Tension</b> pounds	<b>Replay Scale 1:600</b>	0 250 500
5000 0		

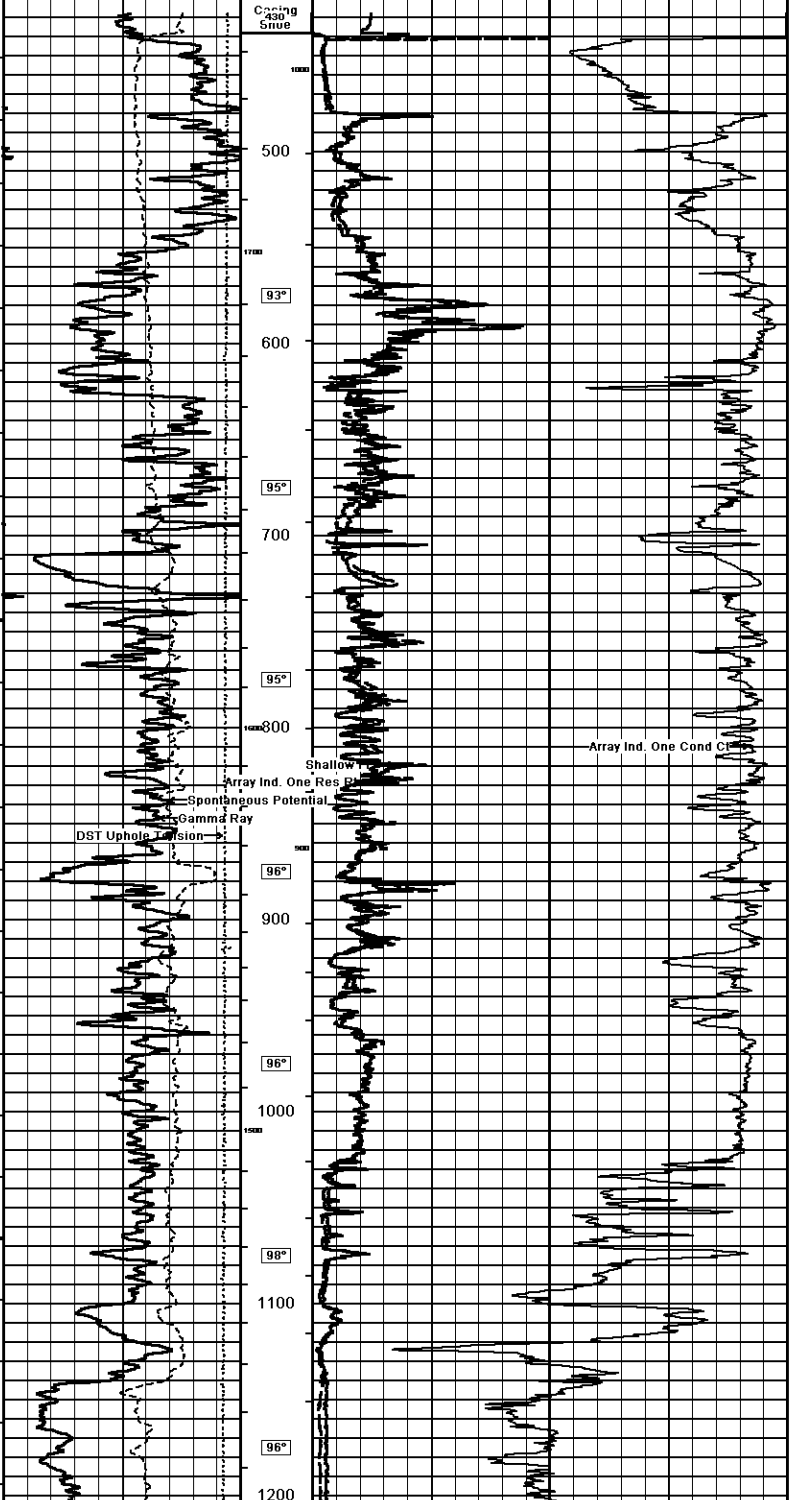

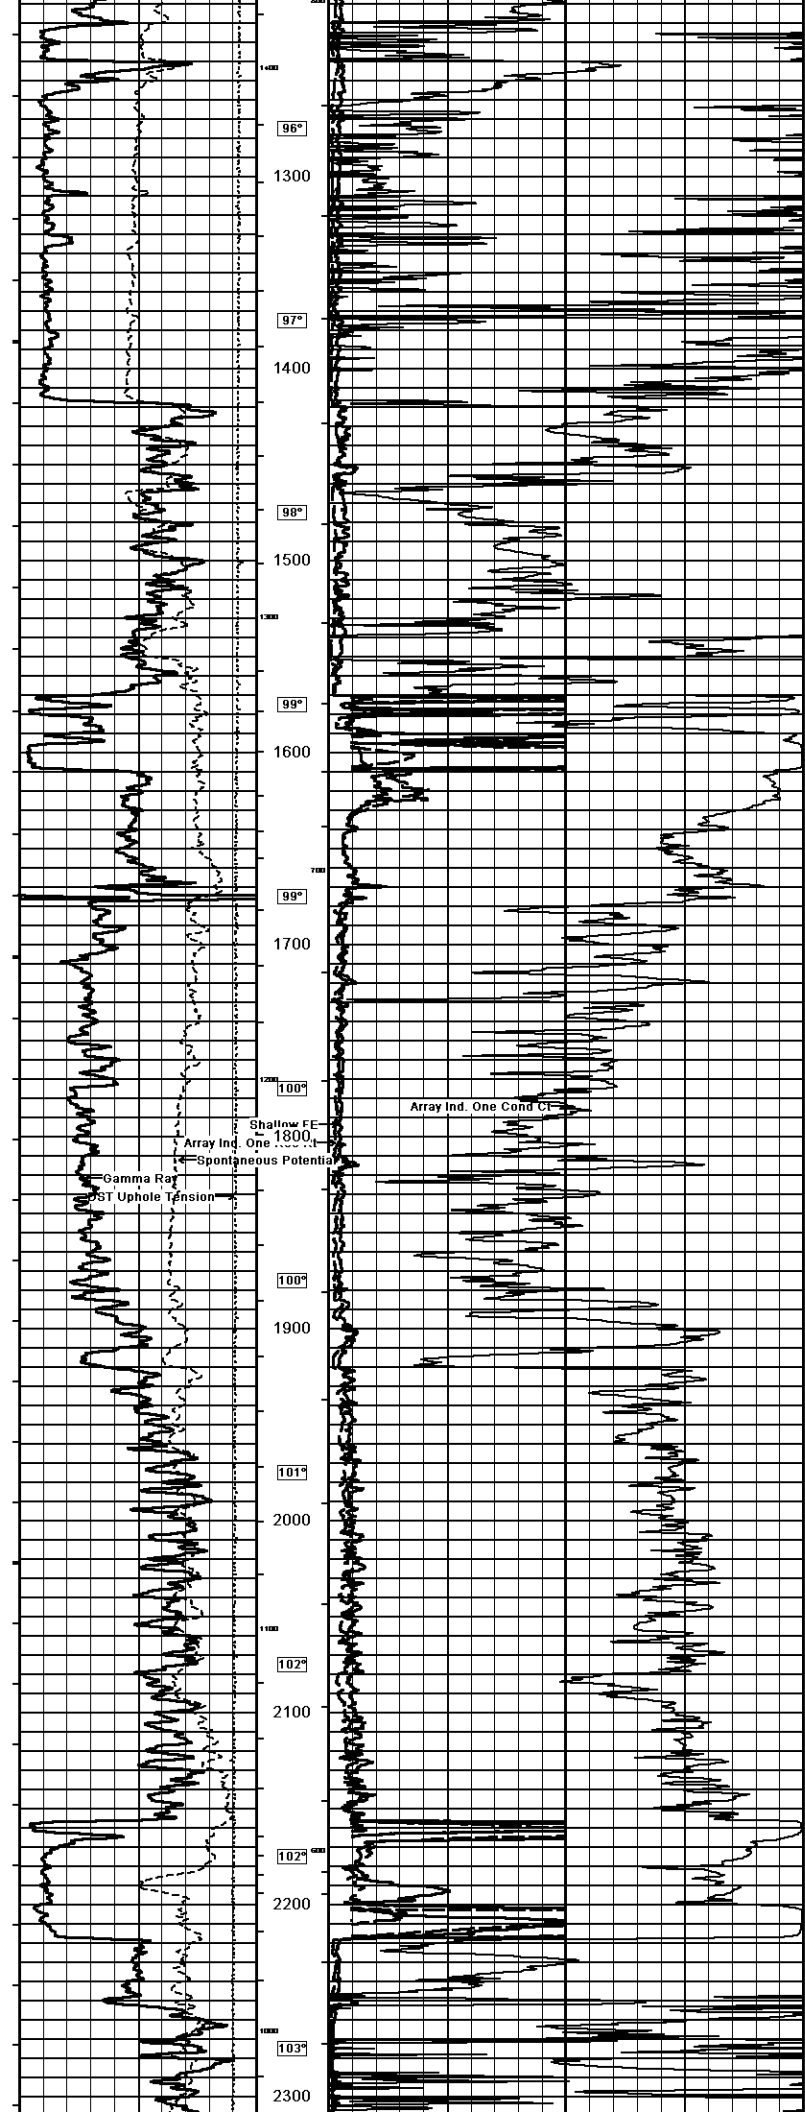

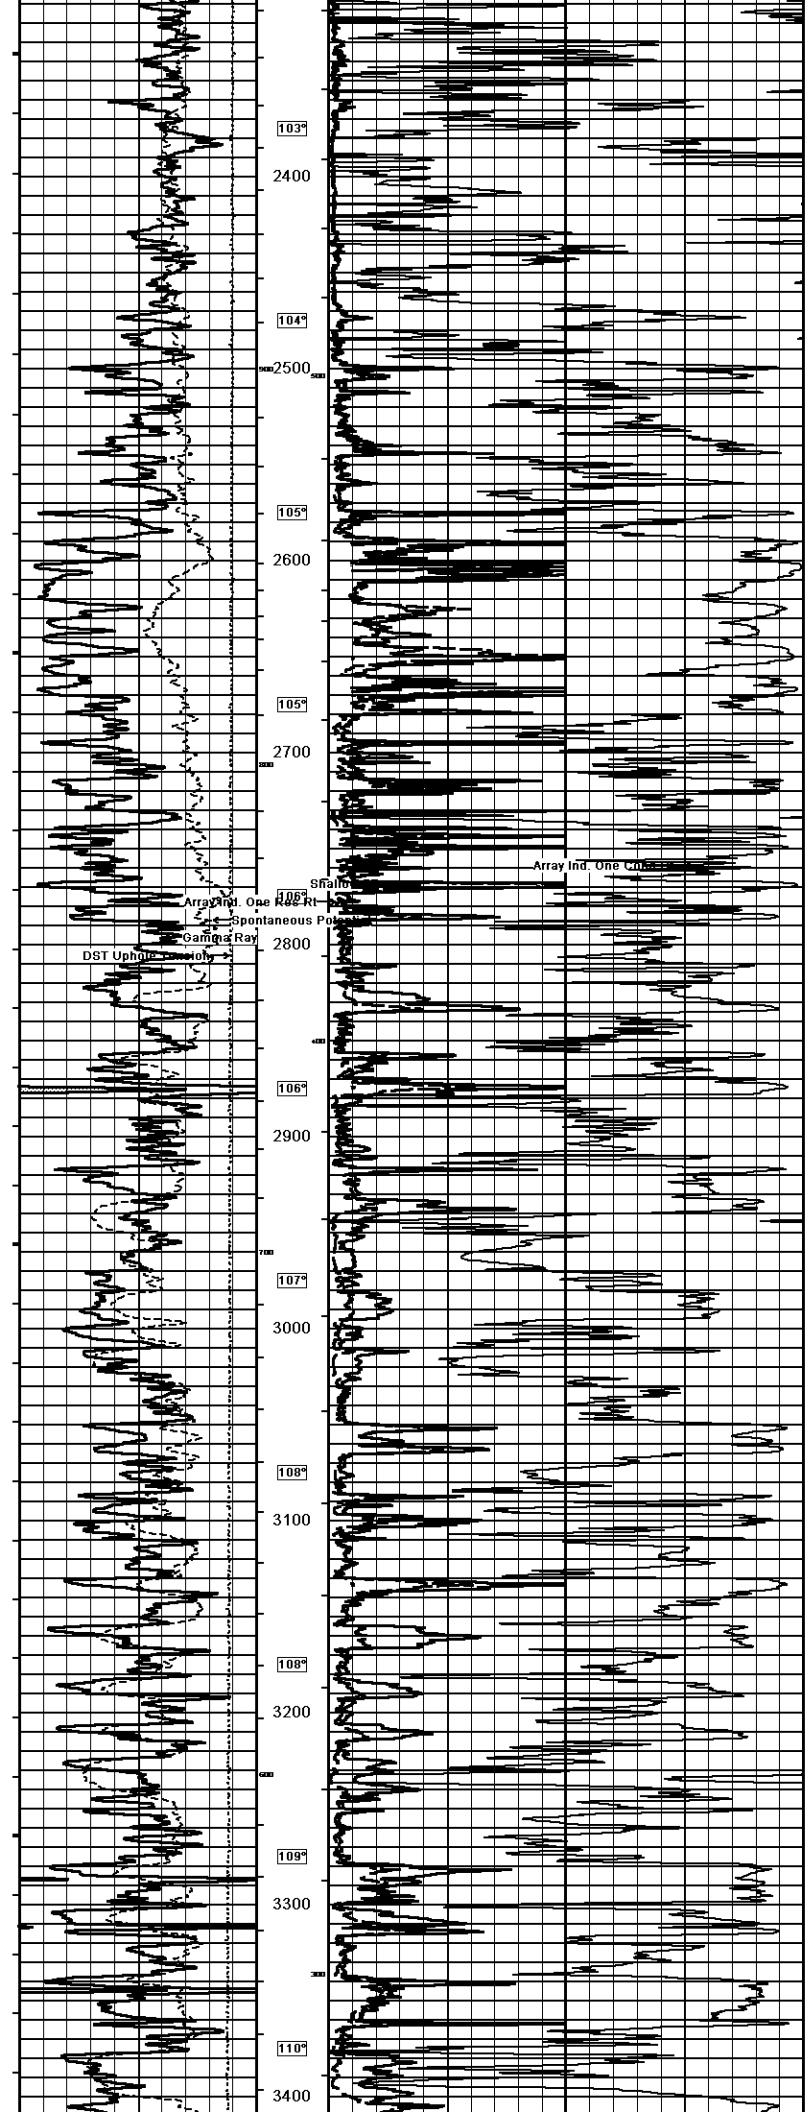

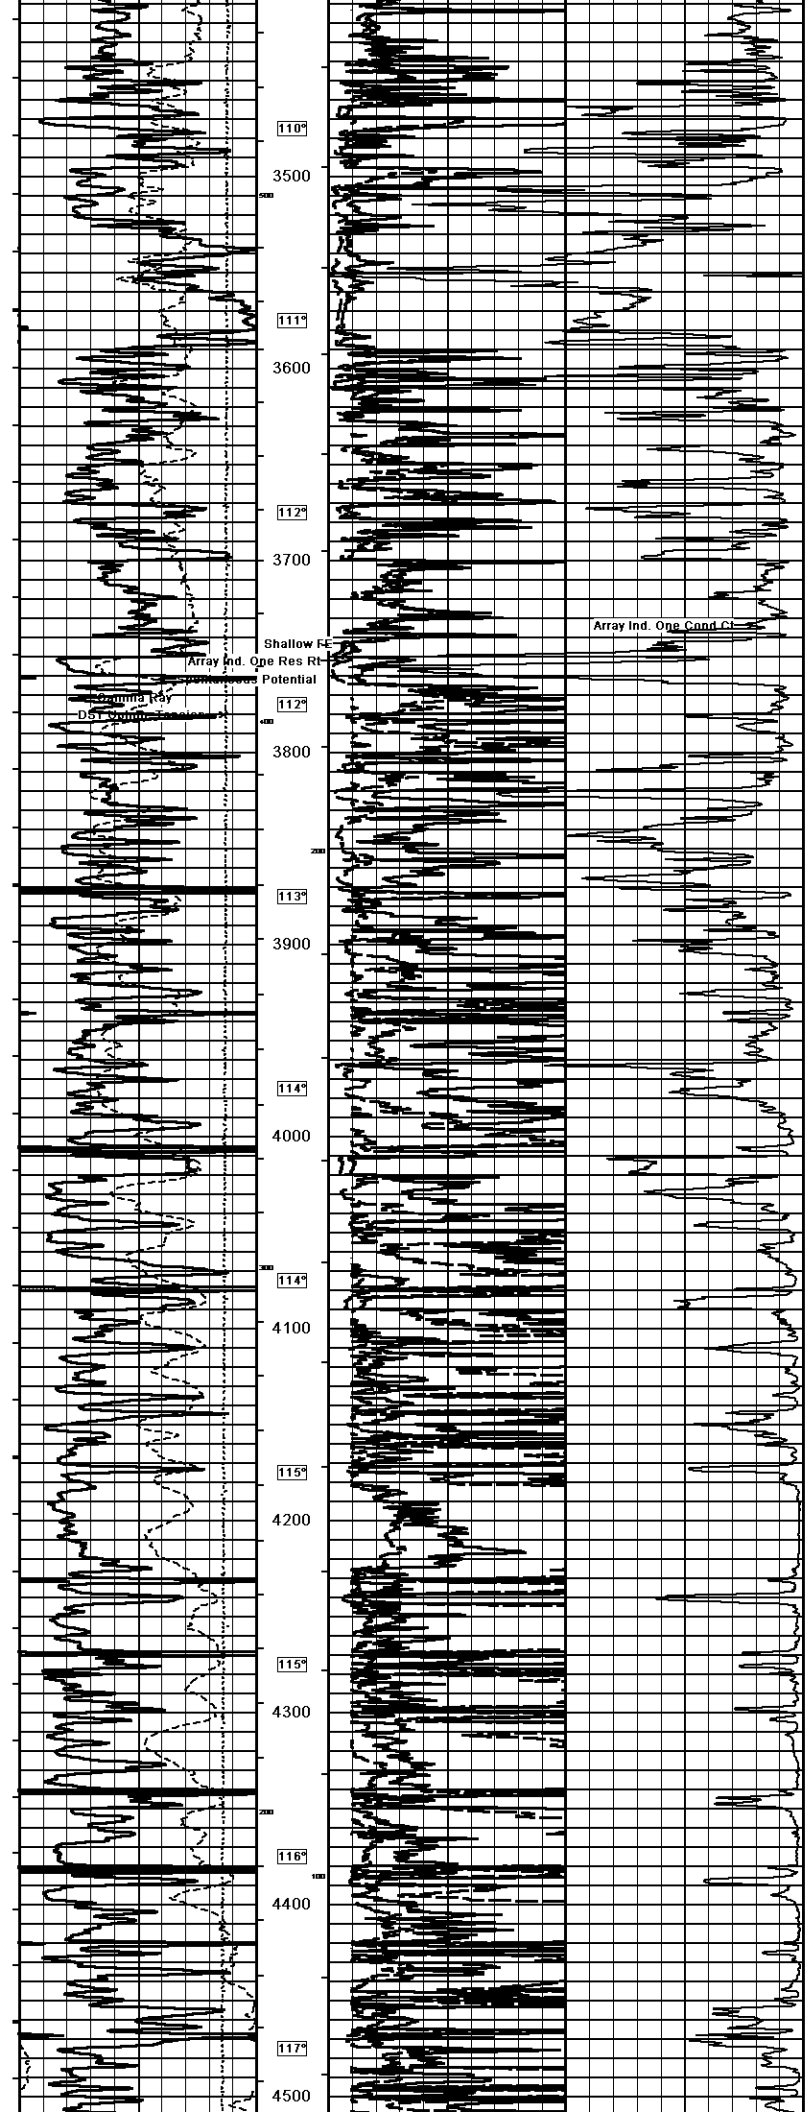

110°

111°

112°

112°

113°

114°

114°

115°

115°

116°

117°

3500

3600

3700

3800

3900

4000

4100

4200

4300

4400

4500


Array Ind. One Res Rt


Shallow F...

Gamma Ray

DST Gamma

Array Ind. One Cond C...

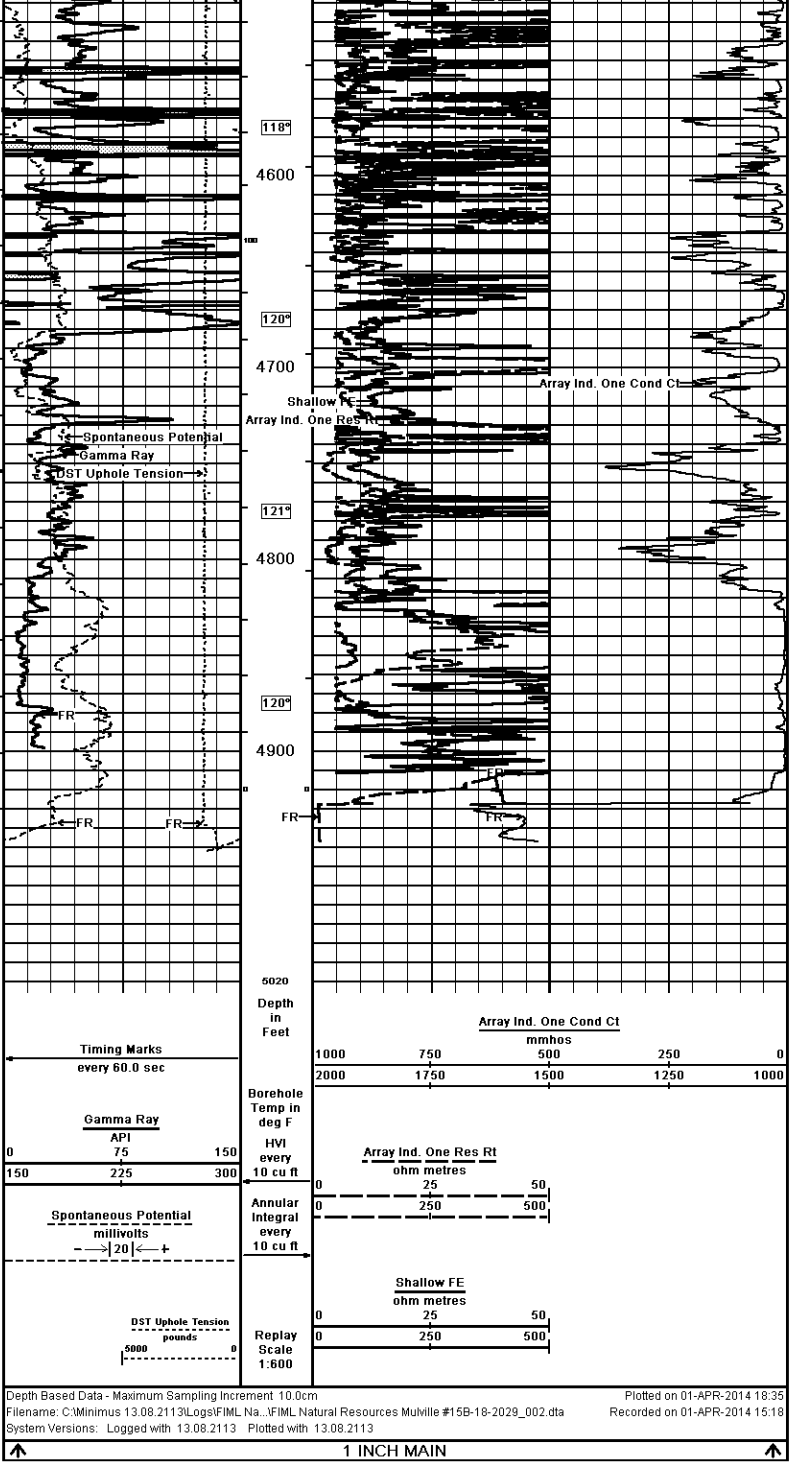

COMPANY	FIML NATURAL RESOURCES, LLC.				
WELL	MULVILLE #15B-18-2029				
FIELD	WILDCAT				
PROVINCE/COUNTY	LANE				
COUNTRY/STATE	U.S.A. / KANSAS				
Elevation Kelly Bushing	2899.00	feet	First Reading	4935.00	feet
Elevation Drill Floor	2897.00	feet	Depth Driller	4935.00	feet
Elevation Ground Level	2889.00	feet	Depth Logger	4938.00	feet
	ARRAY INDUCTION SHALLOW FOCUSED ELECTRIC LOG				