



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**SONIC
LOG**

Company		ABERCROMBIE ENERGY, LLC.	
Well		BRYANT #1-35	
Field		WILDCAT	
County		HASKELL	
State		KANSAS	
Location:		API # : 15-081-22038-0000 330' FNL & 2310' FEL NW - NW - NE	
Permanent Datum Log Measured From Drilling Measured From		GROUND LEVEL KELLY BUSHING 10' A.G.L. KELLY BUSHING	
SEC 35 TWP 29S RGE 31W		Other Services CDL/CNL/PE DIL/MEL	
Elevation		2842	
K.B. 2852 D.F. 2850 G.L. 2842			
Date	11/5/13		
Run Number	TWO		
Depth Driller	5650		
Depth Logger	5650		
Bottom Logged Interval	5640		
Top Log Interval	1600		
Casing Driller	8 5/8" @ 1618'		
Casing Logger	1618'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.25/52	CHLORIDES 3600 PPM	
pH / Fluid Loss	10.0/9.2		
Source of Sample	FLOWLINE		
Rin @ Meas. Temp	1.00 @ 76F		
Rmf @ Meas. Temp	0.75 @ 76F		
Rmc @ Meas. Temp	1.20 @ 76F		
Source of Rmf / Rmc	MEASURED		
Rin @ BHT	0.58 @ 131F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	131F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JEFF GRONEMEG		
Witnessed By	KENT CRISLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING NABORS COMPLETION & PRODUCTION SVCS. (785) 628-6395


DIRECTIONS:

COPELAND, KS - SOUTH 4 1/2 MILES ON RD 2 TO RD A - 2 MILES WEST TO RD XX
1 MILE NORTH - 1/2 MILE WEST - SOUTH INTO

Charted by: _____		Depth in Feet scaled 1:2.15				
0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)	40
6	CALIPER (in)	16	10 (ft3) 0	30	SONIC POROSITY (pu)	-10
-----			TBHV	0	ITT (msec)	20
			0 (ft3) 10			

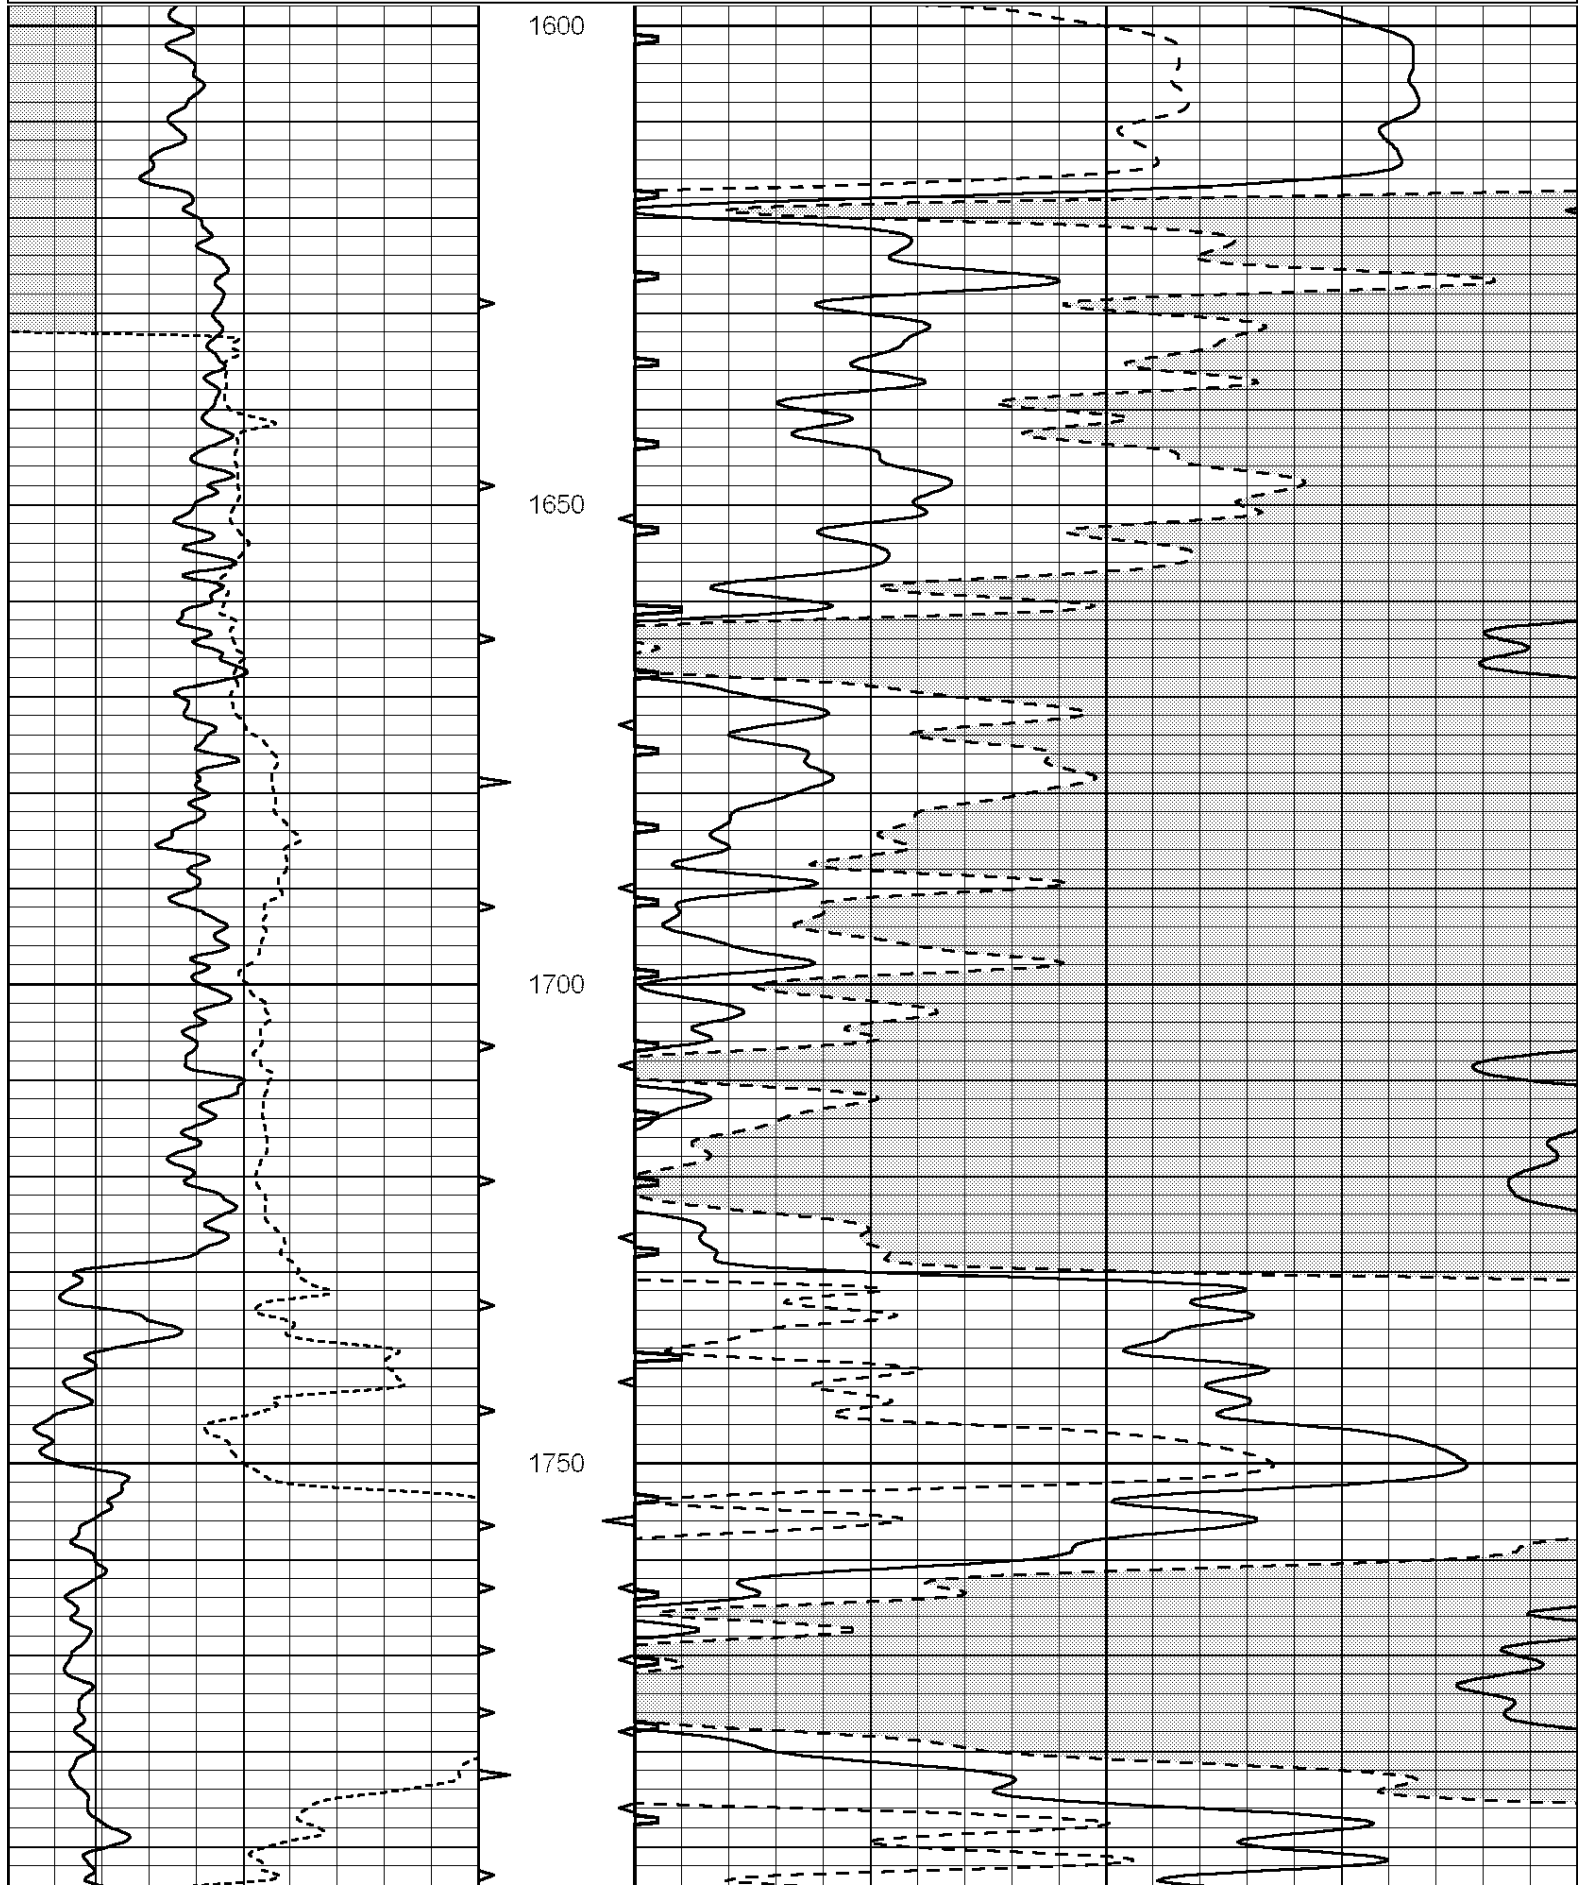

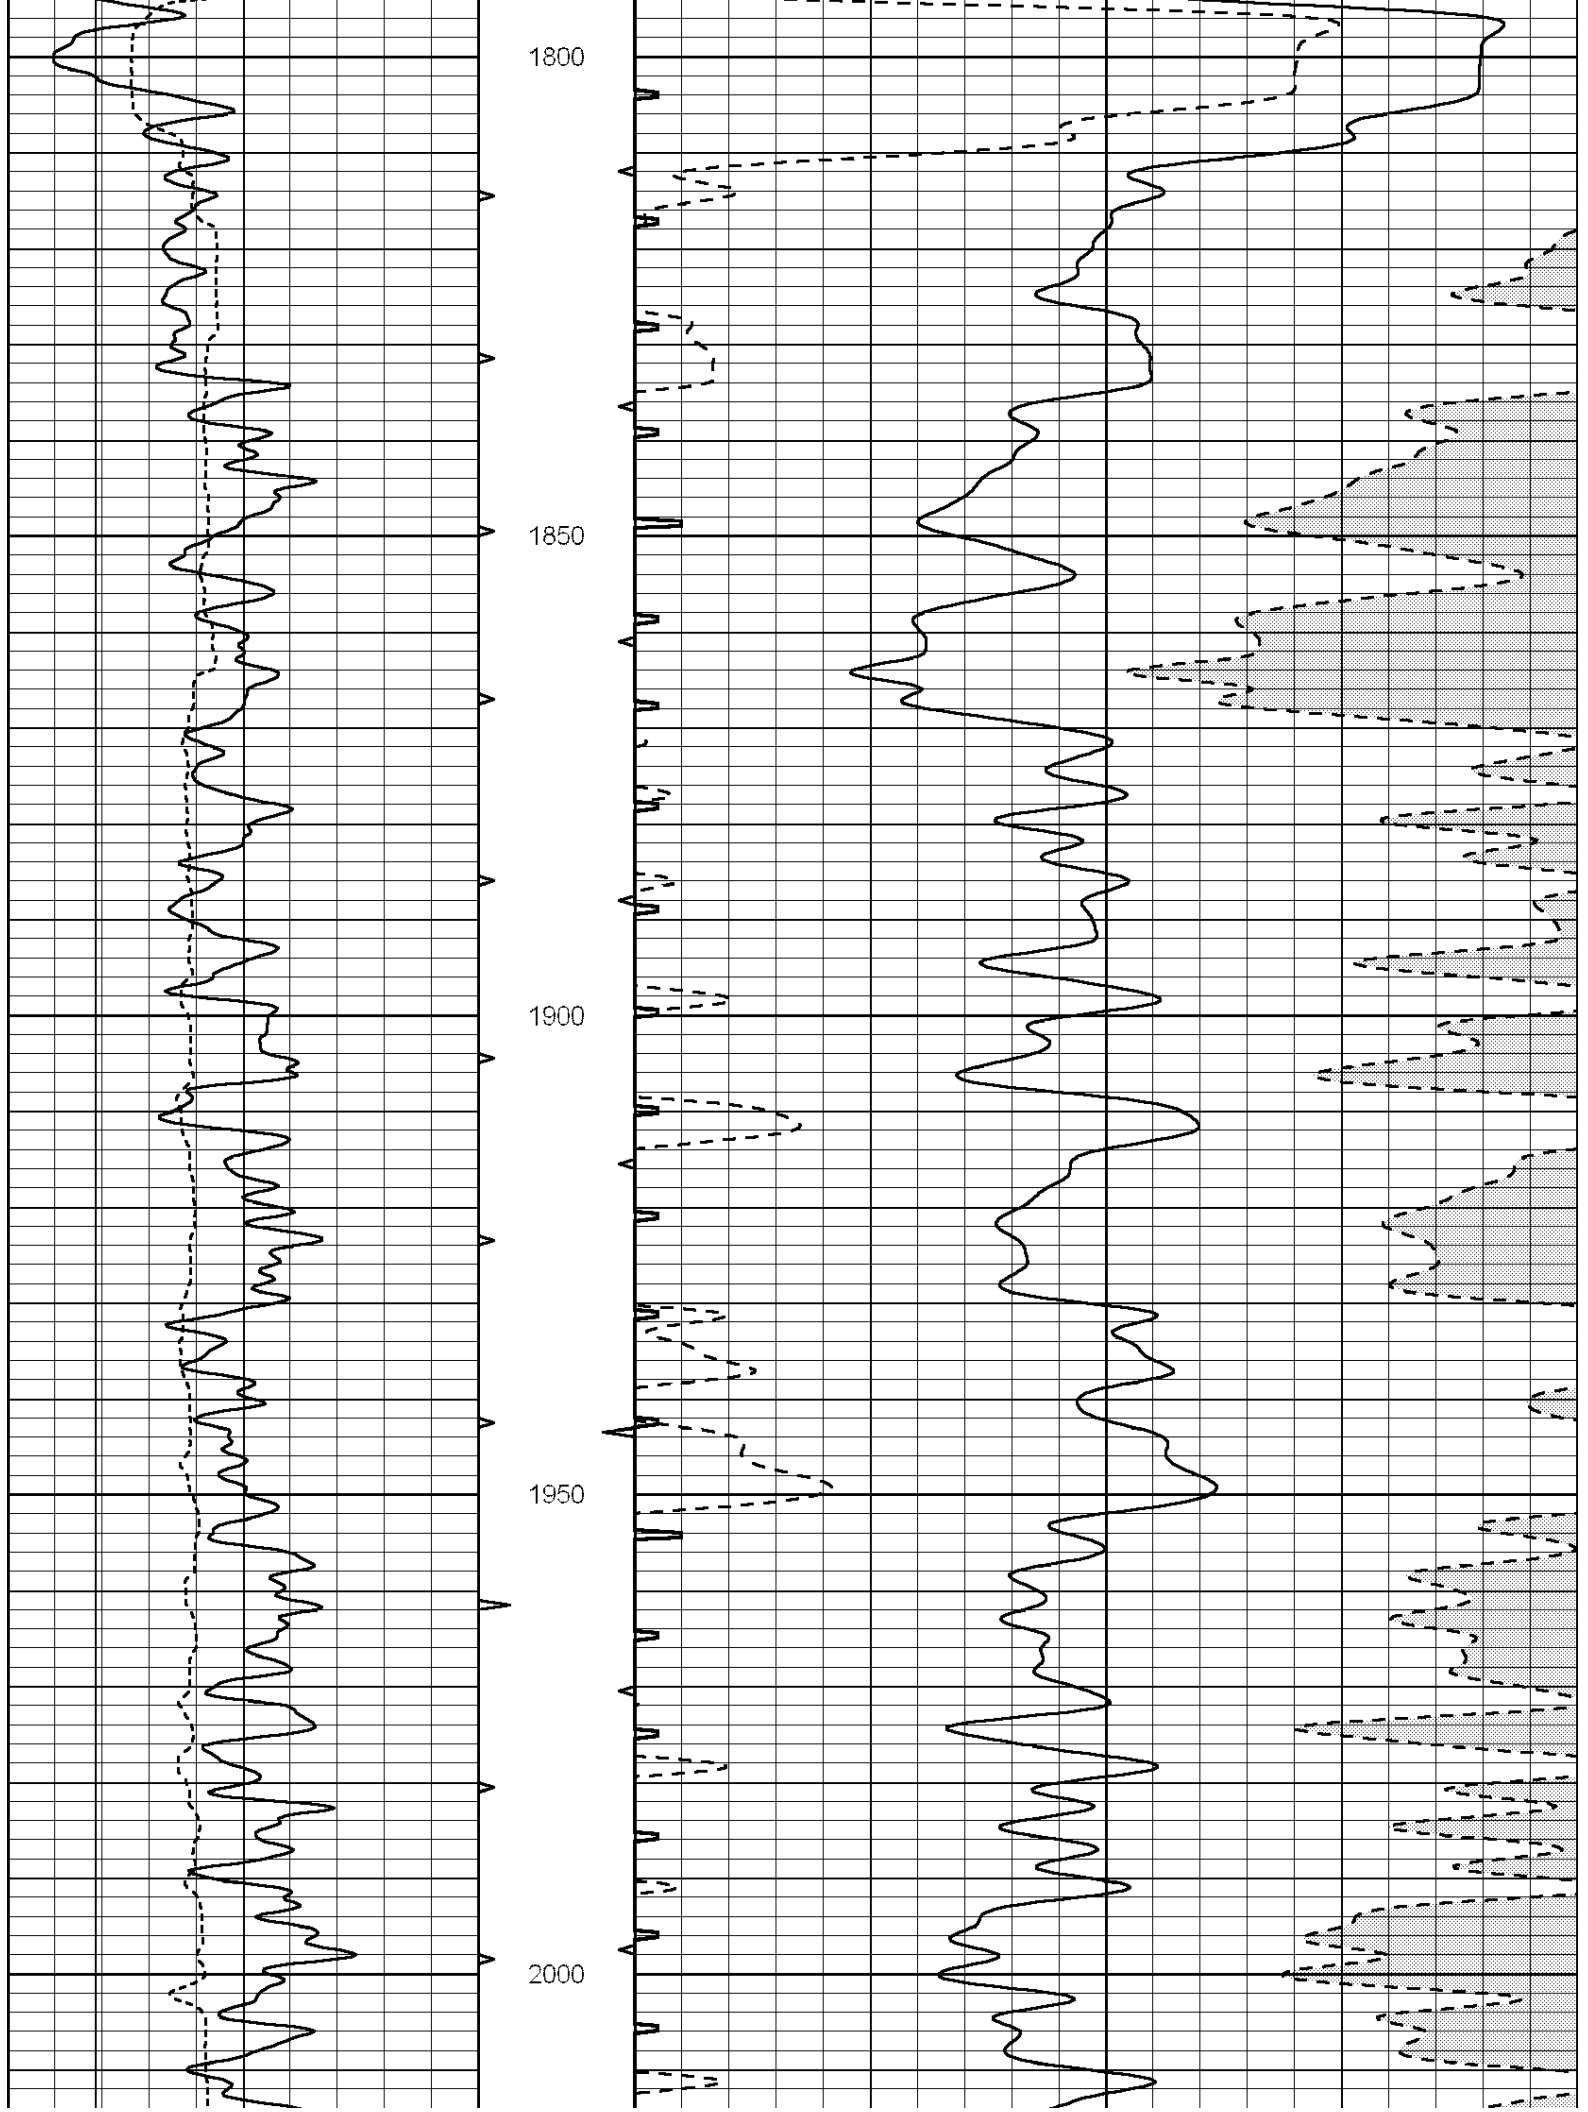

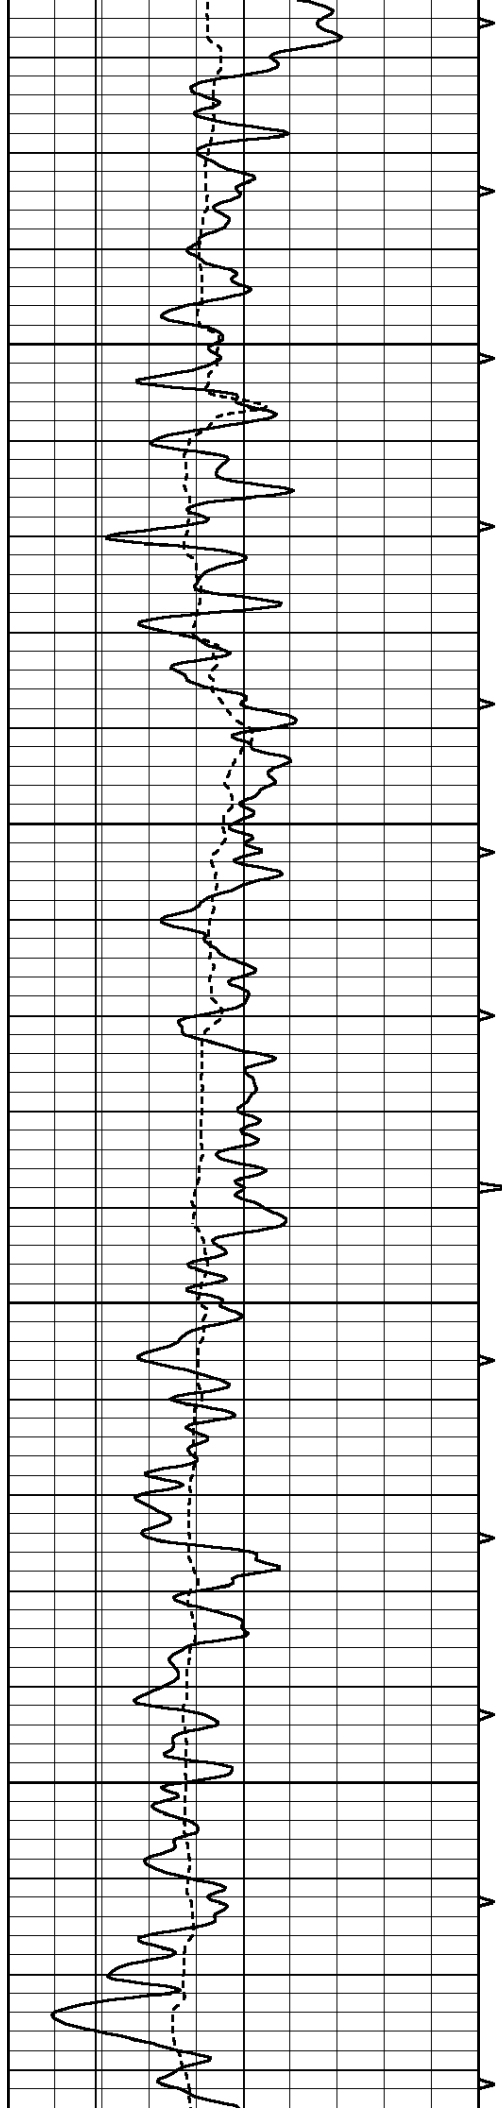



2050


2100

2150

2200

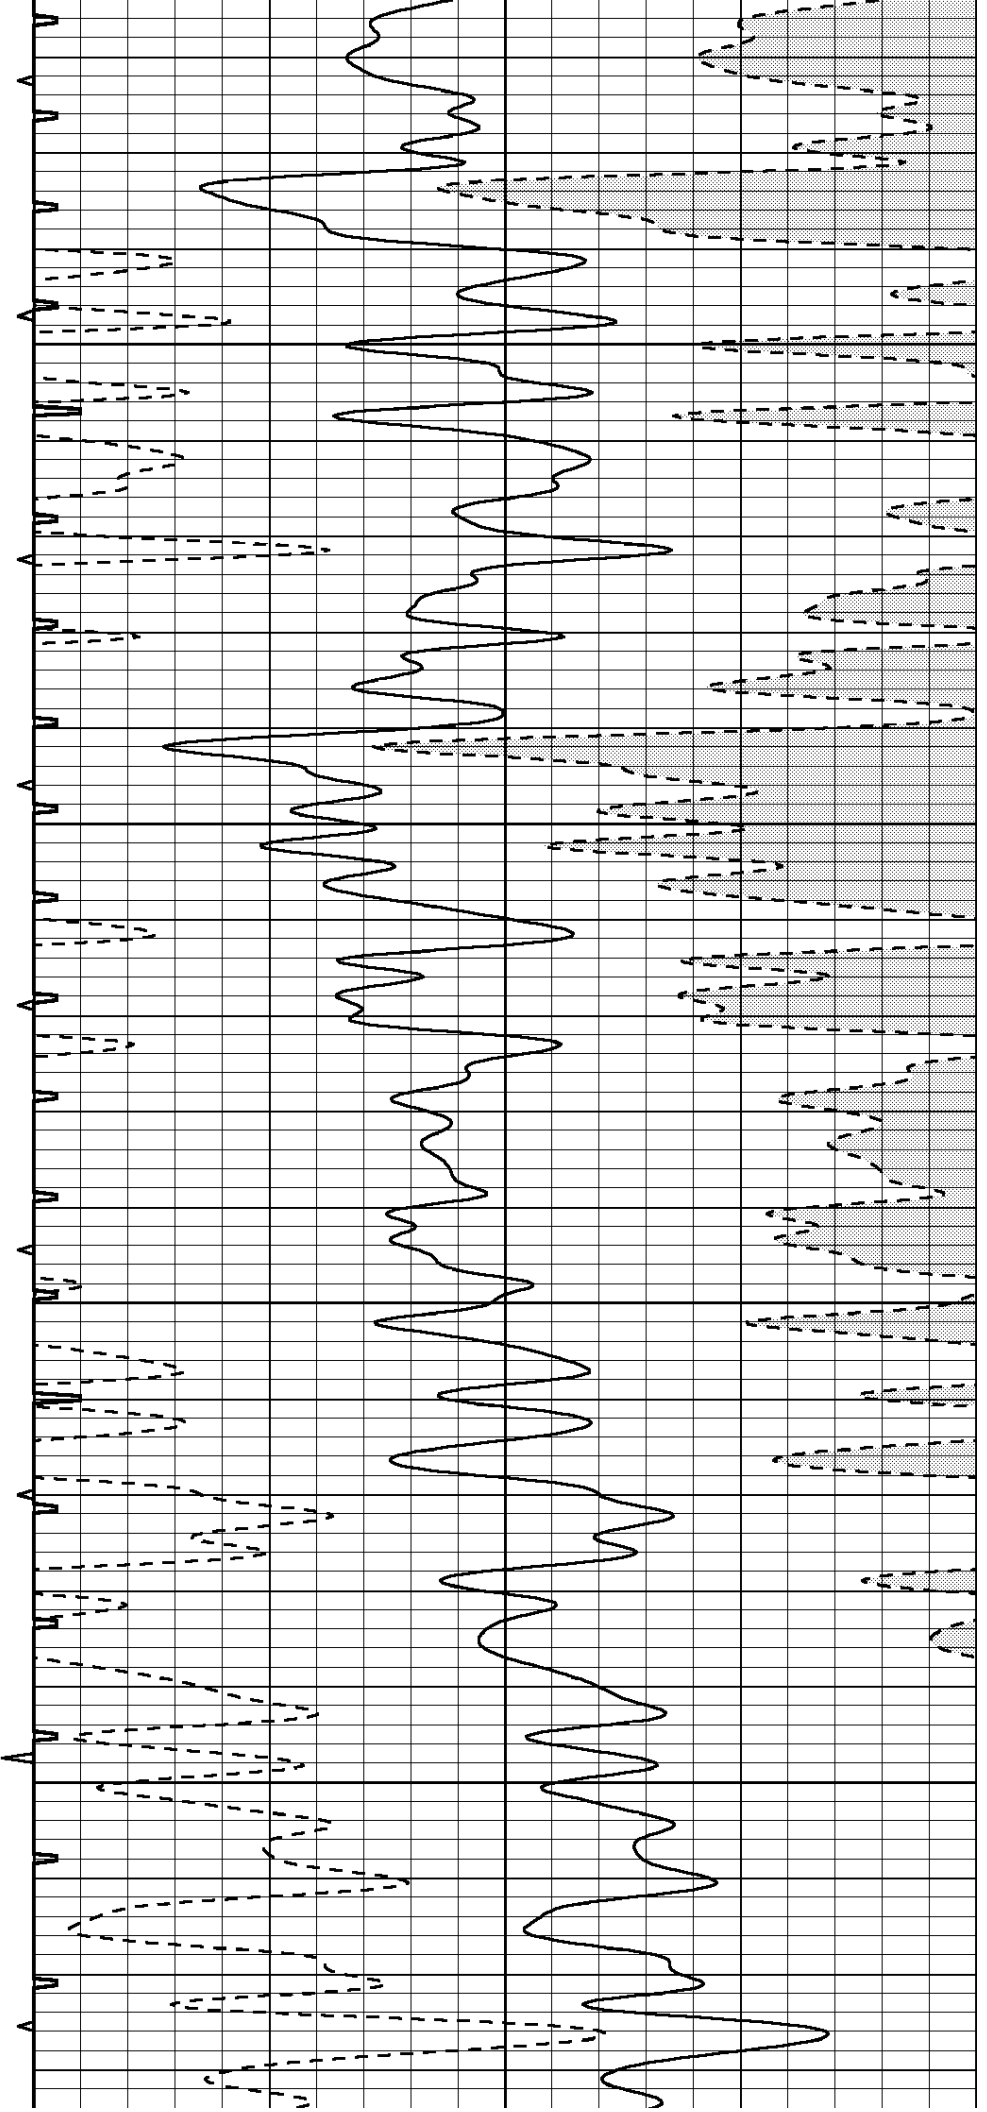

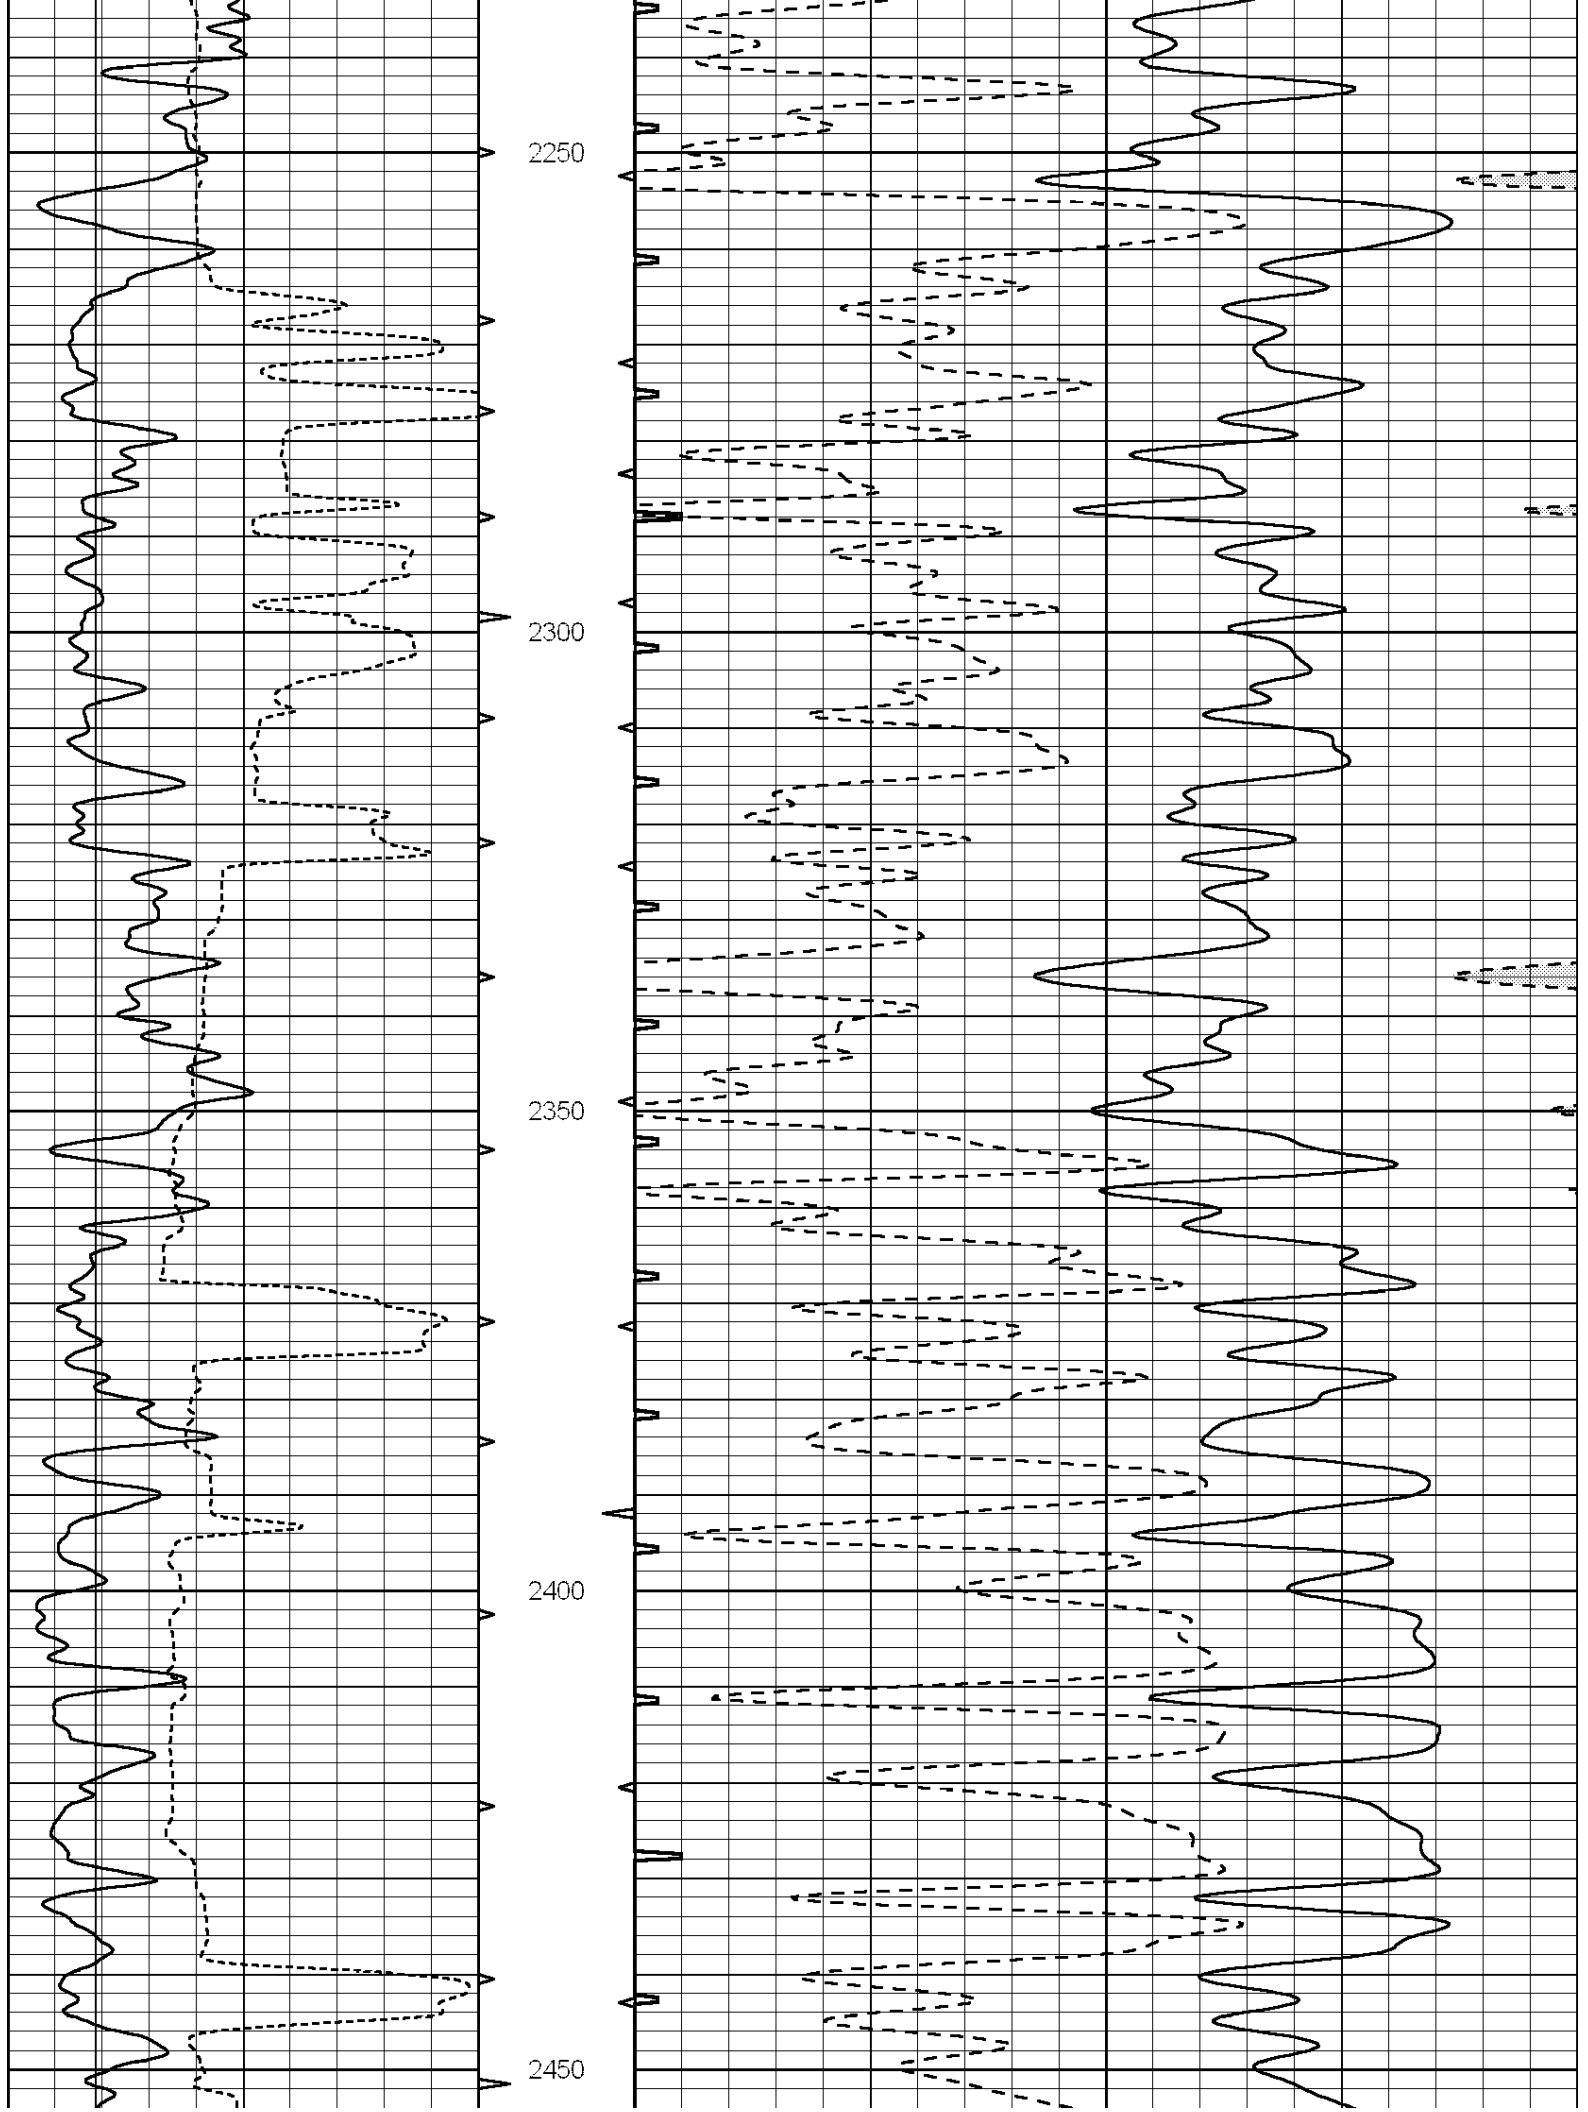

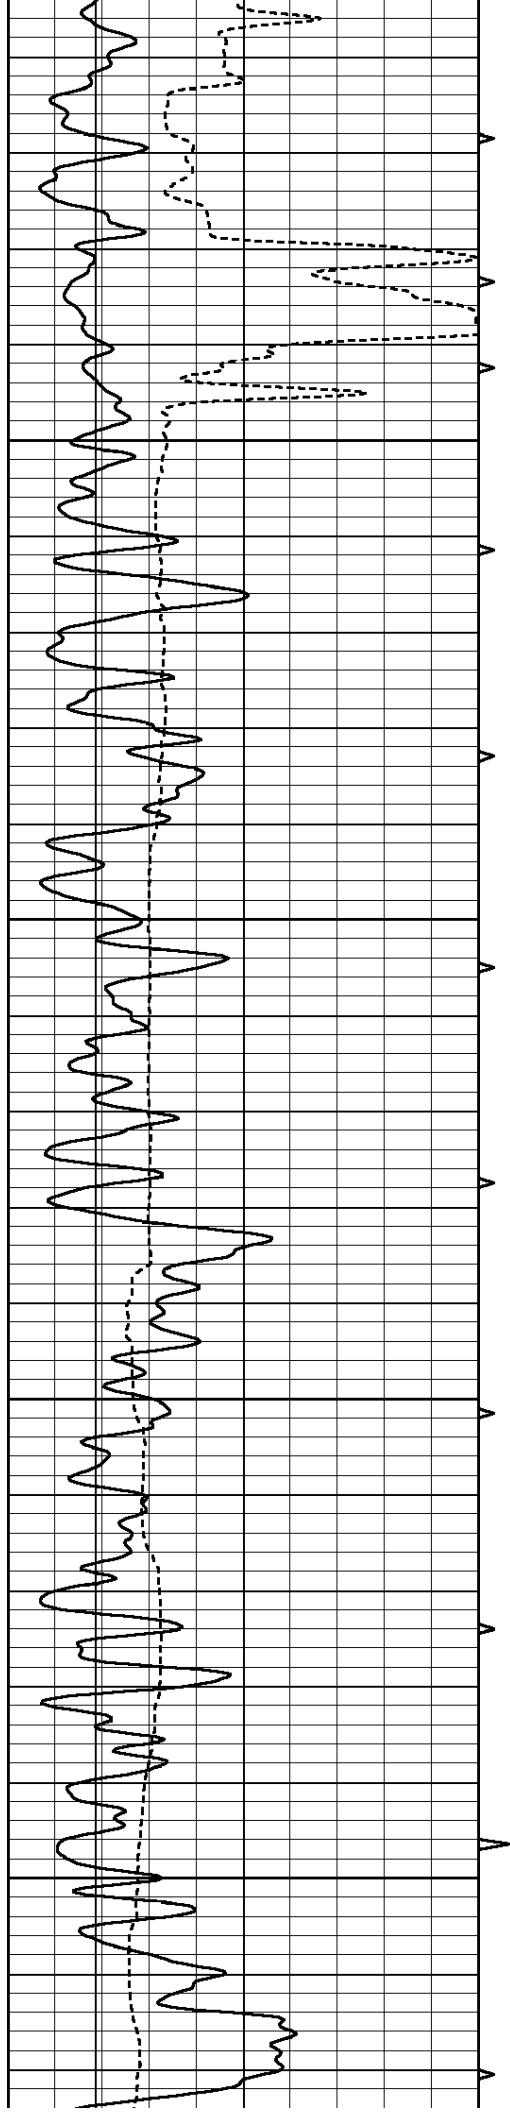




2500


2550



2600


2650

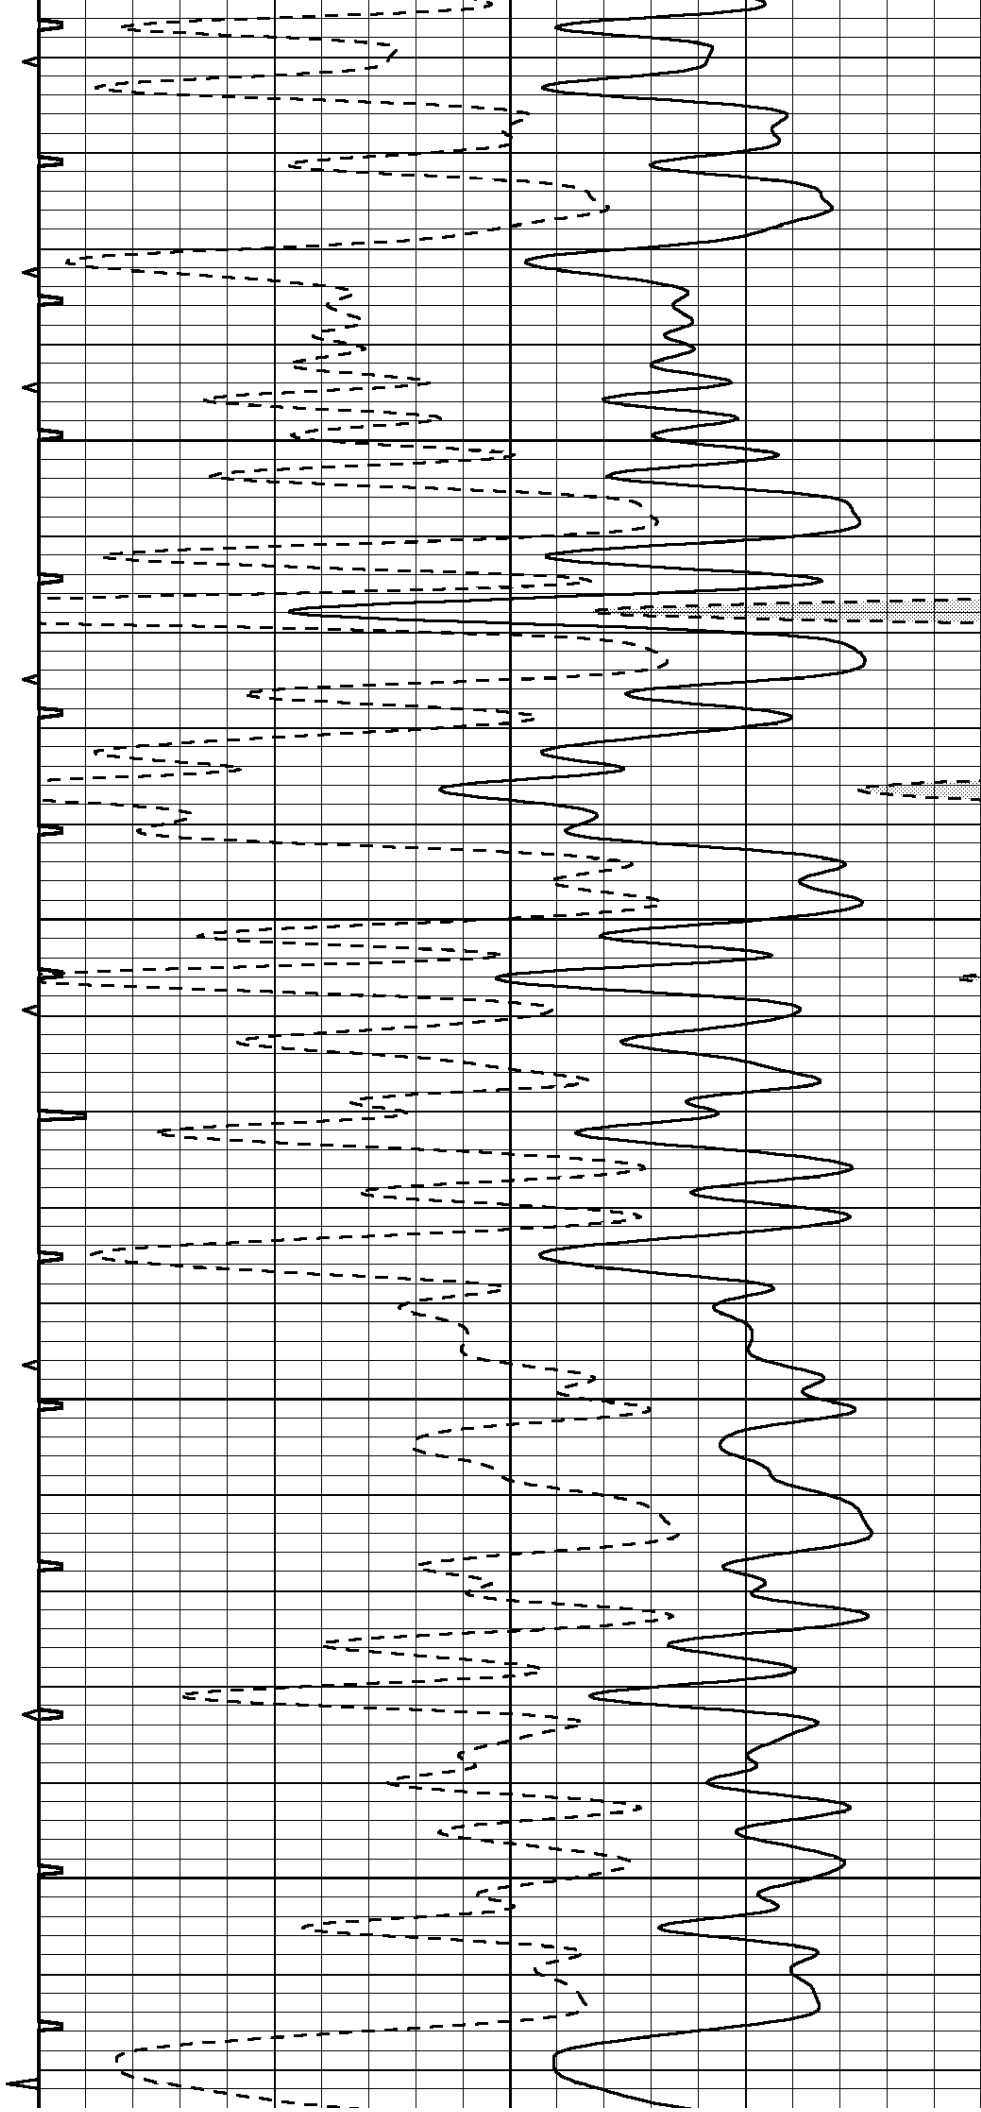


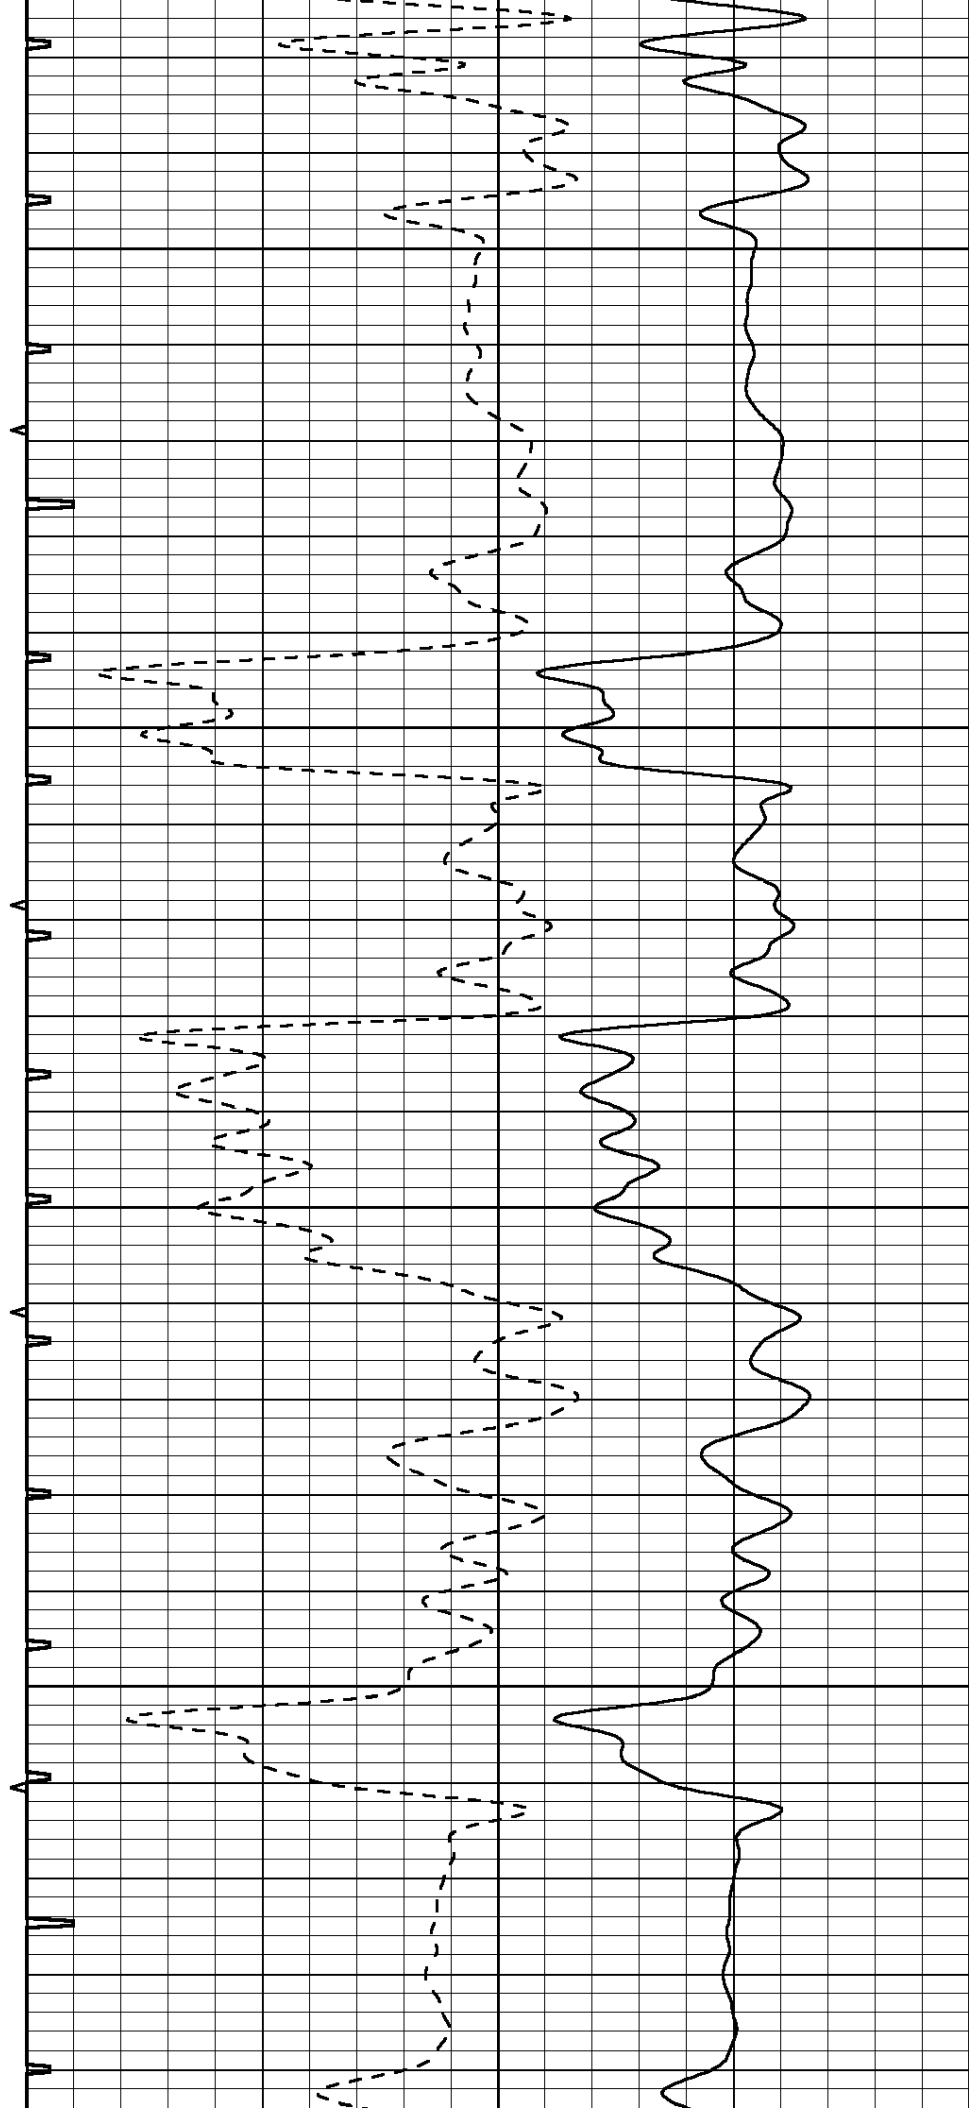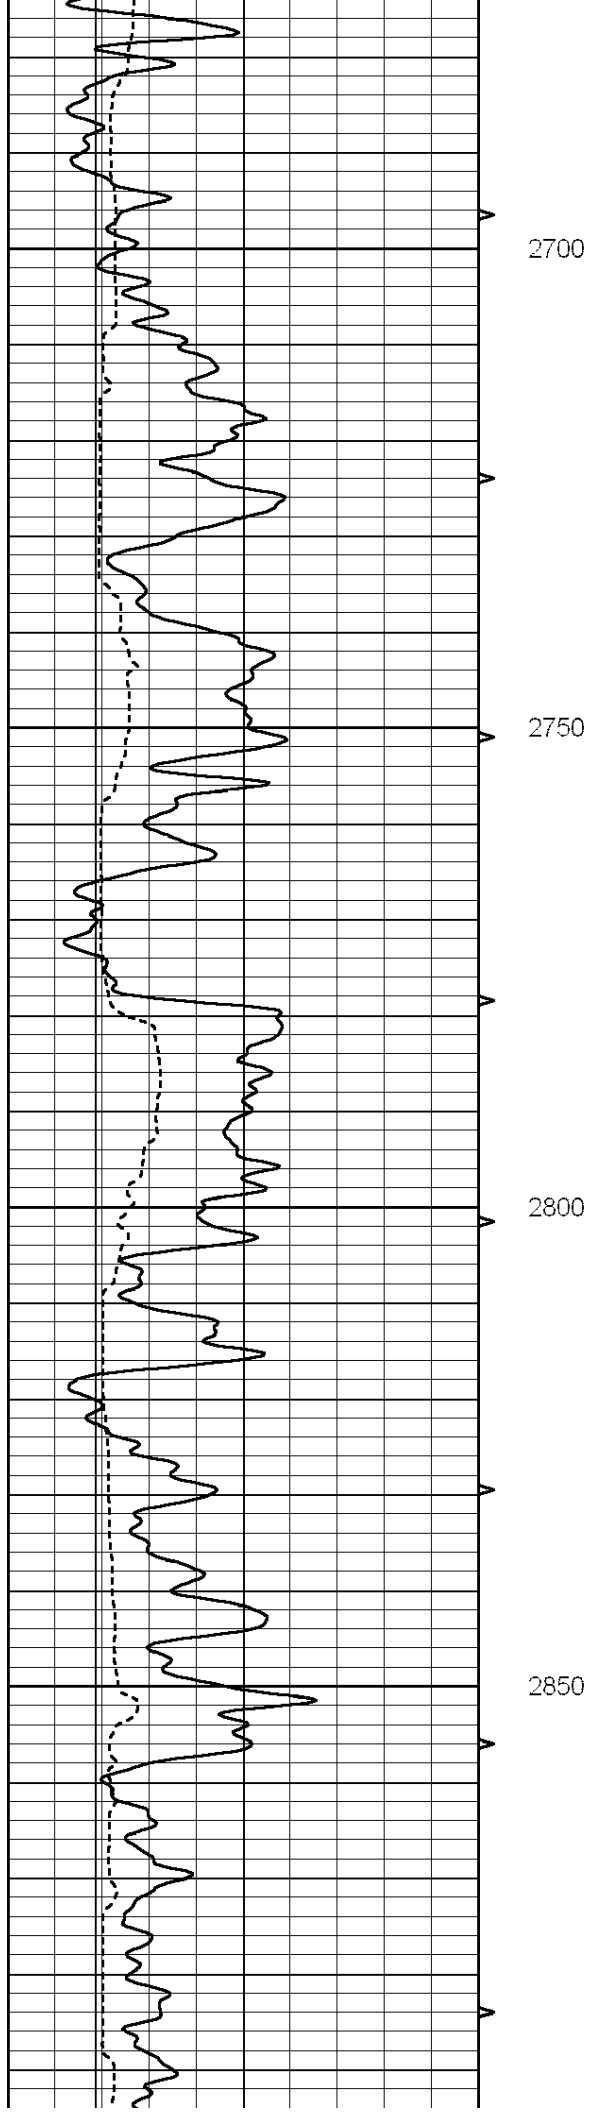

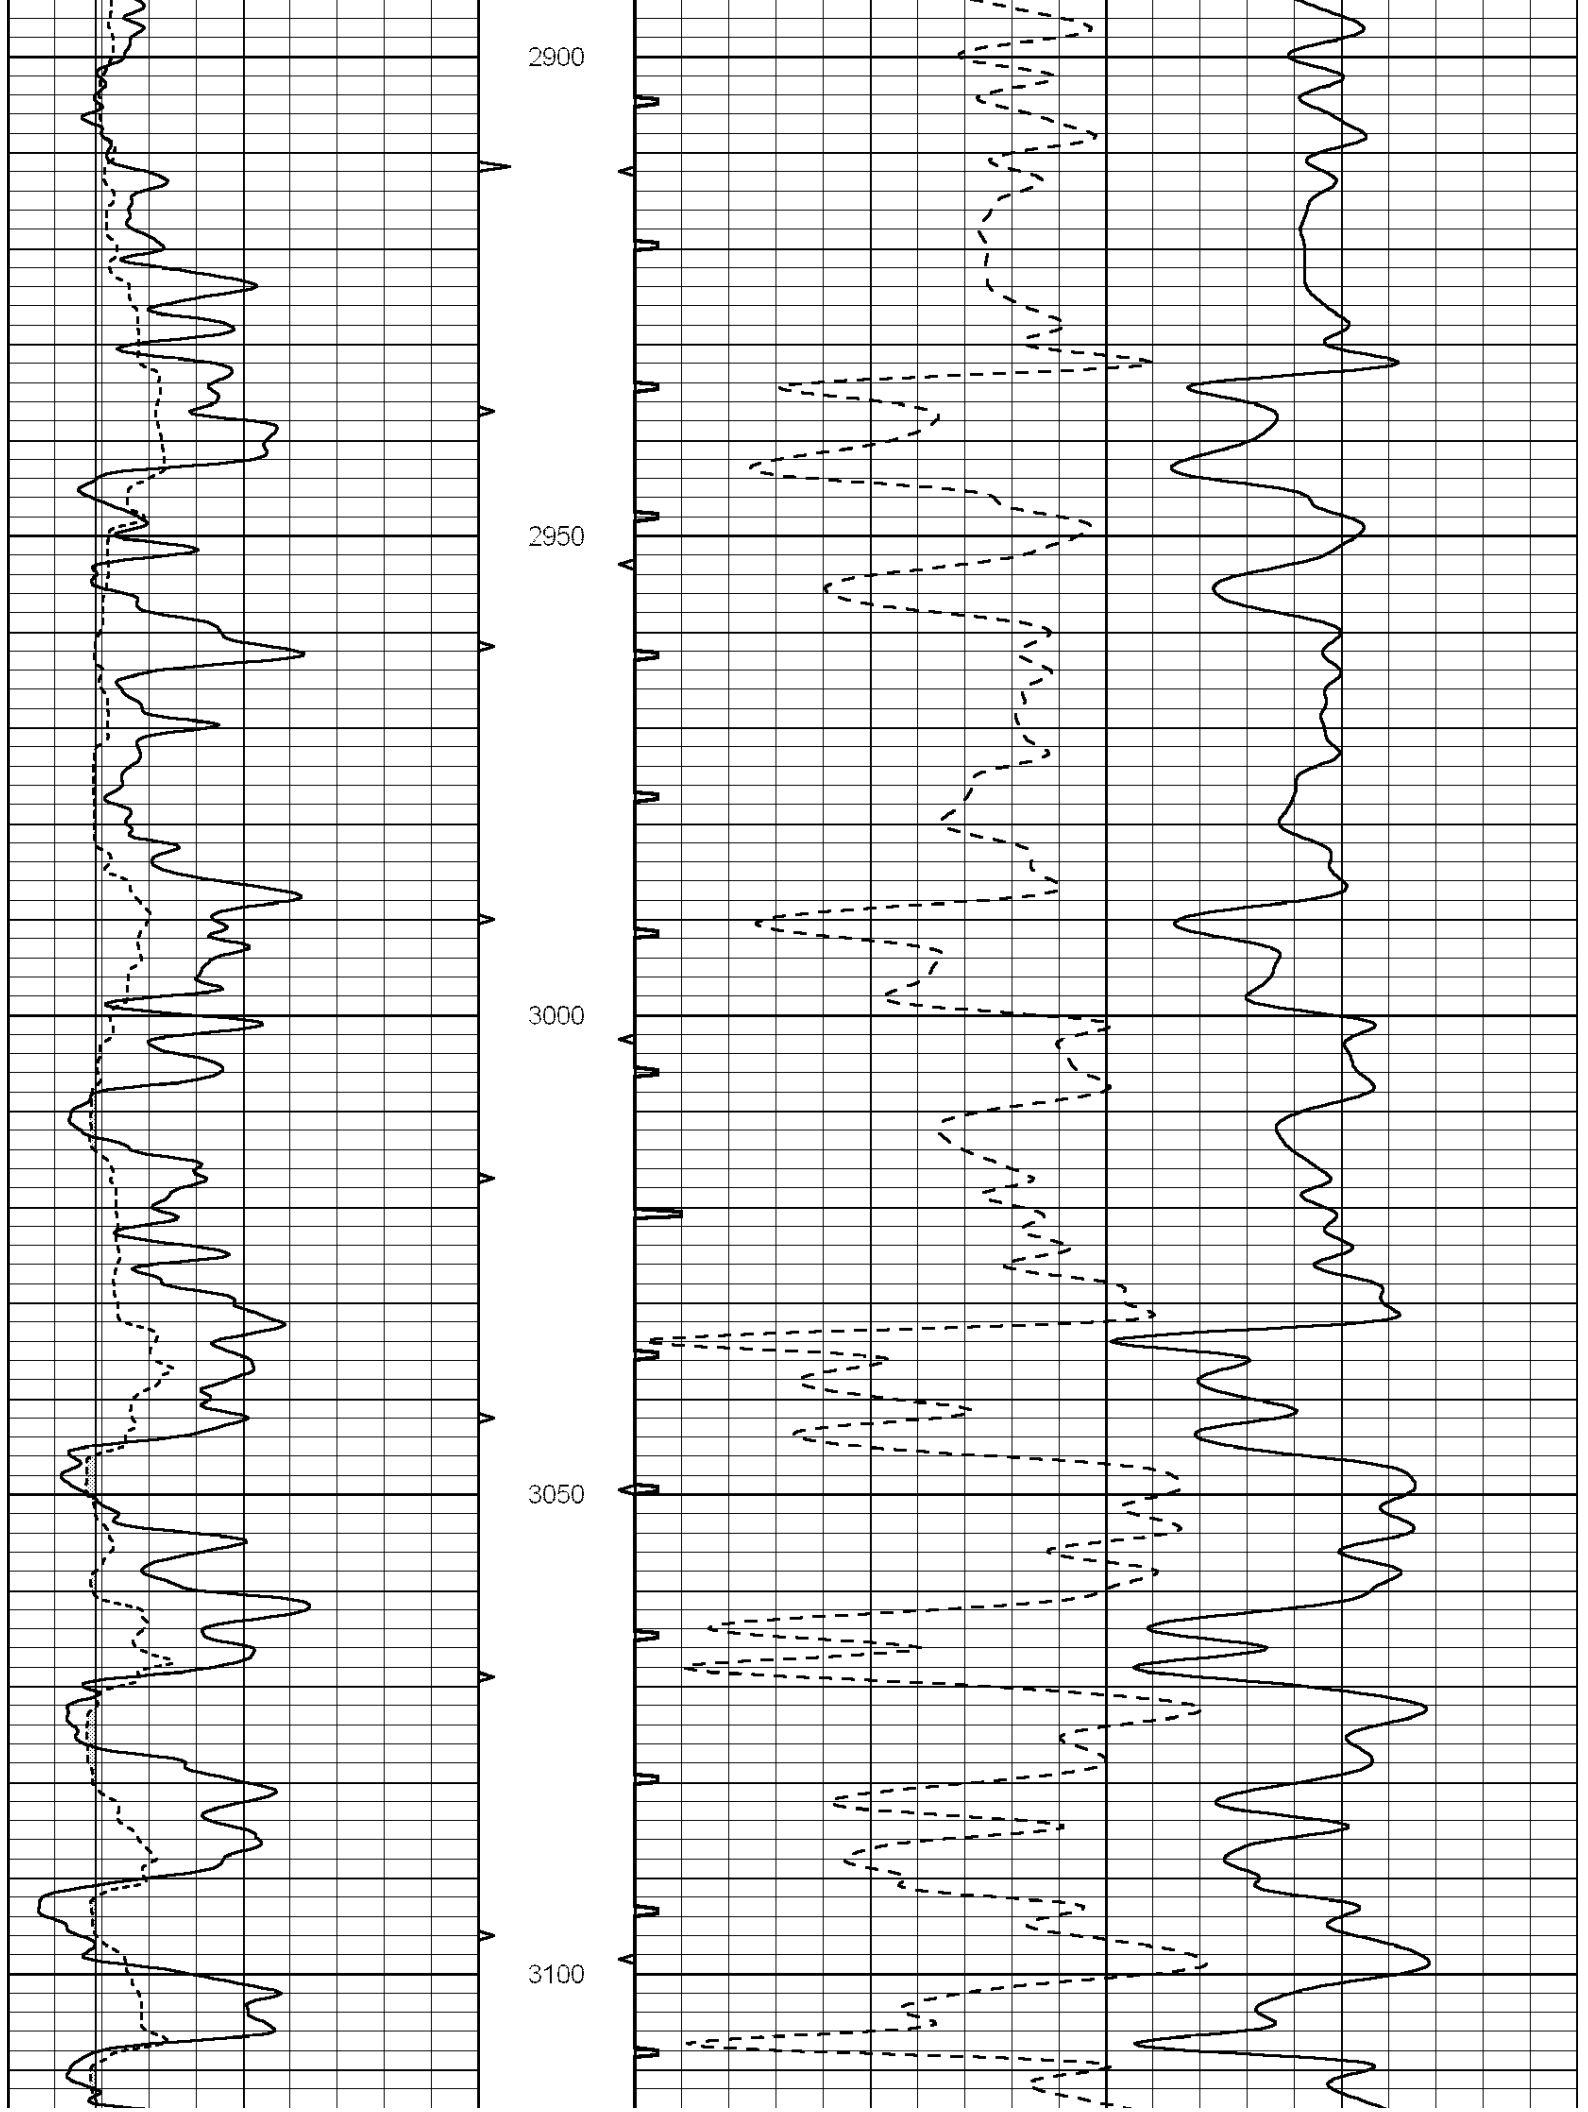

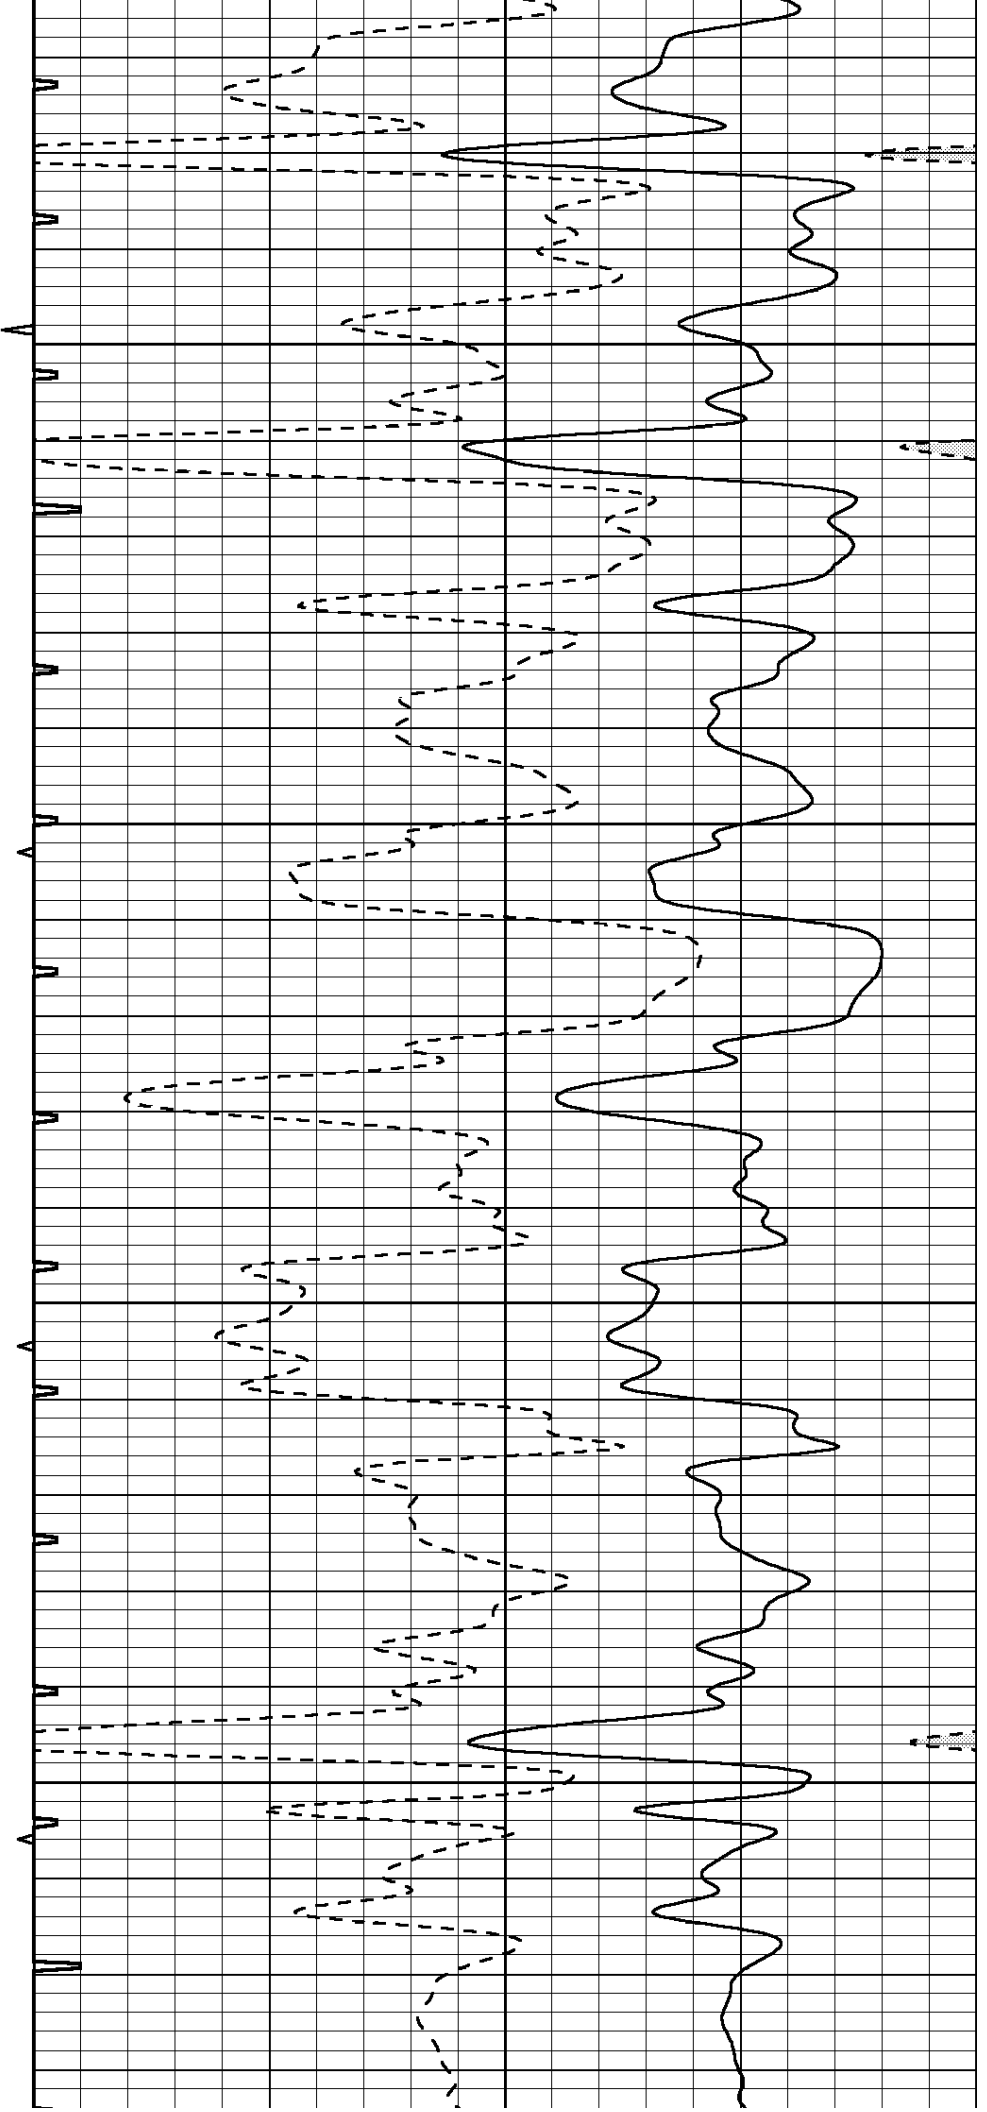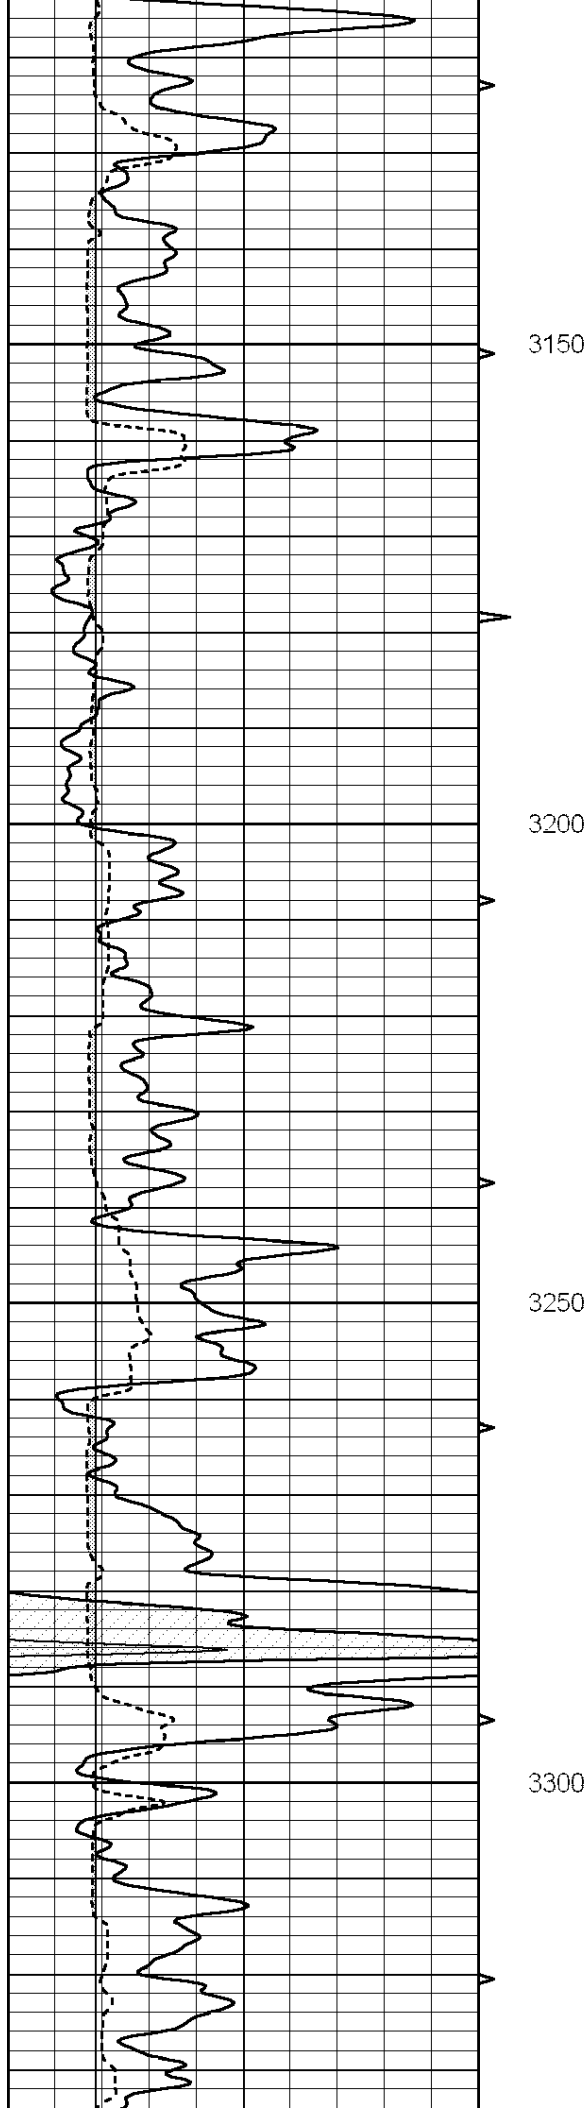

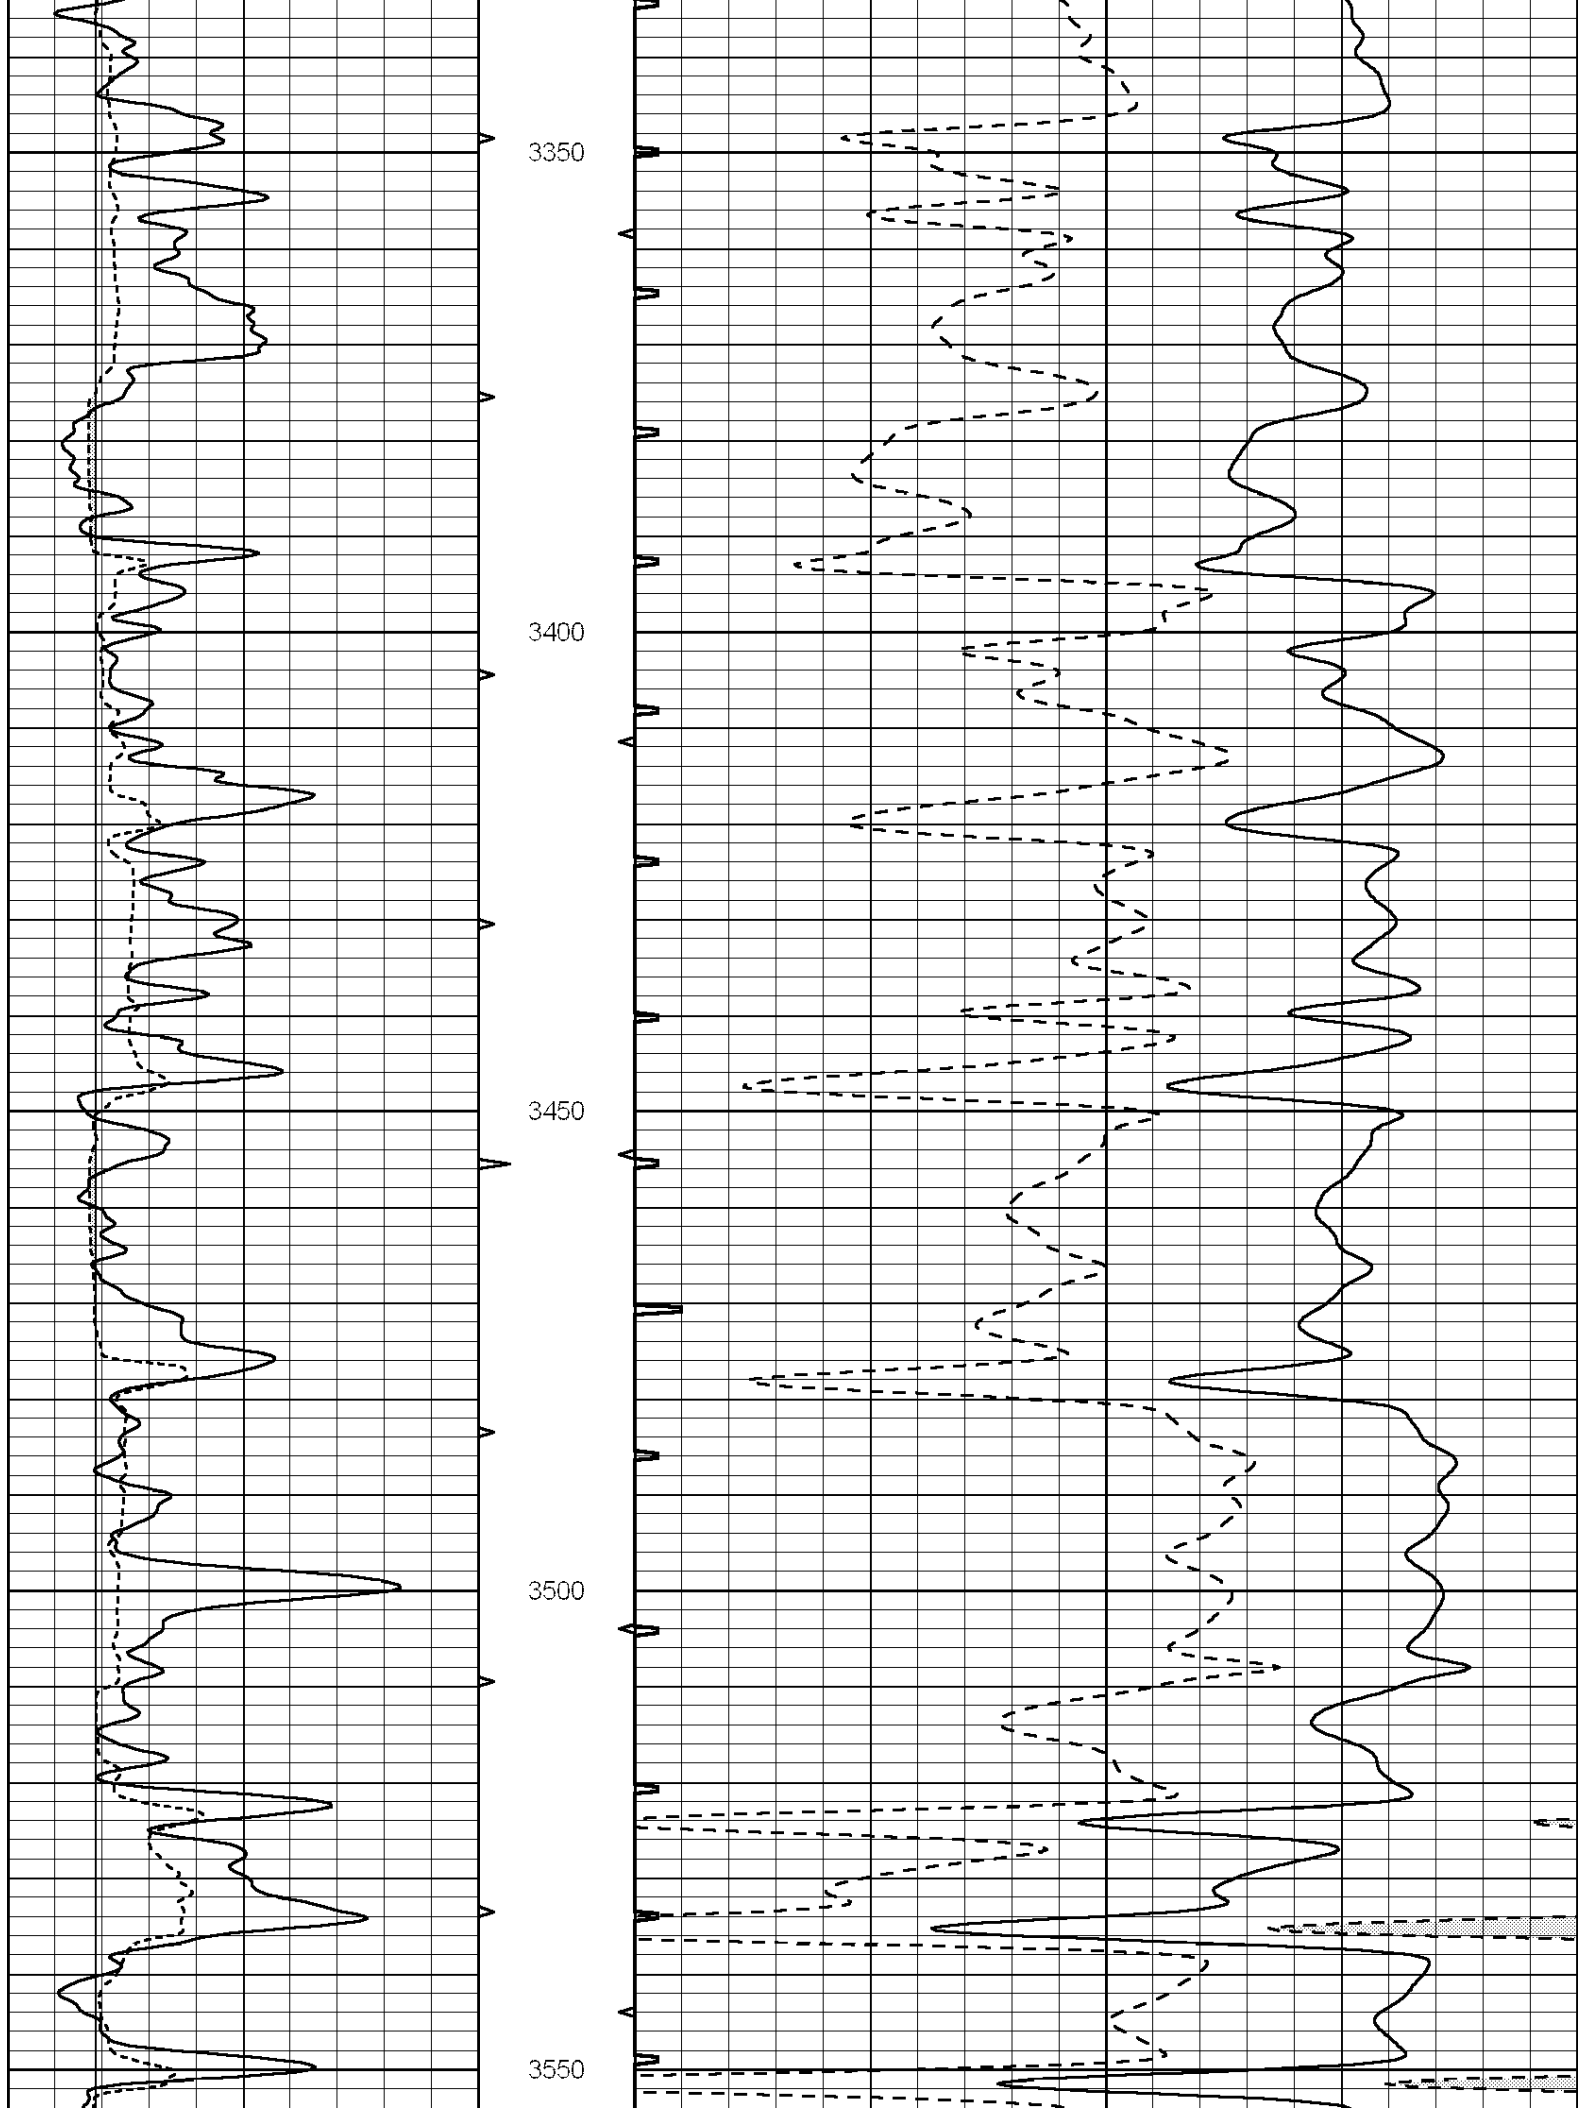

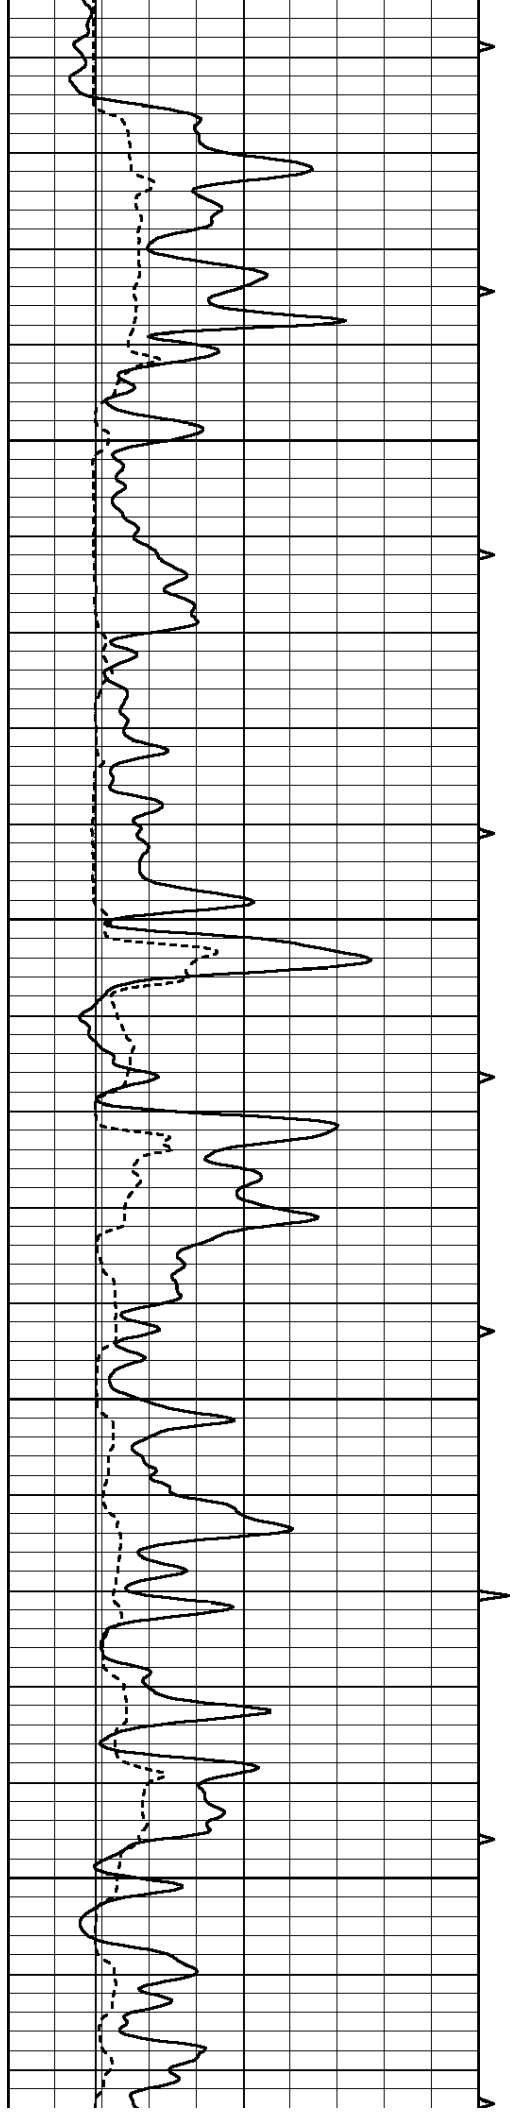



3600

3650

3700

3750

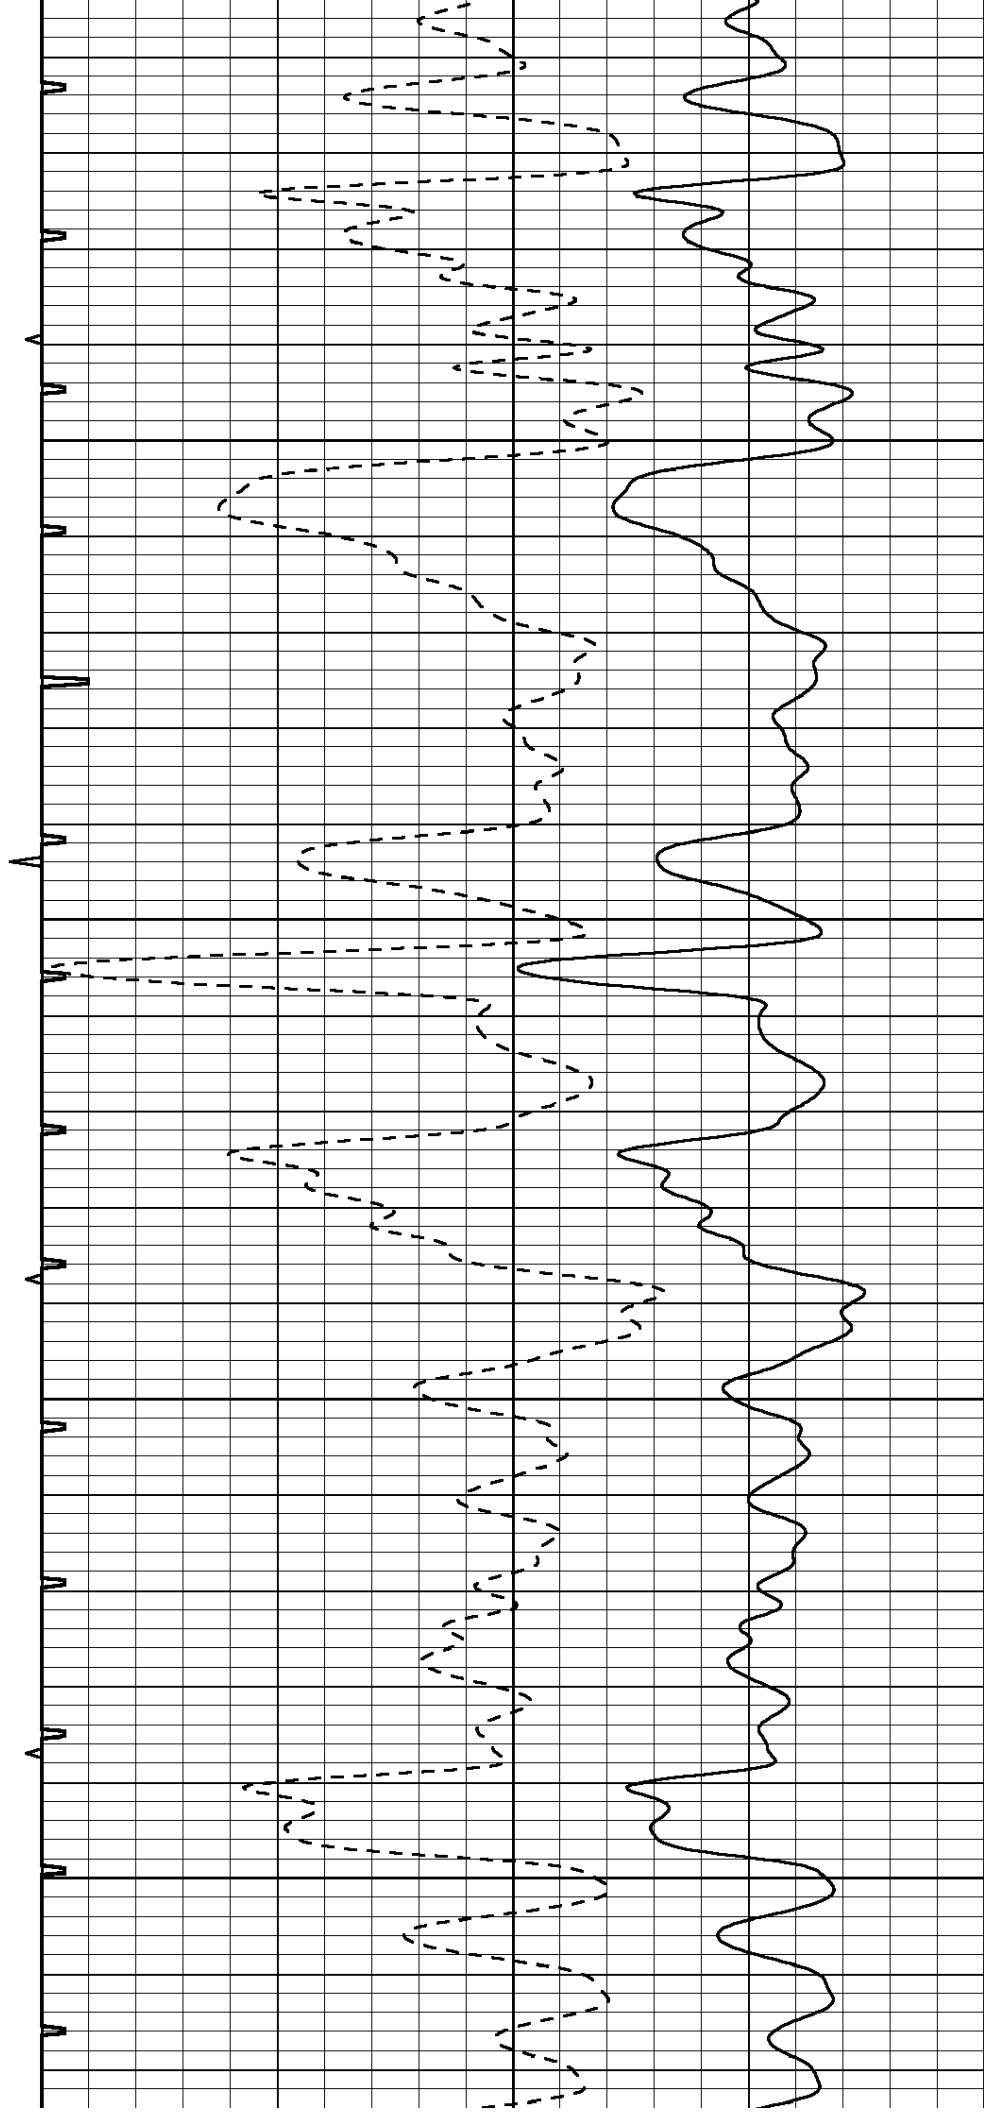

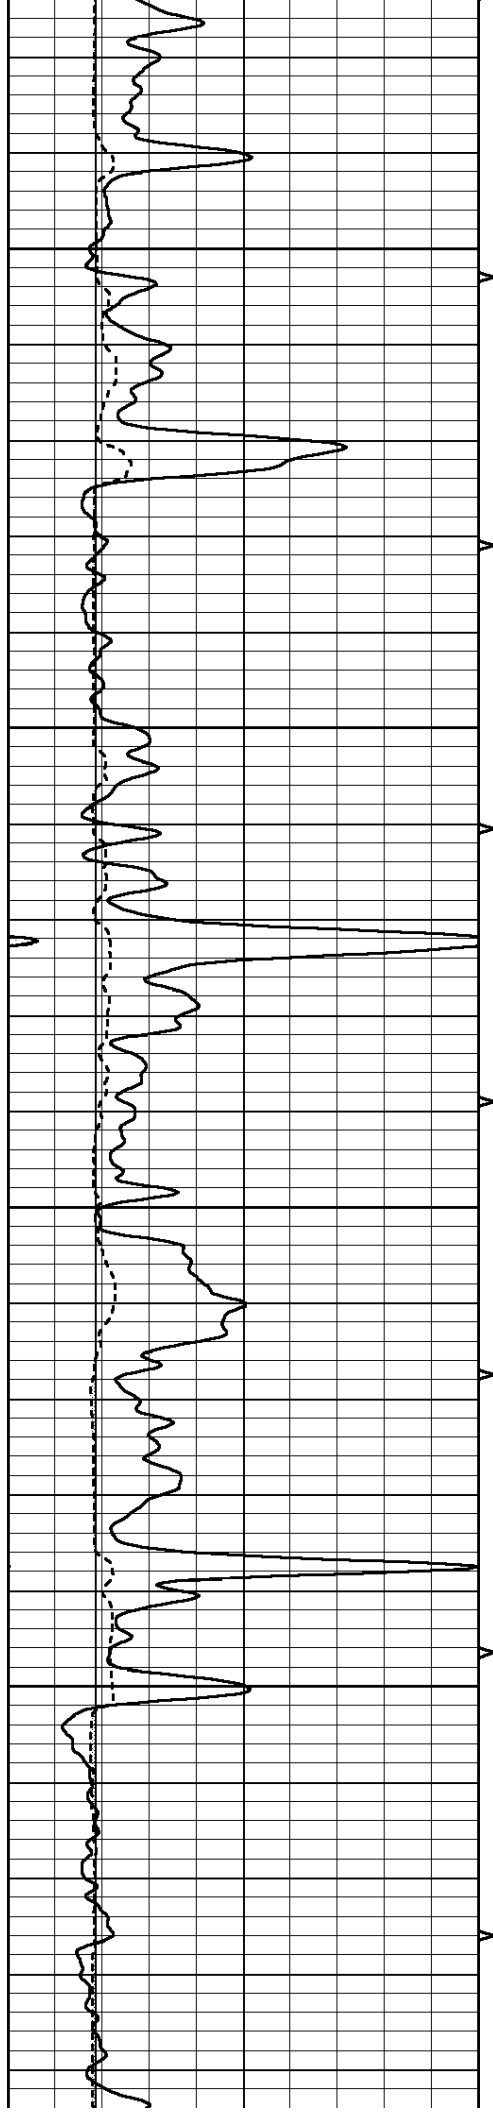



3800


3850

3900

3950

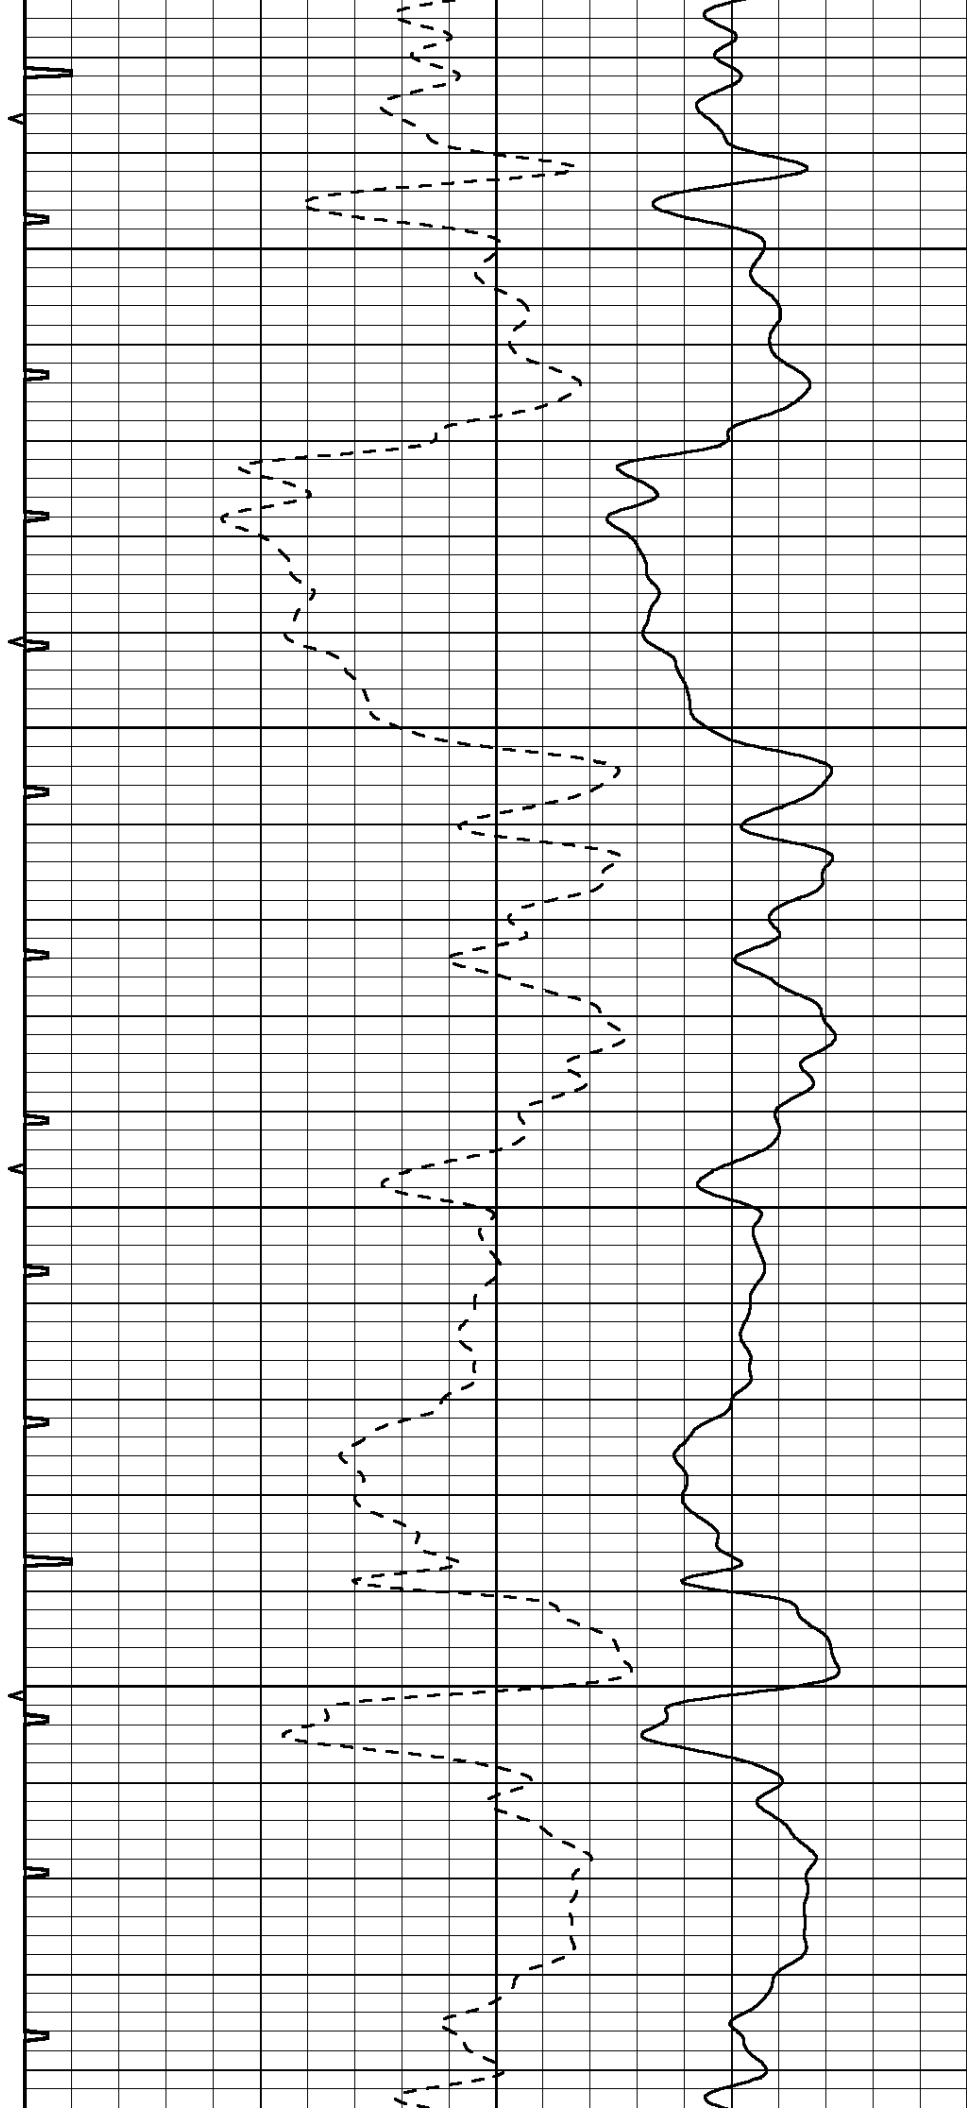

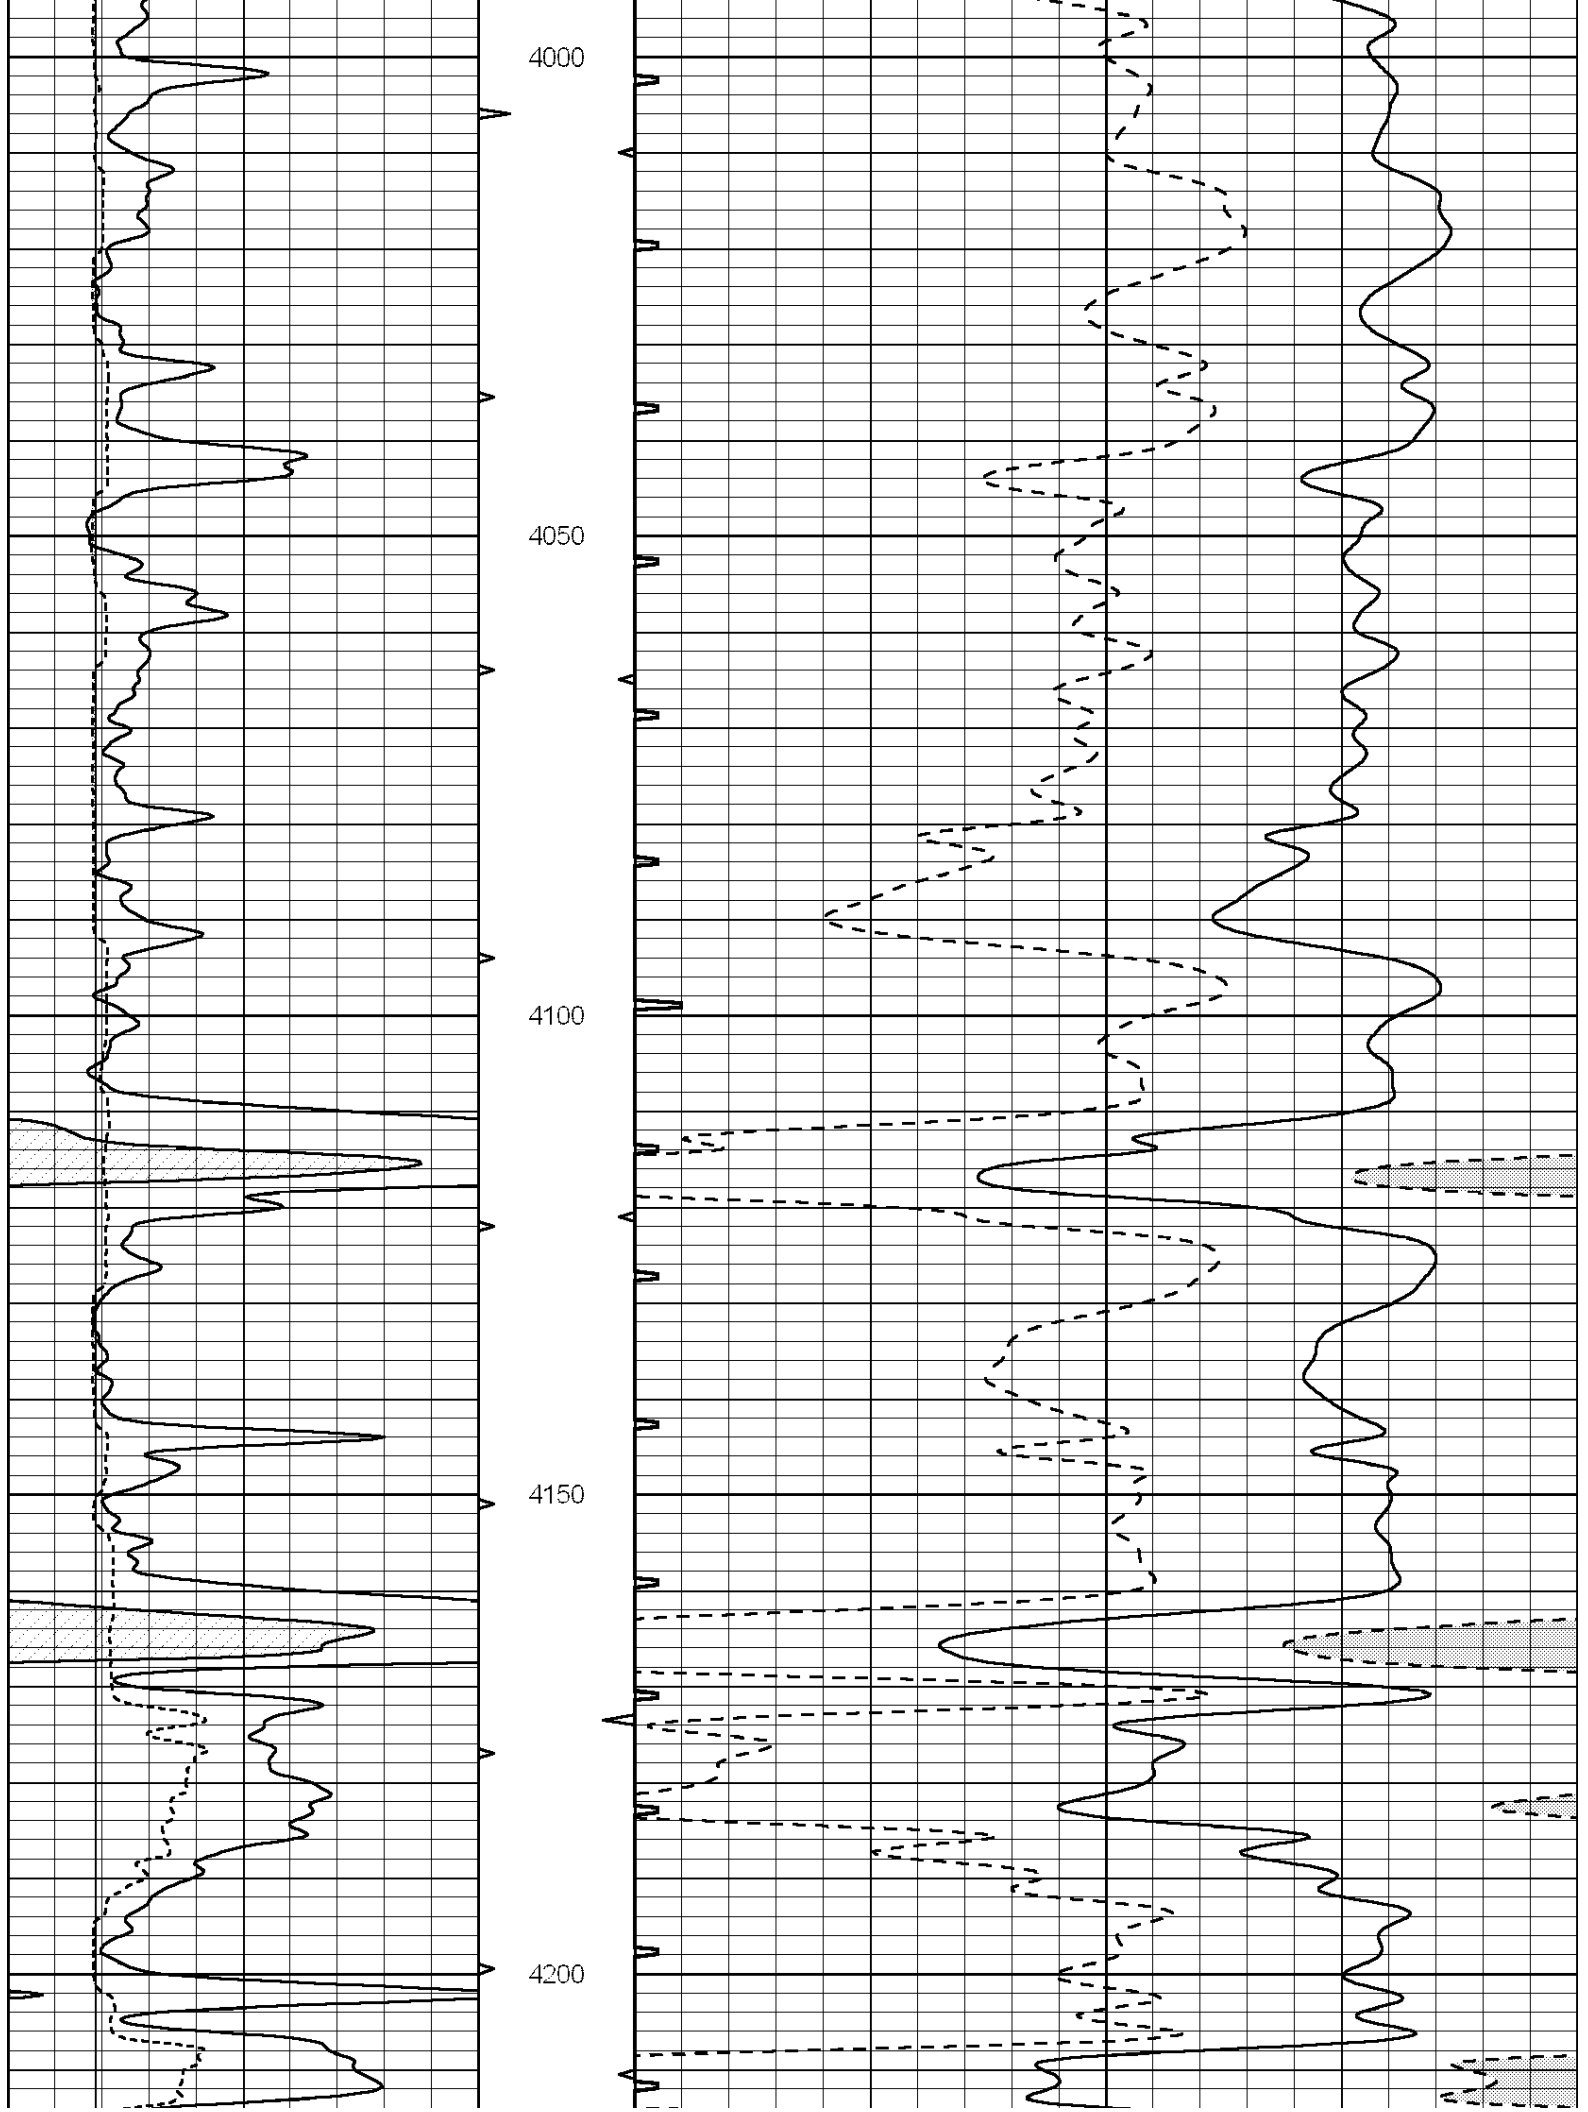

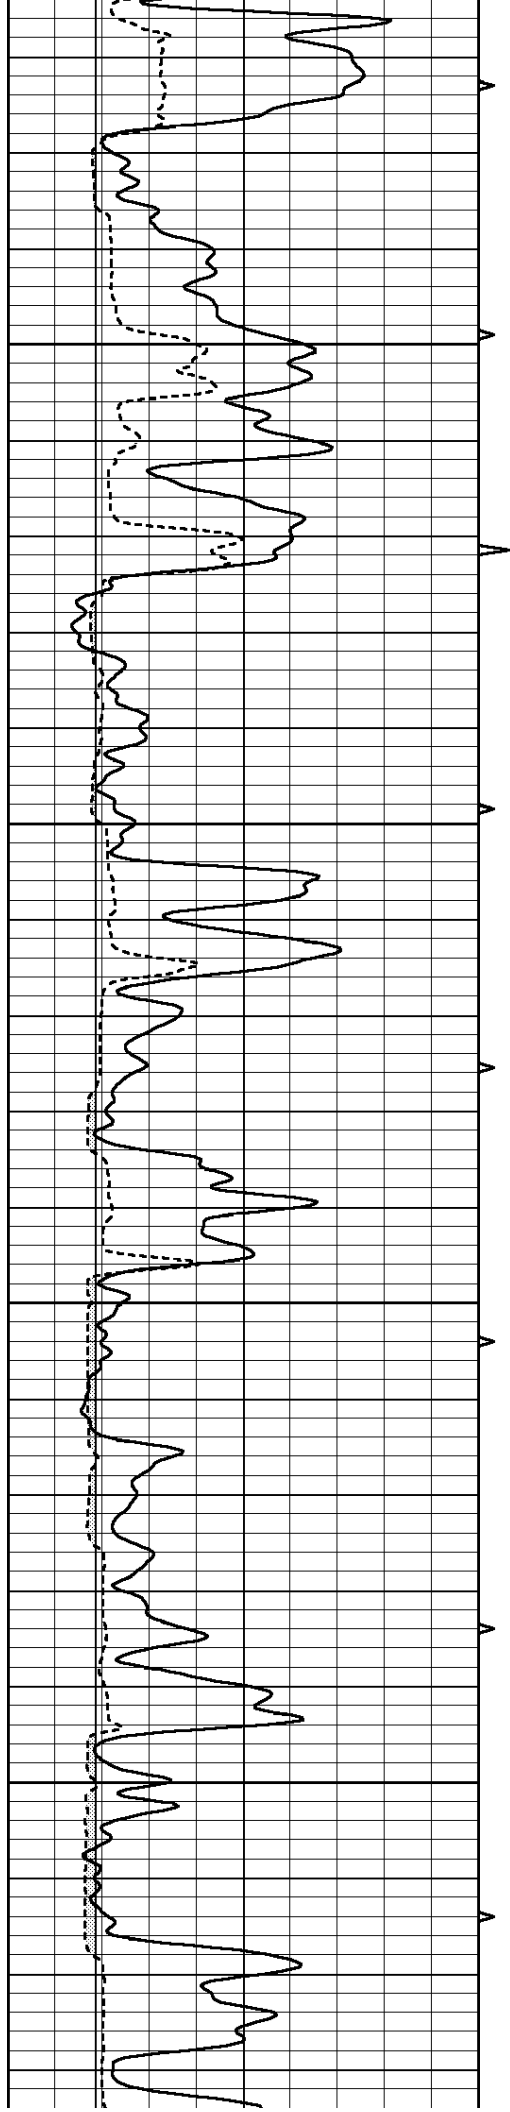




4250


4300

4350

4400

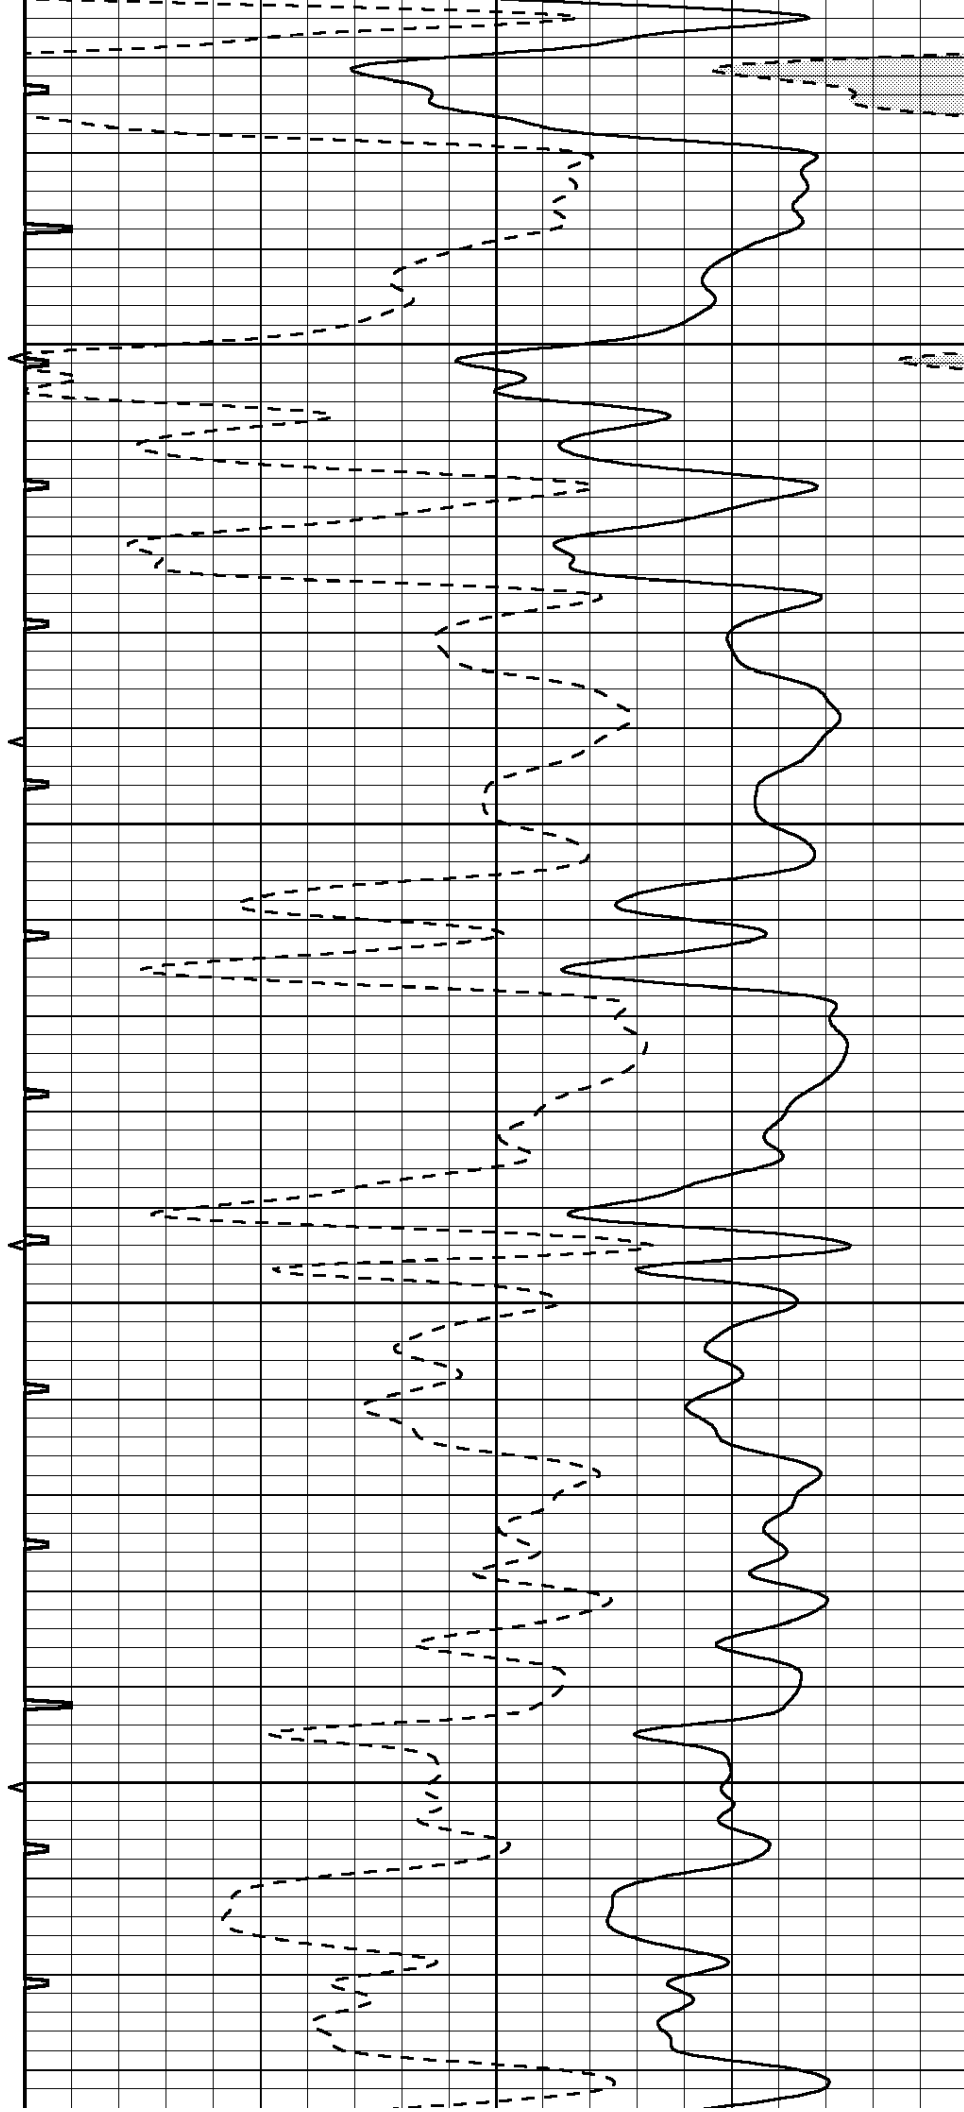

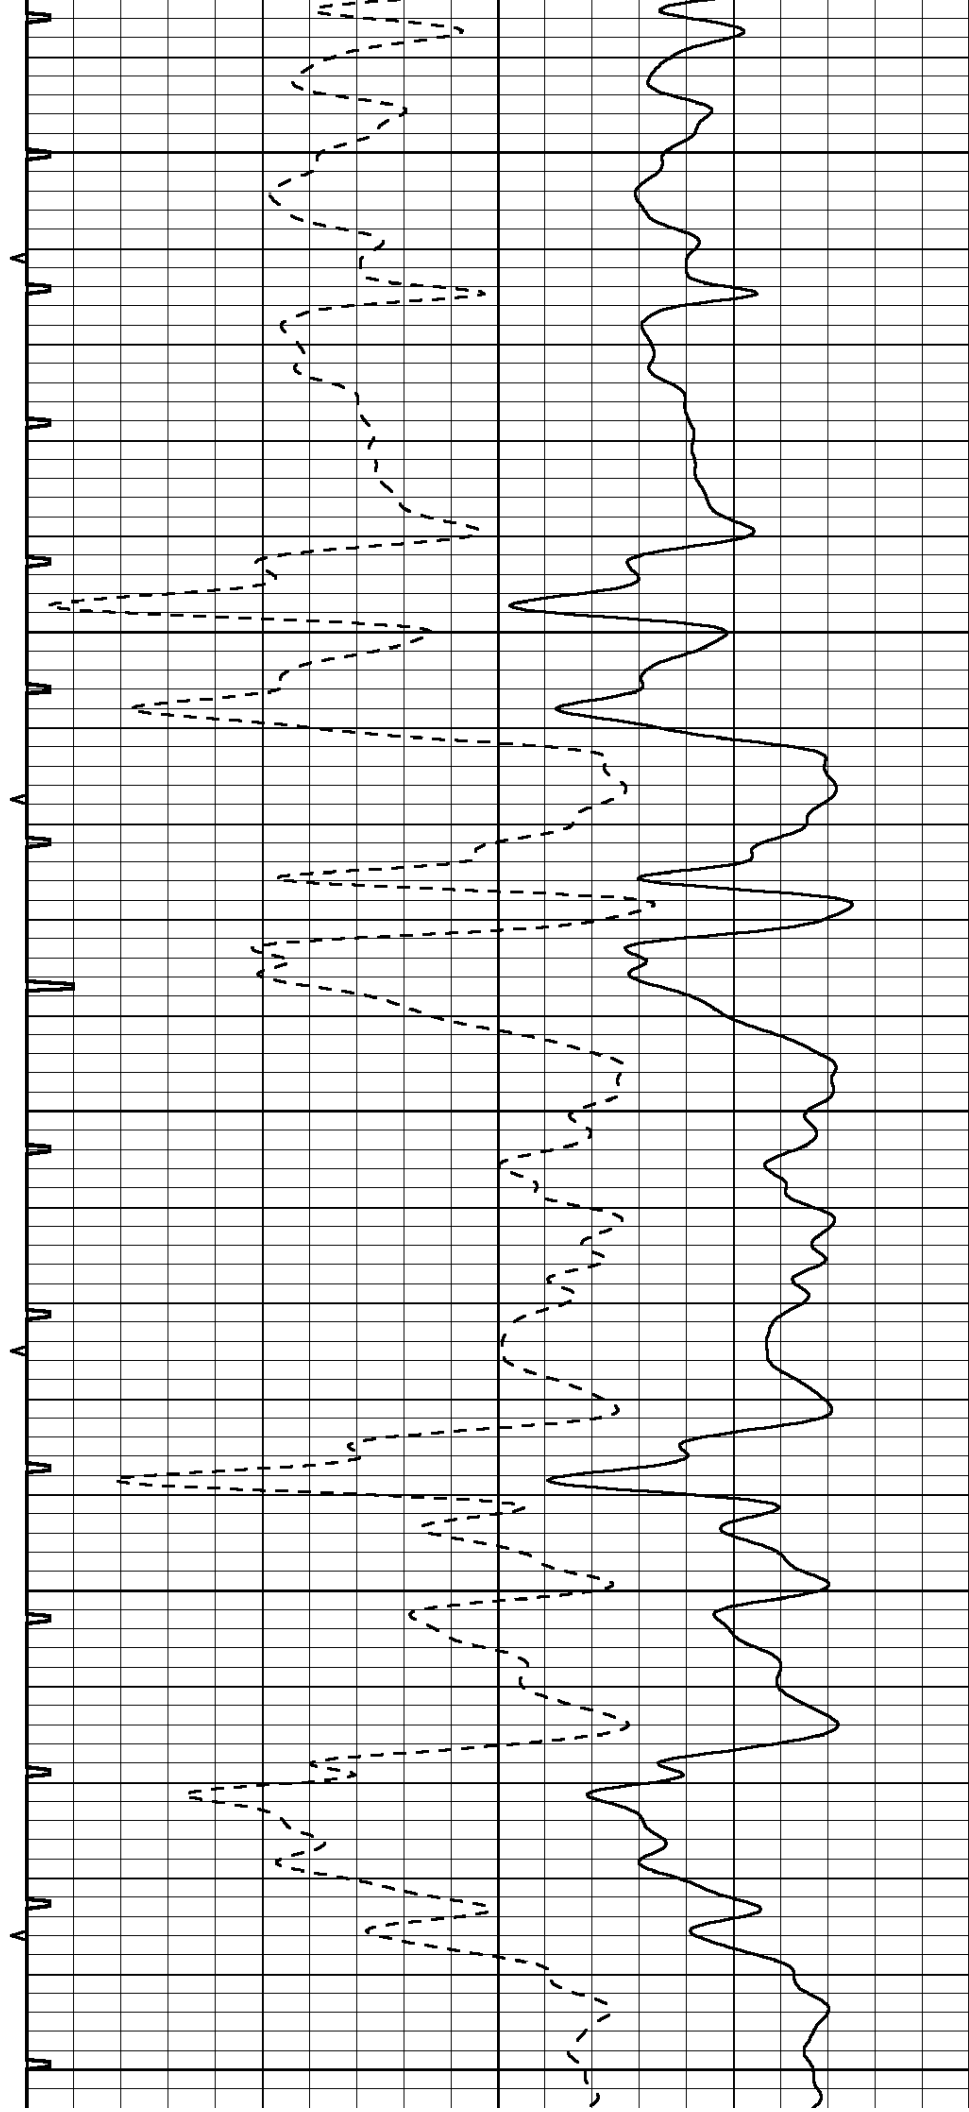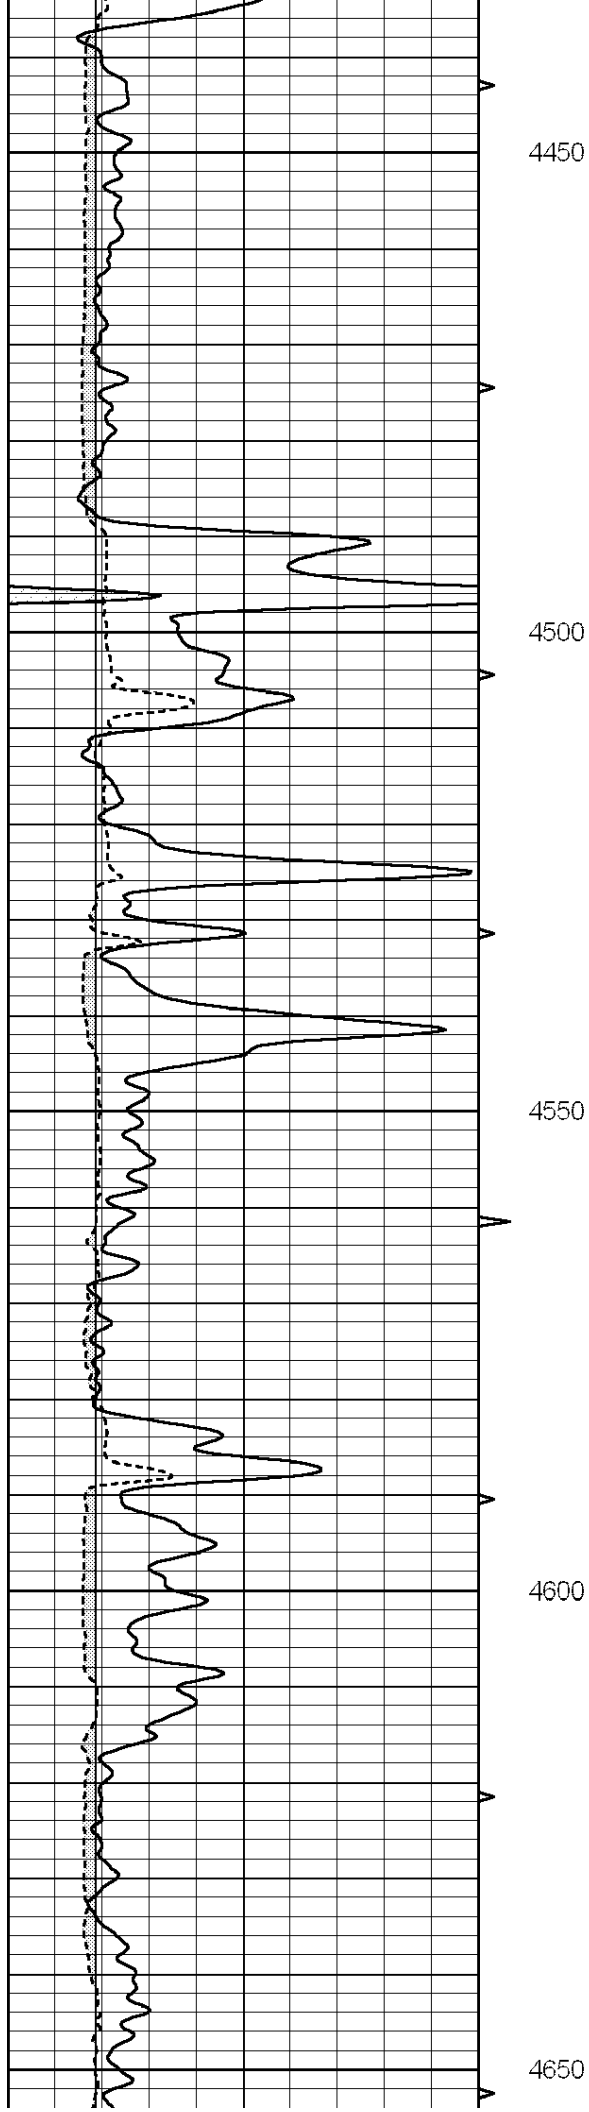

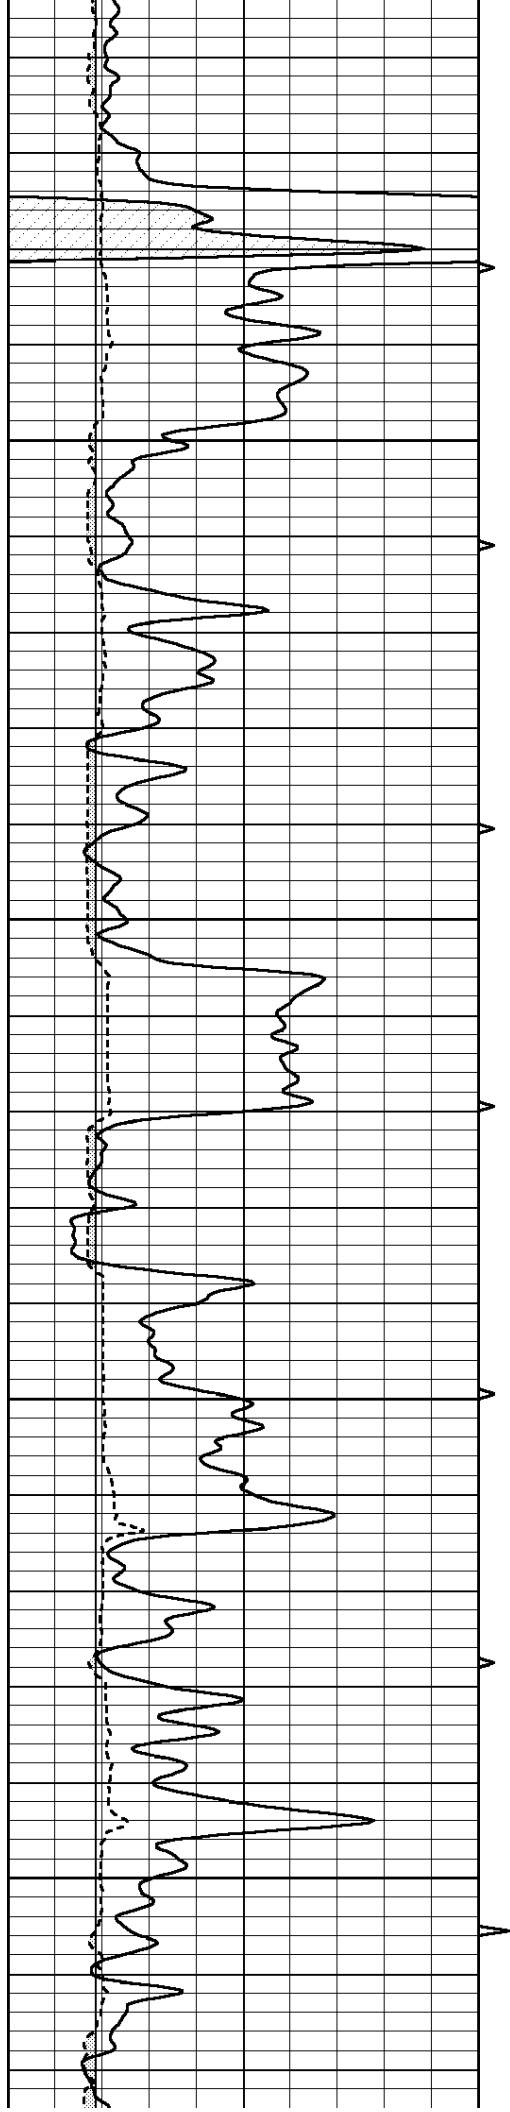



4700

4750

4800

4850

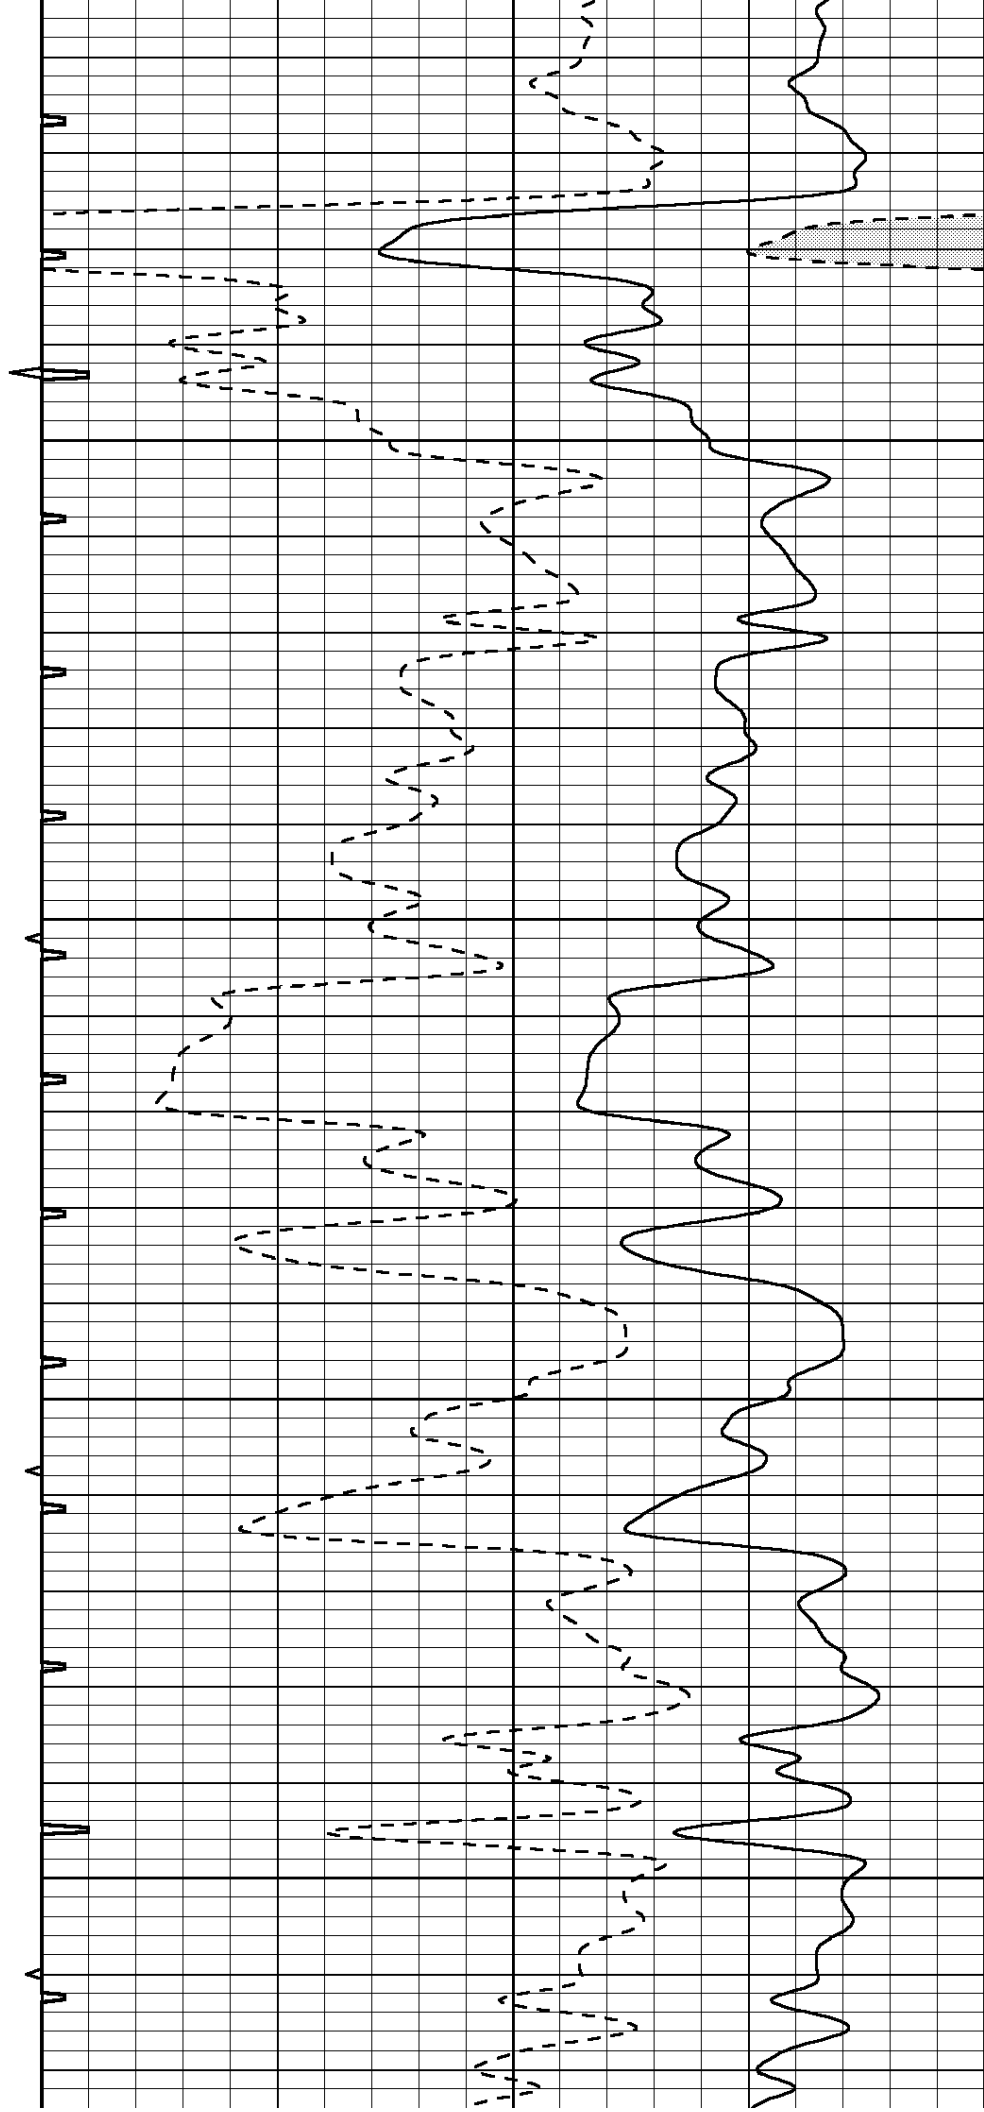

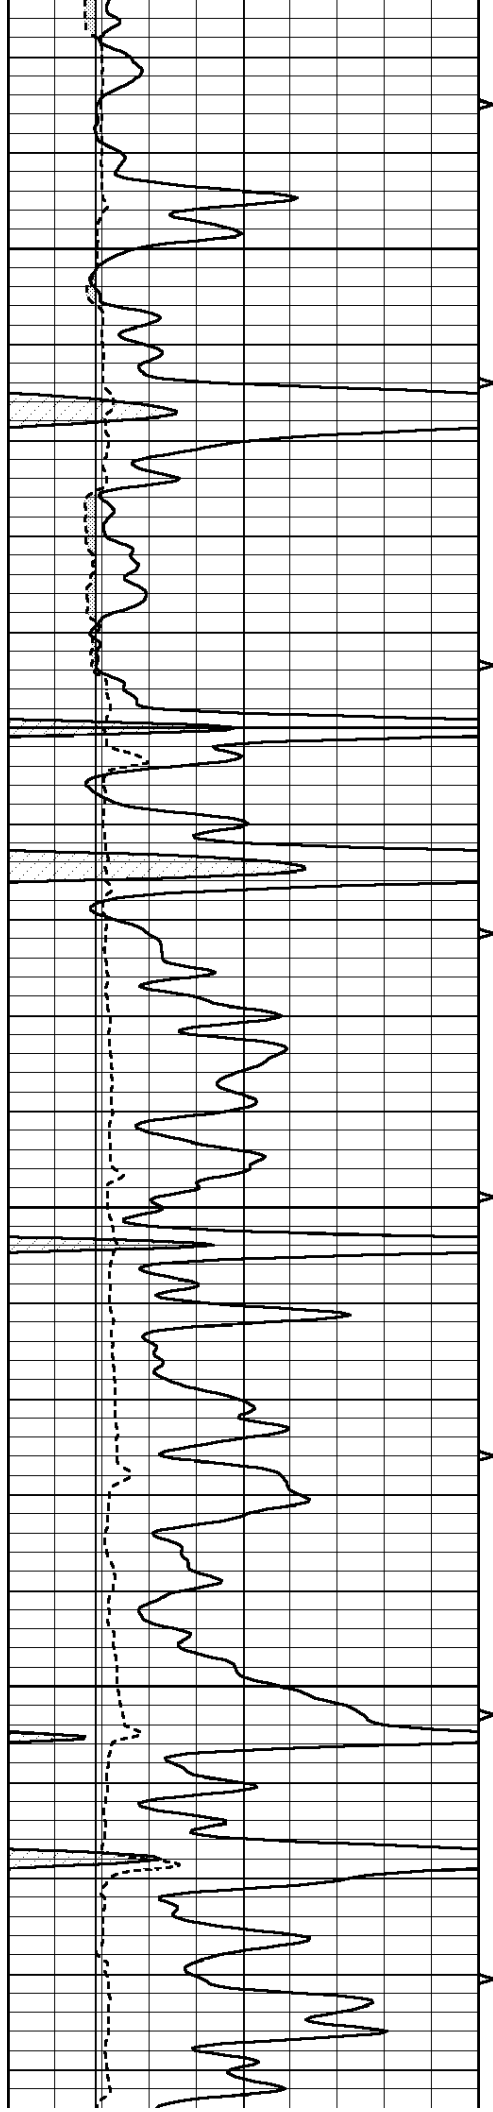




4900


4950

5000

5050

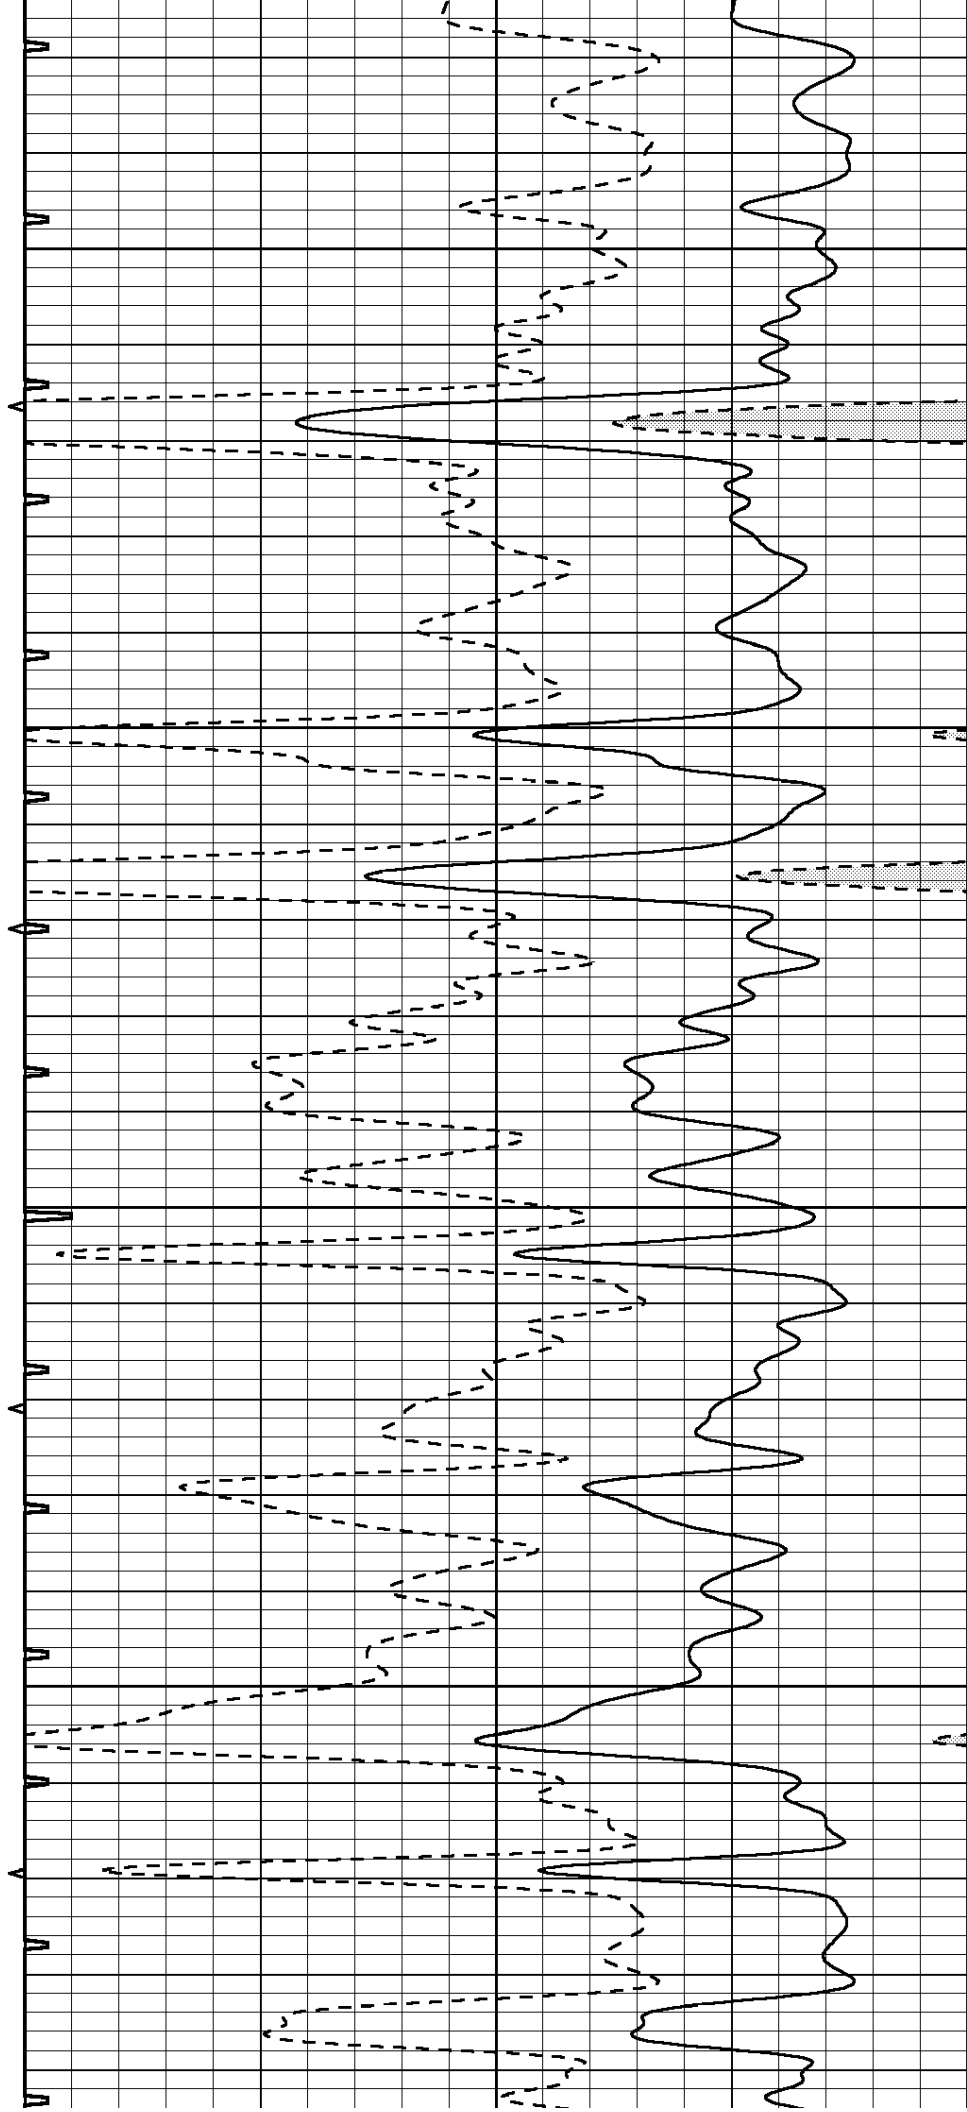

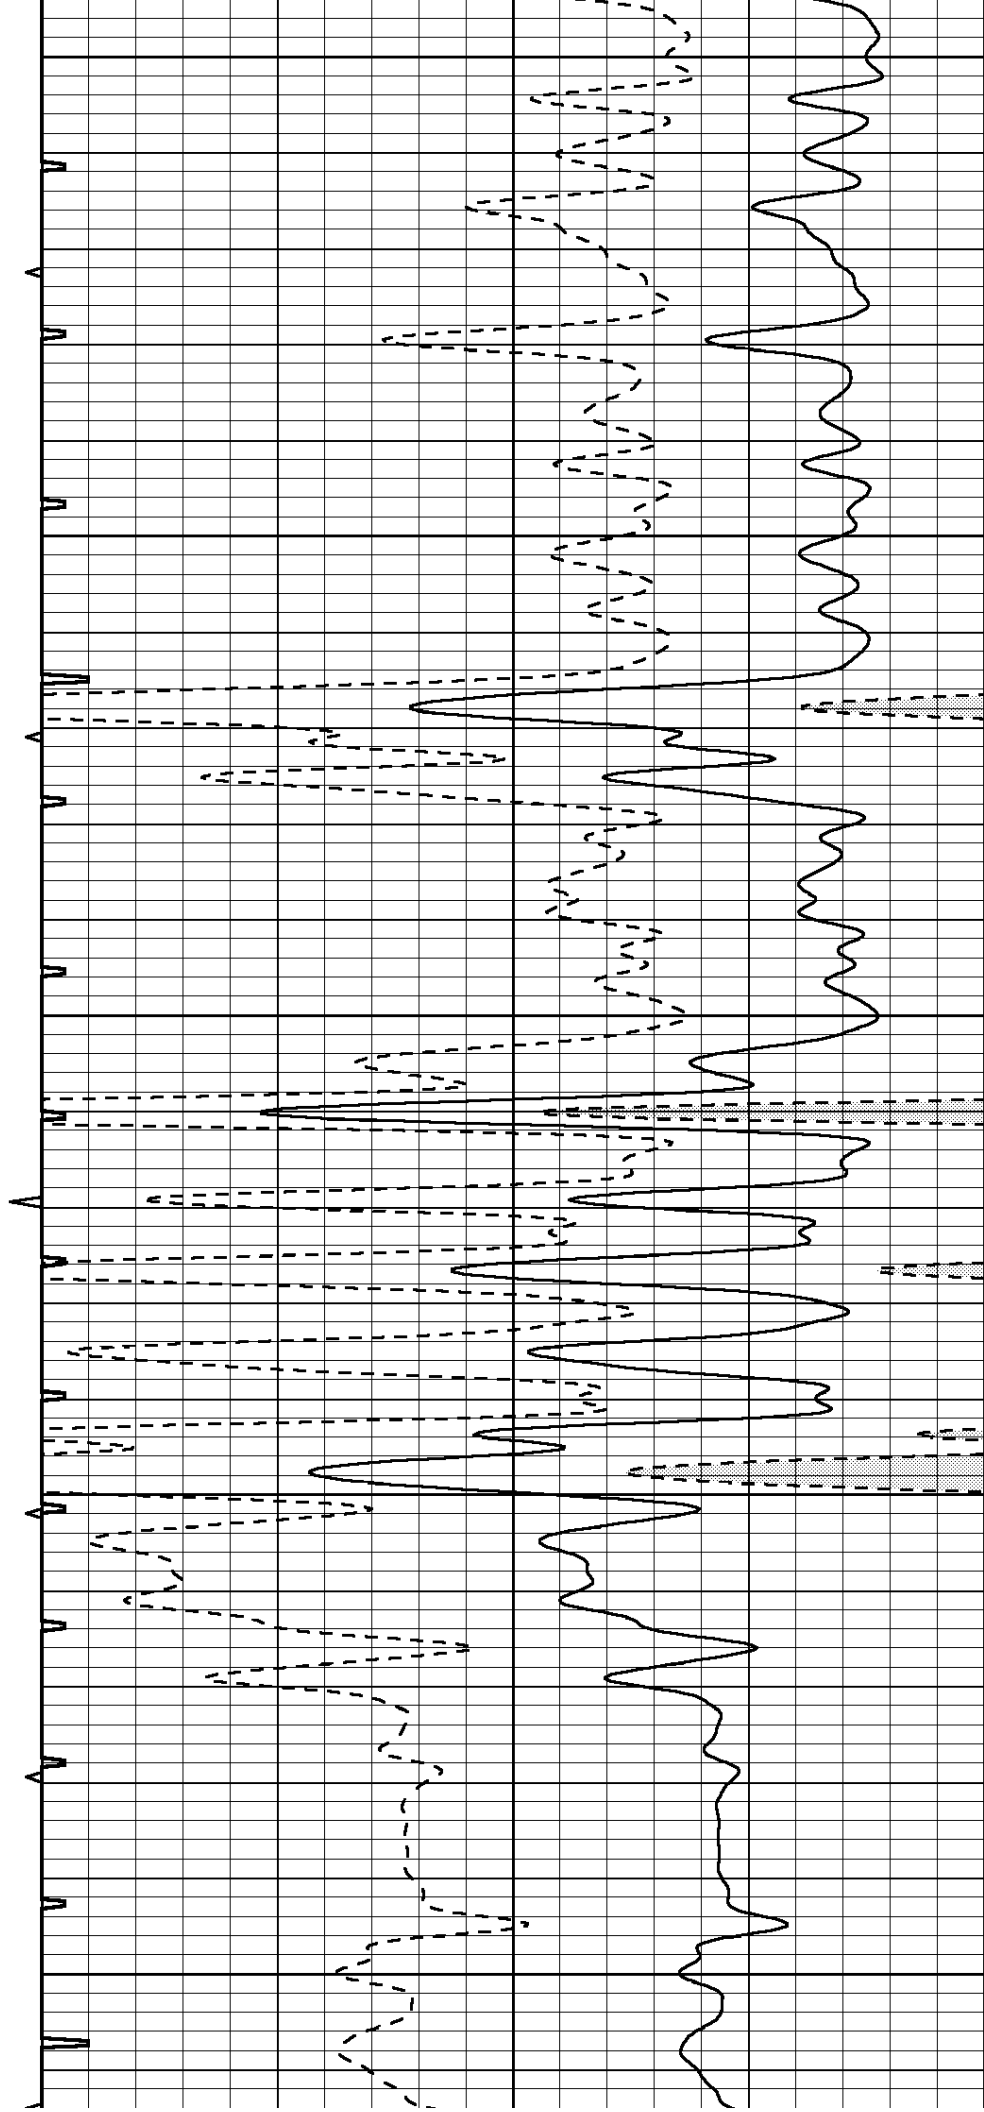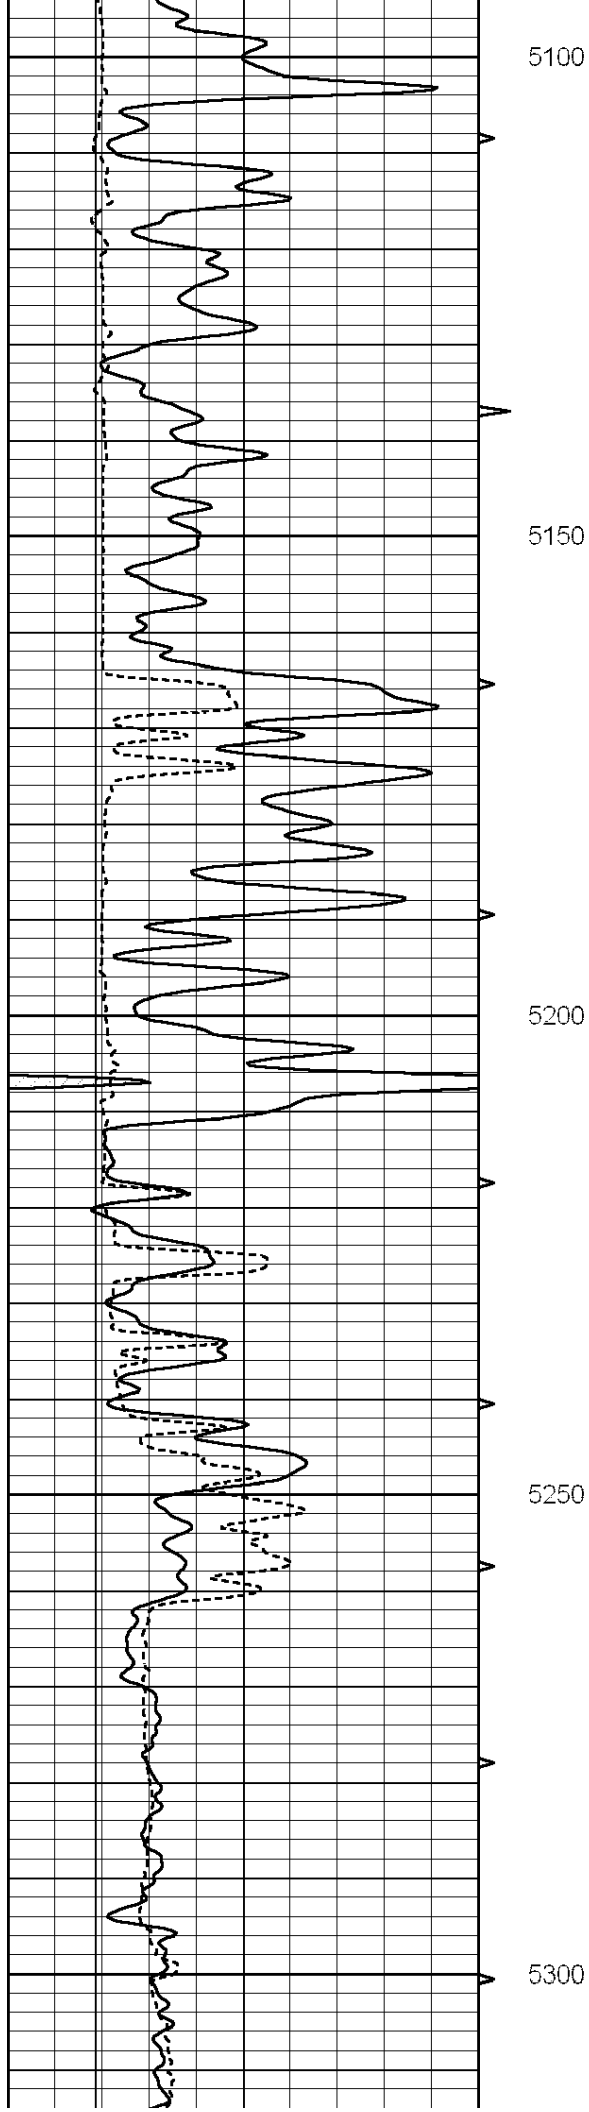

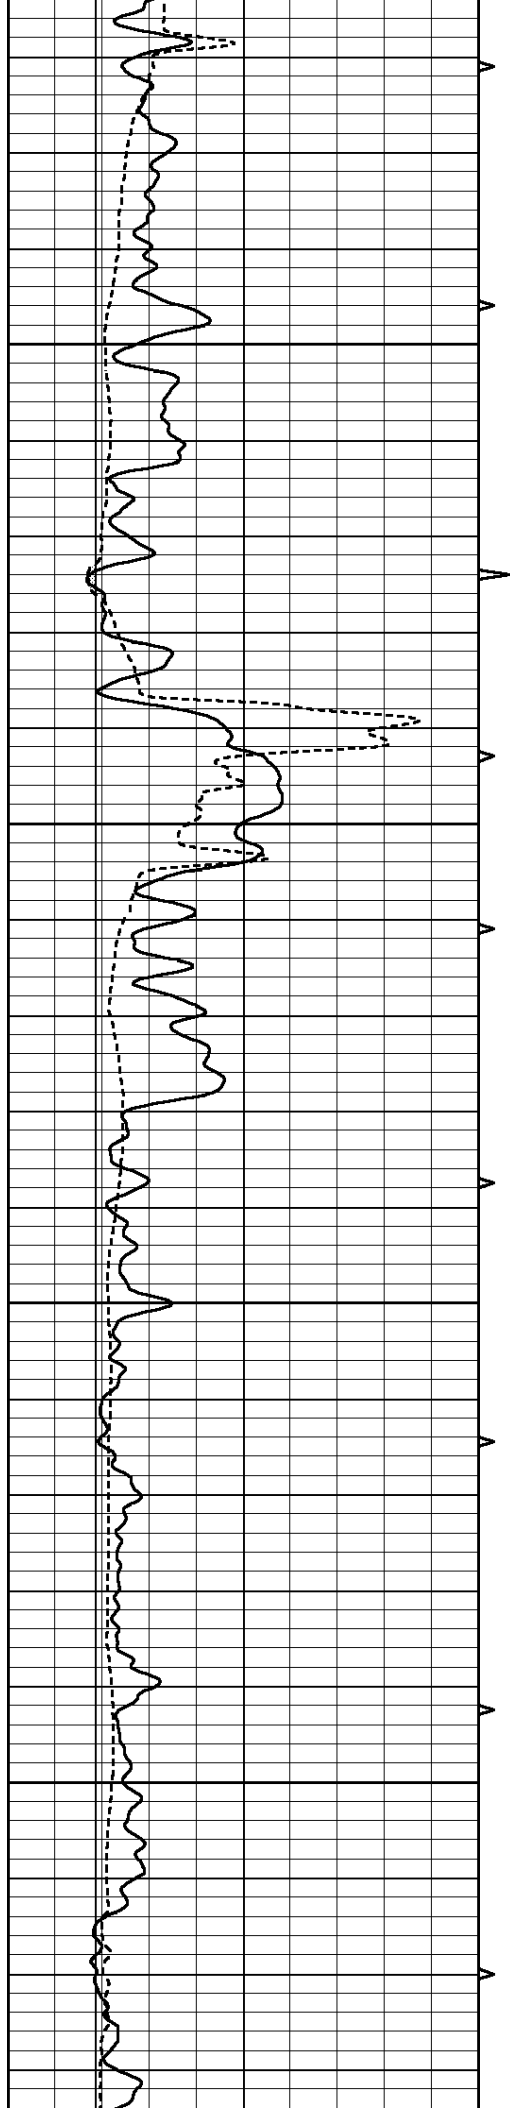



5350

5400

5450

5500

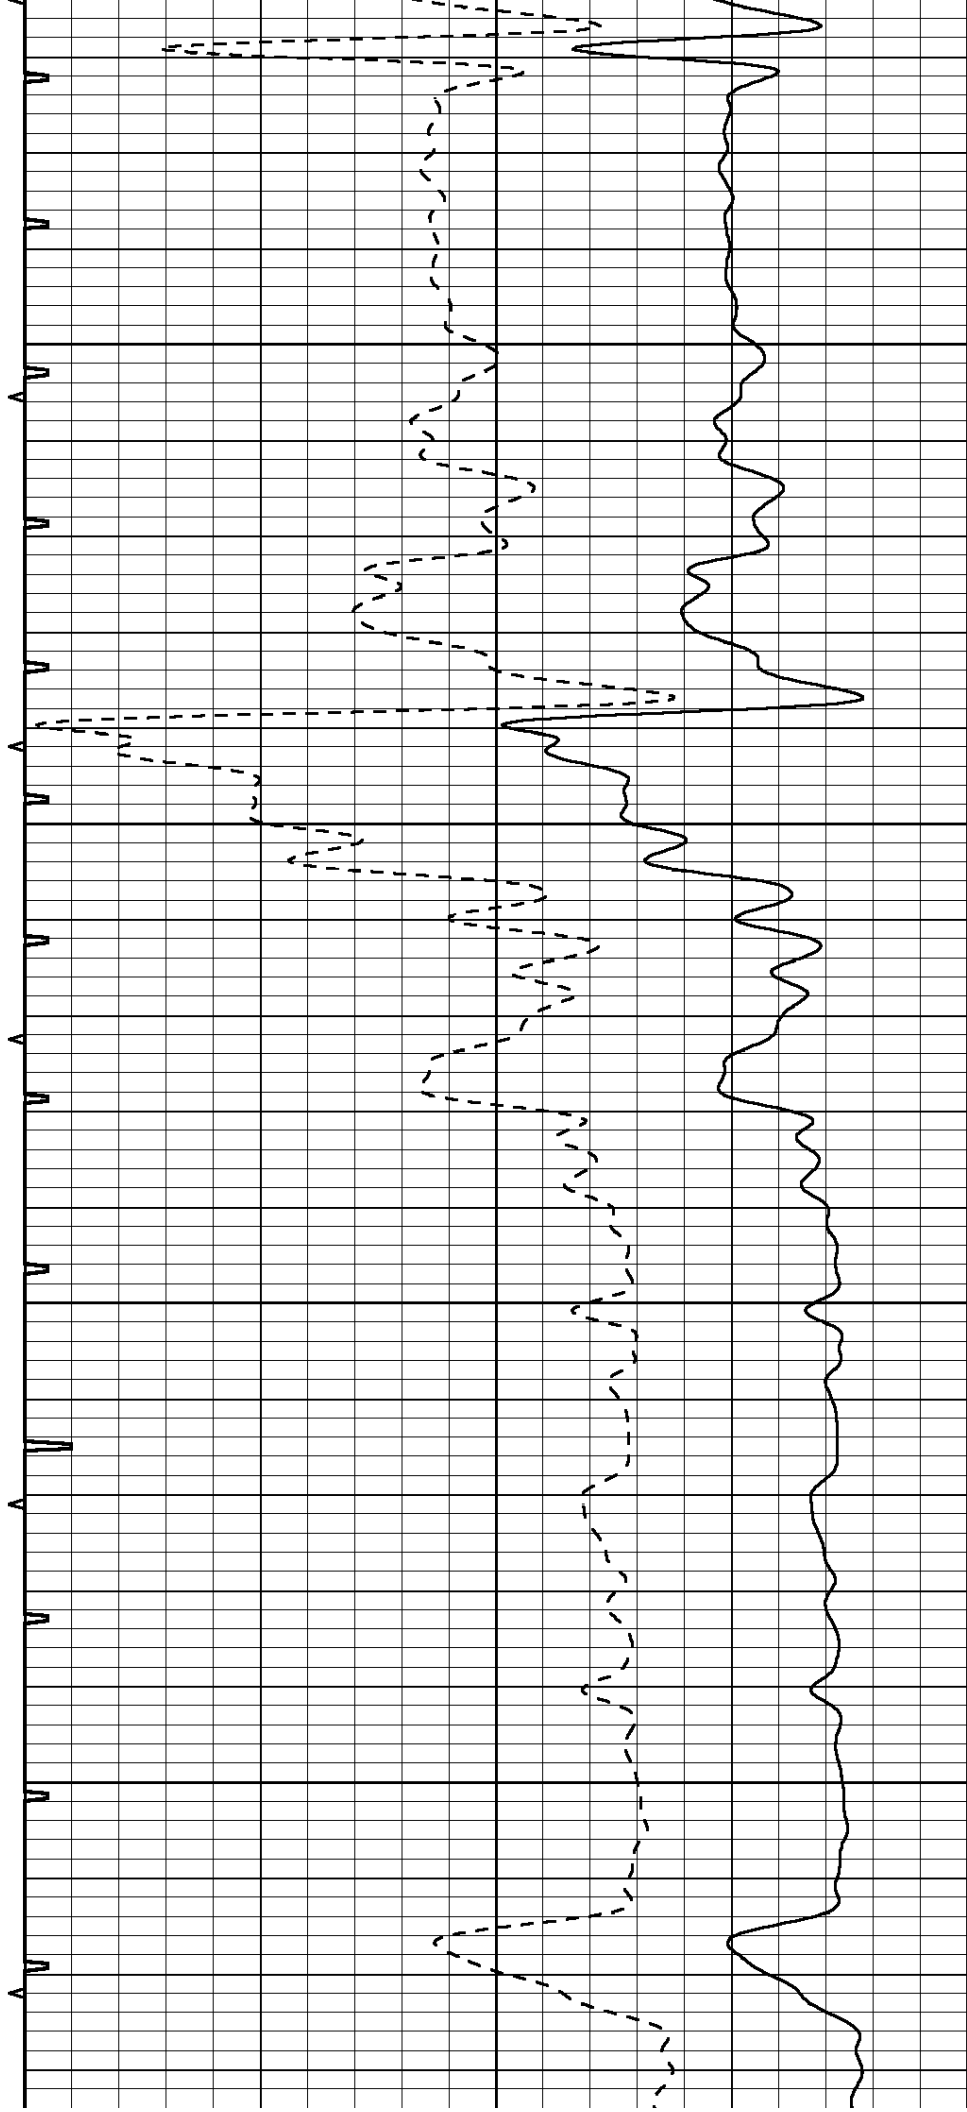


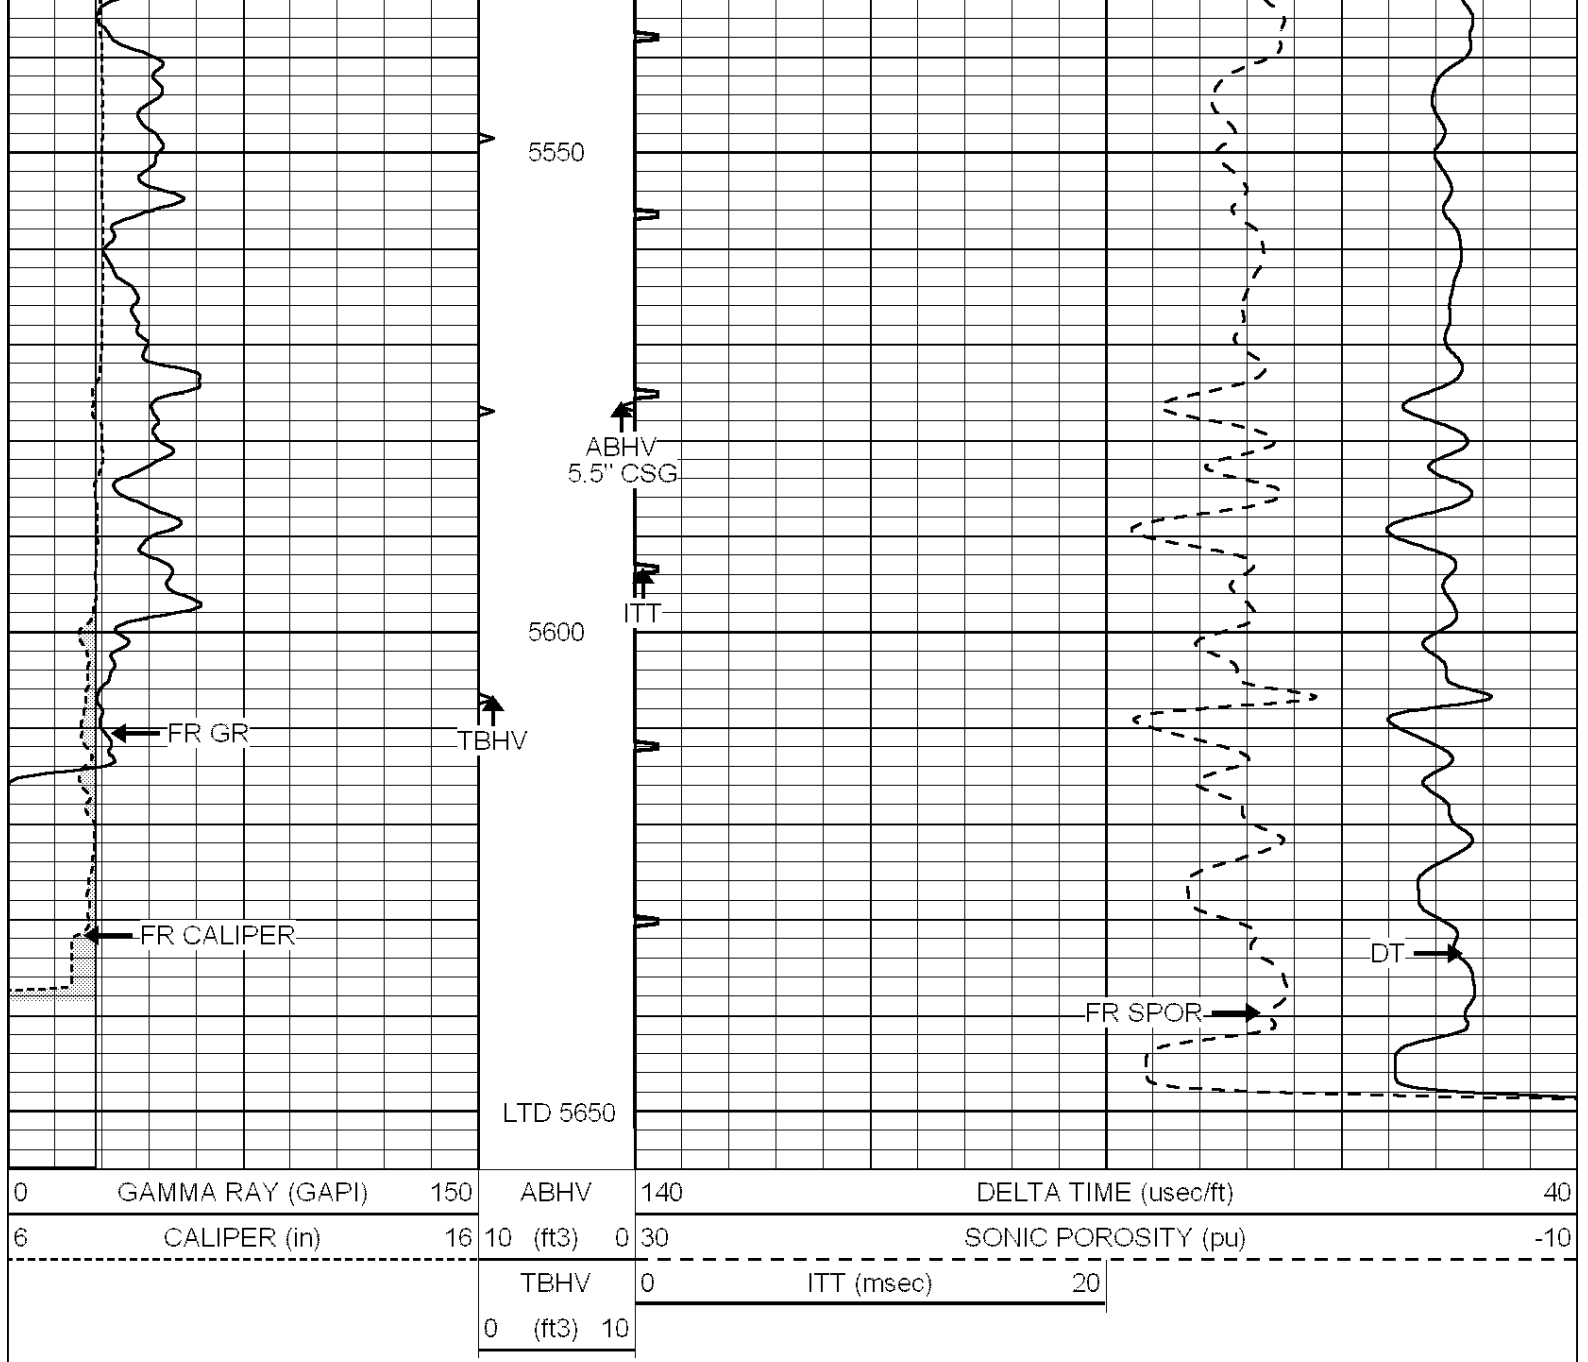



NABORS
 COMPLETION
 & PRODUCTION
 SERVICES CO.

REPEAT SECTION

Database File: 012084pe.db
 Dataset Pathname: pass5.3
 Presentation Format: _slt
 Dataset Creation: Tue Nov 05 20:39:50 2013
 Charted by: Depth in Feet scaled 1:240

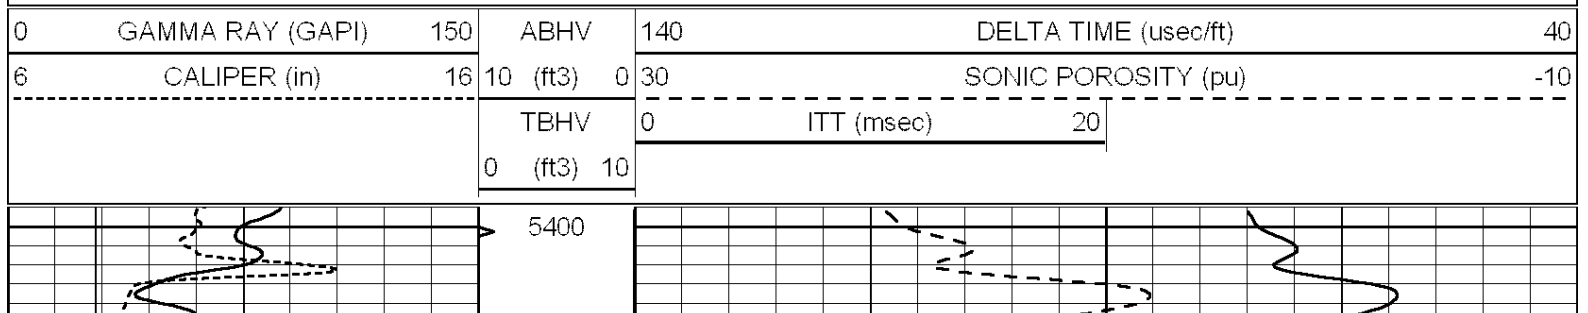

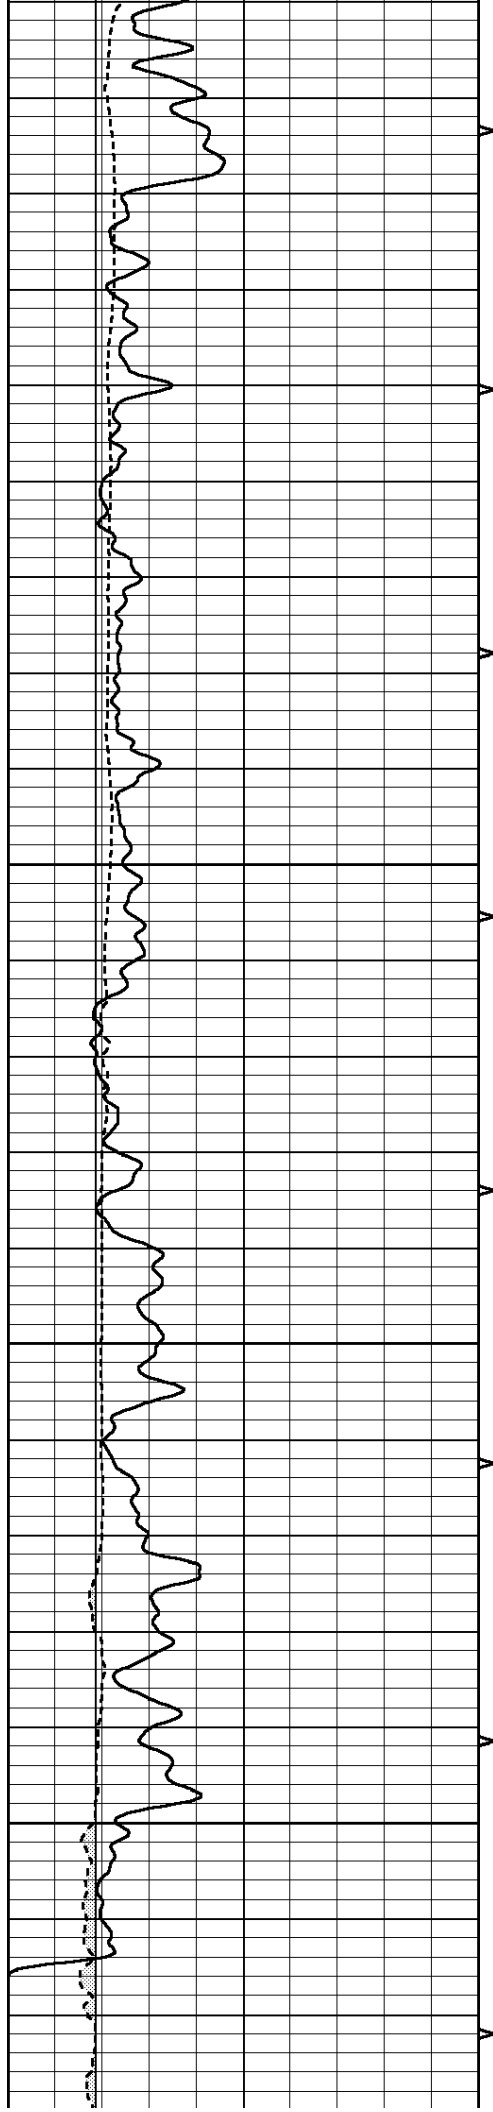

5450

5500

5550

5600

