

# HALLIBURTON

# MICROLOG

COMPANY	OXY USA INC.		
WELL	DRUSSEL E-3		
FIELD/BLOCK	HUGOTON GAS AREA		
COUNTY	FINNEY		
STATE	KANSAS		
COMPANY	OXY USA INC.	WELL	DRUSSEL E-3
FIELD/BLOCK	HUGOTON GAS AREA	COUNTY	FINNEY
STATE	KANSAS		
API No.	15055222390000	Location	(SHL) 1924' FSL & 985' FWL NW SE NW SW
Other Services:	ACRT	DSNT	SDLT
BSAT			
Sect.	36	Twp.	25S
Rge.			33W
GL		Elev.	2904.0 ft
KB		D.F.	2914.0 ft
KB		G.L.	2904.0 ft

Permanent Datum	ONE	Elev.	2915.0 ft
Log measured from	KB	D.F.	2914.0 ft
Drilling measured from	KB	G.L.	2904.0 ft

Date	01-Oct-13		
Run No.	ONE		
Depth - Driller	5295.00 ft		
Depth - Logger	5292.0 ft		
Bottom - Logged Interval	5248.0 ft		
Top - Logged Interval	3800.0 ft		
Casing - Driller	8.625 in @ 1648.0 ft		
Casing - Logger	1646.0 ft		
Bit Size	7.875 in		
Type Fluid in Hole	WATER BASED MUD		
Density	9.6 ppg	34.00 s/qt	
PH	9.30 pH	9.2 cp/m	
Source of Sample	MUD PIT		
Rm @ Meas. Temperature	1.050 ohmm @ 75.00 degF		
Rmf @ Meas. Temperature	0.90 ohmm @ 75.00 degF		
Rmc @ Meas. Temperature	1.400 ohmm @ 75.00 degF		
Source Rmf	MEASURED	MEASURED	
Rm @ BHT	0.57 ohmm @ 144.0 degF		
Time Since Circulation	5.0 hr		
Time on Bottom	01-Oct-13 22:12		
Max. Rec. Temperature	144.0 degF @ 5292.0 ft		
Equipment	11230668 LIBERAL		
Recorded By	J. BOLLOW		
Witnessed By	J. LEWTON		

Fold here

Service Ticket No.: 900785360      API Serial No.: 15055222390000      PGM Version: WL INSITE R3.8.4 (Build 5)

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES				
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole	
Depth-Driller								
Type Fluid in Hole								
Density	Viscosity							
Ph	Fluid Loss							
Source of Sample				RESISTIVITY EQUIPMENT DATA				
Rm @ Meas. Temp	@		@	Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
Rmf @ Meas. Temp.	@		@	ONE	MICROLOG	RUBBER	ADJ	N/A
Rmc @ Meas. Temp.	@		@		10685803			
Source Rmf	Rmc							
Rm @ BHT	@		@					
Rmf @ BHT	@		@					
Rmc @ BHT	@		@					

EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.		Run No.		Run No.	
Serial No.	10748374	Serial No.		Serial No.		Serial No.	
Model No.	GTET	Model No.		Model No.		Model No.	
Diameter	3.625"	No. of Cent.		Diameter		Diameter	
Detector Model No.	T-102	Spacing		Log Type		Log Type	
Type	SCINT			Source Type		Source Type	
Length	8'	LSA [Y/N]		Serial No.		Serial No.	
Distance to Source	10'	FWDA [Y/N]		Strength		Strength	

LOGGING DATA

GENERAL				GAMMA		ACOUSTIC		DENSITY			NEUTRON			
Run No.	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	5292	1646	REC	0	150									

DIRECTIONAL INFORMATION

Maximum Deviation	@	KOP	@
-------------------	---	-----	---

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5-INCH CASING

CHLORIDES REPORTED AT 4,000 MG/L

LCM REPORTED AT 3 LB/BBL

GTET-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION

TODAY'S CREW: K. KING & V. JAIME

THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KS. 620-624-8123

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.

HALLIBURTON




Plot Time: 01-Oct-13 23:52:20


Plot Range: 3800 ft to 5295.5 ft

Data: DRUSSEL\_E-3\Well Based\DETAIL\

Plot File: \\LOCAL-DRUSSEL\_E-3\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\MICRO\Microlog\_IQ\_5\_main.lib

## 5 INCH MAIN LOG

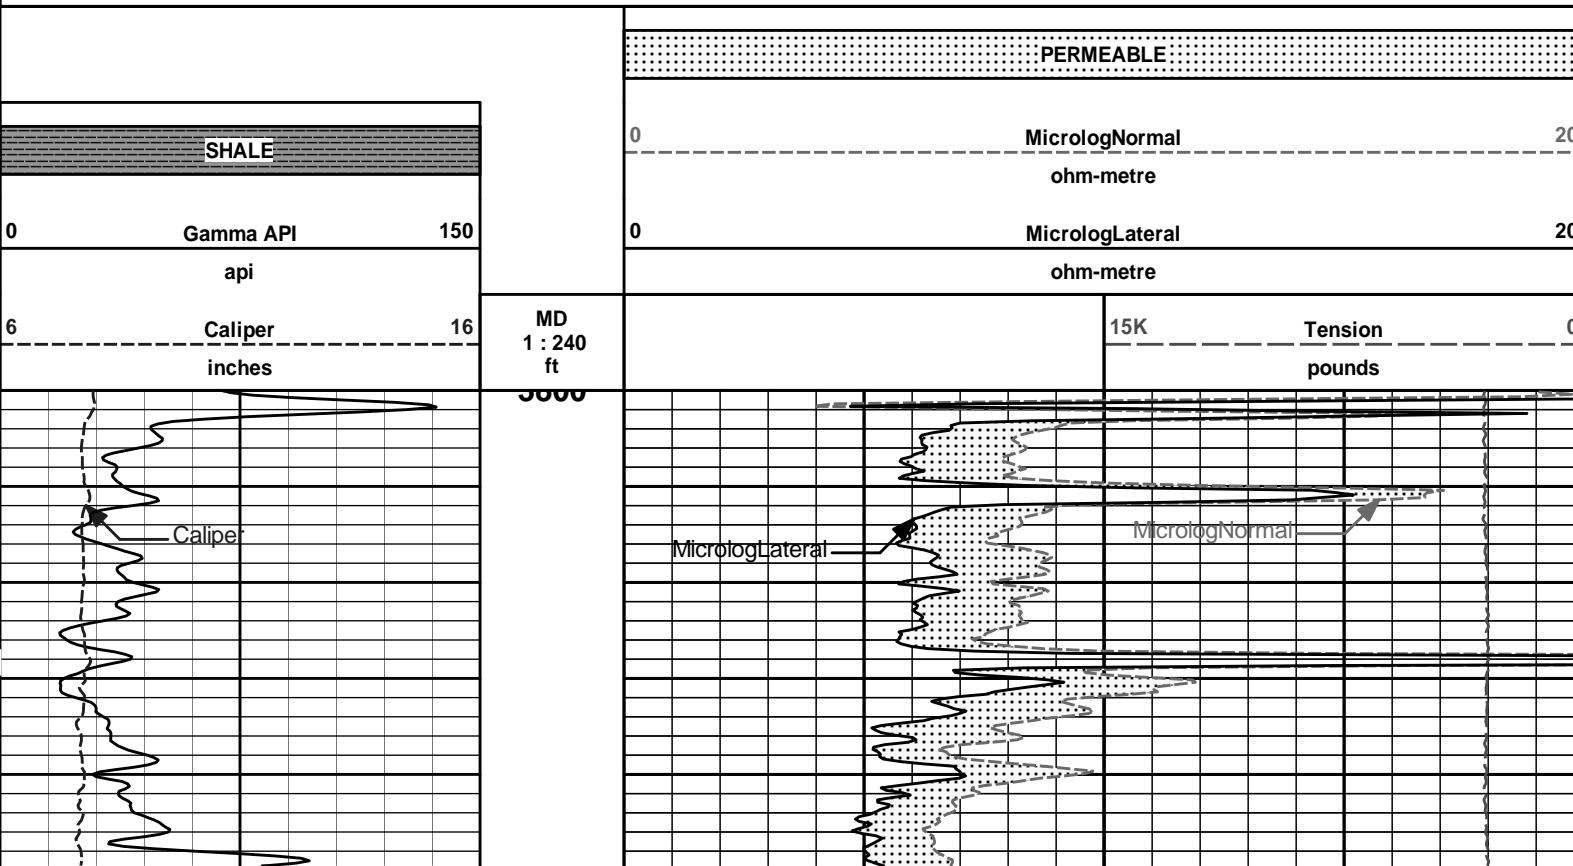

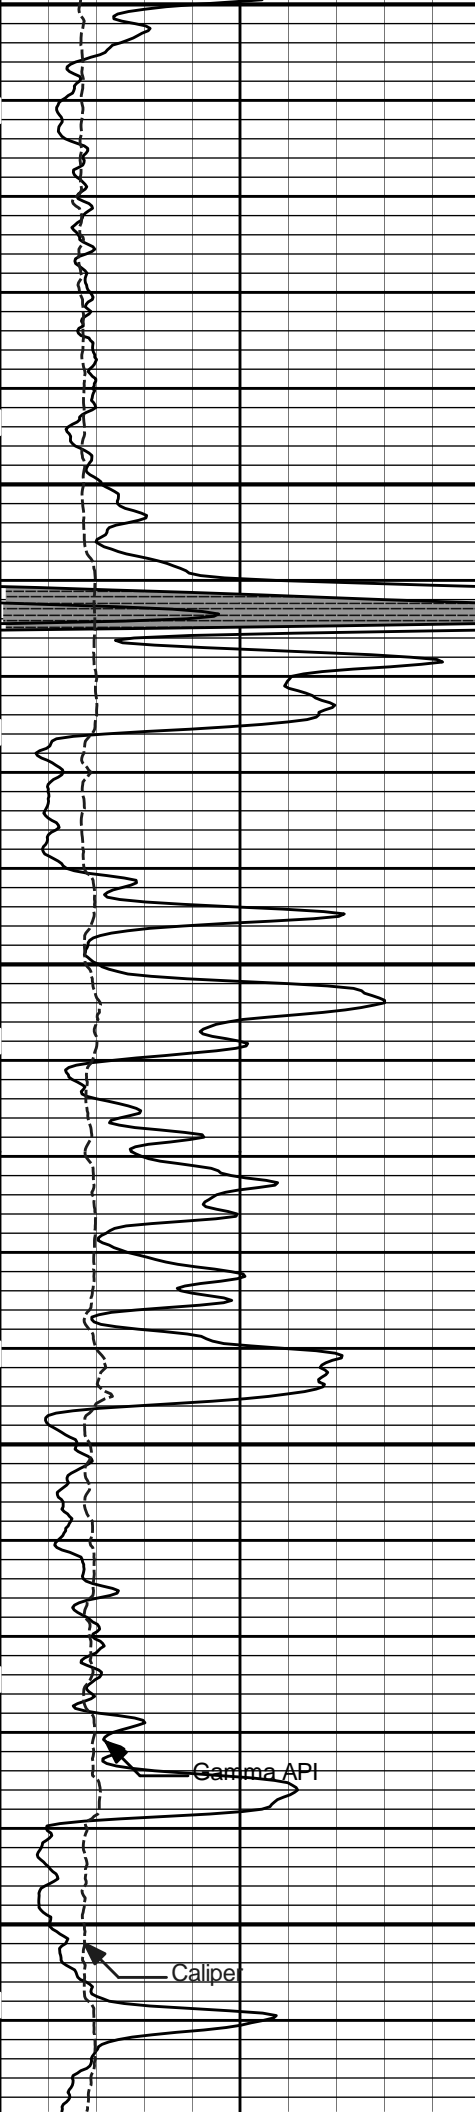


3900

4000


Gamma API

Caliper

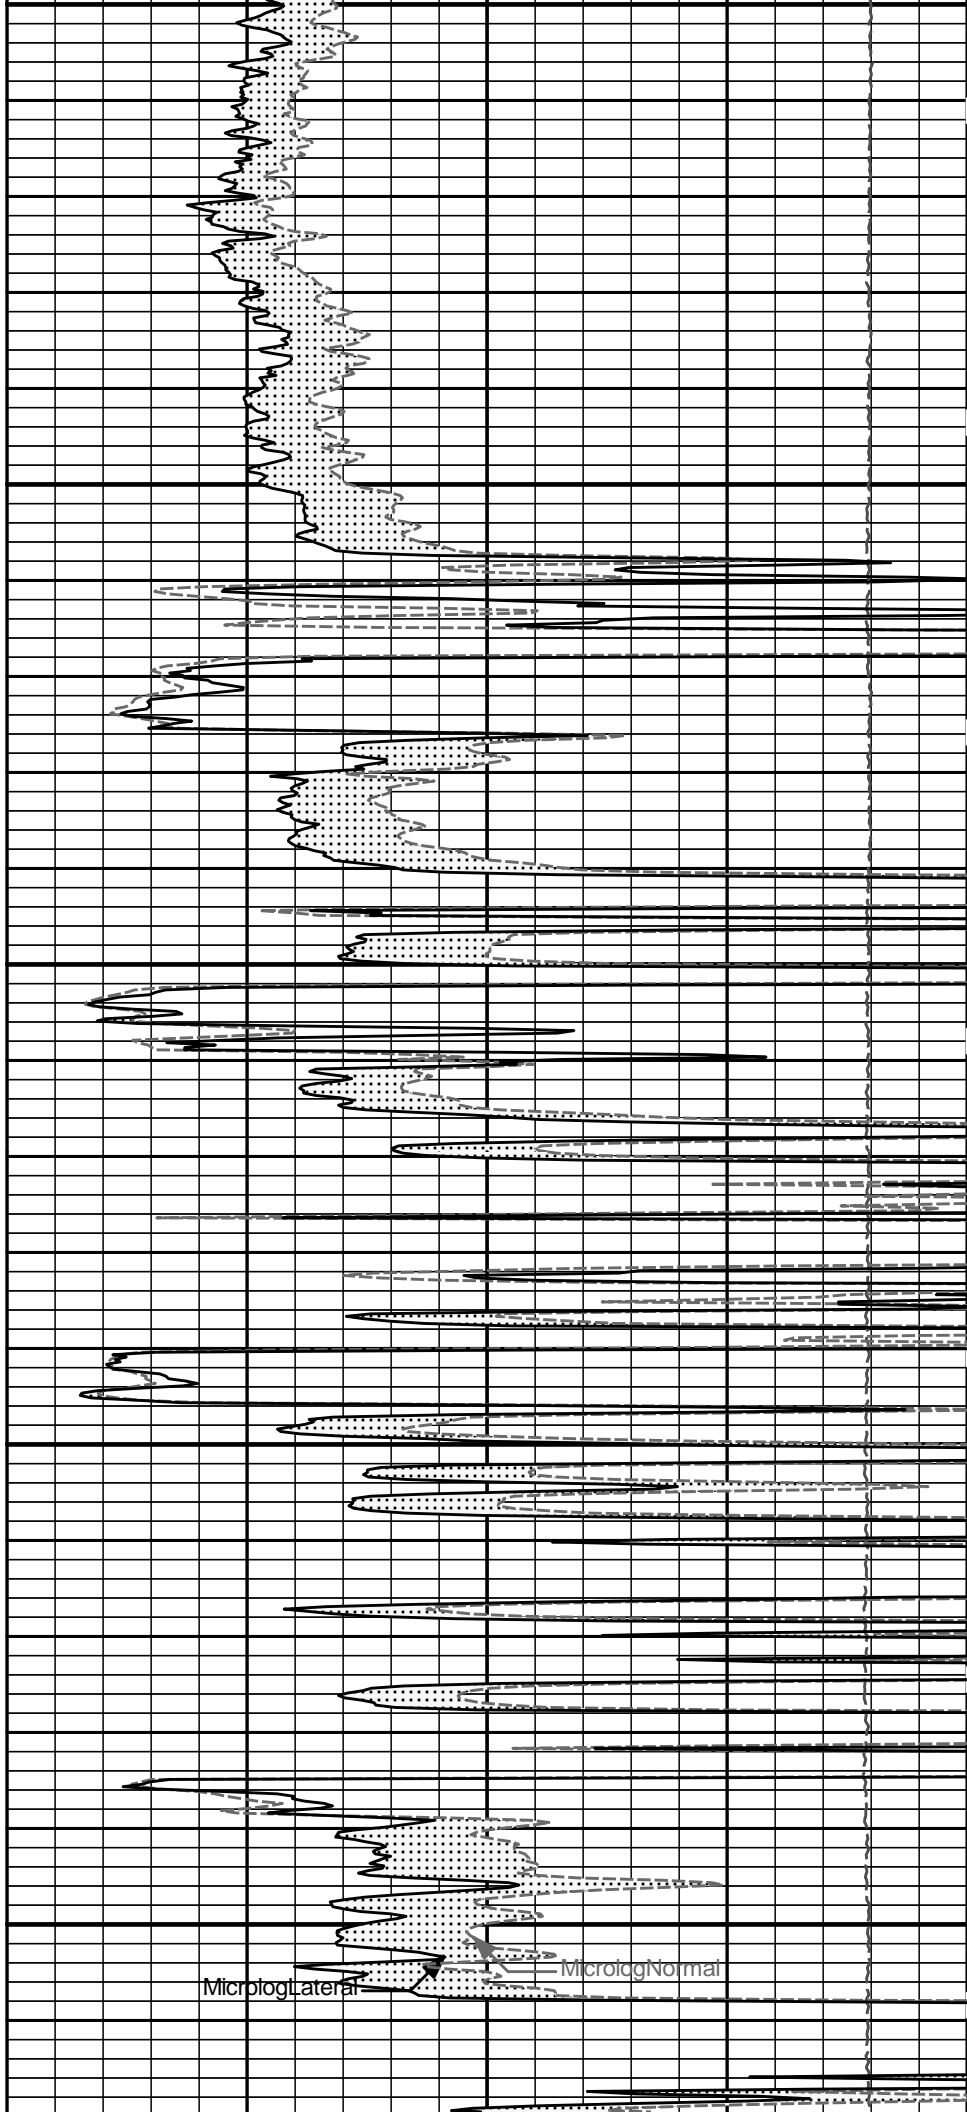

MicrologLateral


MicrologNormal

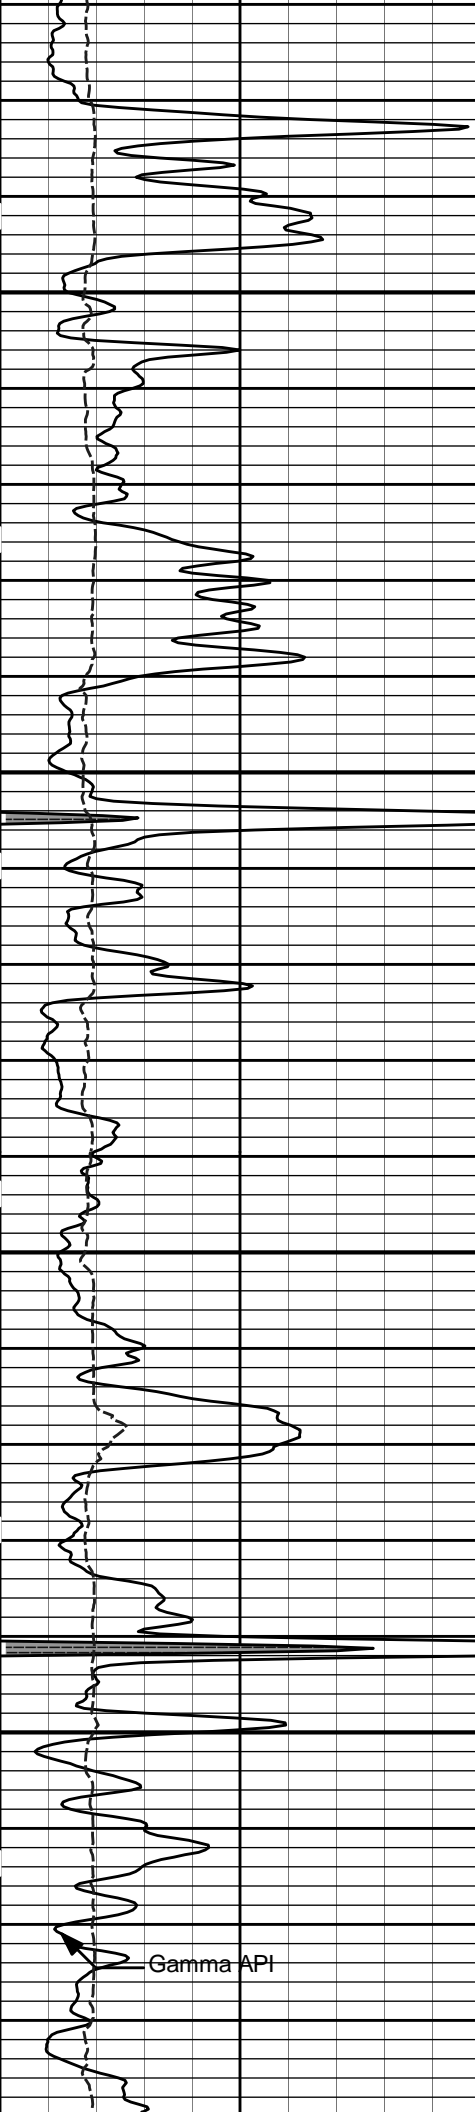

4100

4200

Gamma API

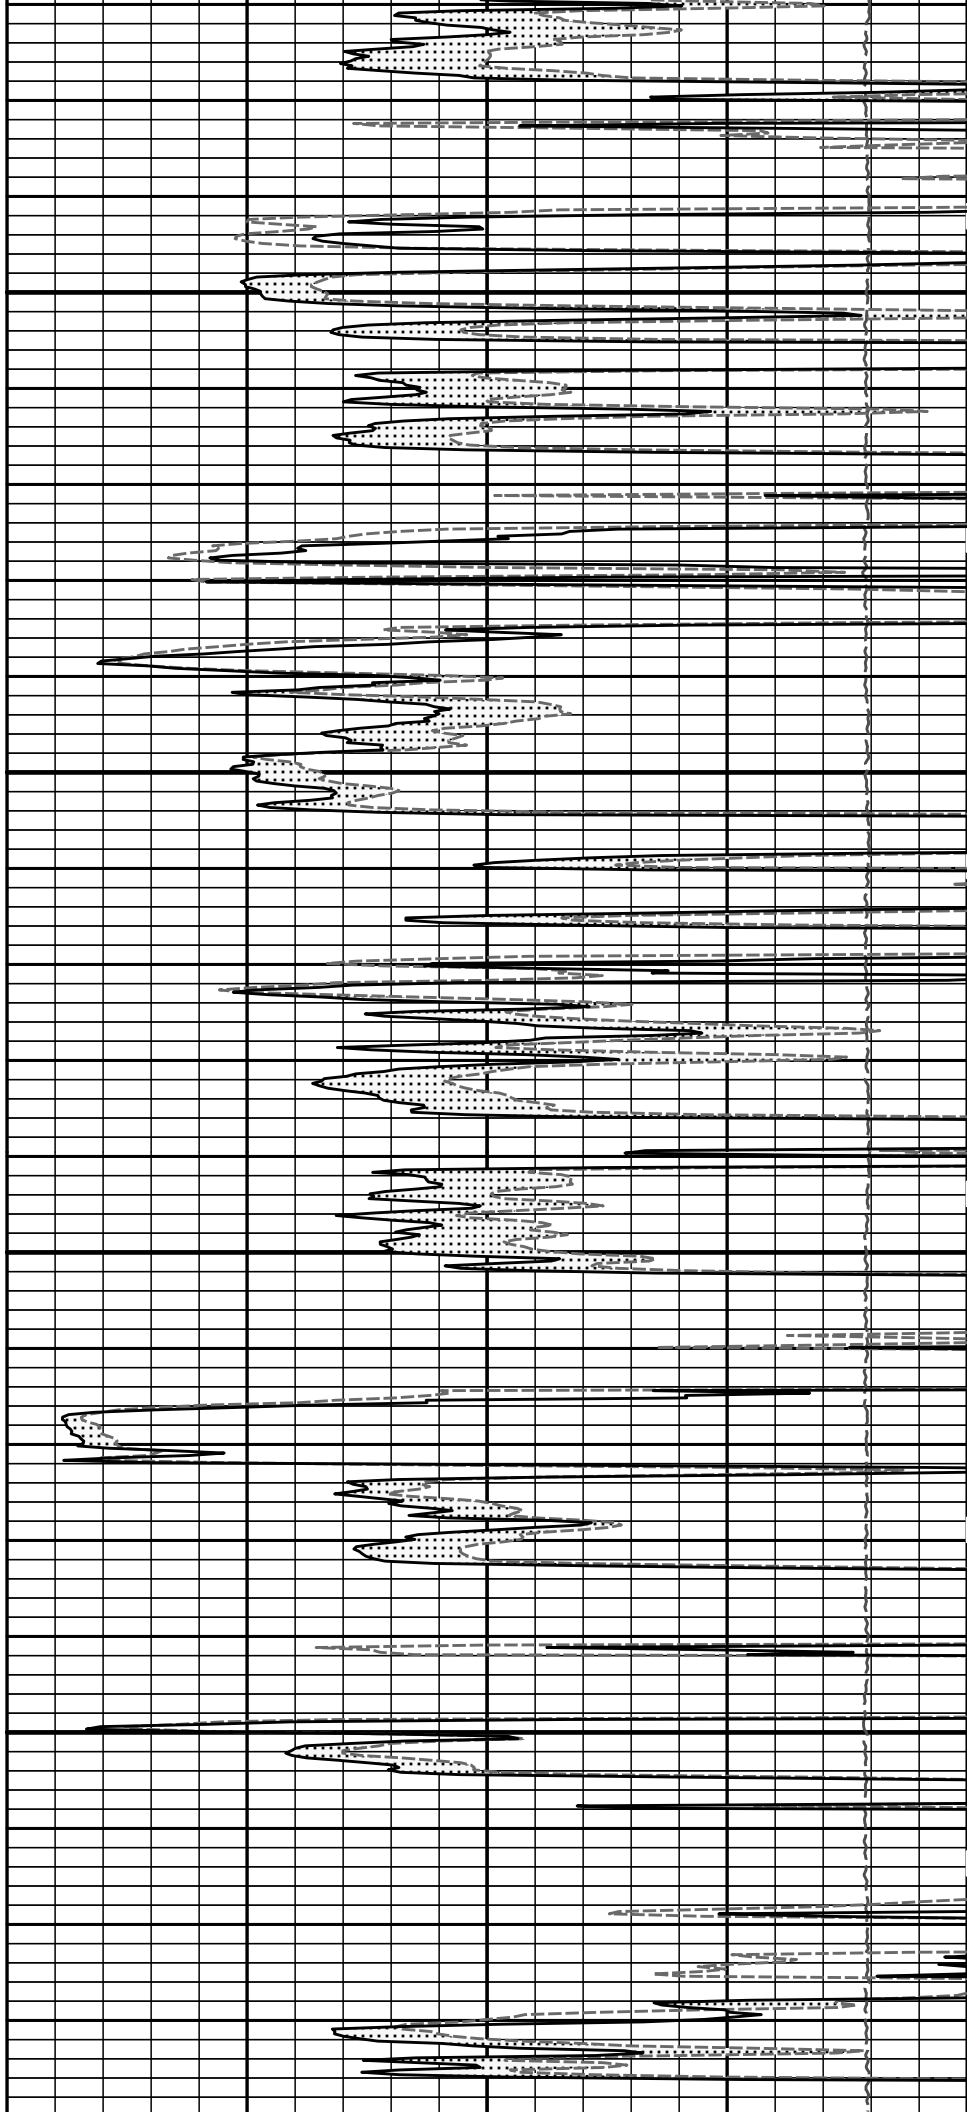





4300

4400


4500

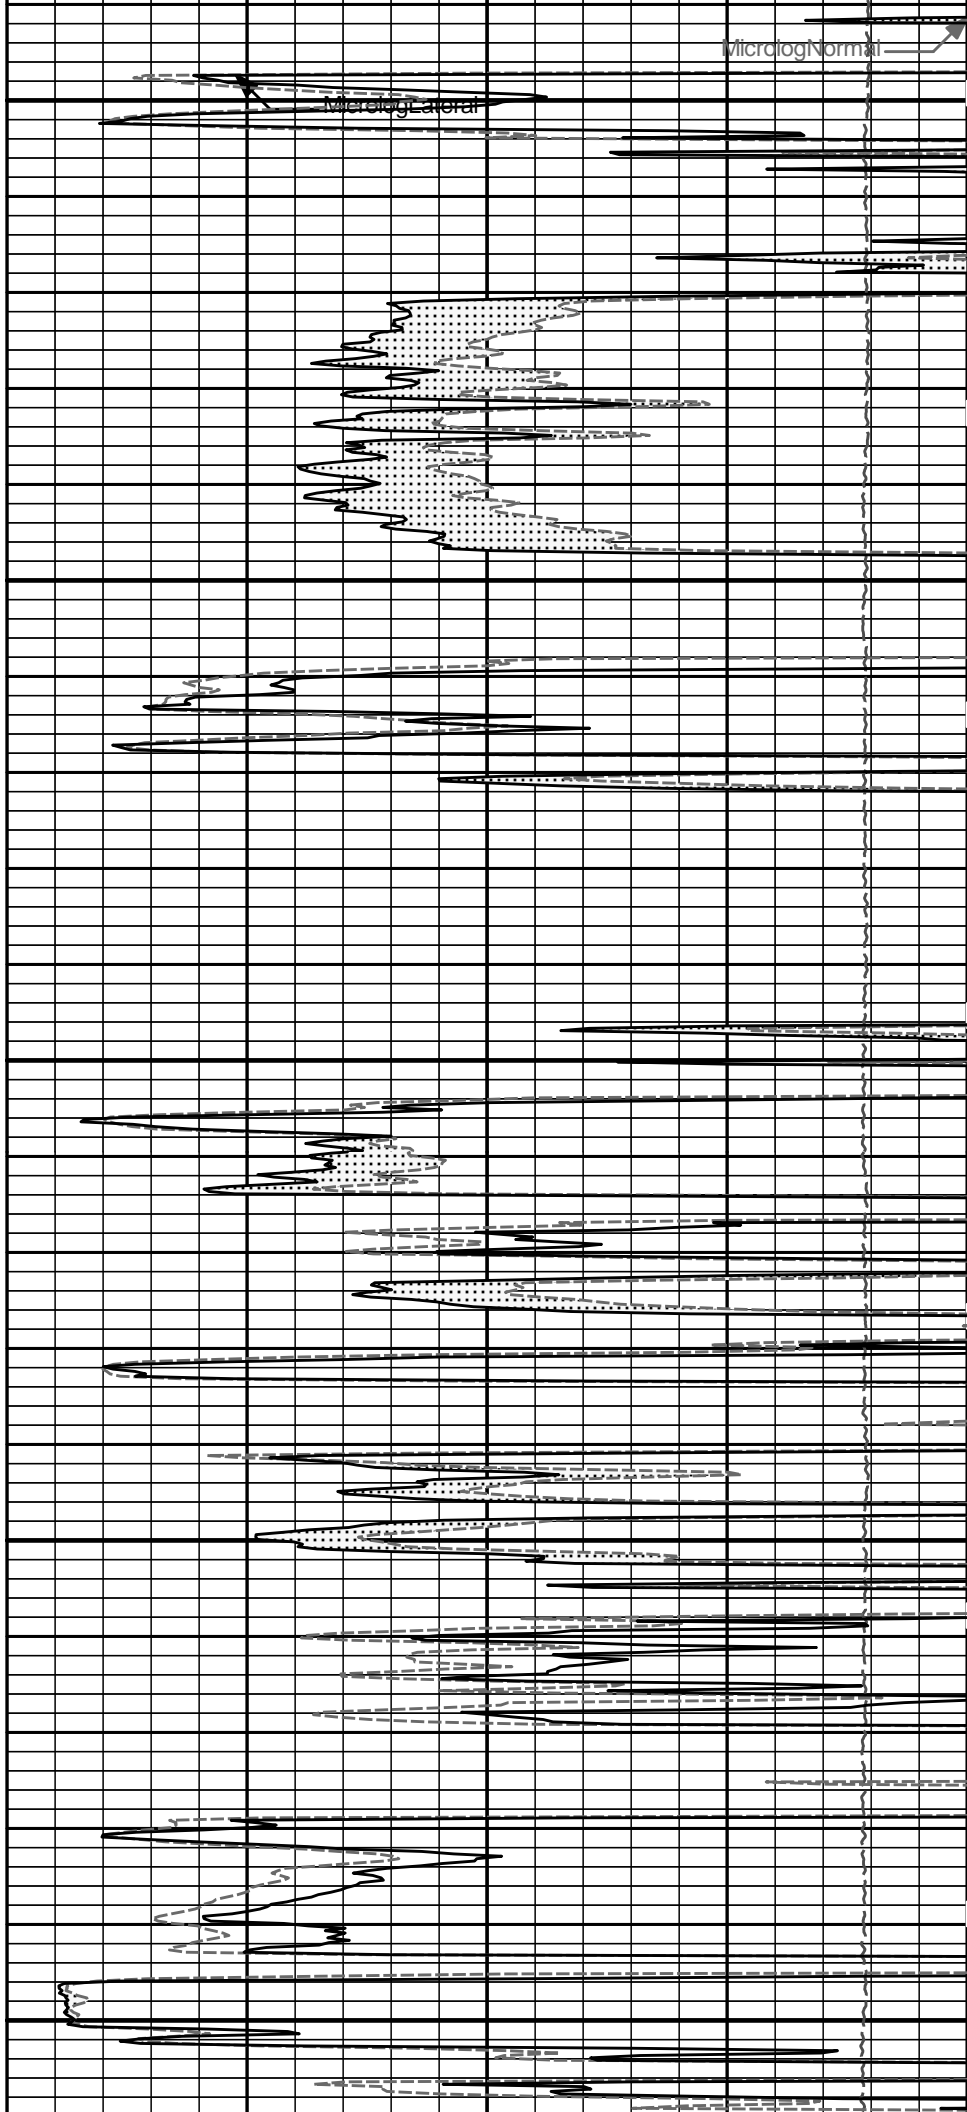


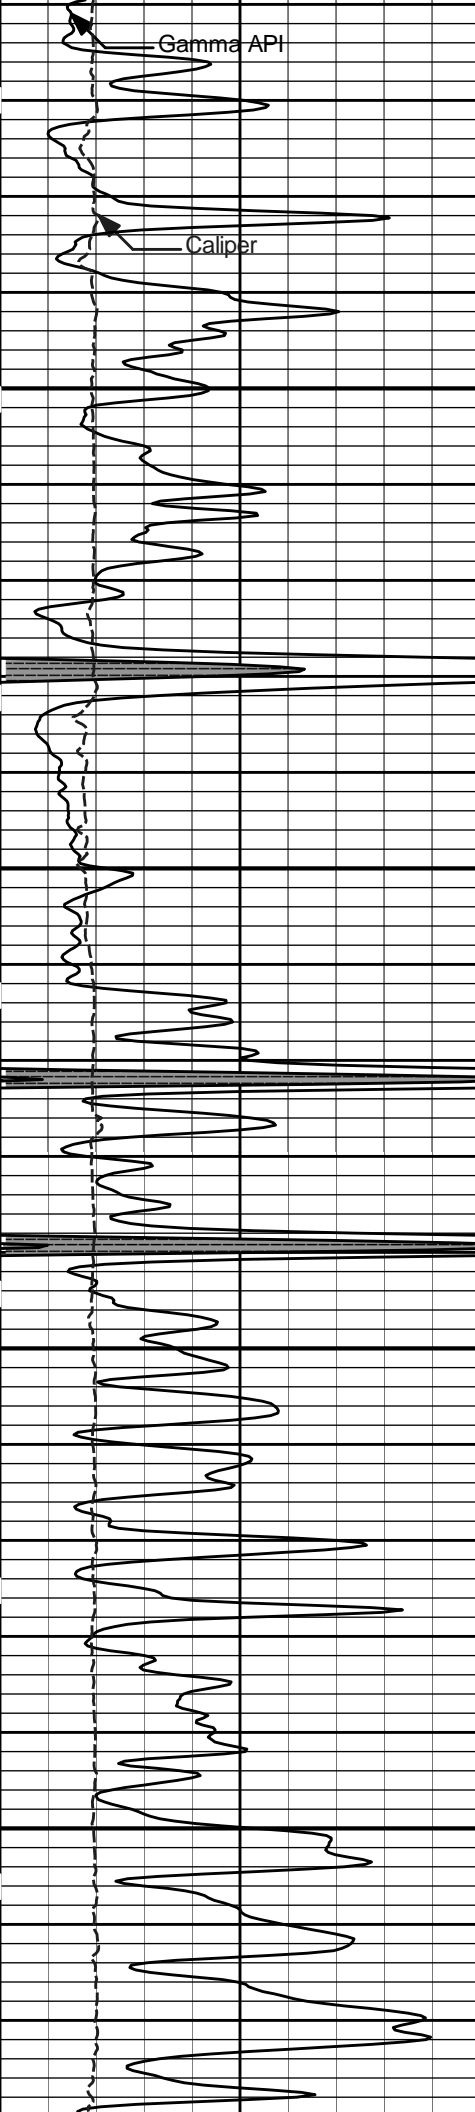

4600

4700

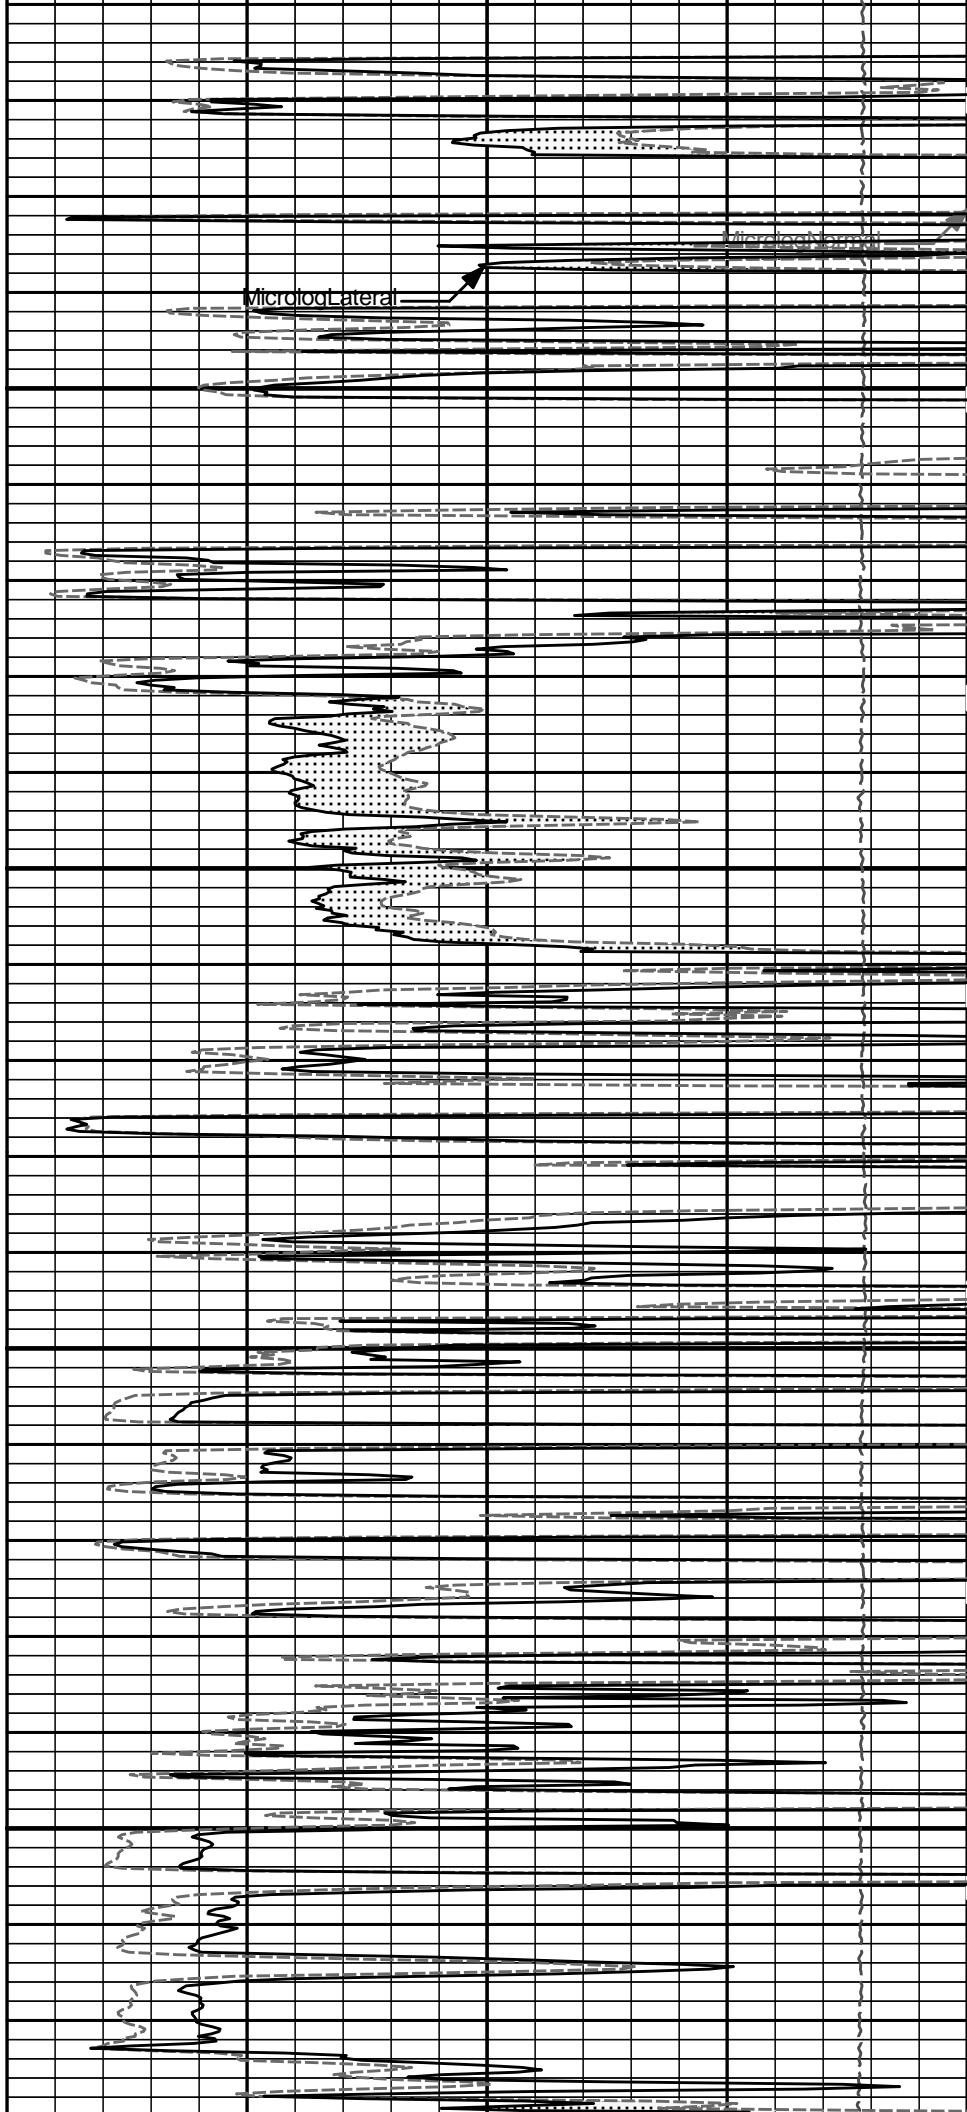

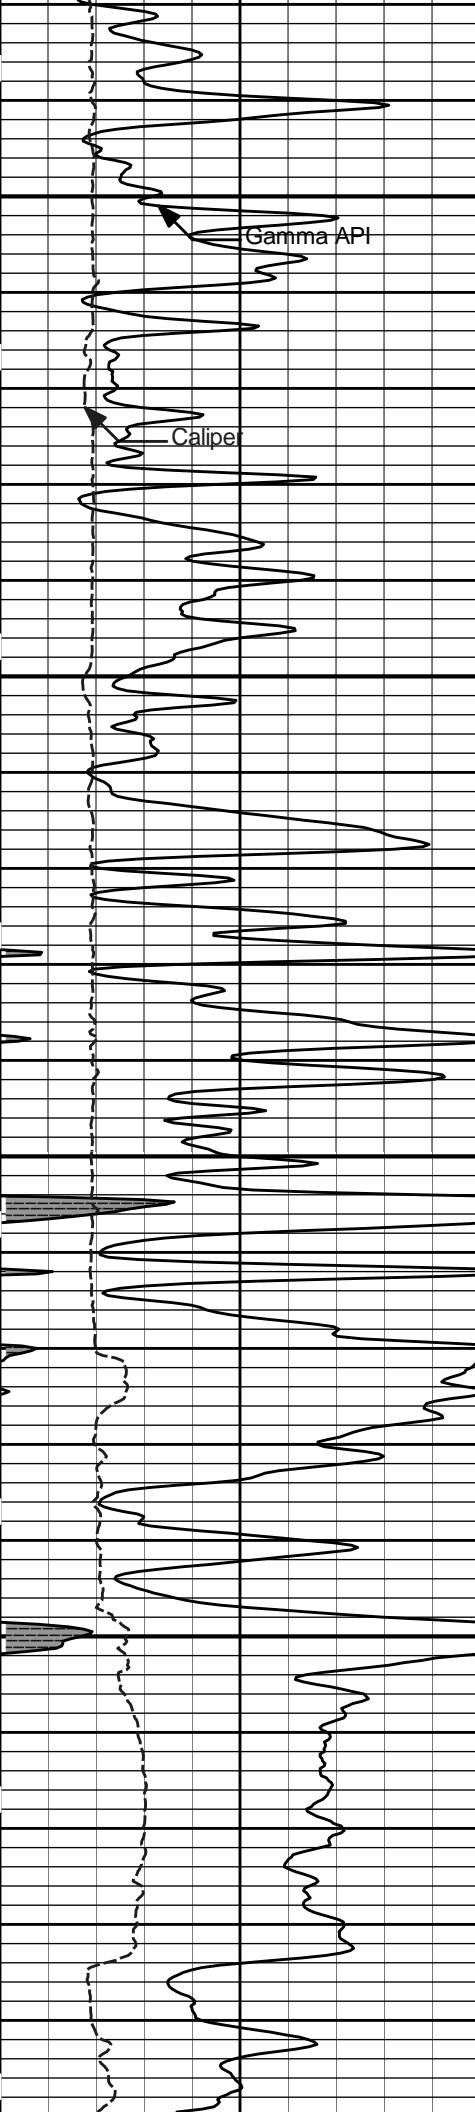


Gamma API

Caliper


4800

4900

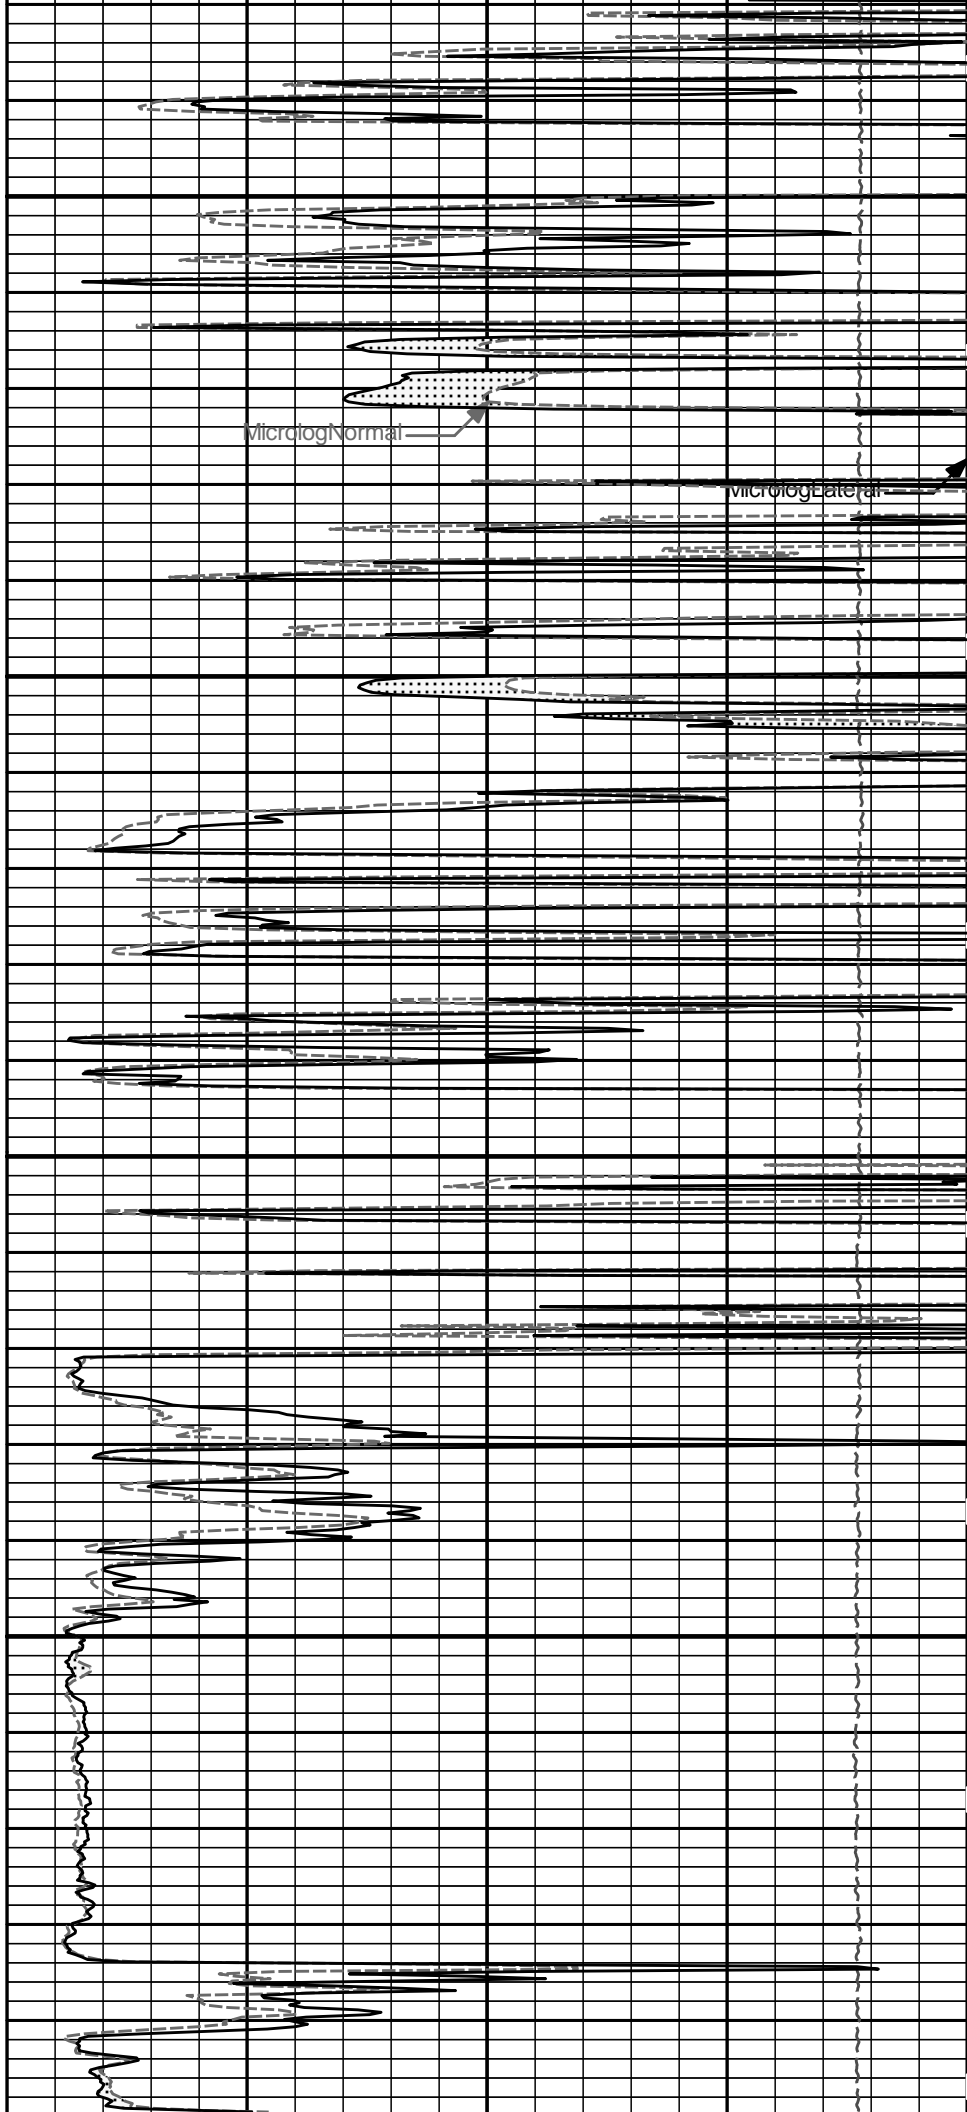


MicrologNormal

MicrologLateral

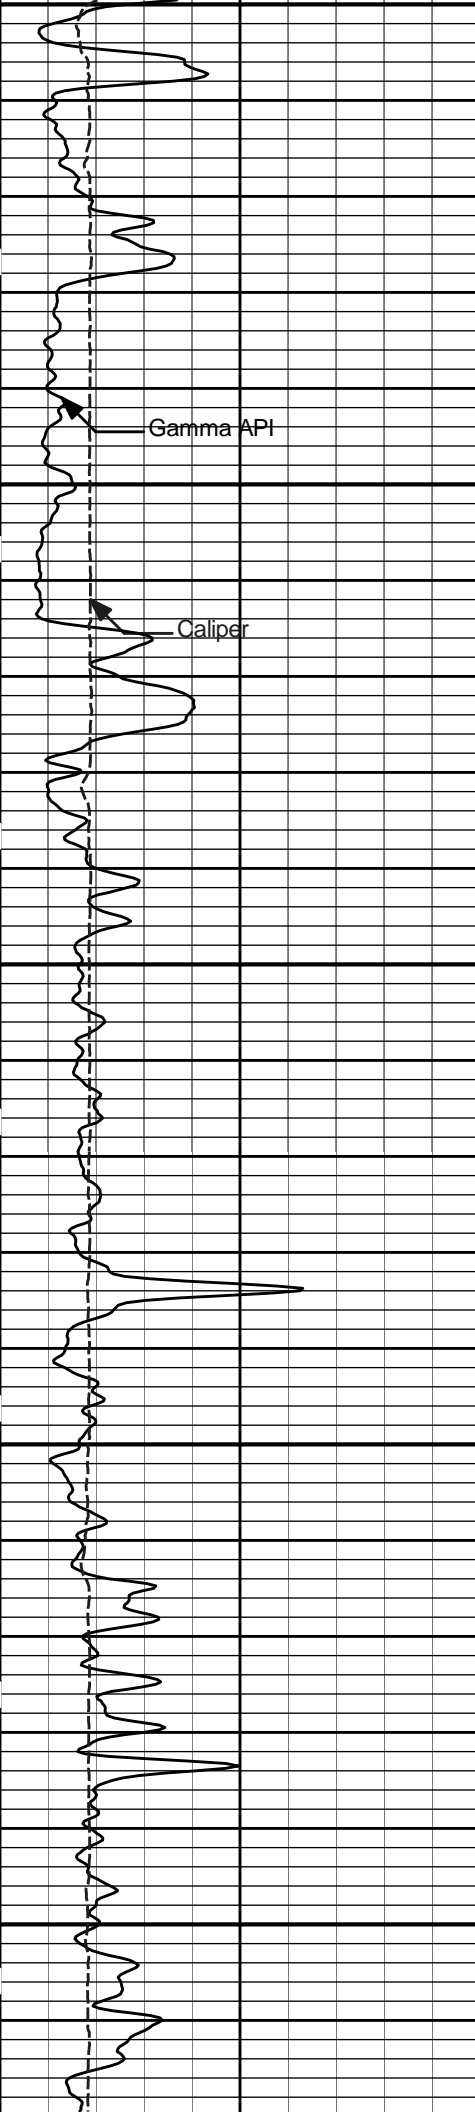


5000

5100

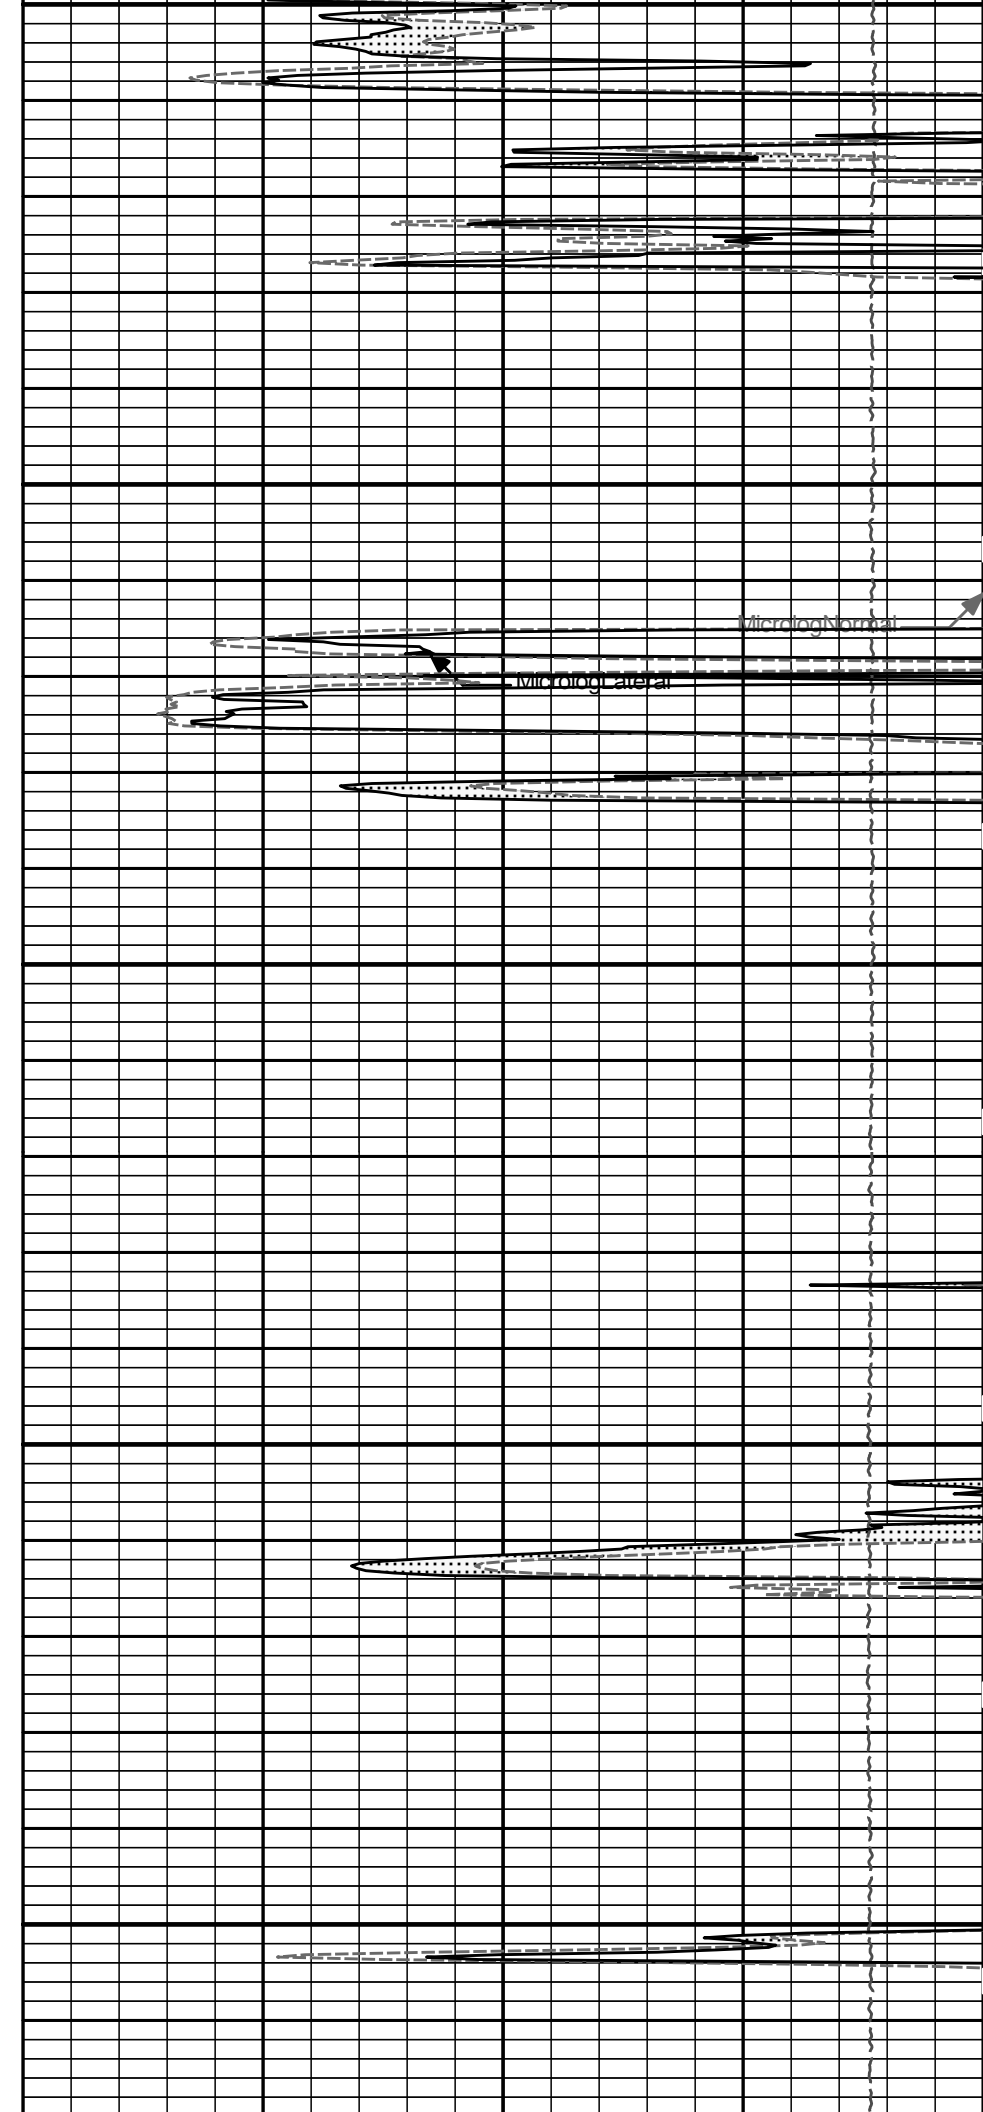

Microlog lateral

Microlog lateral

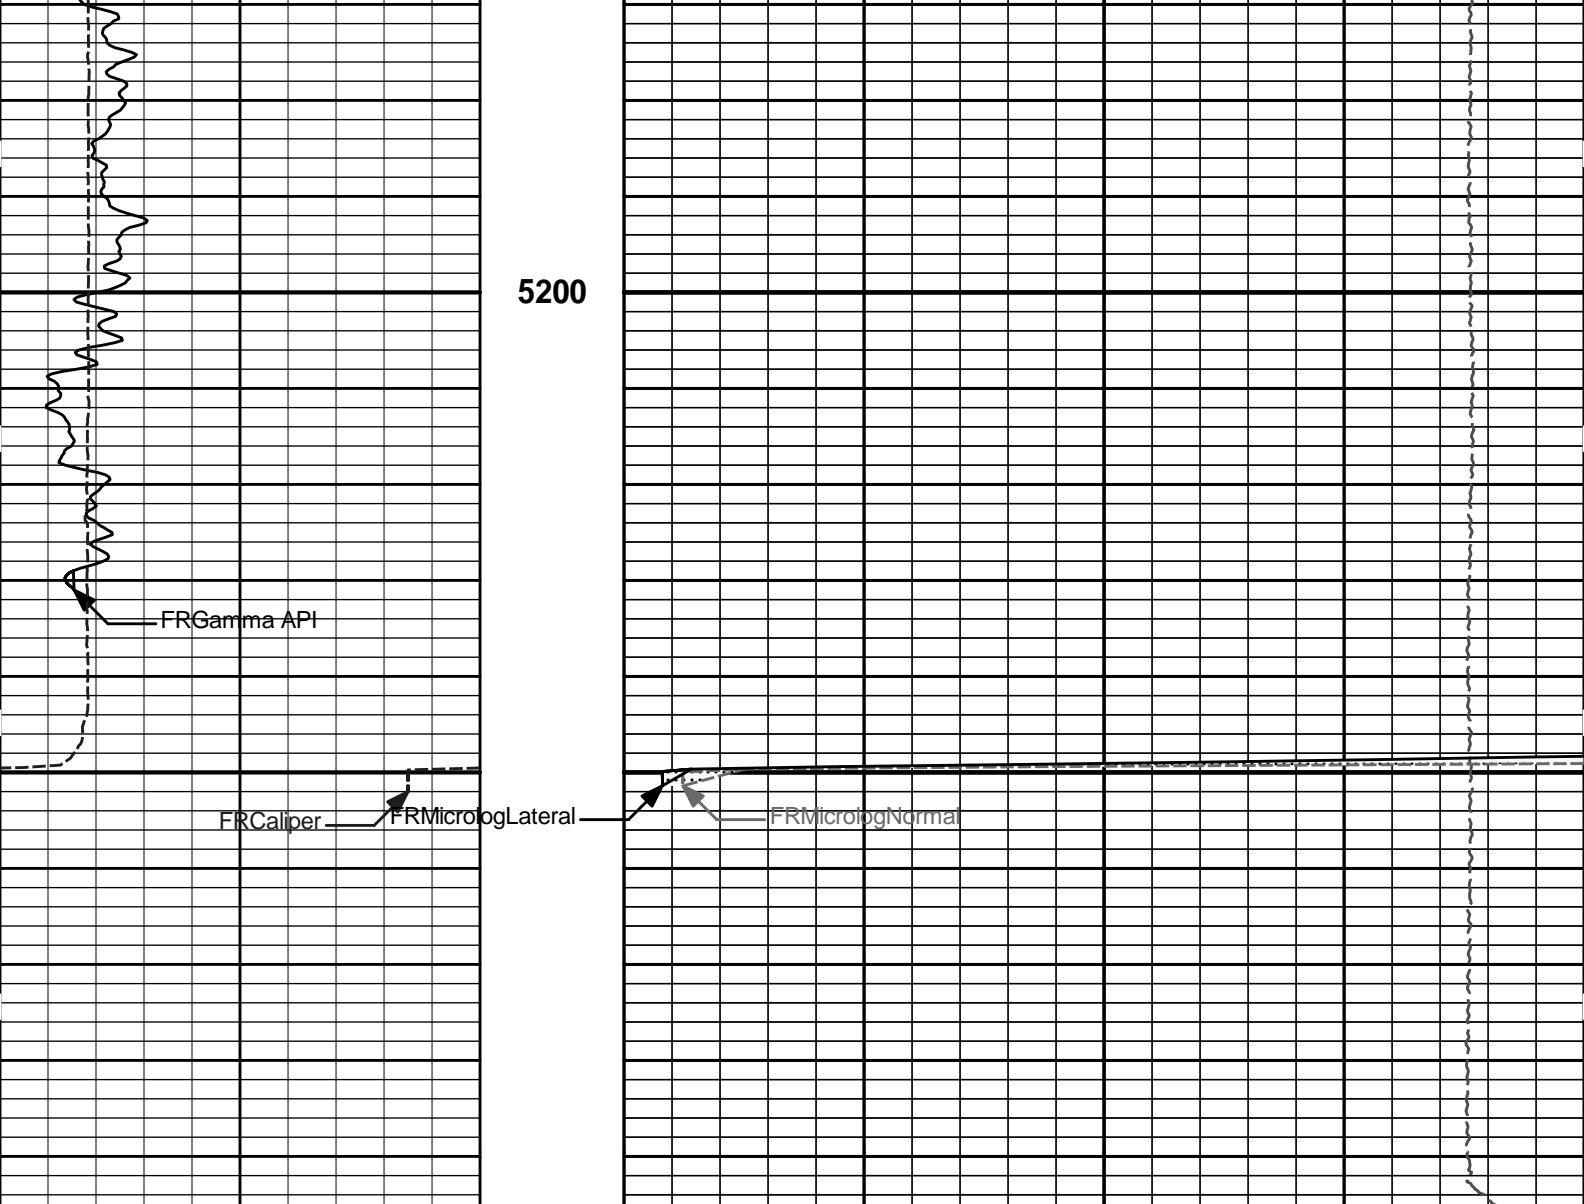

6	Caliper	16	MD	15K	Tension	0
	inches		1 : 240		pounds	
0	Gamma API	150		0	MicrologLateral	20
	api				ohm-metre	
	SHALE			0	MicrologNormal	20
					ohm-metre	
					PERMEABLE	

**HALLIBURTON**

Plot Time: 01-Oct-13 23:52:23  
 Plot Range: 3800 ft to 5295.5 ft  
 Data: DRUSSEL\_E-3\Well Based\DETAIL\  
 Plot File: \\-LOCAL-IDRUSSEL\_E-310001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNMICRO\Microlog\_IQ\_5\_main\_lib

**5 INCH MAIN LOG**

**HALLIBURTON**

Plot Time: 01-Oct-13 23:52:23  
 Plot Range: 4200 ft to 5295.08 ft  
 Data: DRUSSEL\_E-3\Well Based\REPEAT\  
 Plot File: \\-LOCAL-IDRUSSEL\_E-310001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNMICRO\Microlog\_IQ\_5\_rep\_lib

**REPEAT SECTION**



SHALE		
0	Gamma API	150
api		
6	Caliper	16
inches		

PERMEABLE


0 MicrologNormal 20  
ohm-metre

0 MicrologLateral 20  
ohm-metre

MD 1 : 240 ft  
15K Tension pounds

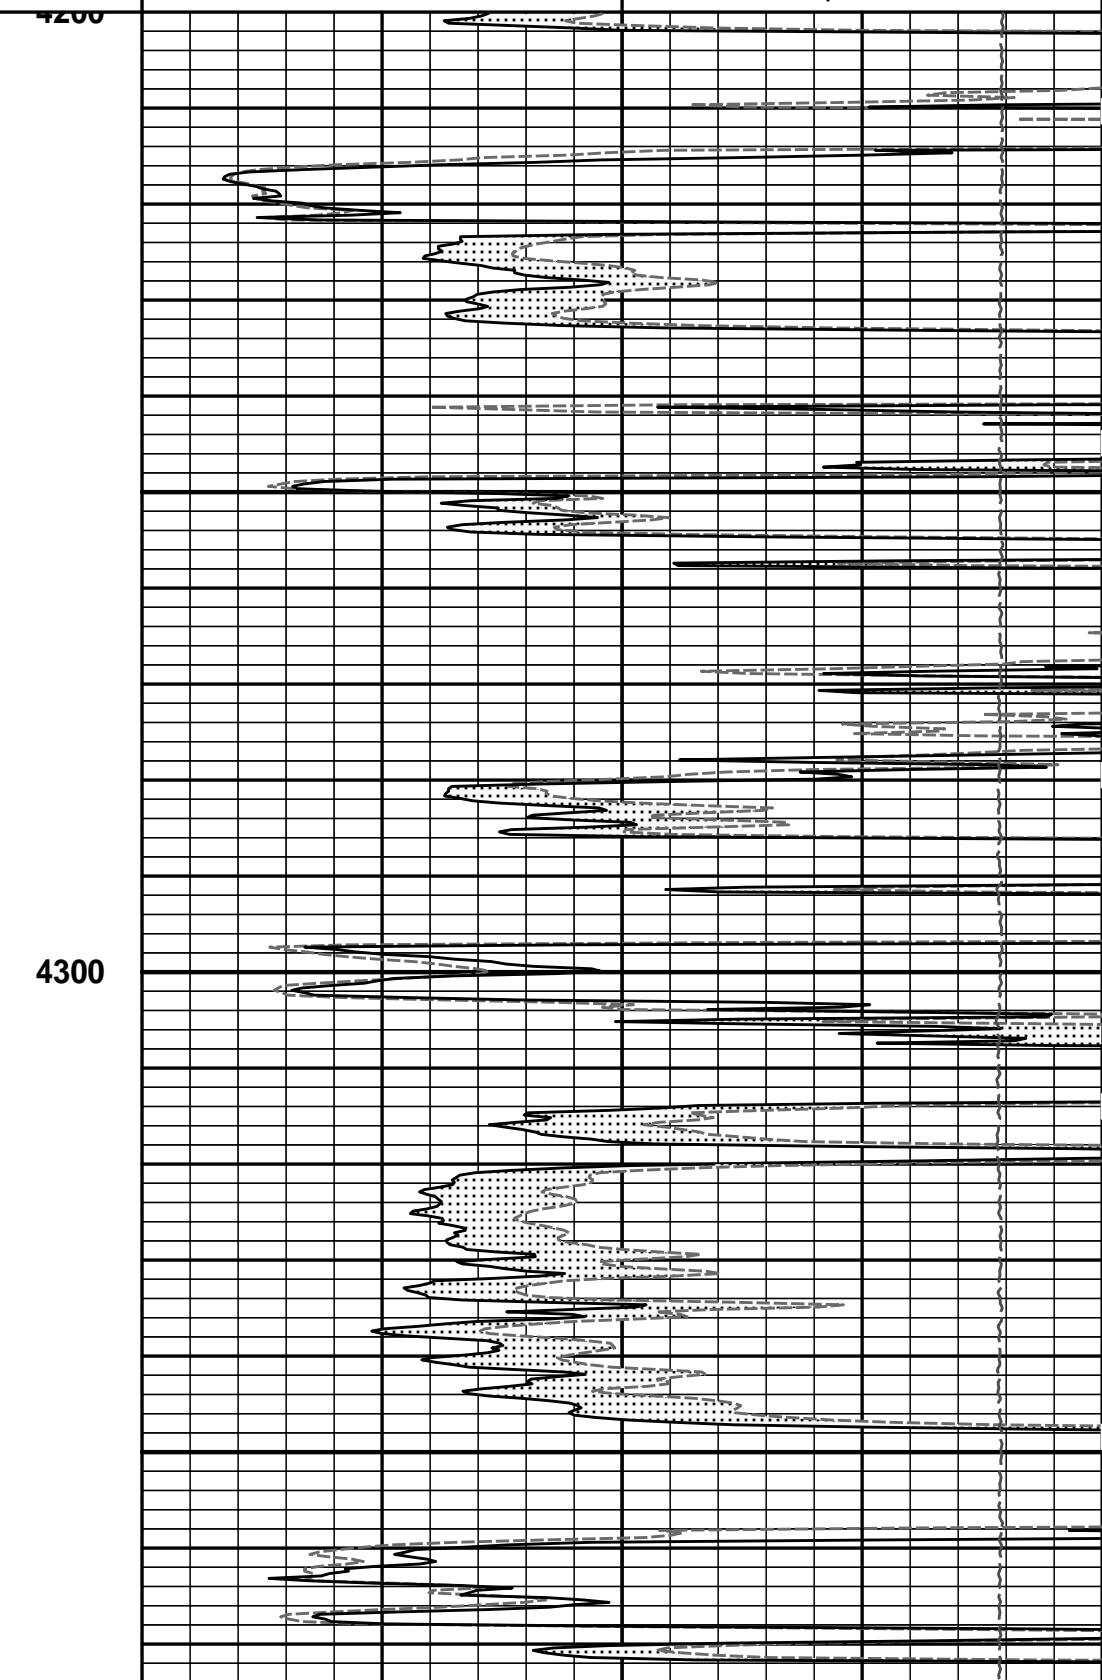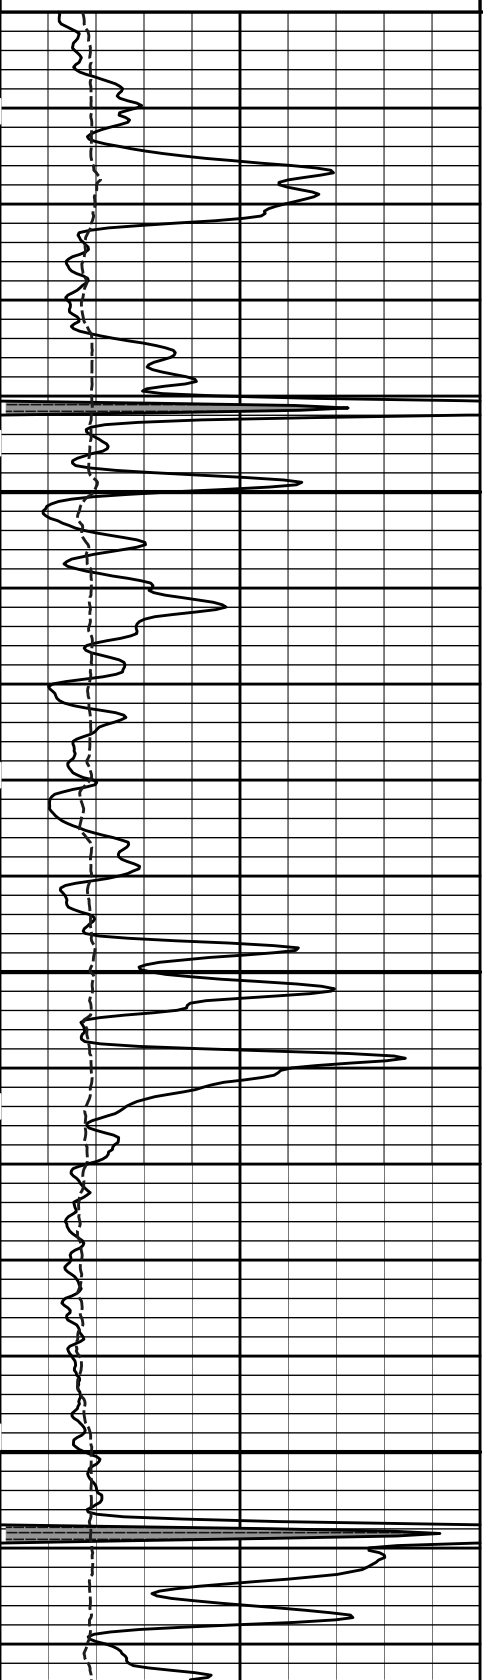



4300

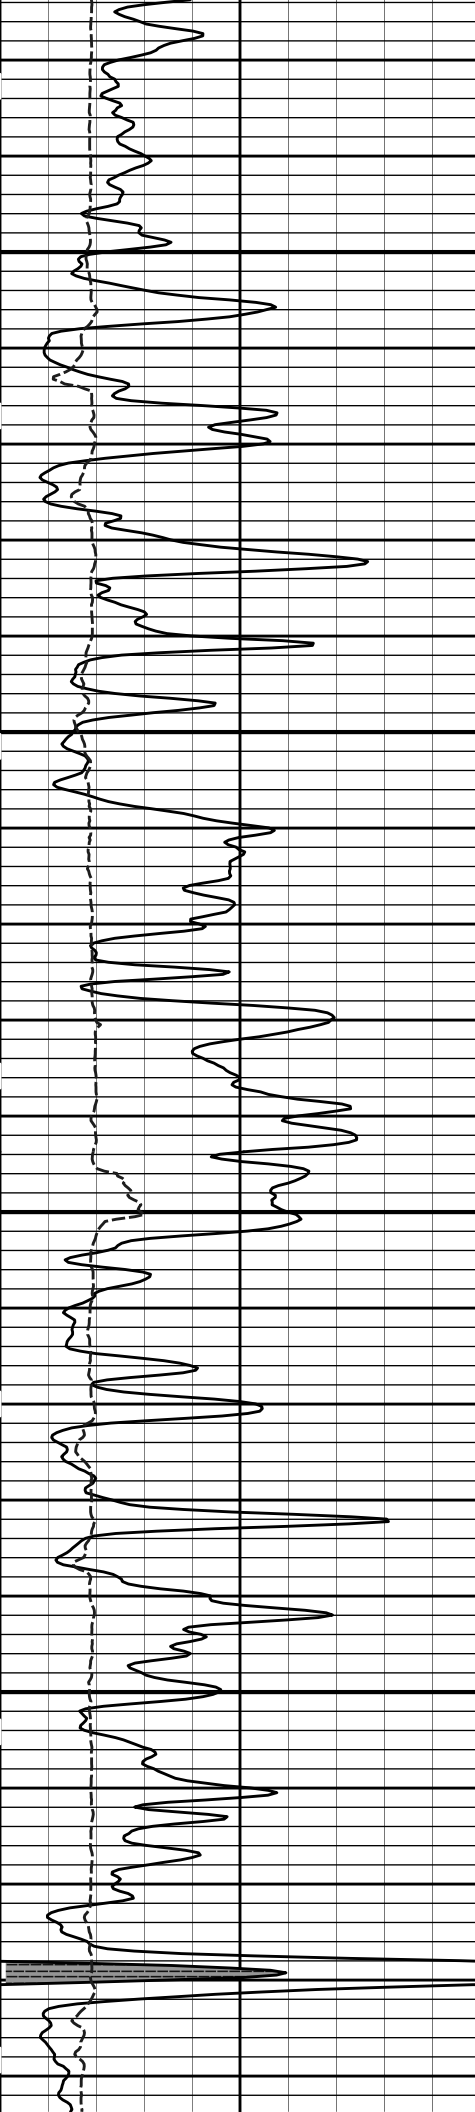

4400

4500

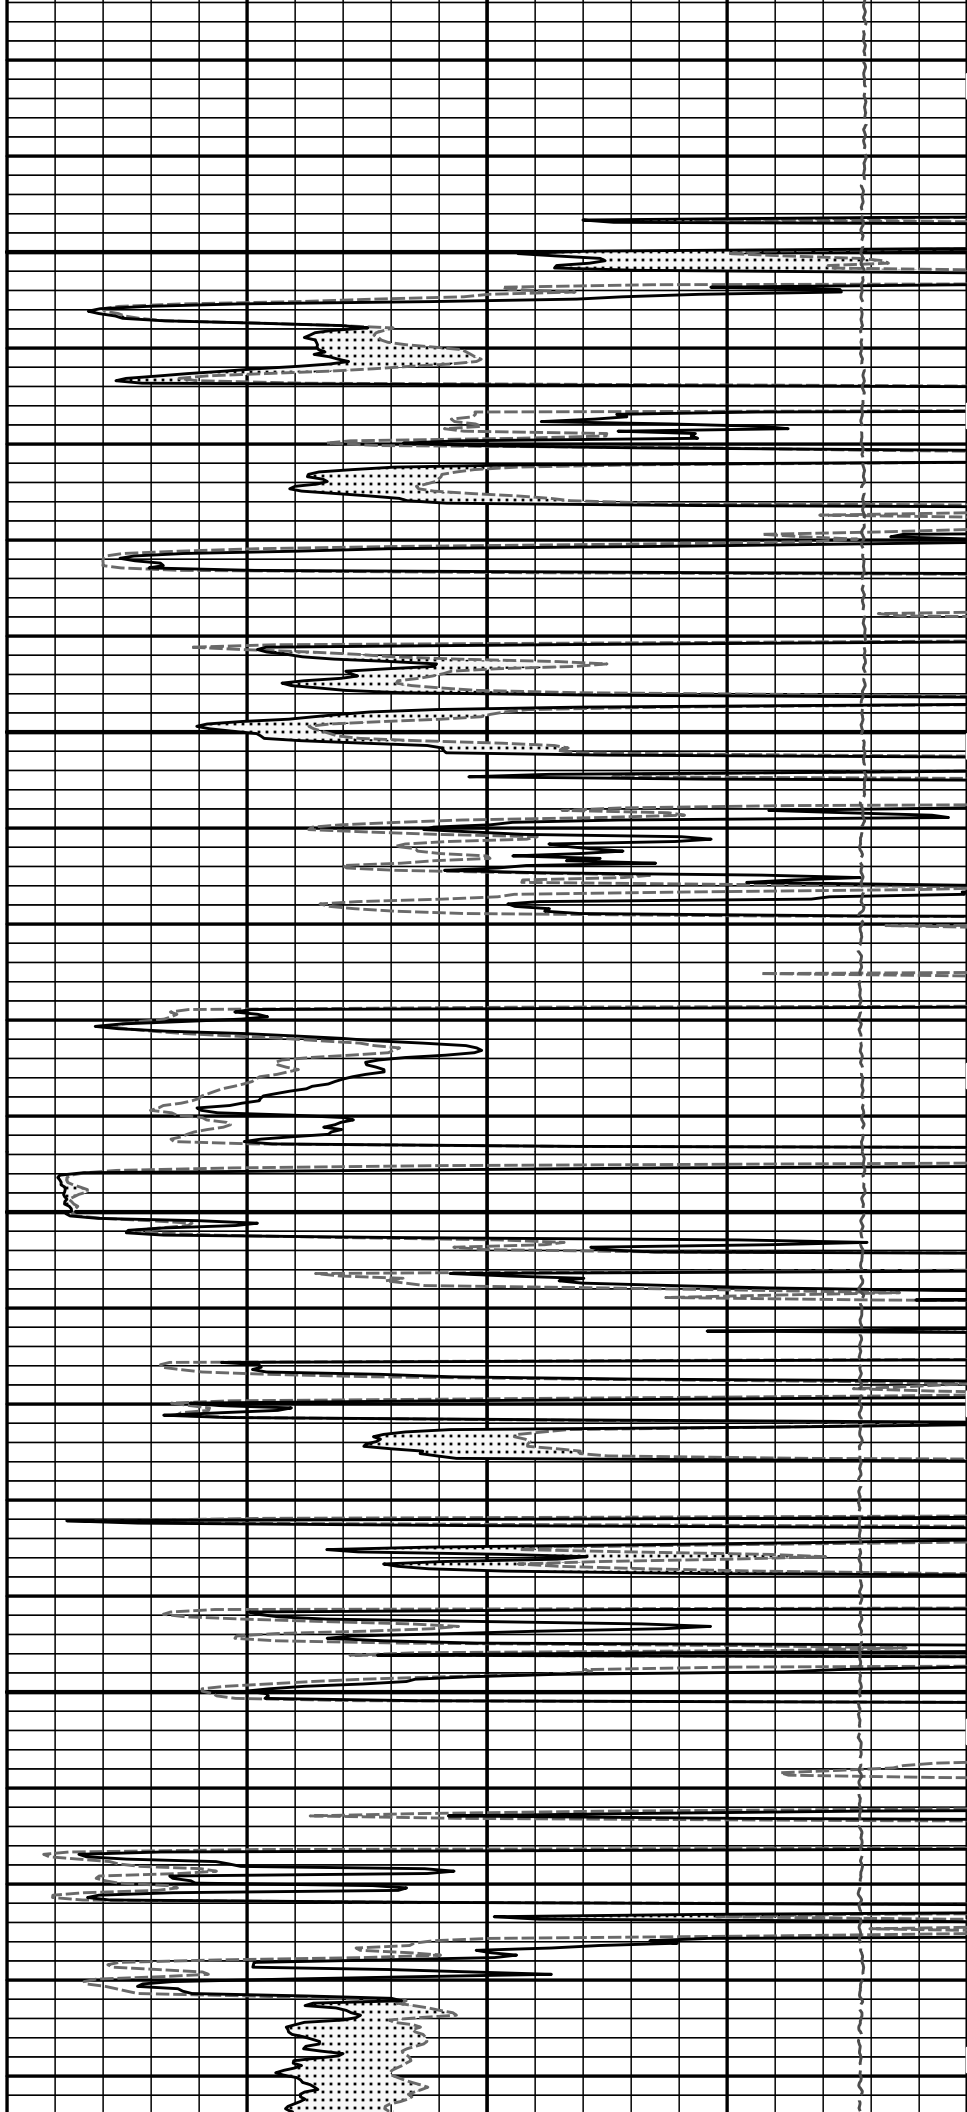


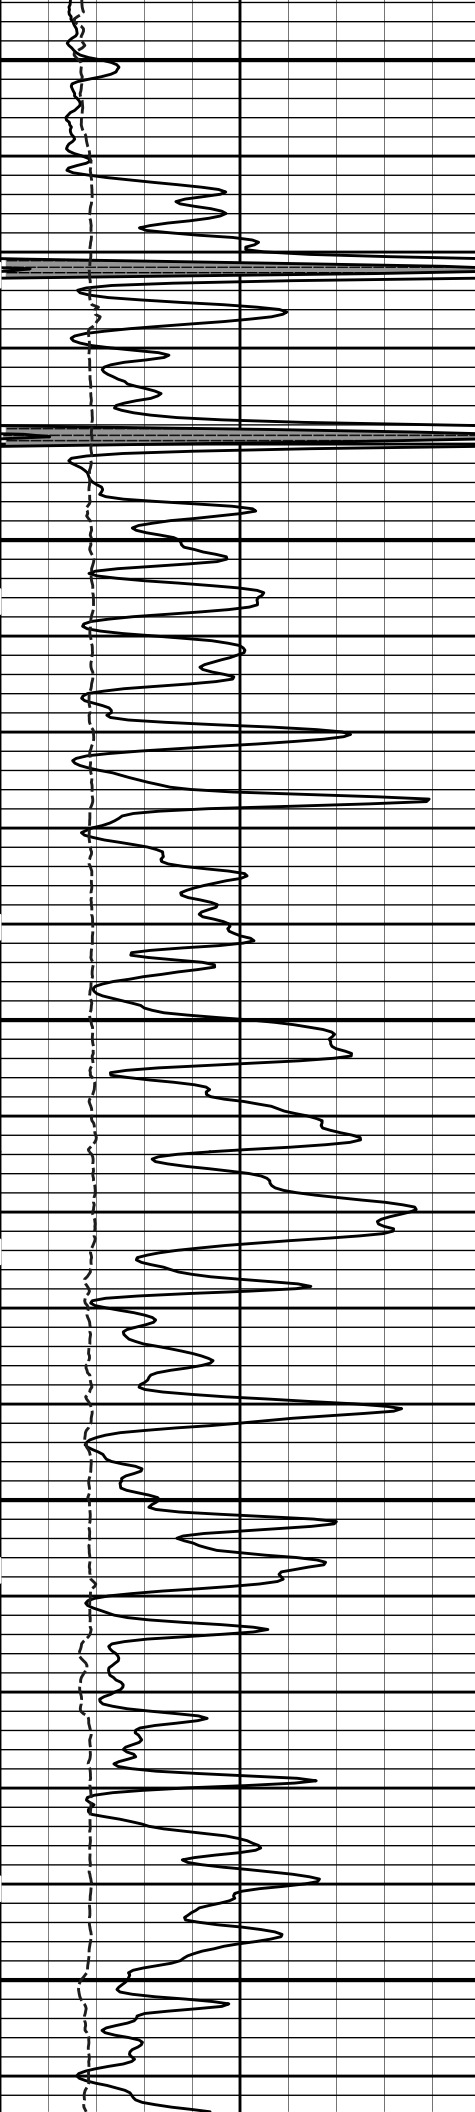


4600

4700


4800

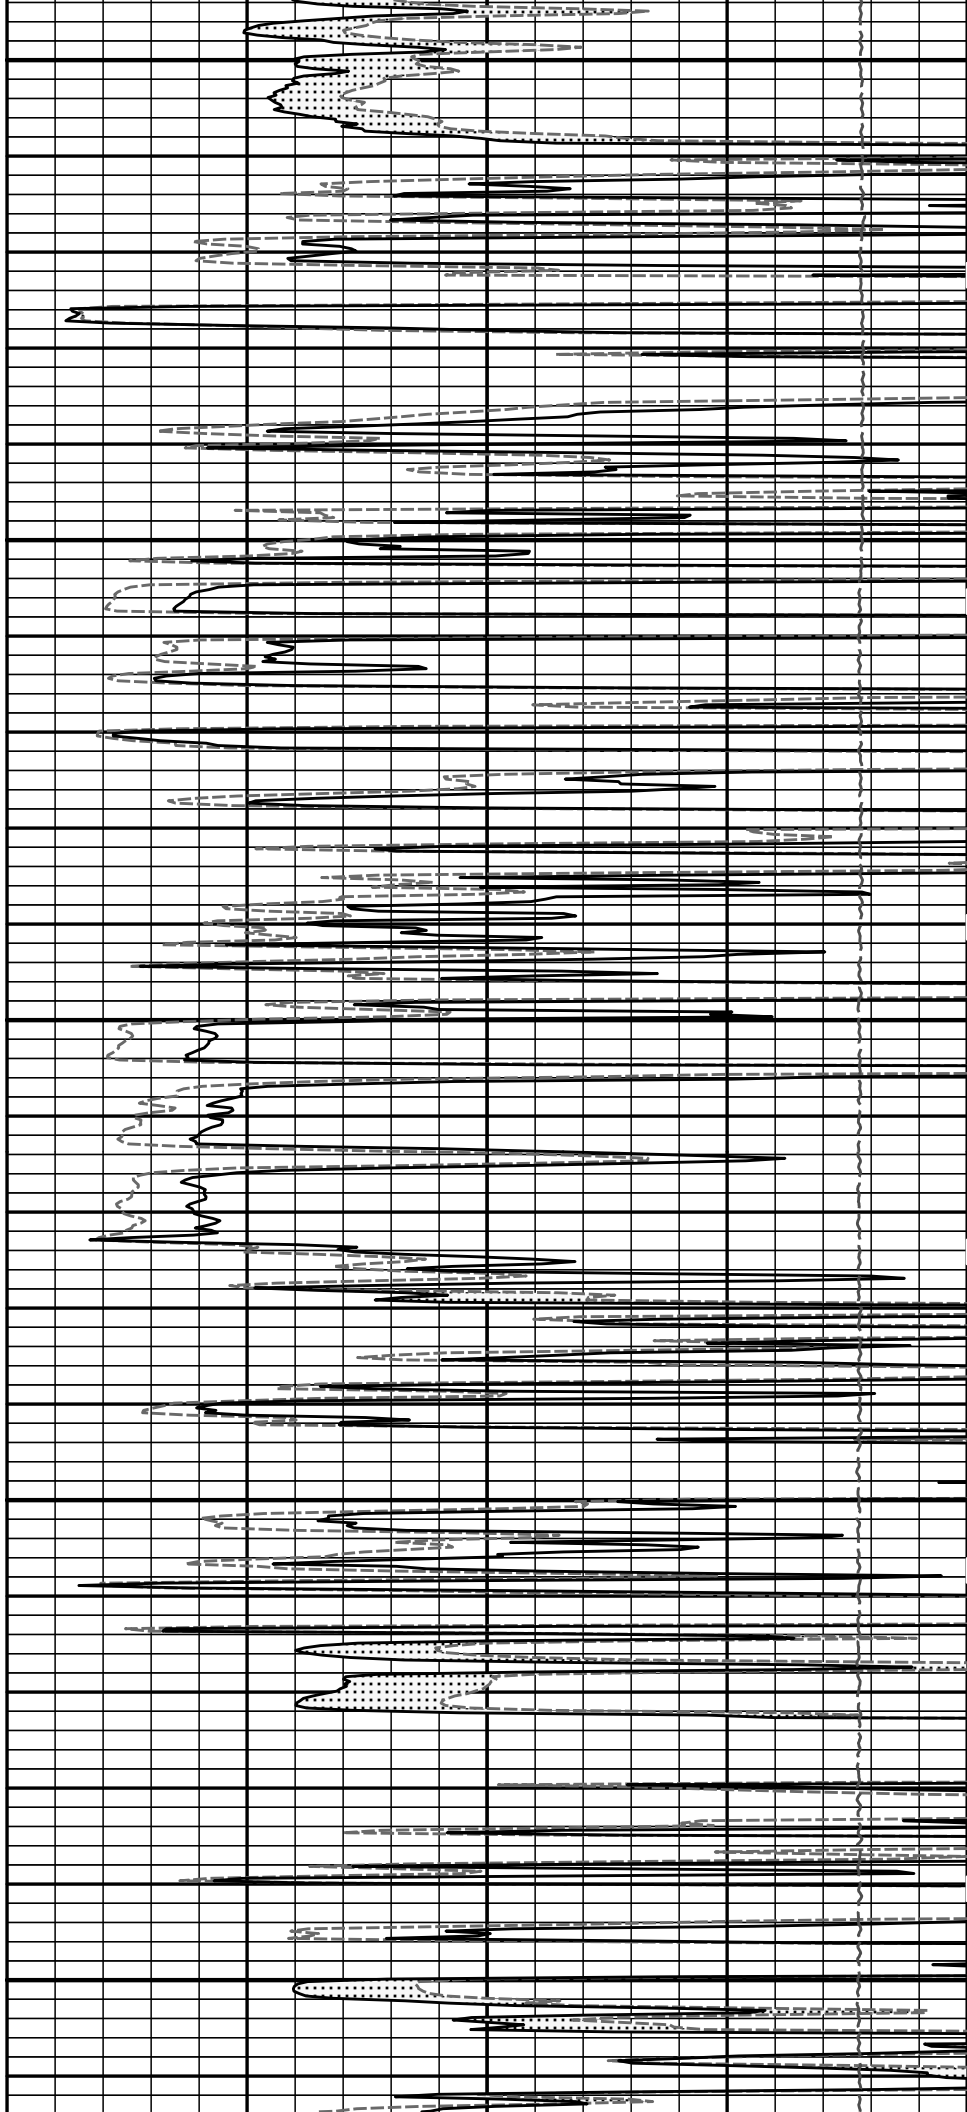

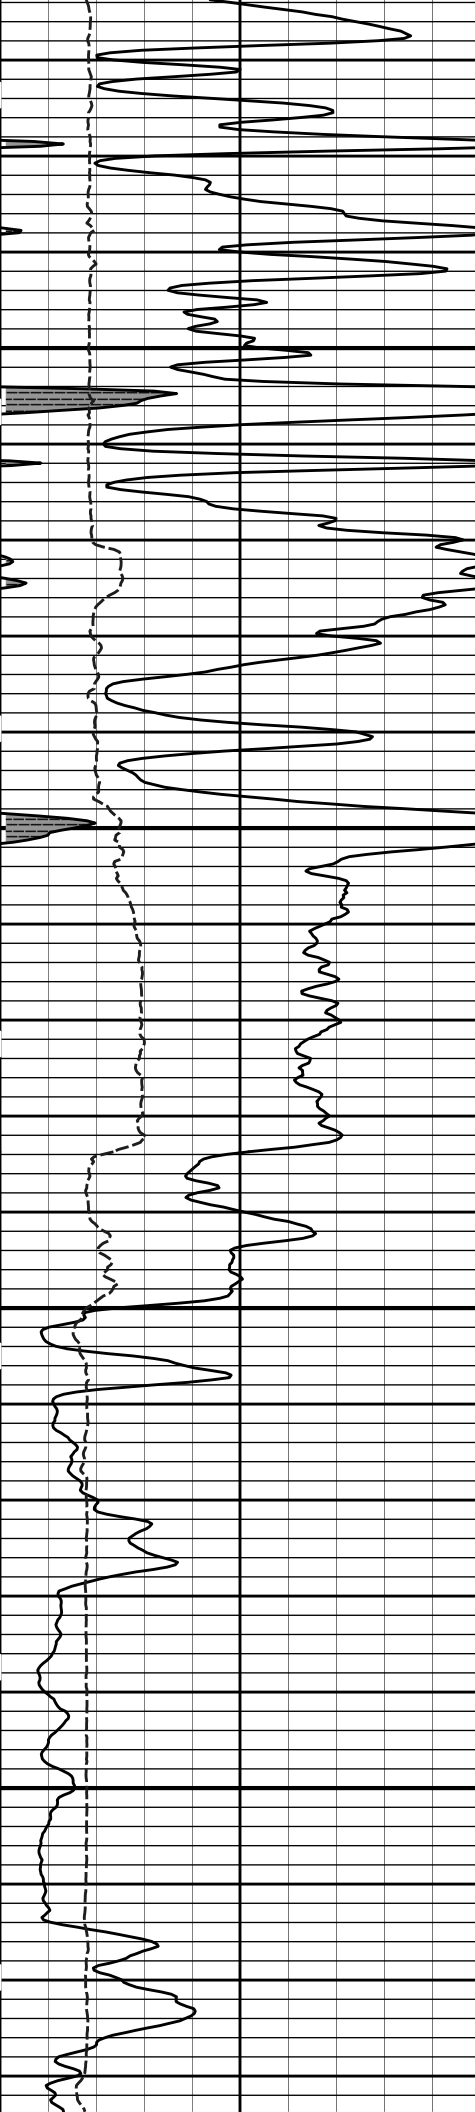

4900


5000

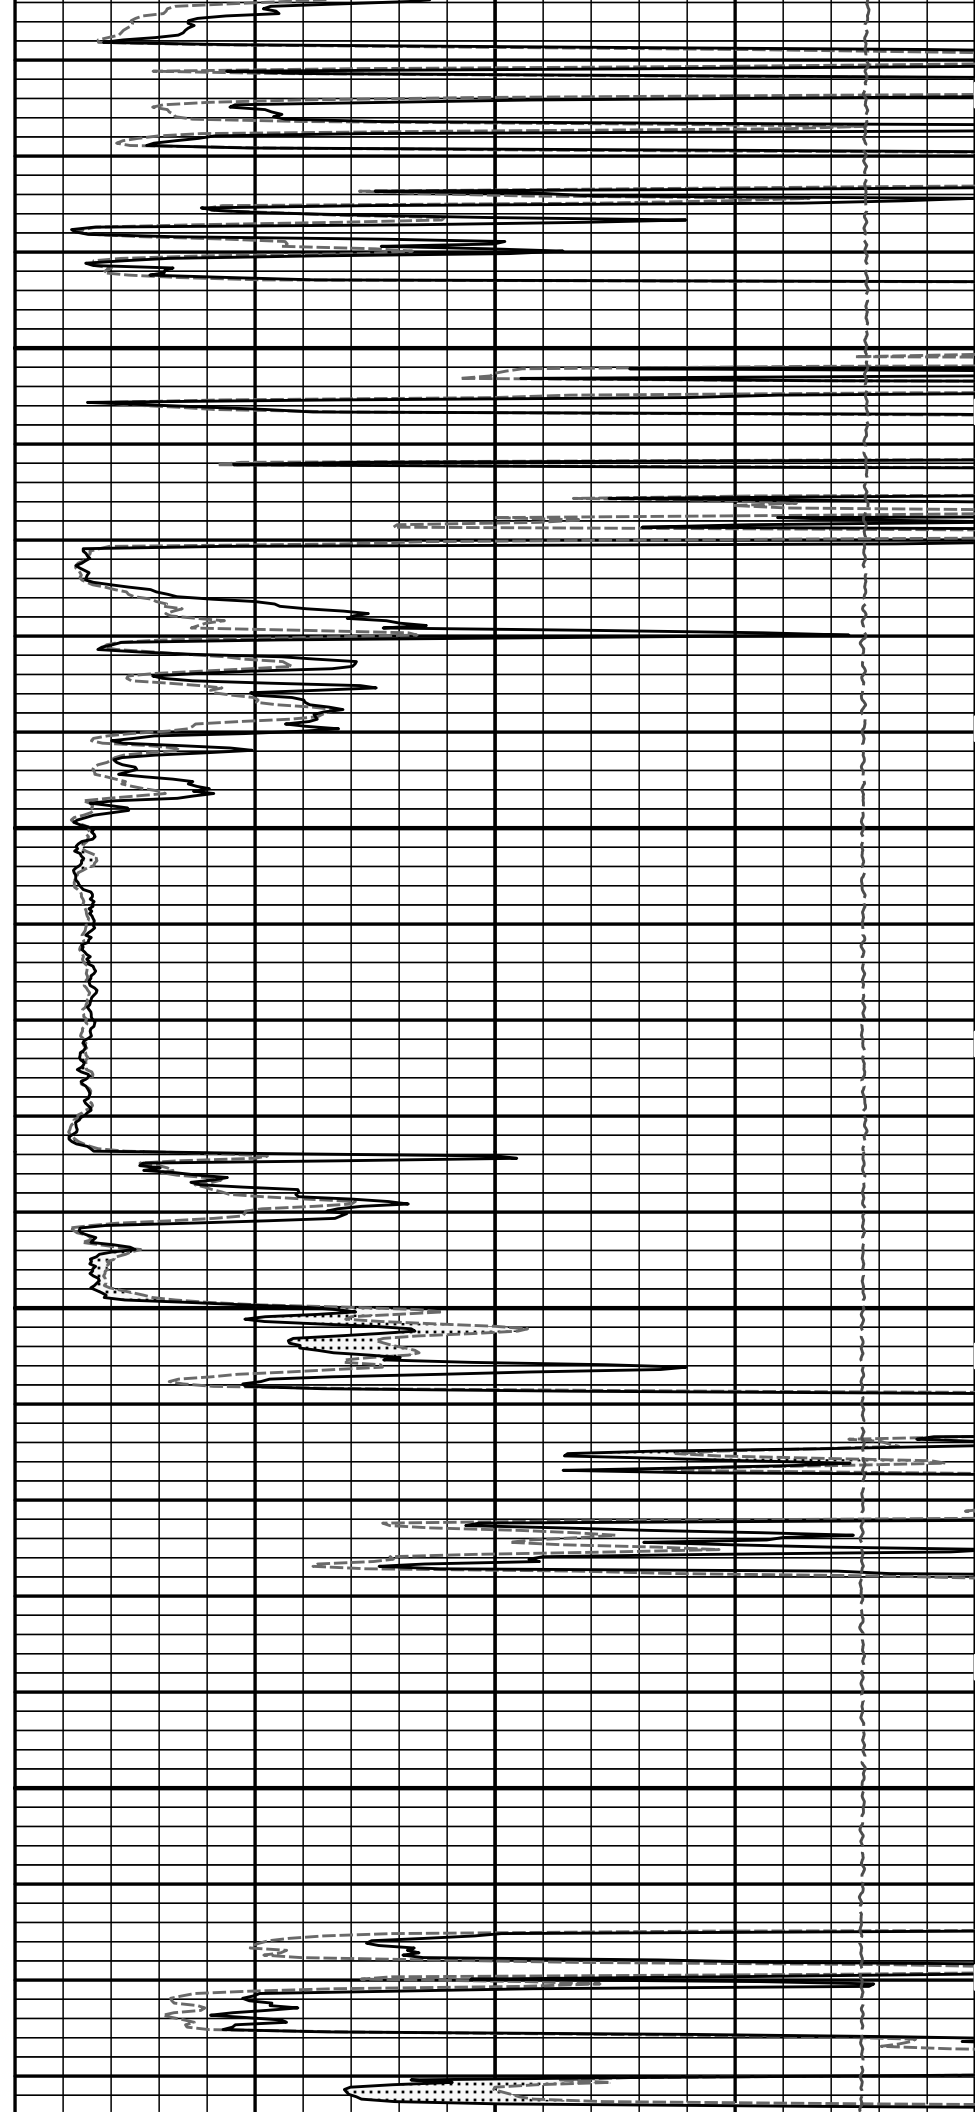




5100

5200

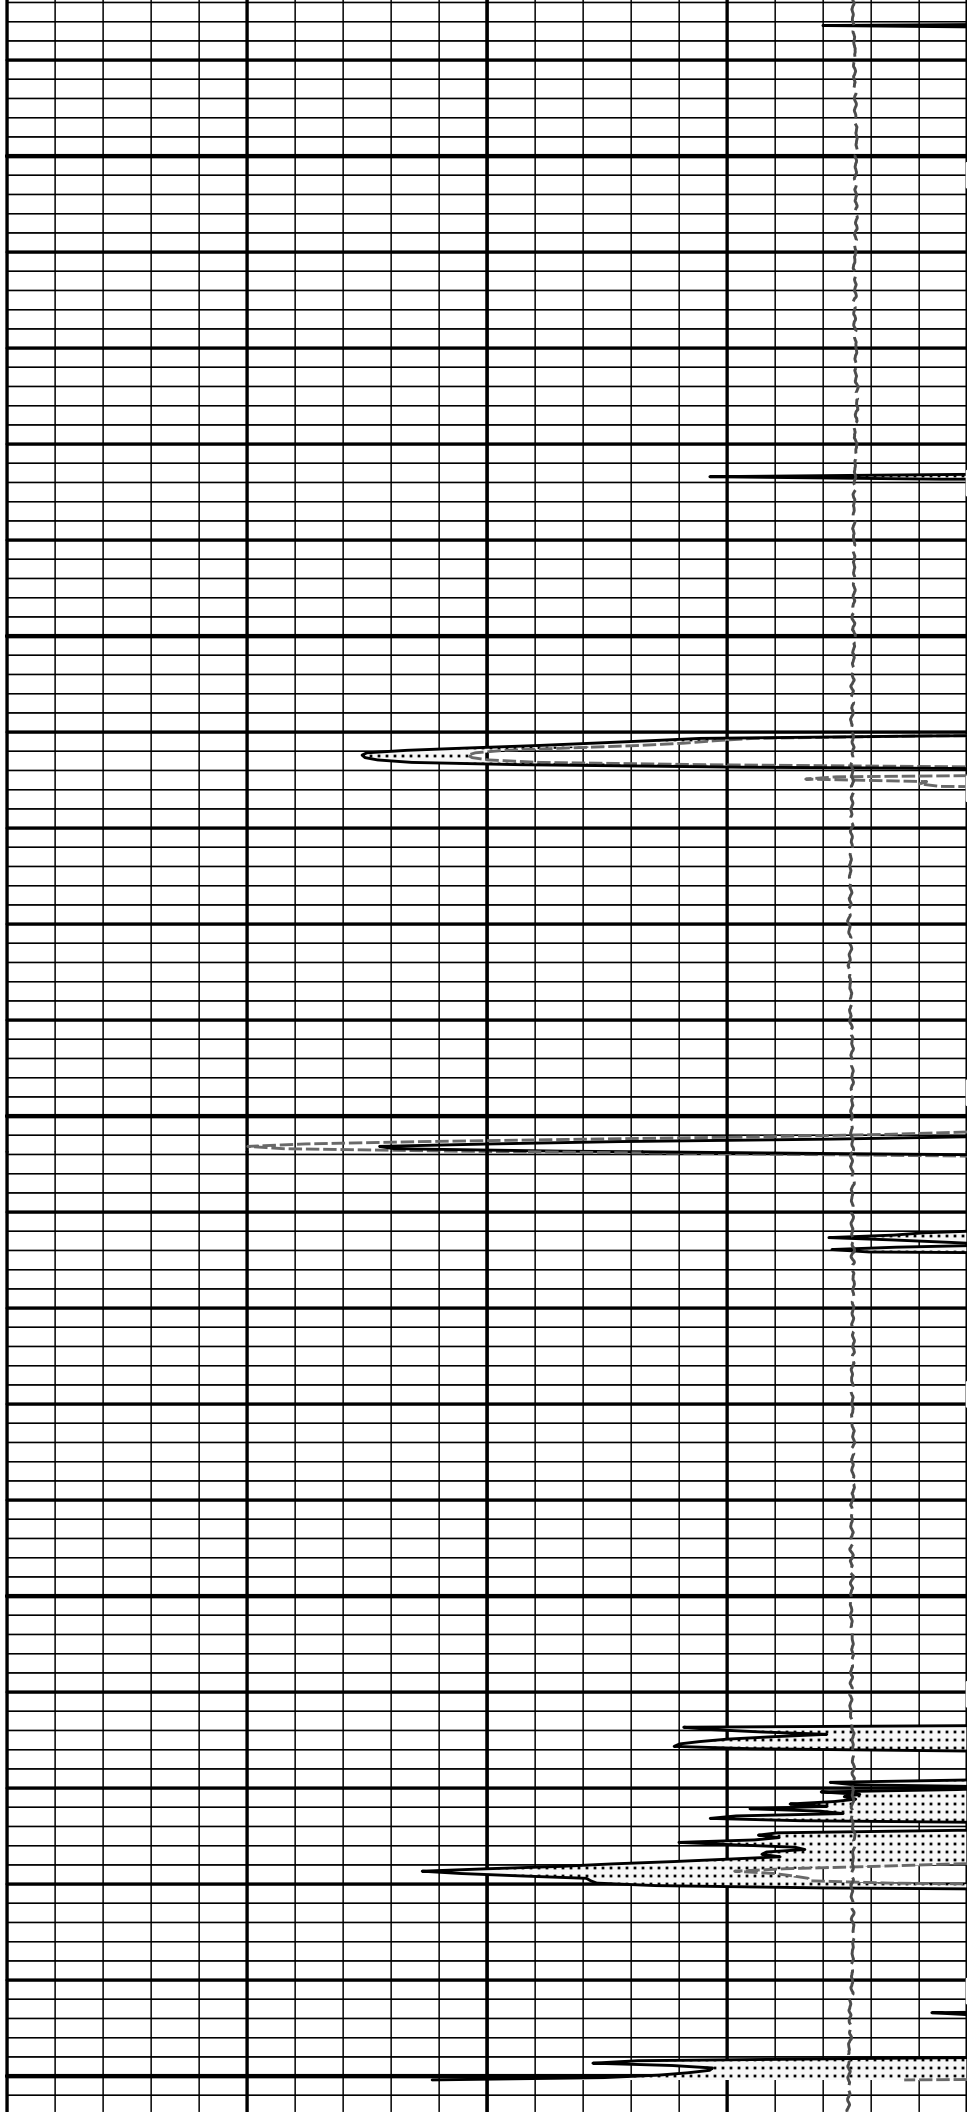

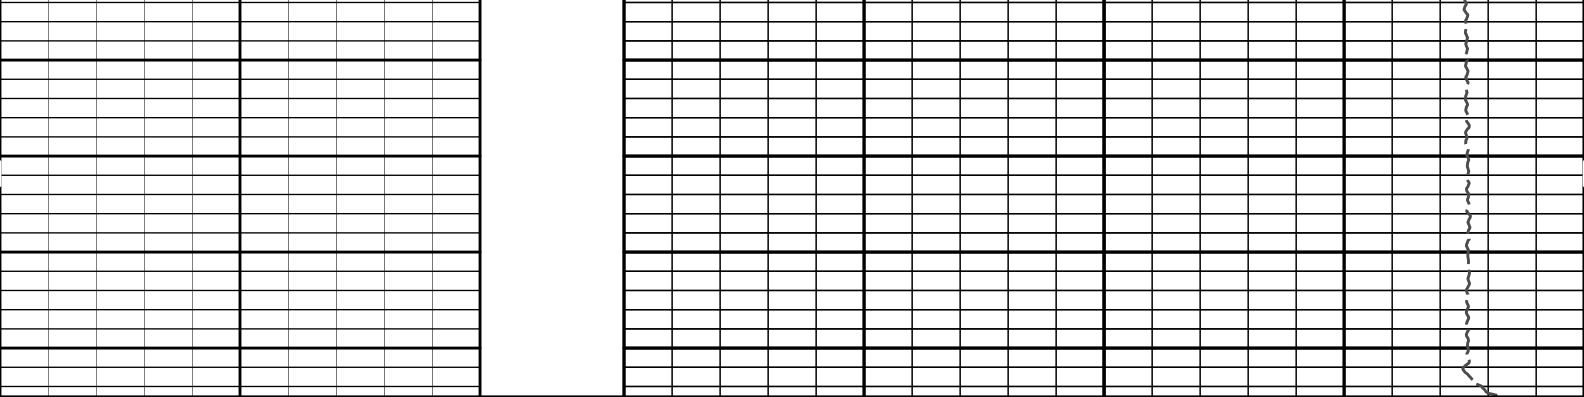

6	Caliper	16	MD	1 : 240	ft	15K	Tension	0
	inches						pounds	
0	Gamma API	150	0	MicrologLateral				20
	api			ohm-metre				
	SHALE		0	MicrologNormal				20
				ohm-metre				
				PERMEABLE				

**HALLIBURTON**

Plot Time: 01-Oct-13 23:52:24  
 Plot Range: 4200 ft to 5295.08 ft  
 Data: DRUSSEL\_E-3\Well Based\REPEAT\  
 Plot File: \\-LOCAL-IDRUSSEL\_E-3\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\MICROWMicrolog\_IQ\_5\_rep.lib

## REPEAT SECTION

**HALLIBURTON**

## TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
RWCH-12027542 135.00 lbs		Ø 3.625 in →		← Load Cell @ 76.35 ft ← BH Temperature @ 75.79 ft	6.25 ft	80.04 ft
SP Sub-12345678 60.00 lbs		Ø 3.625 in →		← SP @ 72.01 ft	3.74 ft	73.79 ft
GTET-10748374 165.00 lbs		Ø 3.625 in →		← GammaRay @ 63.99 ft	8.52 ft	70.05 ft
DSN Decentralizer - Large Hole-00000001		Ø 5.000 in* →				61.53 ft

6.60 lbs

DSNT-10755066  
174.00 lbs

Ø 3.625 in →

9.69 ft

← DSN Far @ 54.59 ft  
← DSN Near @ 53.84 ft

51.84 ft

SDLT-10685803  
360.00 lbs

SDLT Pad-10714945  
65.00 lbs  
Microlog Pad-10685803  
8.00 lbs

Ø 4.500 in →

10.81 ft

← Microlog @ 44.03 ft  
← SDL Caliper @ 43.84 ft  
← SDL @ 43.83 ft

41.03 ft

IQ Flex-10000954  
140.00 lbs

Ø 3.625 in →

5.67 ft

35.36 ft

Centralizer 25-00000002  
8.00 lbs

Ø 4.000 in\* →

BSAT-10747684  
300.00 lbs

Ø 3.625 in →

15.77 ft

← Sonic Receivers @ 26.84 ft

19.58 ft

ACRt Instrument-  
10929776  
50.00 lbs

Centralizer 25-00000003  
8.00 lbs

Ø 3.625 in →  
Ø 4.000 in\* →

5.03 ft

← Mud Resistivity @ 13.19 ft


14.55 ft

ACRt Sonde-  
10929775  
200.00 lbs

Ø 3.625 in →

14.22 ft

← ACRt @ 9.21 ft

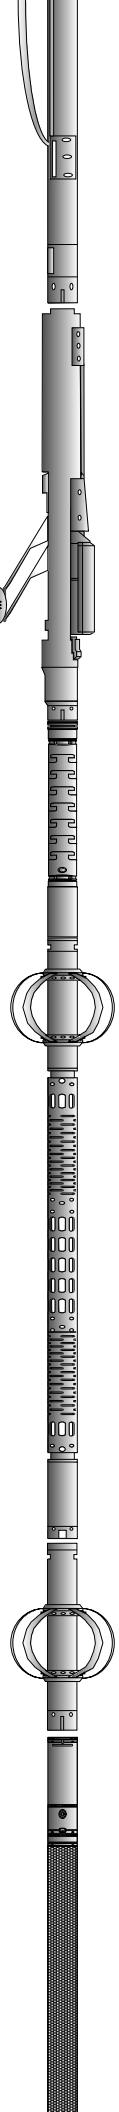

Bull Nose-00000001  
5.00 lbs

Ø 2.750 in →



0.33 ft  
0.33 ft  
0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	12027542	135.00	6.25	73.79	300.00
SP	SP Sub	12345678	60.00	3.74	70.05	300.00
GTET	Gamma Telemetry Tool	10748374	165.00	8.52	61.53	60.00
DSNT	Dual Spaced Neutron	10755066	174.00	9.69	51.84	60.00
DCNT	DSN Decentralizer Large Hole	00000001	6.60	9.42 *	55.17	300.00
SDLT	Spectral Density Tool	10685803	360.00	10.81	41.03	60.00
MICP	Microlog Pad	10685803	8.00	1.00 *	43.53	60.00
SDLP	Density Insite Pad	10714945	65.00	2.55 *	43.24	60.00
IQF	IQ Flex tool	10000954	140.00	5.67	35.36	300.00
BSAT	Borehole Sonic Array Tool	10747684	300.00	15.77	19.58	60.00
OBCEN	Centralizer - 25 in. Overbody	00000002	8.00	2.08 *	32.51	300.00
ACRt	Array Compensated True Resistivity Instrument Section	10929776	50.00	5.03	14.55	300.00
OBCEN	Centralizer - 25 in. Overbody	00000003	8.00	2.08 *	15.87	300.00
ACRt	Array Compensated True Resistivity Sonde Section	10929775	200.00	14.22	0.33	300.00
BLNS	Bull Nose	00000001	5.00	0.33	0.00	300.00
<b>Total</b>			<b>1,684.60</b>	<b>80.04</b>		

\* Not included in Total Length and Length Accumulation.

Data: DRUSSEL\_E-3\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE Date: 01-Oct-13 21:19:59

# HALLIBURTON

## CALIBRATION REPORT

### NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 10748374

Reference Calibration Date: 02-Aug-13 14:20:06

Engineer: THOMAS HYDE

Calibration Date: 03-Sep-13 10:36:47

Software Version: WL INSITE R3.8.4 (Build 5)

Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Measurement	Measured	Calibrated	Units
Background	44.2	44.4	api
Background + Calibrator	275.0	276.4	api
Calibrator	230.8	232.0	api

### NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 10748374

Reference Calibration Date: 03-Sep-13 10:36:47

Engineer: S. INGERSOLL

Calibration Date: 30-Sep-13 20:11:26

Software Version: WL INSITE R3.8.4 (Build 5)

Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Field Verification	Shop	Field	Units
Background	44.4	66.4	api
Background + Calibrator	276.4	298.2	api

Calibrator

232.0

231.8

api

Shop	Field	Difference	Tolerance
232.0	231.8	0.2	+/- 9.00

### MICRO LOG SHOP CALIBRATION

**Tool Name:** Microlog Pad - 10685803      **Reference Calibration Date:** 05-Sep-13 09:33:39  
**Engineer:** S. INGERSOLL      **Calibration Date:** 23-Sep-13 23:39:48  
**Software Version:** WL INSITE R3.8.4 (Build 5)      **Calibration Version:** 1  
**Host Tool Name:** DSNT - 10755066

### CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.01	-0.08	-0.07	-0.00	ohmm
Calibration Point #1	0.07	0.00	-0.06	0.00	ohmm
Calibration Point #2	19.96	20.00	19.99	20.00	ohmm
Internal Reference	19.90	19.93	19.99	20.00	ohmm

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	-1.92	0.82	V
Calibration Point #1	18.15	1.30	V
Calibration Point #2	5307.73	6885.75	V
Internal Reference	5289.58	6884.96	V

### MICRO LOG FIELD CHECK

**Tool Name:** Microlog Pad - 10685803      **Reference Calibration Date:** 23-Sep-13 23:39:48  
**Engineer:** S. INGERSOLL      **Calibration Date:** 30-Sep-13 20:12:58  
**Software Version:** WL INSITE R3.8.4 (Build 5)      **Calibration Version:** 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.08	-0.07	-0.00	-0.00	ohmm
Internal Reference	19.93	19.93	20.00	20.00	ohmm

Signal	Summary			
	Shop	Field	Difference	Tolerance
Microlog Normal	19.93	19.93	0.00	+/- 0.80
Microlog Lateral	20.00	20.00	0.00	+/- 0.80

### CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
<b>GTET-10748374</b>						
Gamma Ray Calibrator	232.0	231.8	-----	0.2	+/- 9.00	api
<b>Microlog Pad-10685803</b>						
MicroLog Normal	19.93	19.93	-----	0.00	+/-0.80	ohmm
MicroLog Lateral	20.00	20.00	-----	0.00	+/-0.80	ohmm

Data: DRUSSEL\_E-3\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\IDLE

Date: 01-Oct-13 21:50:27

# HALLIBURTON

# PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.600	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5295.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
	DSNT	DNTP	Temperature Correction Type	None	
	DSNT	DPRS	DSN Pressure Correction Type	None	
	DSNT	SHCO	View More Correction Options	No	
	DSNT	UTVD	Use TVD for Gradient Corrections?	No	
	DSNT	LHWT	Logging Horizontal Water Tank?	No	
	SDLT	CLOK	Process Caliper Outputs?	Yes	
	SDLT Pad	DNOK	Process Density?	Yes	
	SDLT Pad	DNOK	Process Density EVR?	No	
	SDLT Pad	CB	Logging Calibration Blocks?	No	
	SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
	SDLT Pad	DTWN	Disable temperature warning	No	
	SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc

SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.00	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm

BOTTOM

Data: DRUSSEL\_E-310001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\IDLE

Date: 01-Oct-13 21:23:57

# HALLIBURTON

## INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
<b>Depth Panel</b>				
TENS	Tension	0.00	NO	
<b>RWCH</b>				
DHTN	DownholeTension	0.00	BLK	0.000
<b>SP Sub</b>				
PLTC	Plot Control Mask	72.01	NO	
SP	Spontaneous Potential	72.01	BLK	1.250
SPR	Raw Spontaneous Potential	72.01	NO	
SPO	Spontaneous Potential Offset	72.01	NO	
<b>GTET</b>				
TPUL	Tension Pull	63.99	NO	
GR	Natural Gamma Ray API	63.99	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	63.99	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	63.99	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
<b>DSNT</b>				
TPUL	Tension Pull	53.74	NO	
RNDS	Near Detector Telemetry Counts	53.84	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.59	TRI	0.583
DNTT	DSN Tool Temperature	53.84	NO	
DSNS	DSN Tool Status	53.74	NO	

ERNDR	Near Detector Telemetry Counts EVR	53.84	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.59	BLK	0.000
ENTM	DSN Tool Temperature EVR	53.84	NO	
<b>SDLT</b>				
TPUL	Tension Pull	43.84	NO	
PCAL	Pad Caliper	43.84	TRI	0.250
ACAL	Arm Caliper	43.84	TRI	0.250
<b>BSAT</b>				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
<b>ACRt Sonde</b>				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000

RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Current Raw 12K X Receiver	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	

### SDLT Pad

TPUL	Tension Pull	43.83	NO	
NAB	Near Above	43.66	BLK	0.920
NHI	Near Cesium High	43.66	BLK	0.920
NLO	Near Cesium Low	43.66	BLK	0.920
NVA	Near Valley	43.66	BLK	0.920
NBA	Near Barite	43.66	BLK	0.920
NDE	Near Density	43.66	BLK	0.920
NPK	Near Peak	43.66	BLK	0.920
NLI	Near Lithology	43.66	BLK	0.920
NBAU	Near Barite Unfiltered	43.66	BLK	0.250
NLIU	Near Lithology Unfiltered	43.66	BLK	0.250
FAB	Far Above	44.01	BLK	0.250
FHI	Far Cesium High	44.01	BLK	0.250
FLO	Far Cesium Low	44.01	BLK	0.250
FVA	Far Valley	44.01	BLK	0.250
FBA	Far Barite	44.01	BLK	0.250
FDE	Far Density	44.01	BLK	0.250
FPK	Far Peak	44.01	BLK	0.250
FLI	Far Lithology	44.01	BLK	0.250
PTMP	Pad Temperature	43.84	BLK	0.920
NHV	Near Detector High Voltage	43.24	NO	
FHV	Far Detector High Voltage	43.24	NO	
ITMP	Instrument Temperature	43.24	NO	
DDHV	Detector High Voltage	43.24	NO	

### Microlog Pad

TPUL	Tension Pull	44.03	NO	
MINV	Microlog Lateral	44.03	BLK	0.750
MNOR	Microlog Normal	44.03	BLK	0.750

Data: DRUSSEL\_E-3\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE

Date: 01-Oct-13 21:22:30

COMPANY      **OXY USA INC.**

WELL            **DRUSSEL E-3**

FIELD          **HUGOTON GAS AREA**

COUNTY        **FINNEY**

STATE            **KANSAS**

