



Borehole Compensated Sonic Log

Pioneer Energy Services

API No.

15-203-20221-00-00

Company Russell Oil, Inc.

Well Ken Baker "A" #1-10

Field Wildcat

County Wichita

State Kansas

Location 420' FNL / 1760' FEL

Other Services
CNL/CDL
MEL/DIL

Sec: 10 Twp: 16S Rge: 35W

Permanent Datum Ground Level Elevation 3132
Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation
K.B. 3142
D.F.
G.L. 3132

Date

7/18/2013

Run Number

Two

Type Log

BHC Sonic

Depth Driller

4800

Depth Logger

4800

Bottom Logged Interval

4789

Top Logged Interval

300

Type Fluid In Hole

Chemical

Salinity, PPM CL

7000

Density

9.4

Level

Full

Max. Rec. Temp. F

126

Operating Rig Time

5 Hours

Equipment -- Location

91 Hays

Recorded By

R. Barnhart

Witnessed By

Kitt Noah

Borehole Record

Casing Record

Run No.

Bit

From

To

Size

Wgt.

From

To

One

12.25

00

311

8.625

23#

00

311

Two

7.875

311


TD



Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858



Pence, KS:
4W to 23 Rd., 3N to White CG, W into



0	Gamma Ray (GAPI)	150	Sonic Int	140	Delta Time (usec/ft) (usec/ft)	40
150	Gamma Ray (GAPI)	300	5 (msec) 0	30	Sonic Porosity (pu)	-10
6	dCAL (in)	16		15000	LTEN (lb) (lb)	0
						LSPD (ft/min)


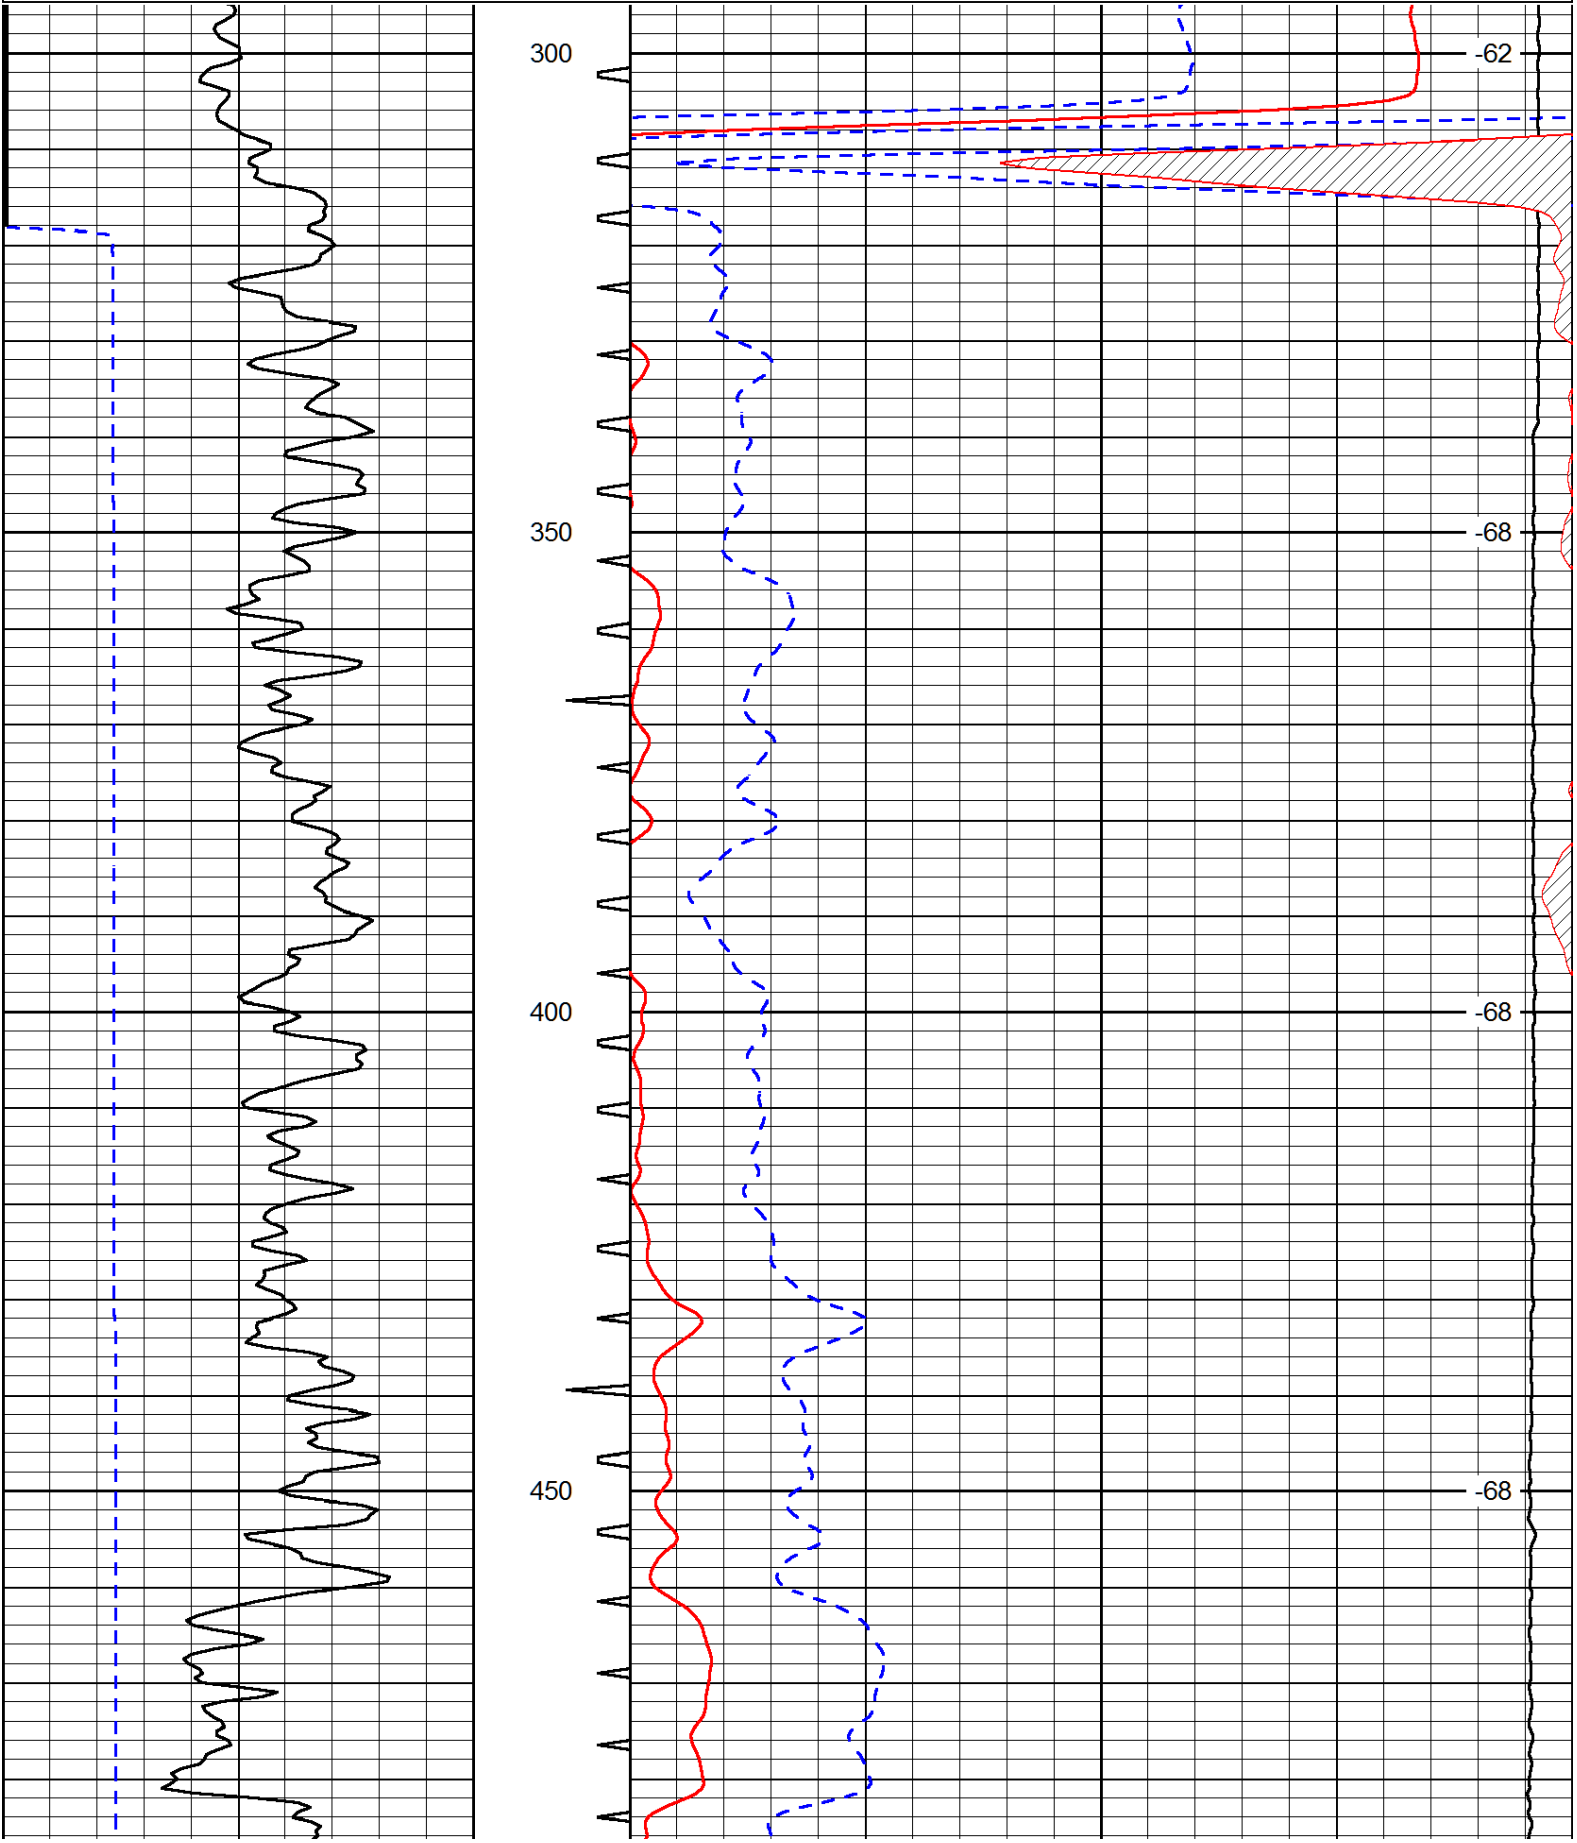


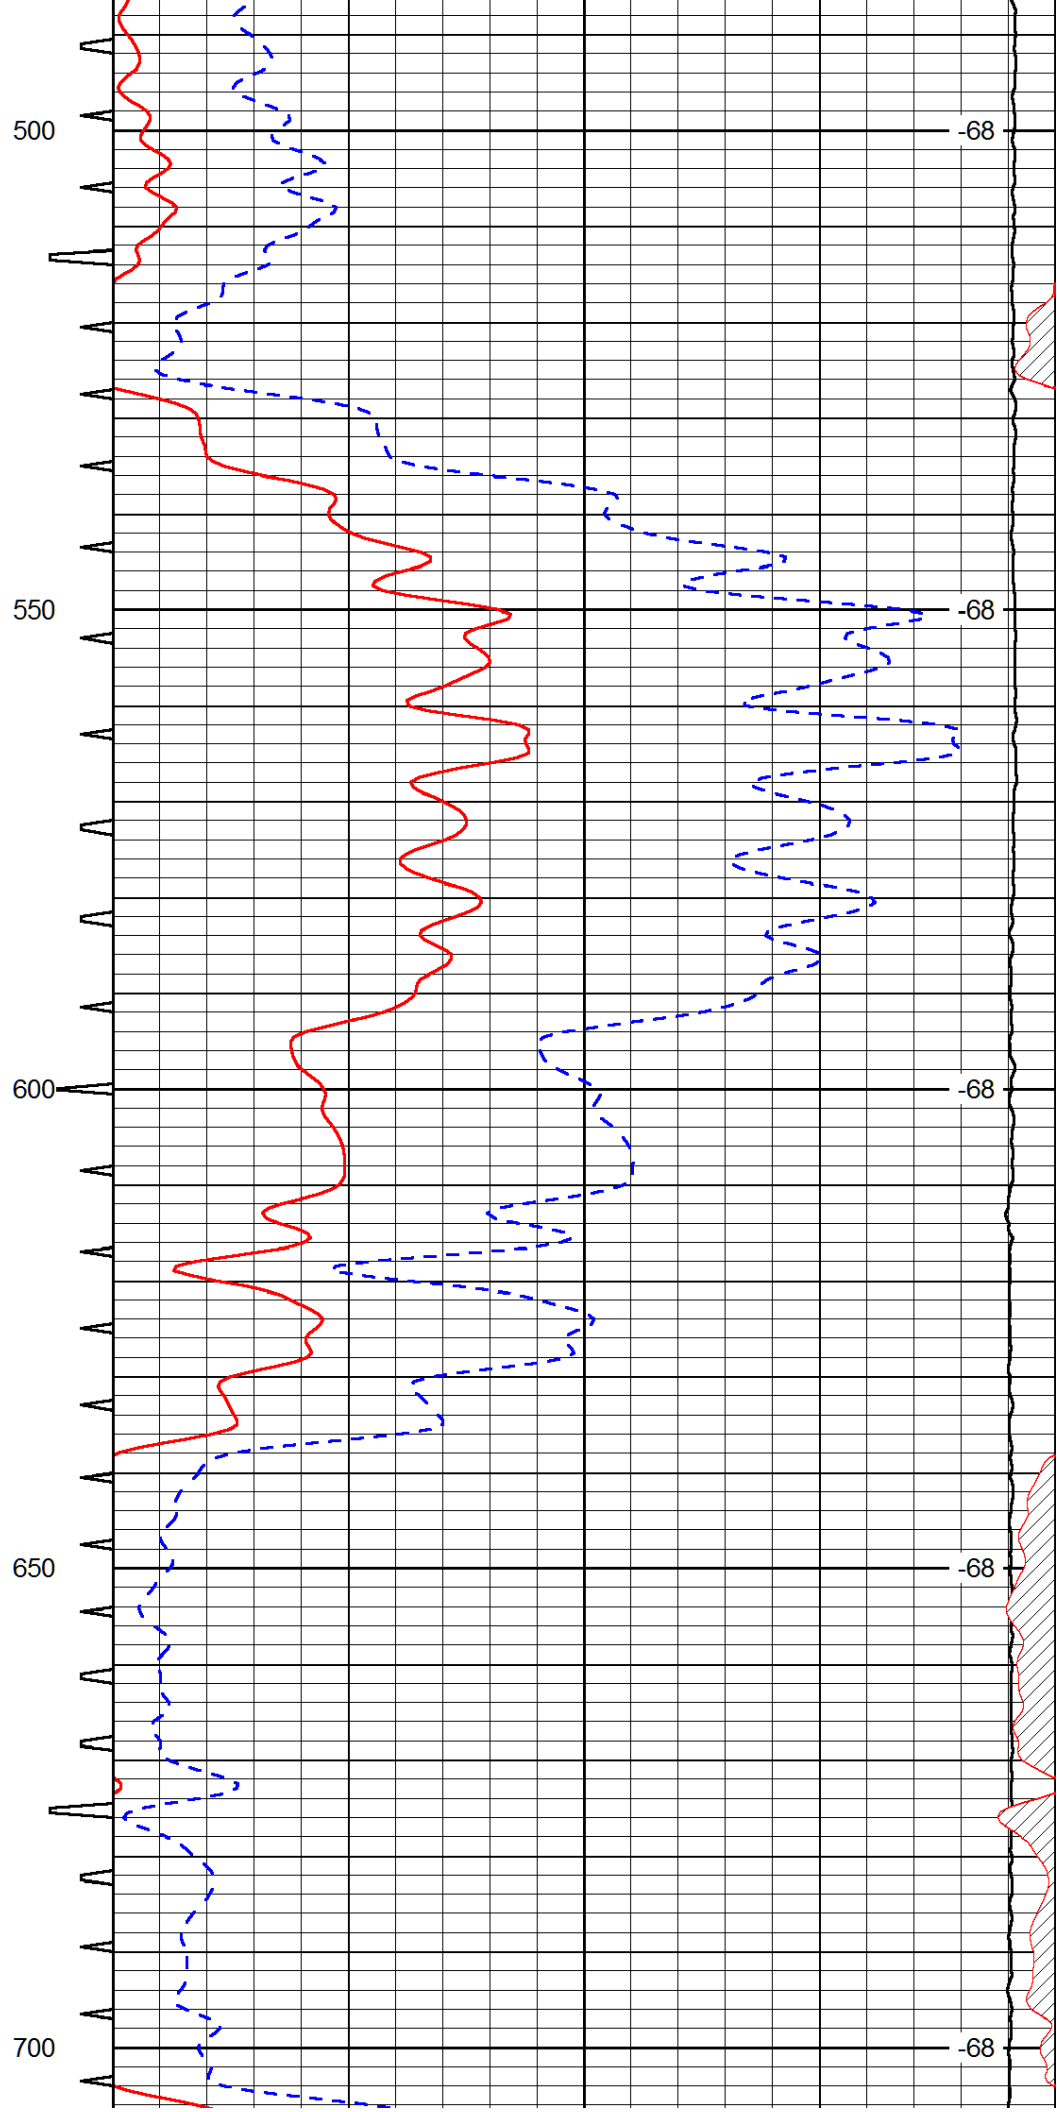
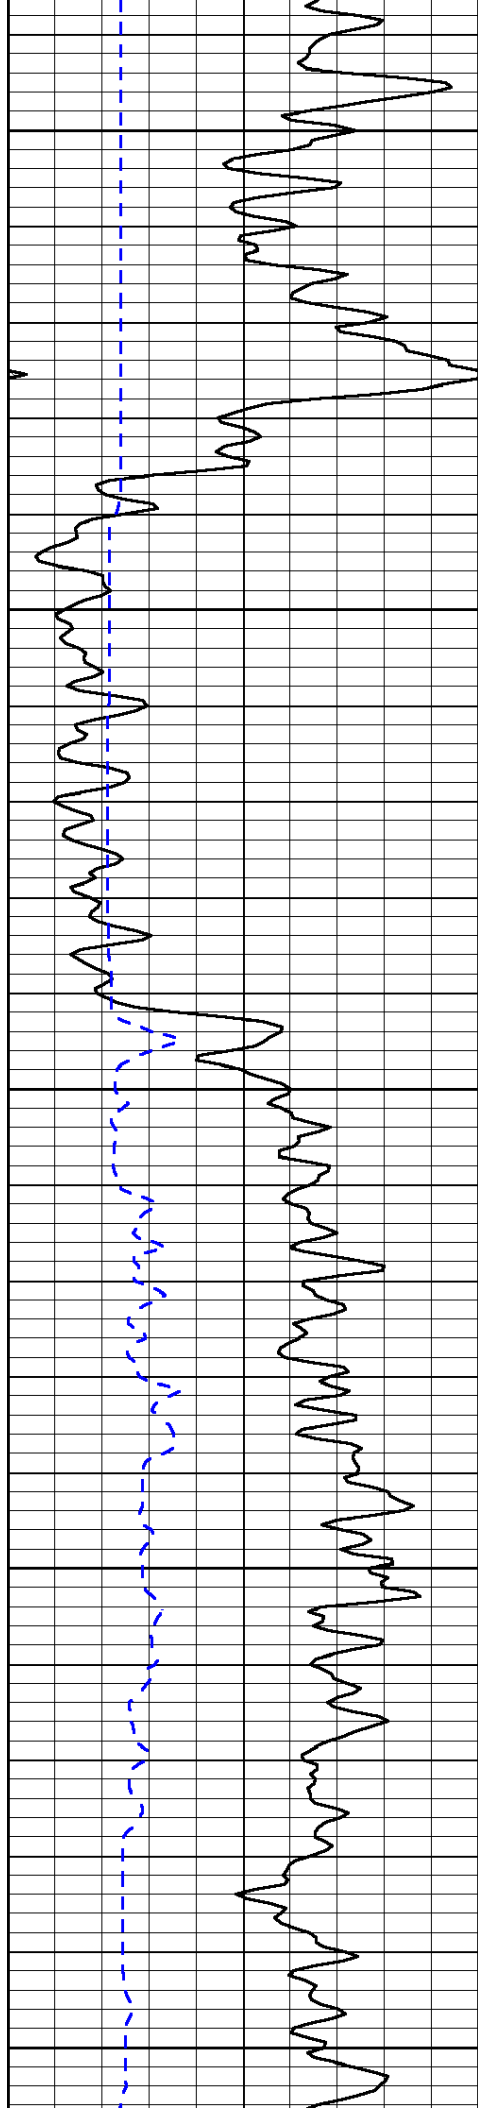


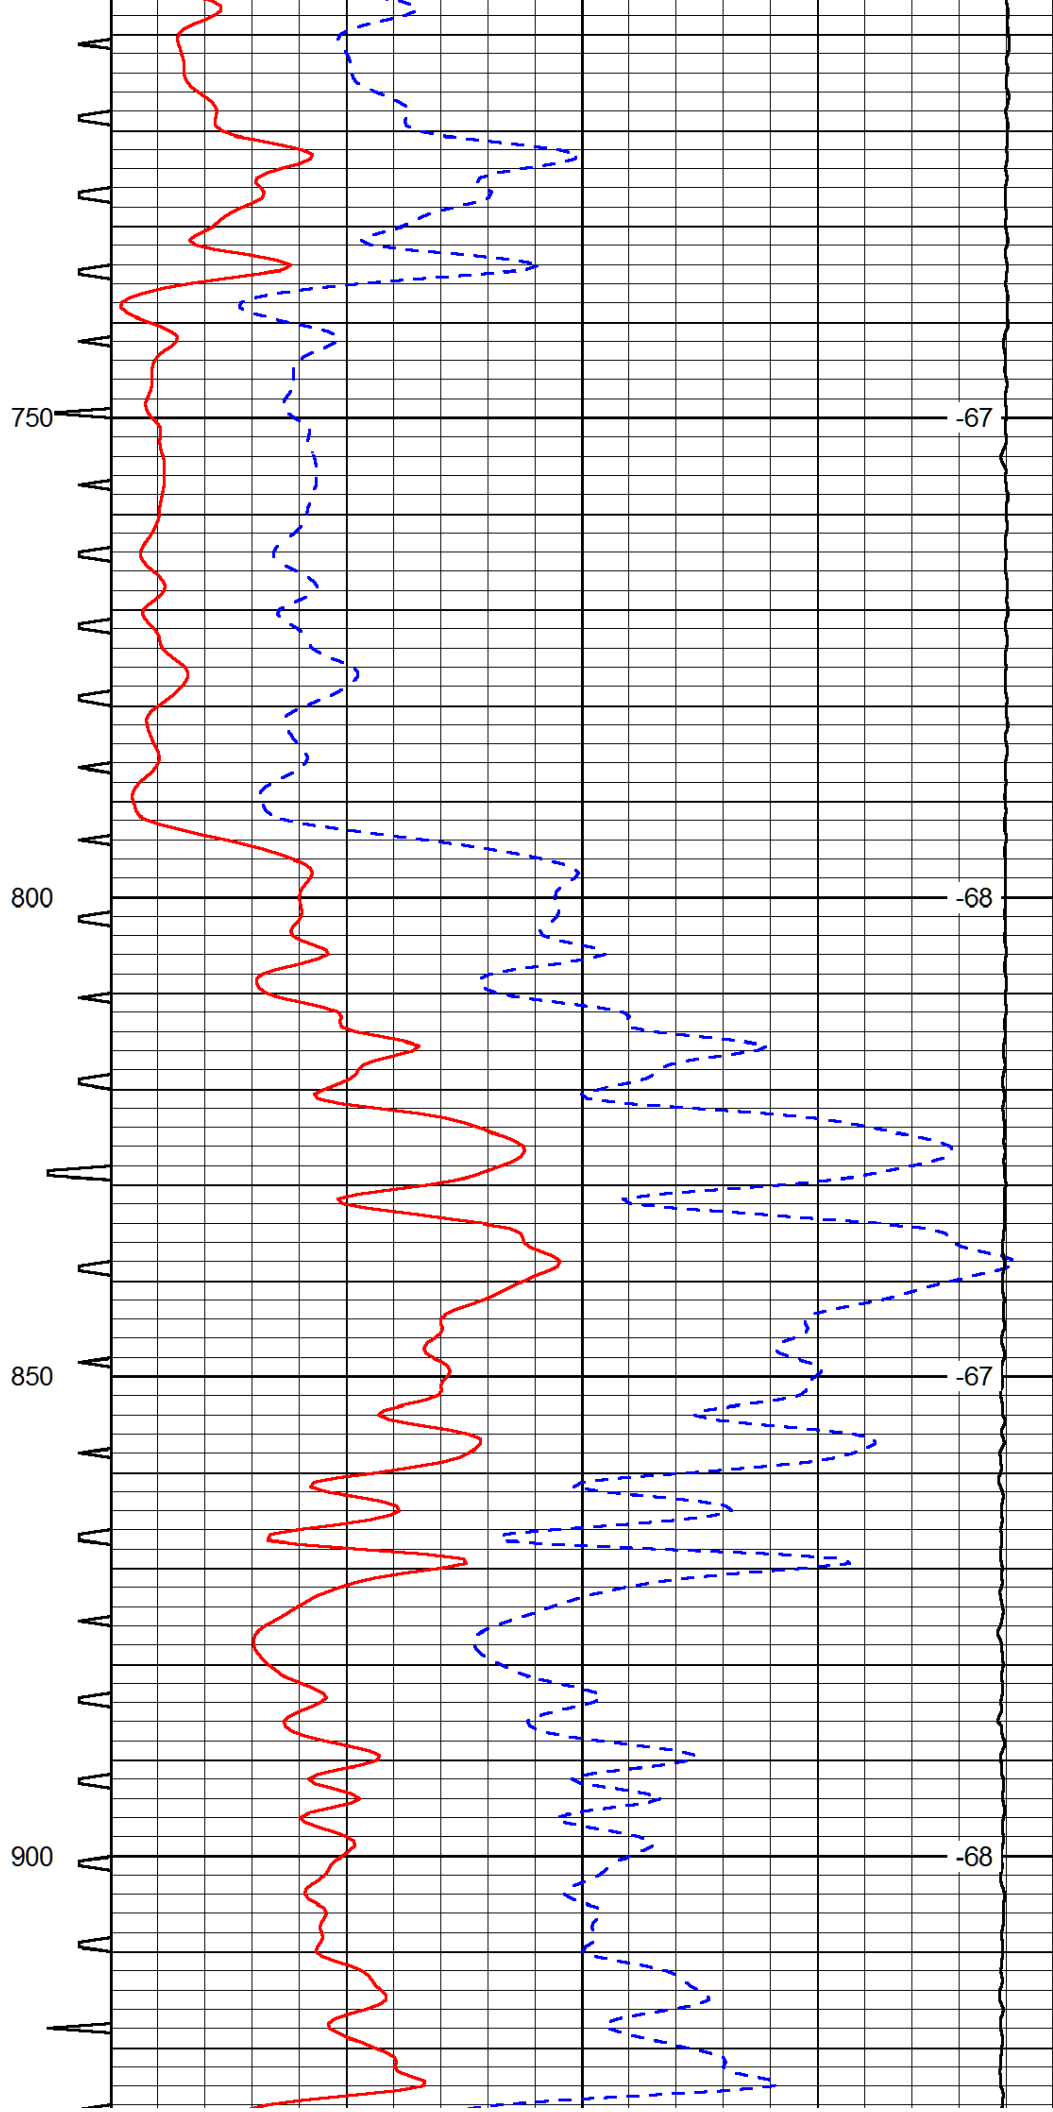
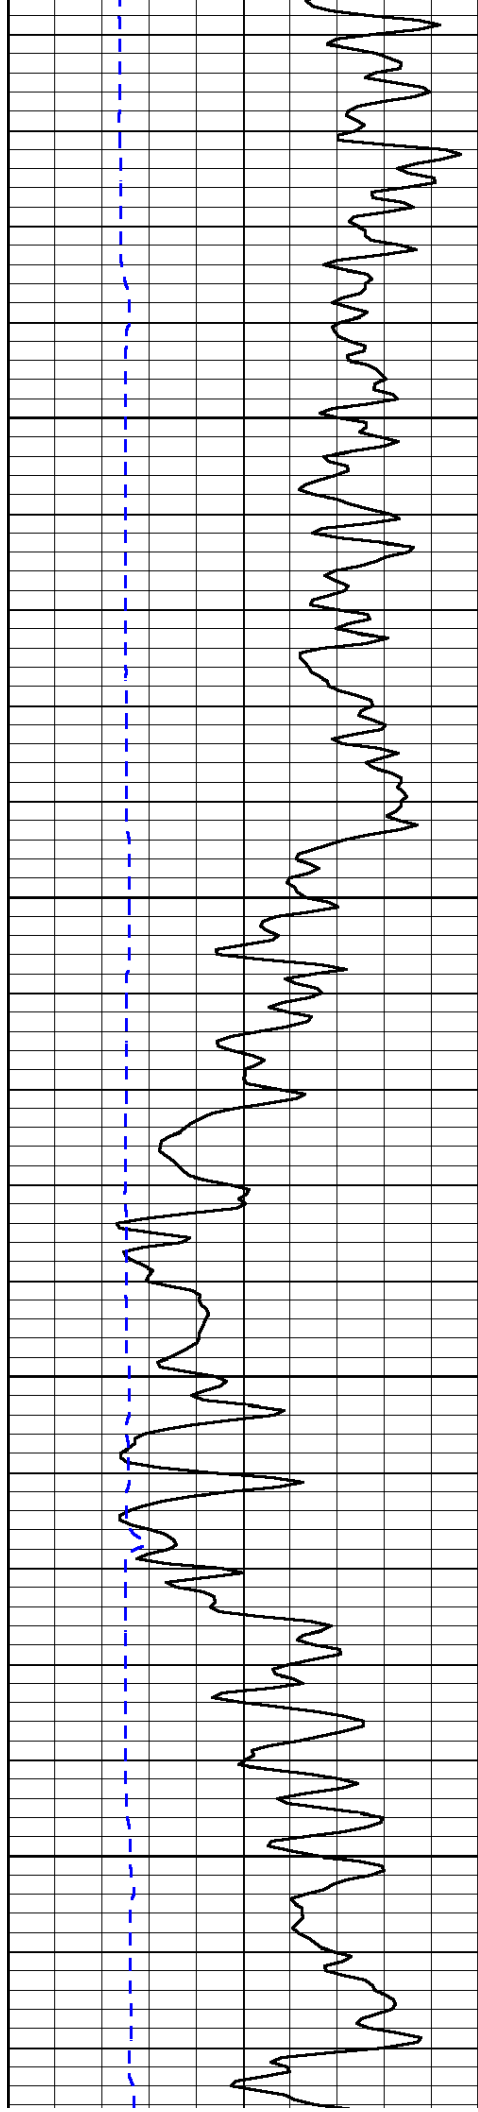


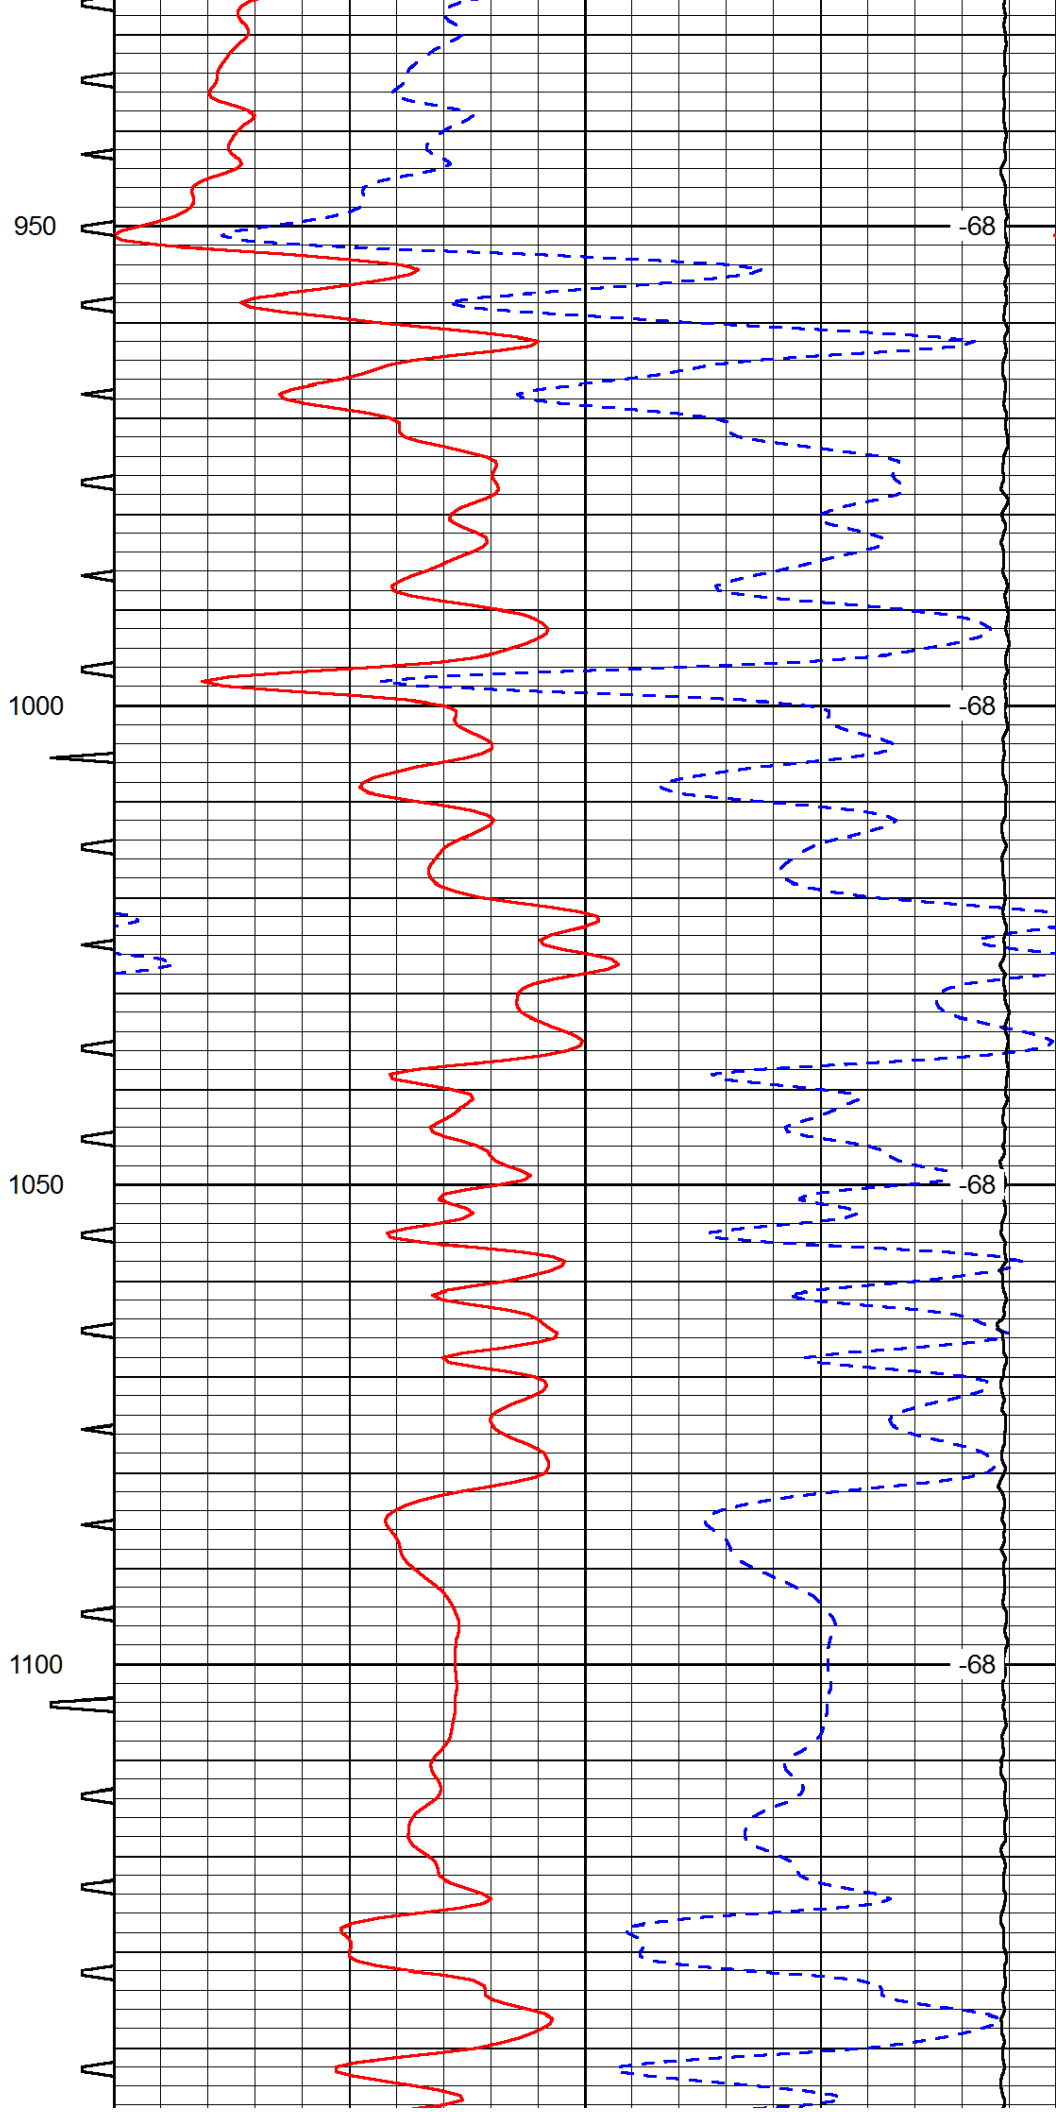
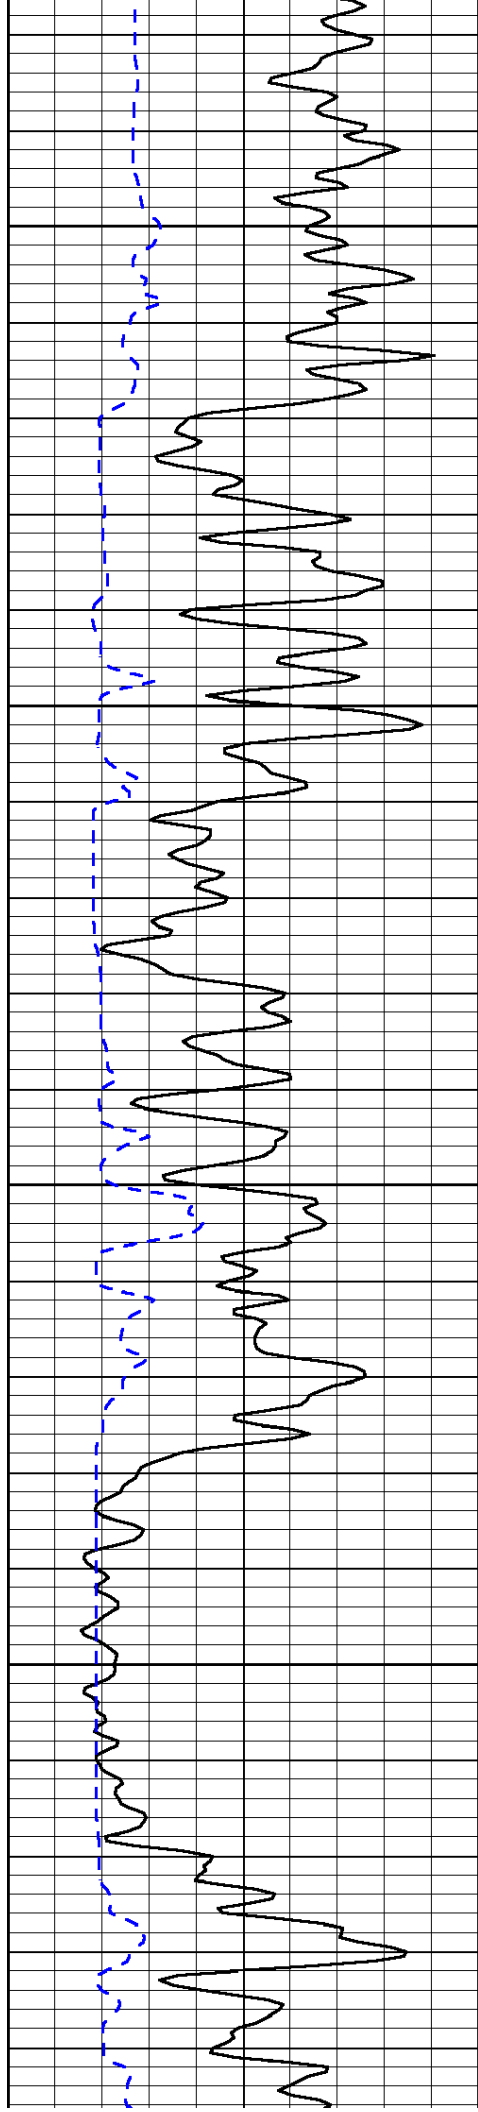


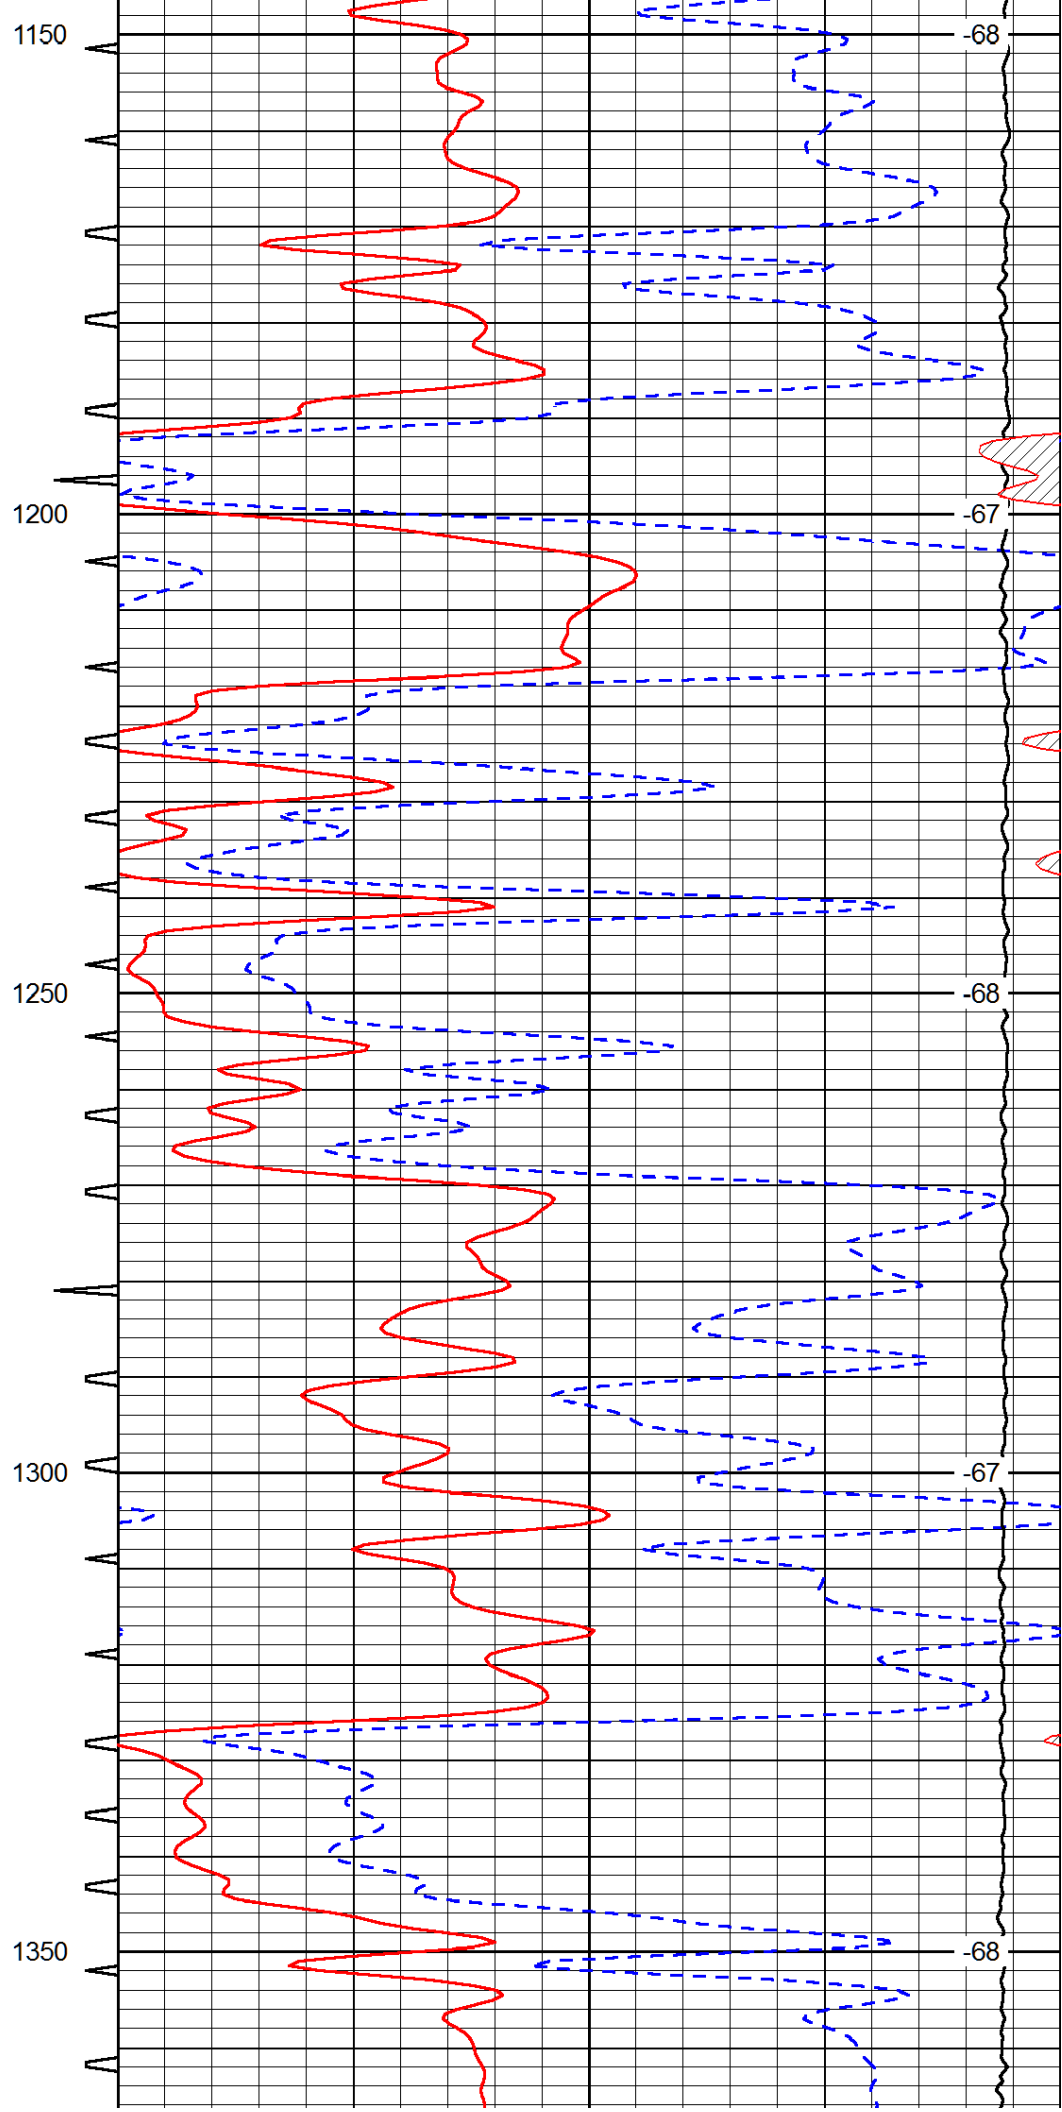
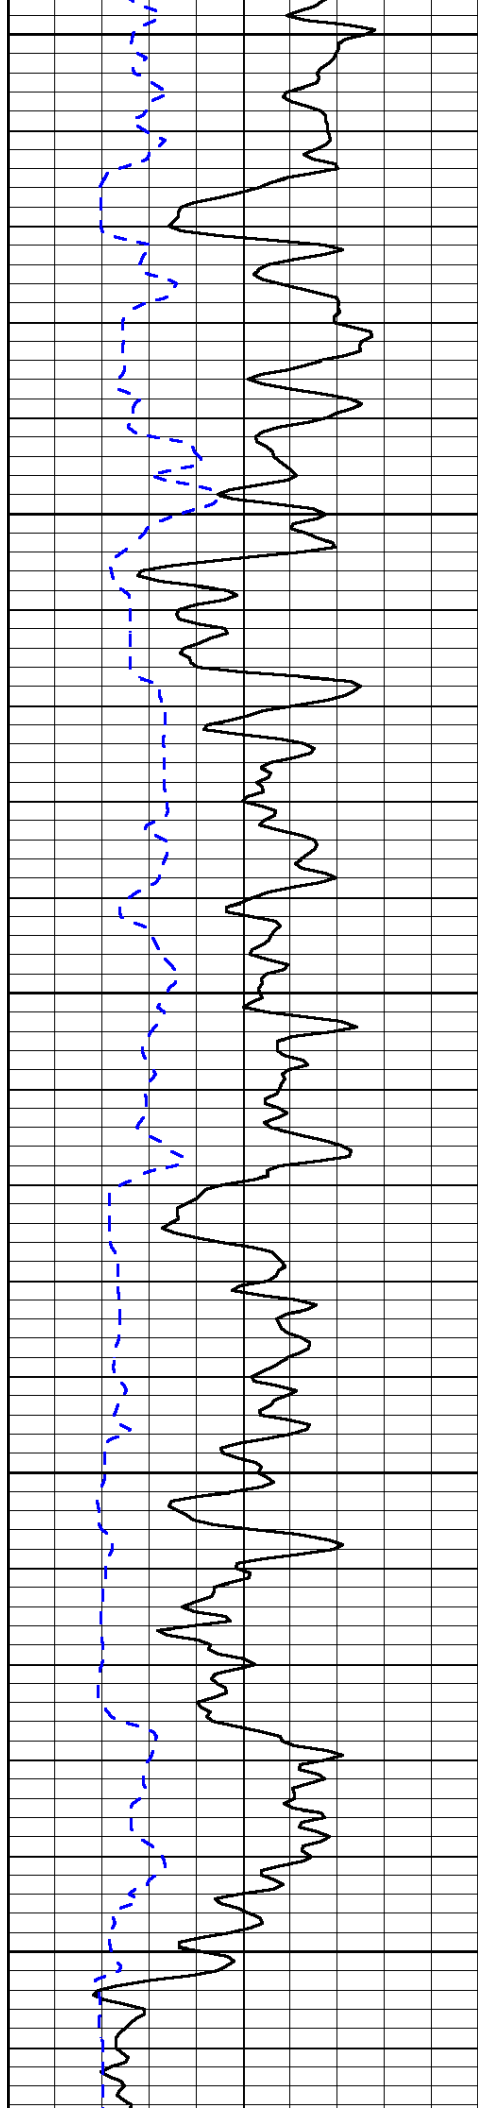


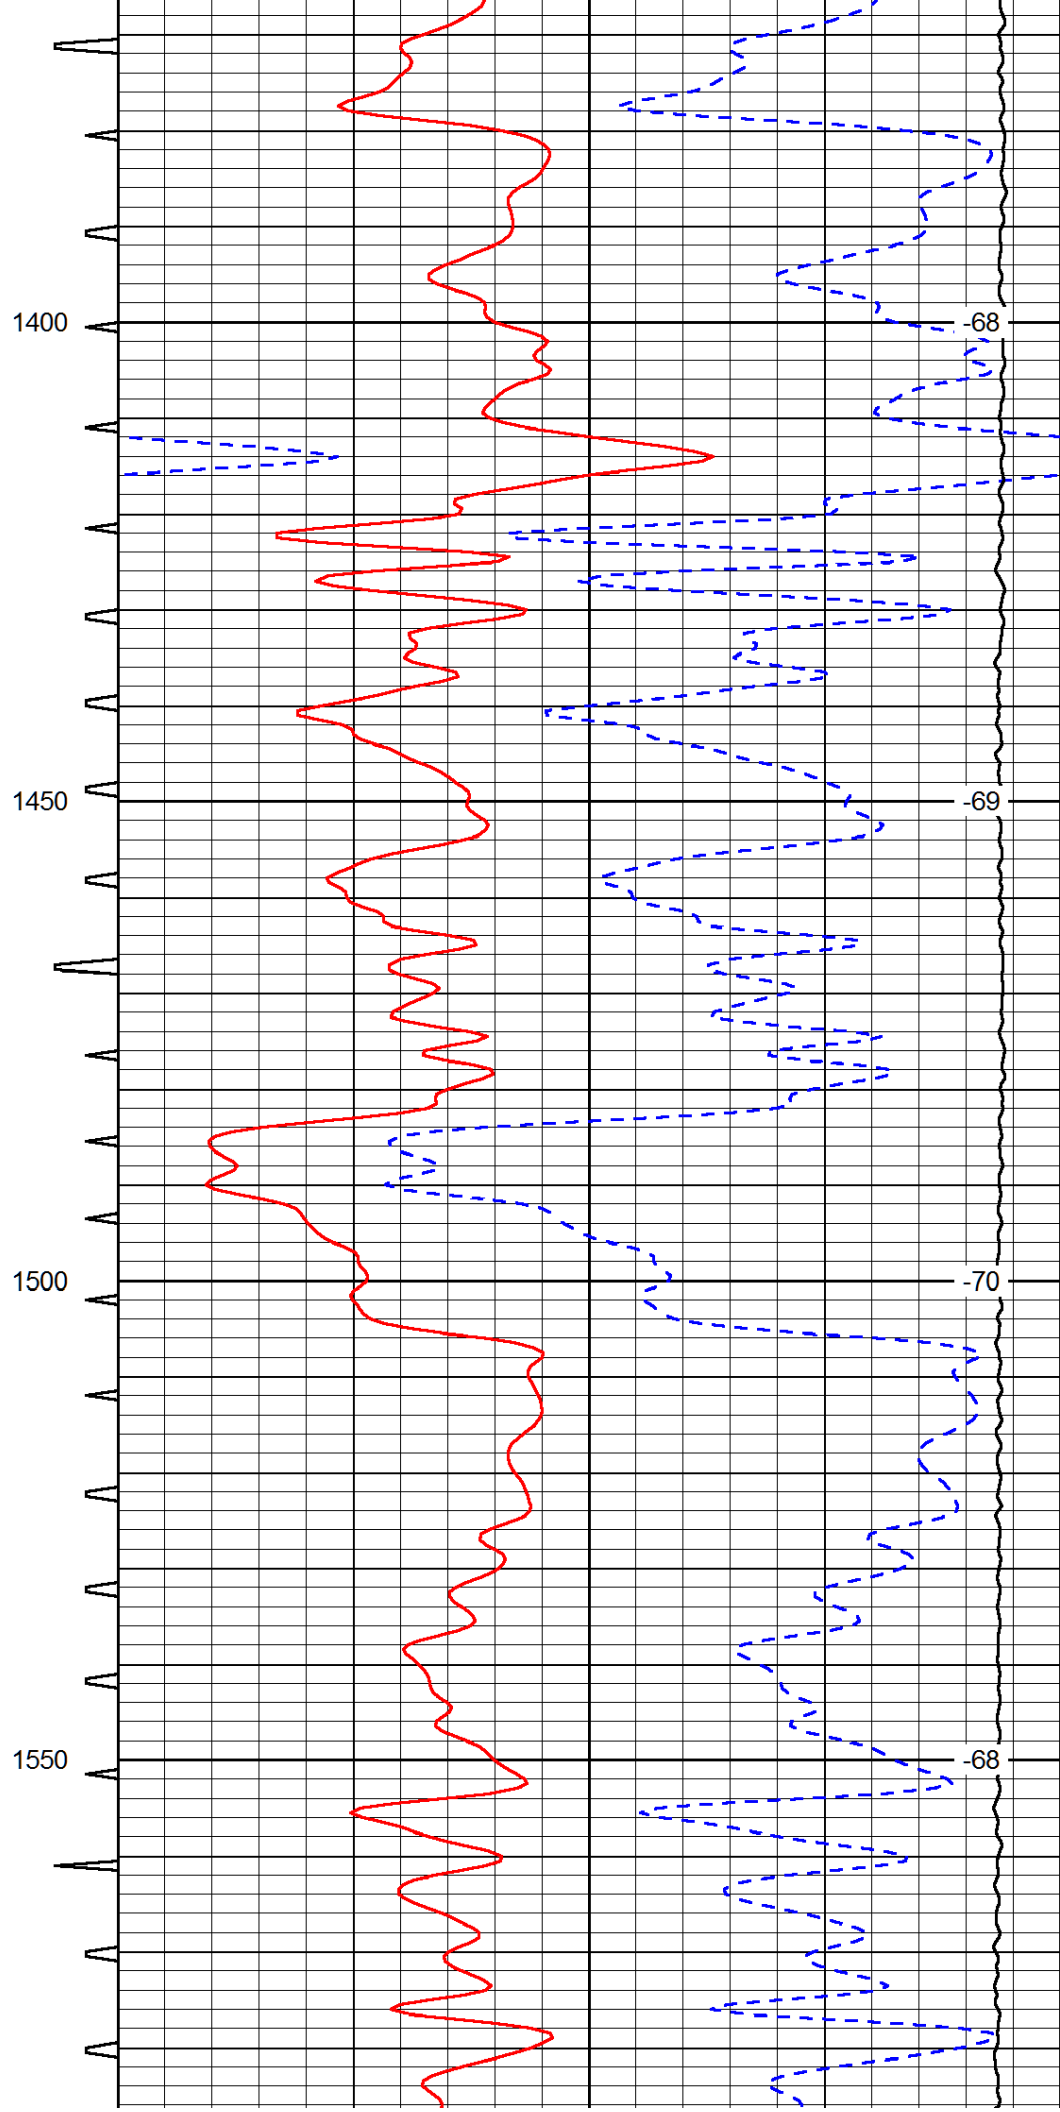
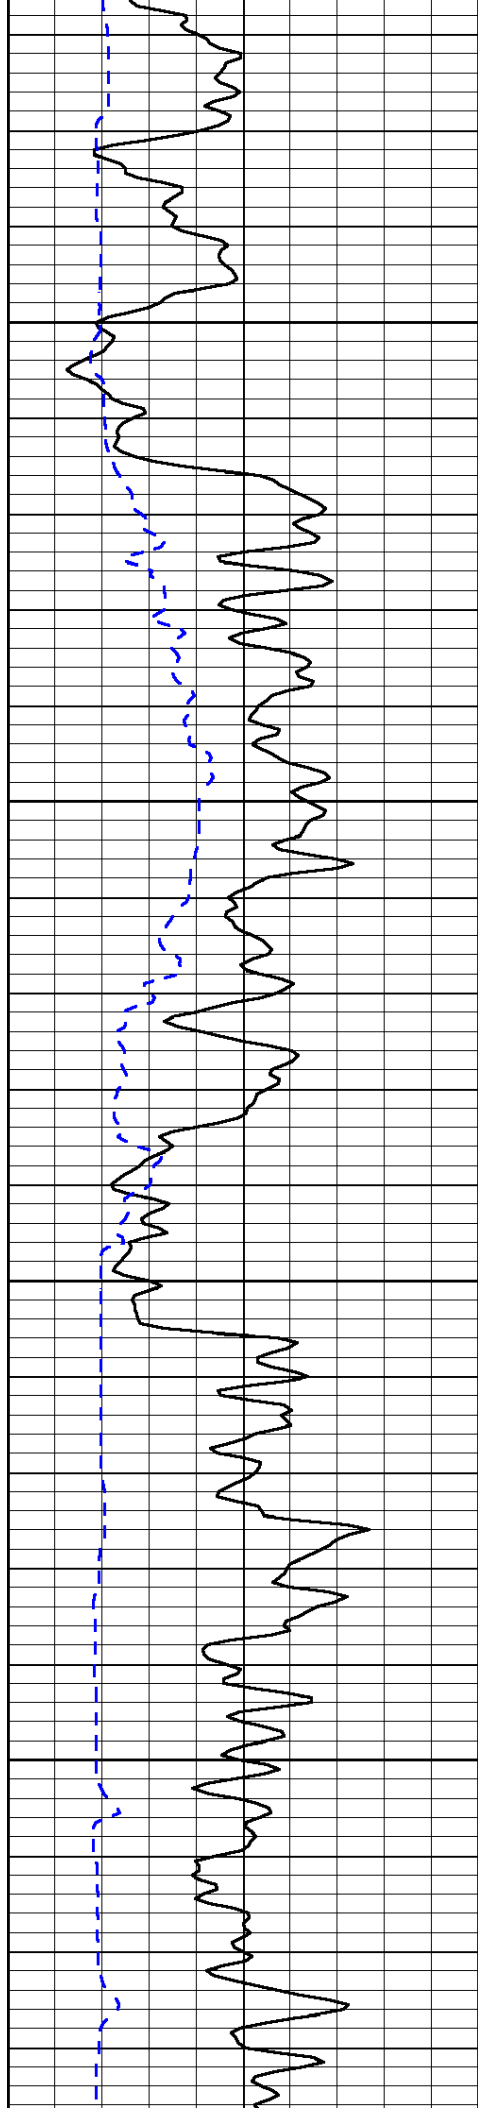


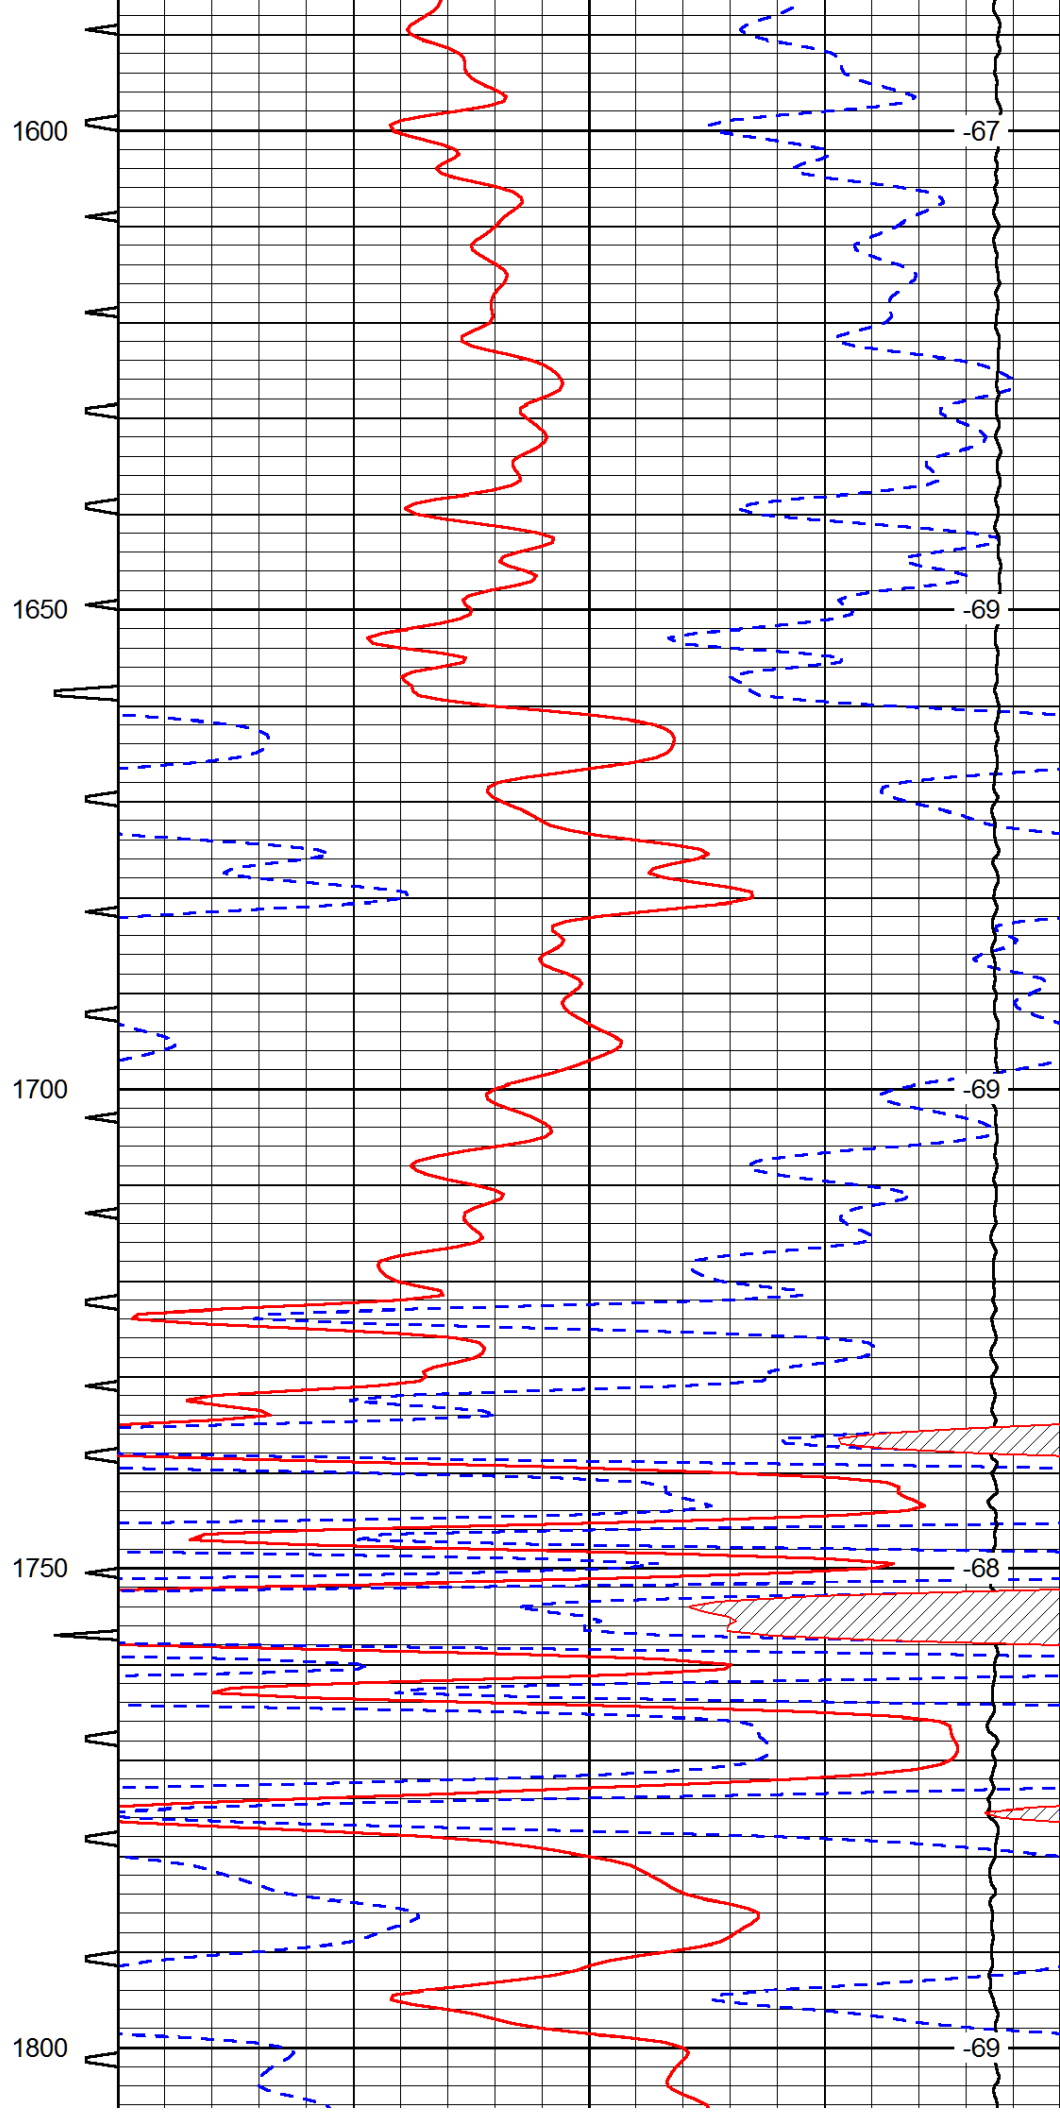
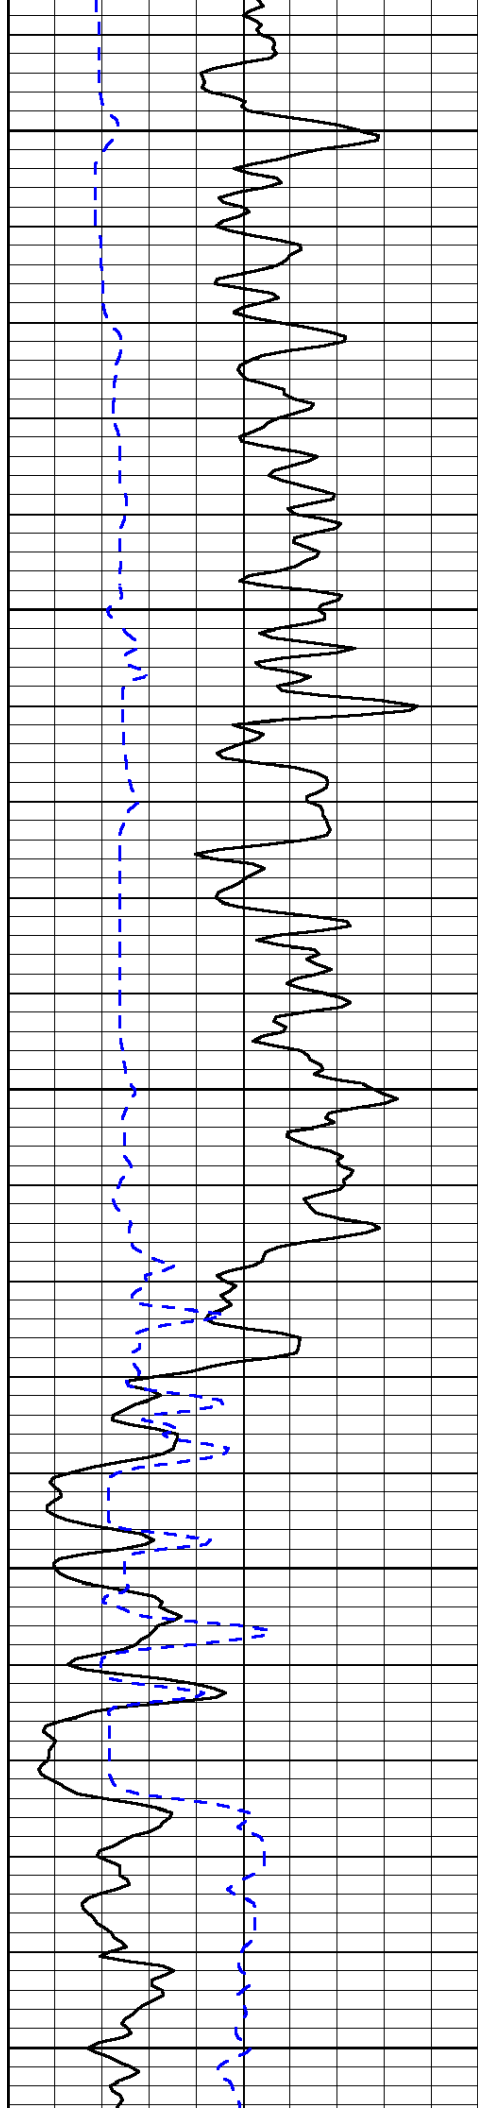


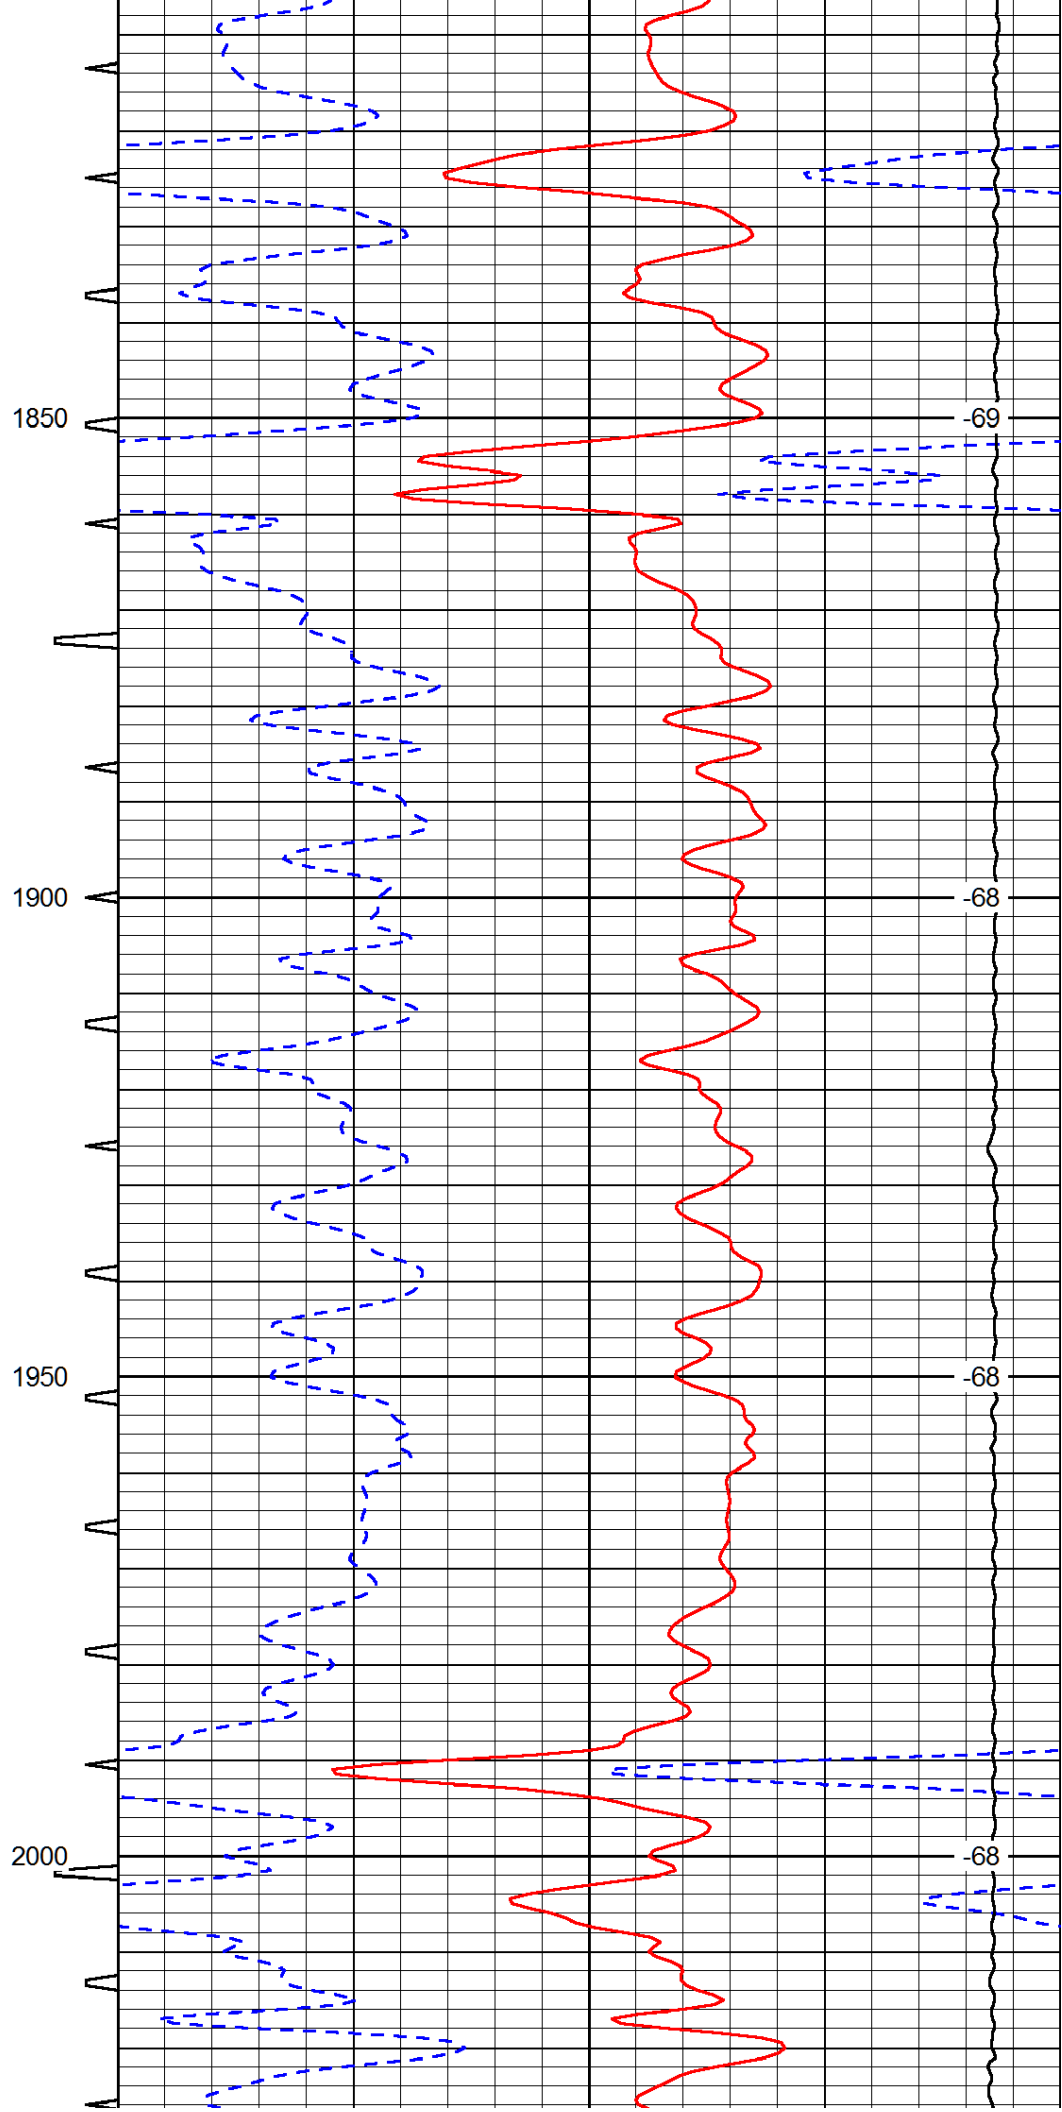
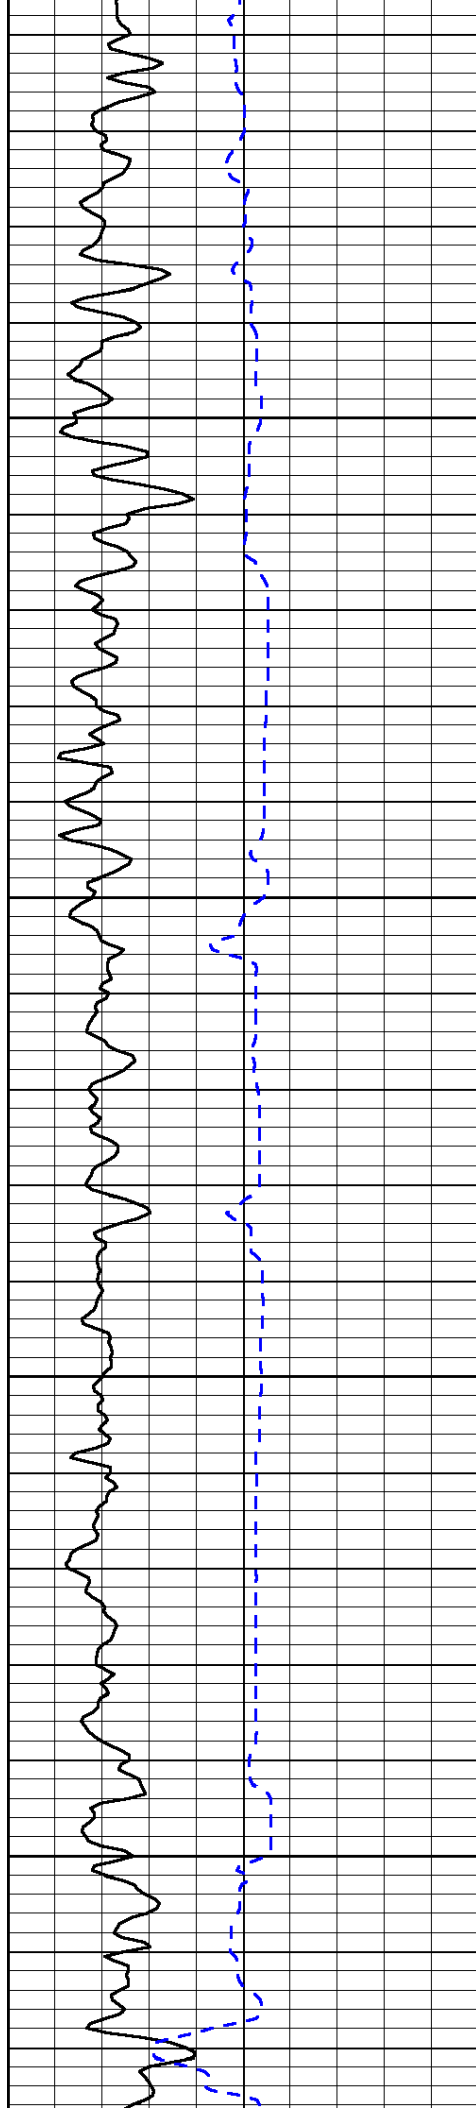


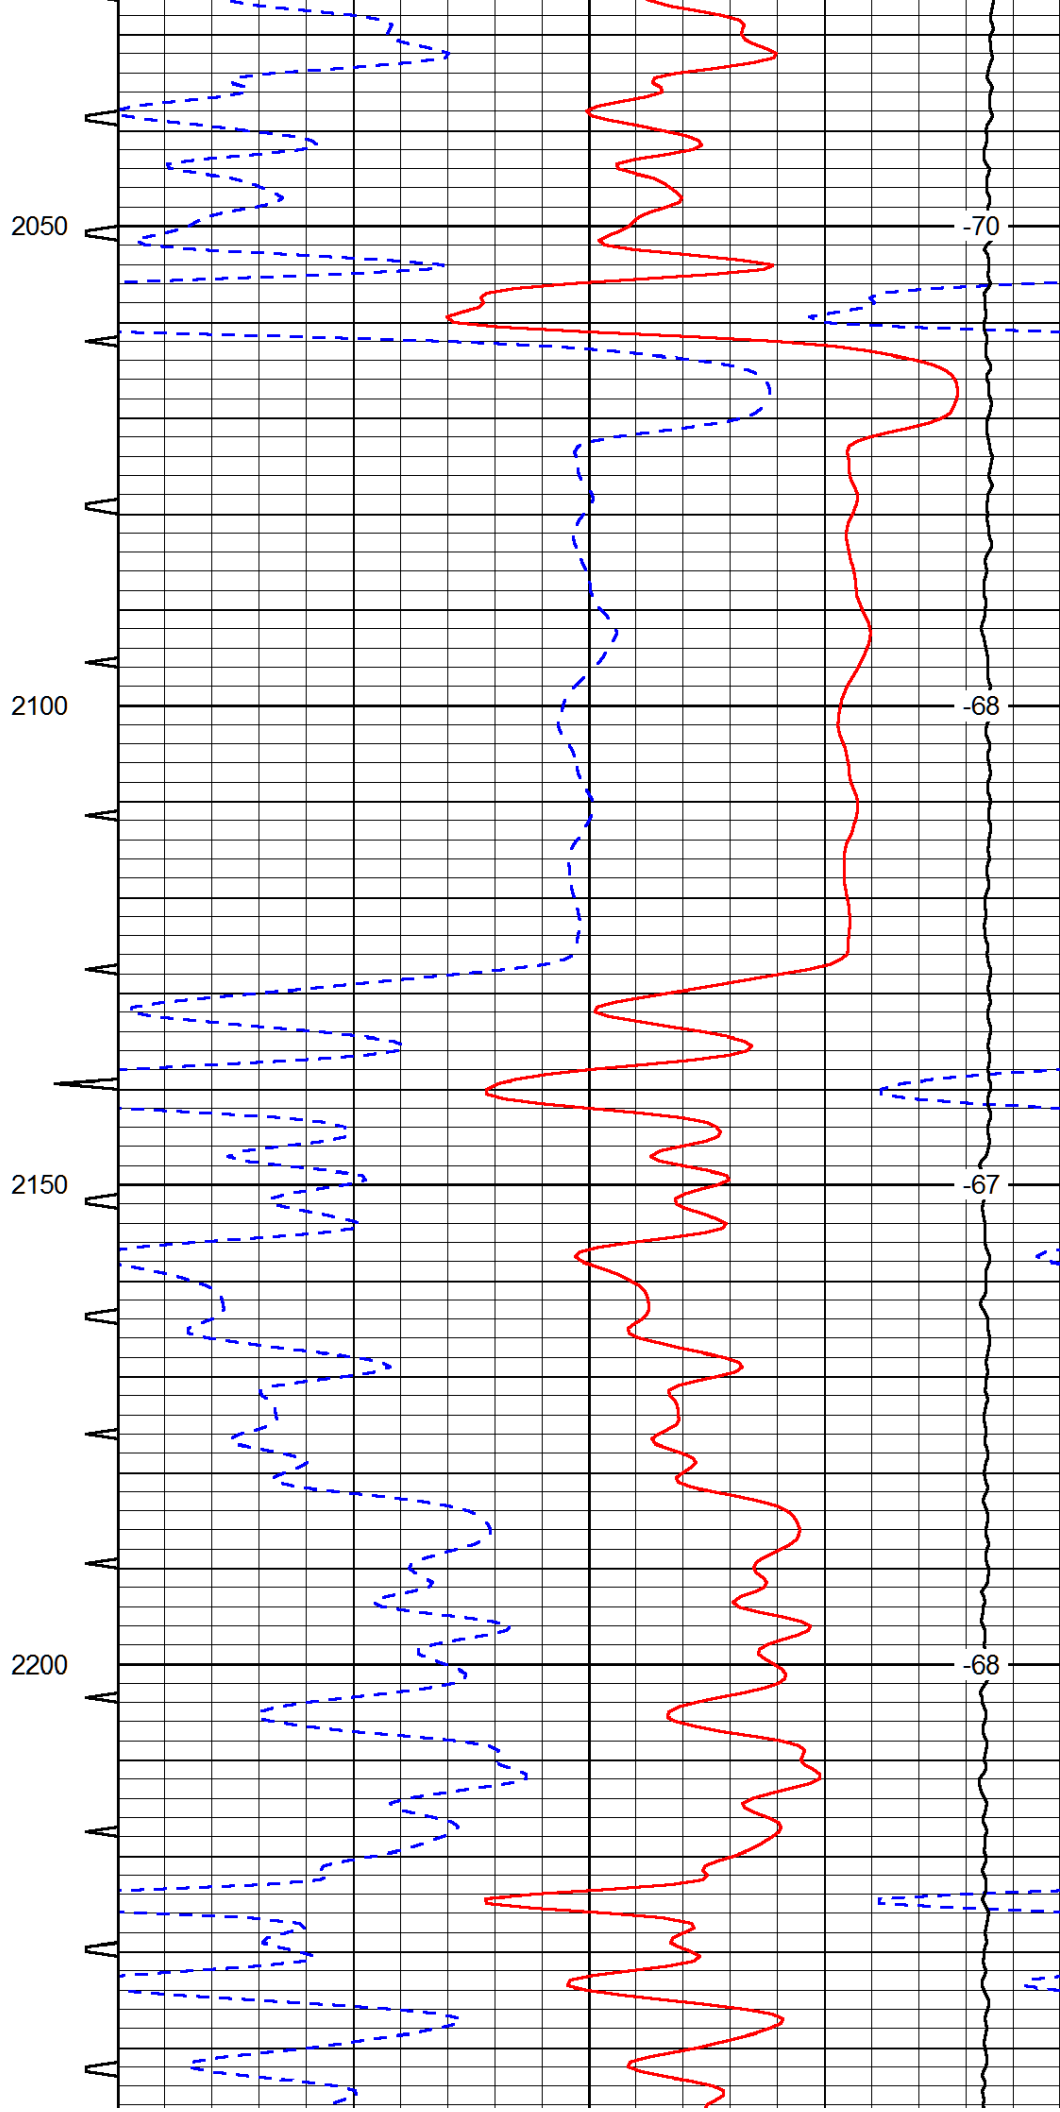
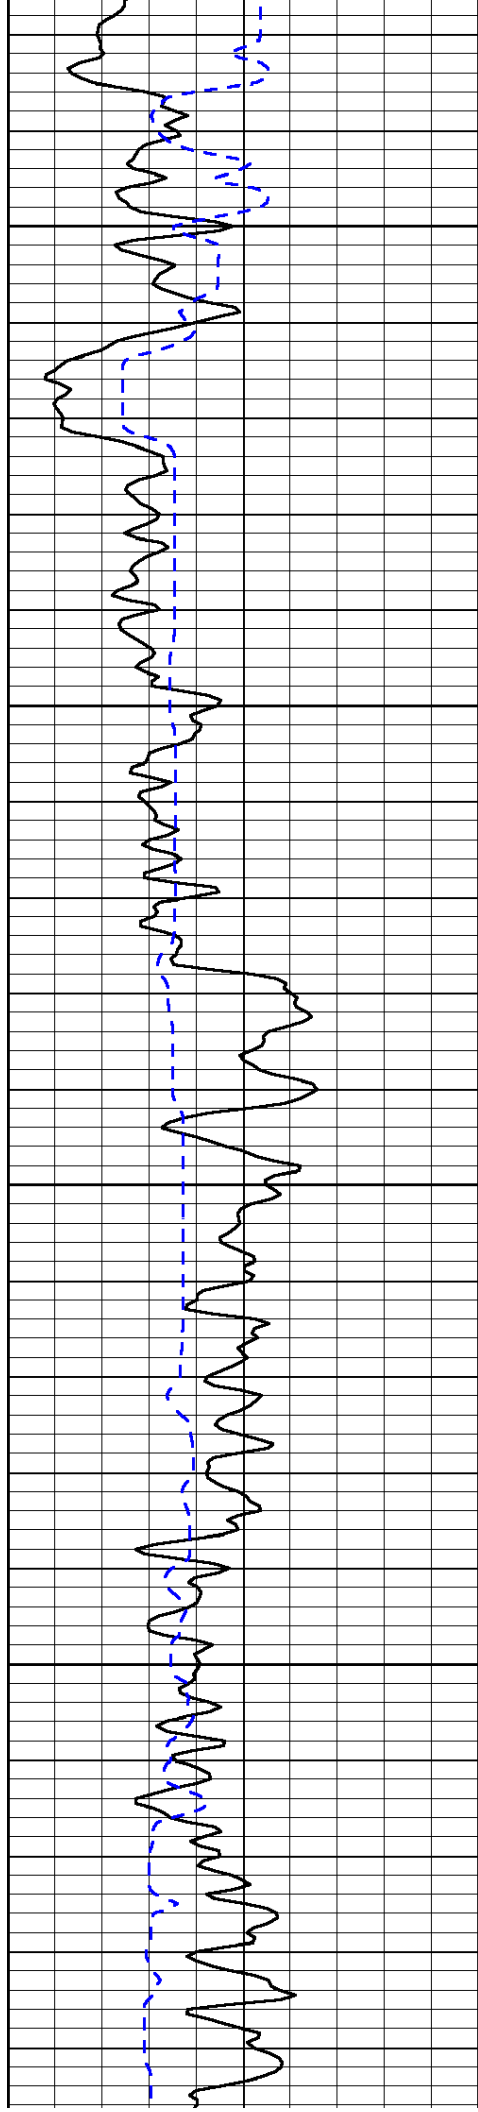


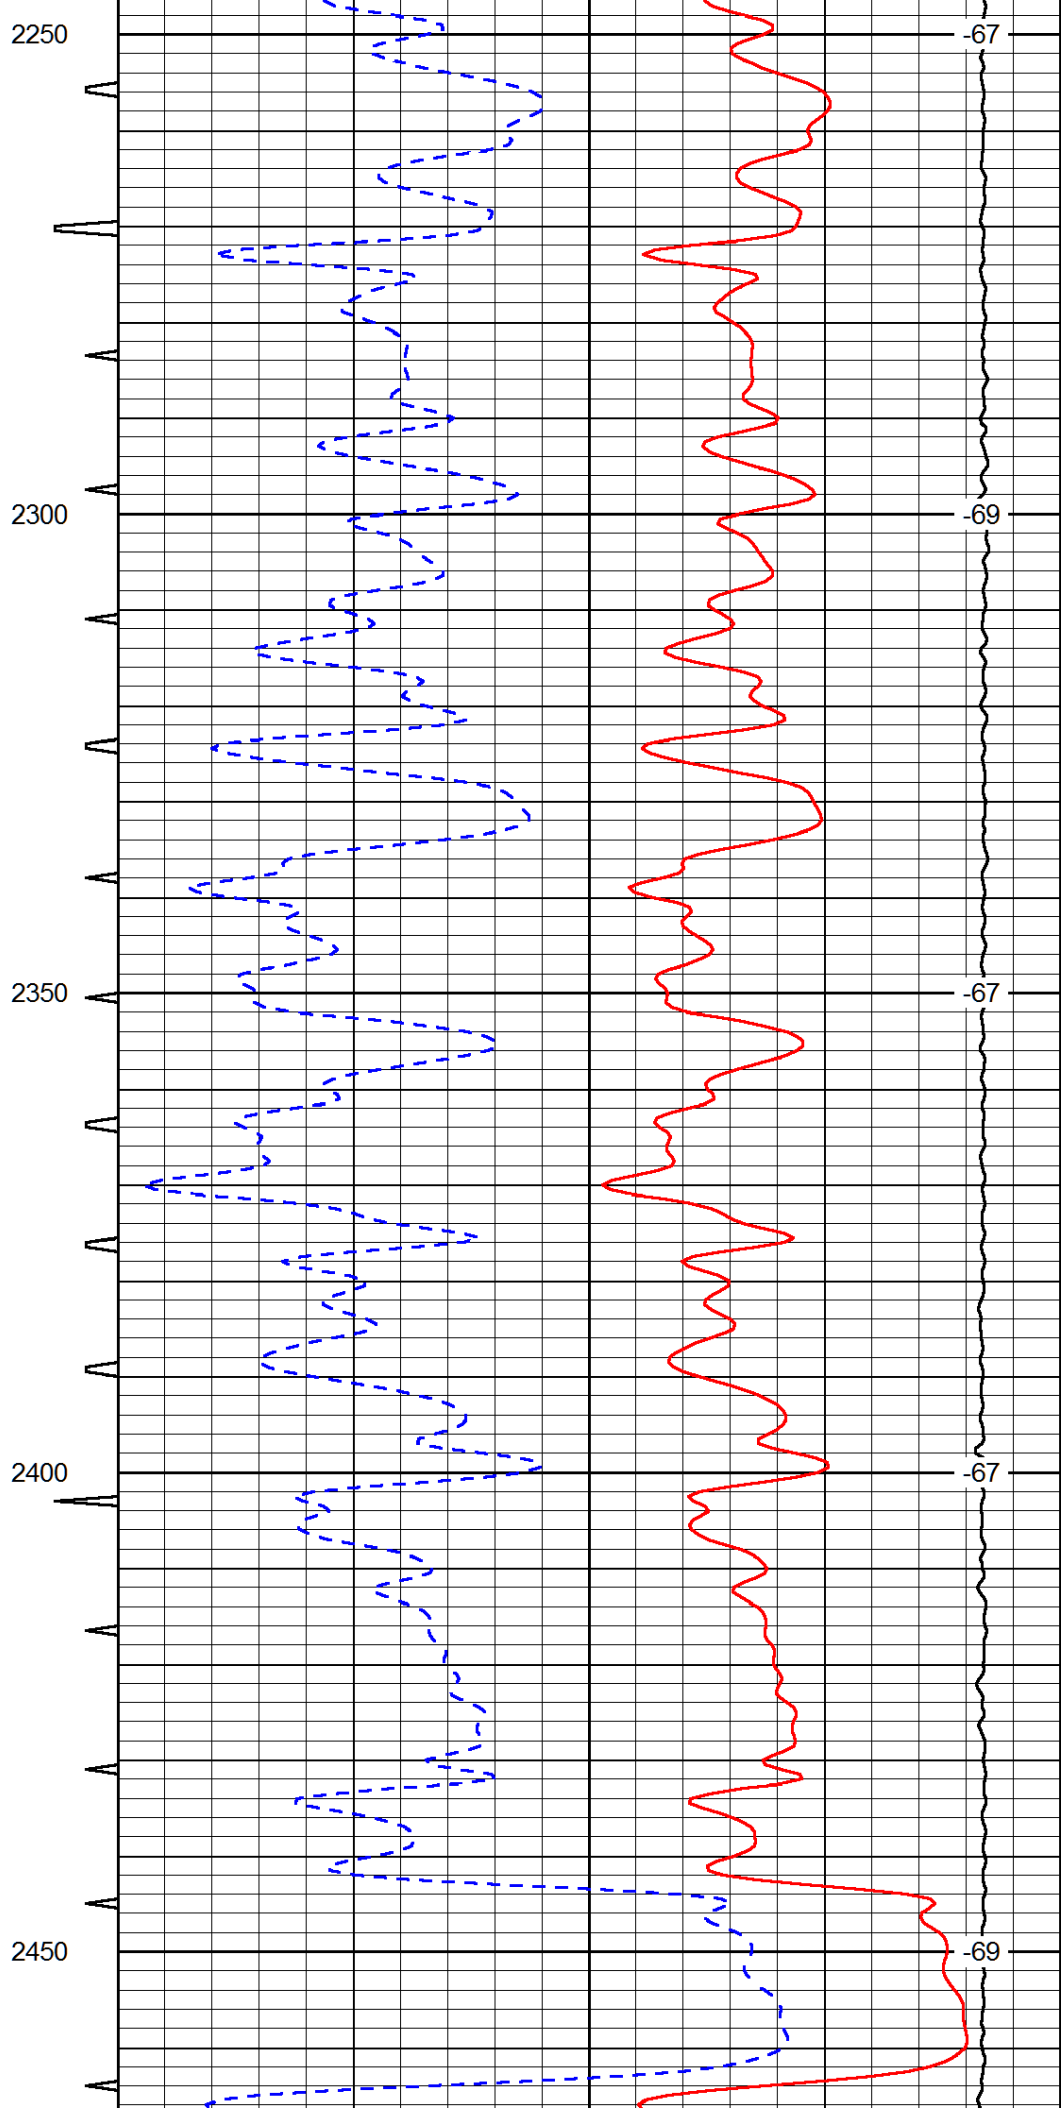
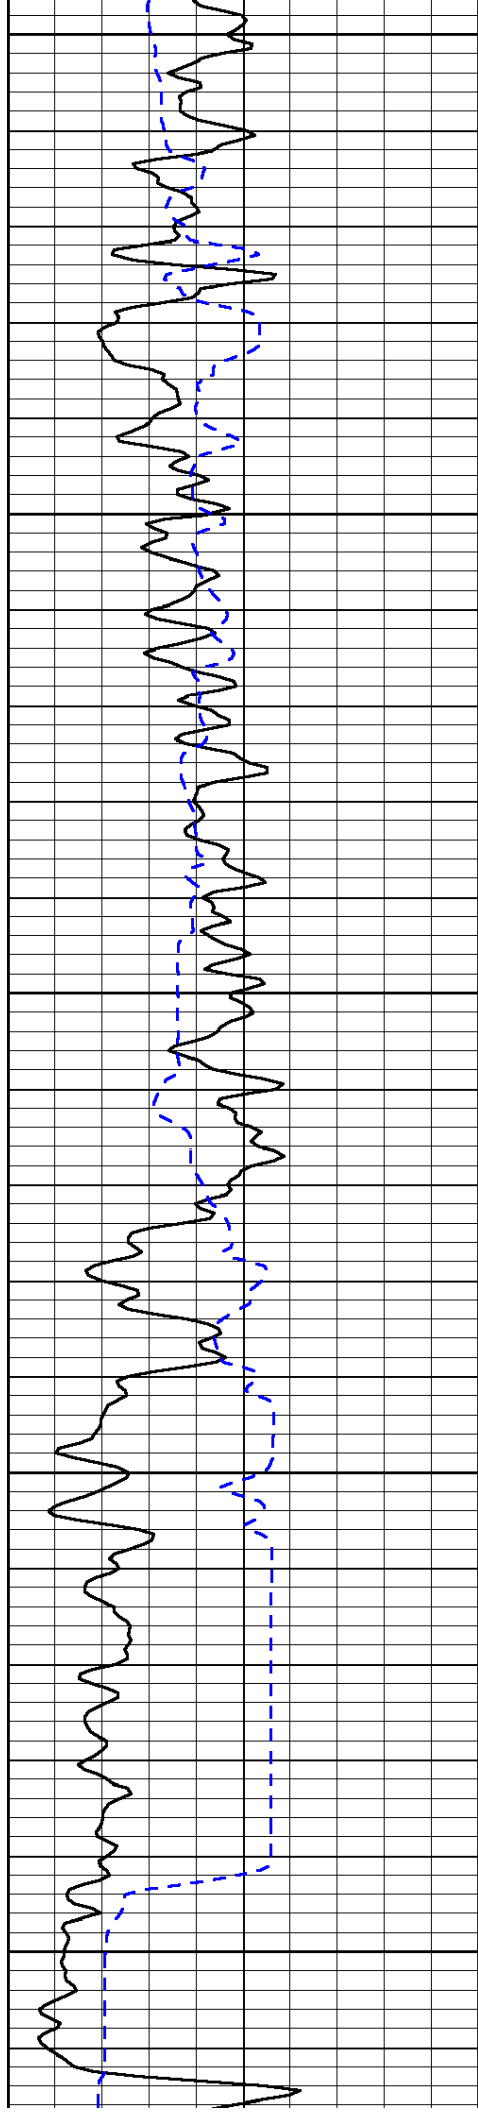


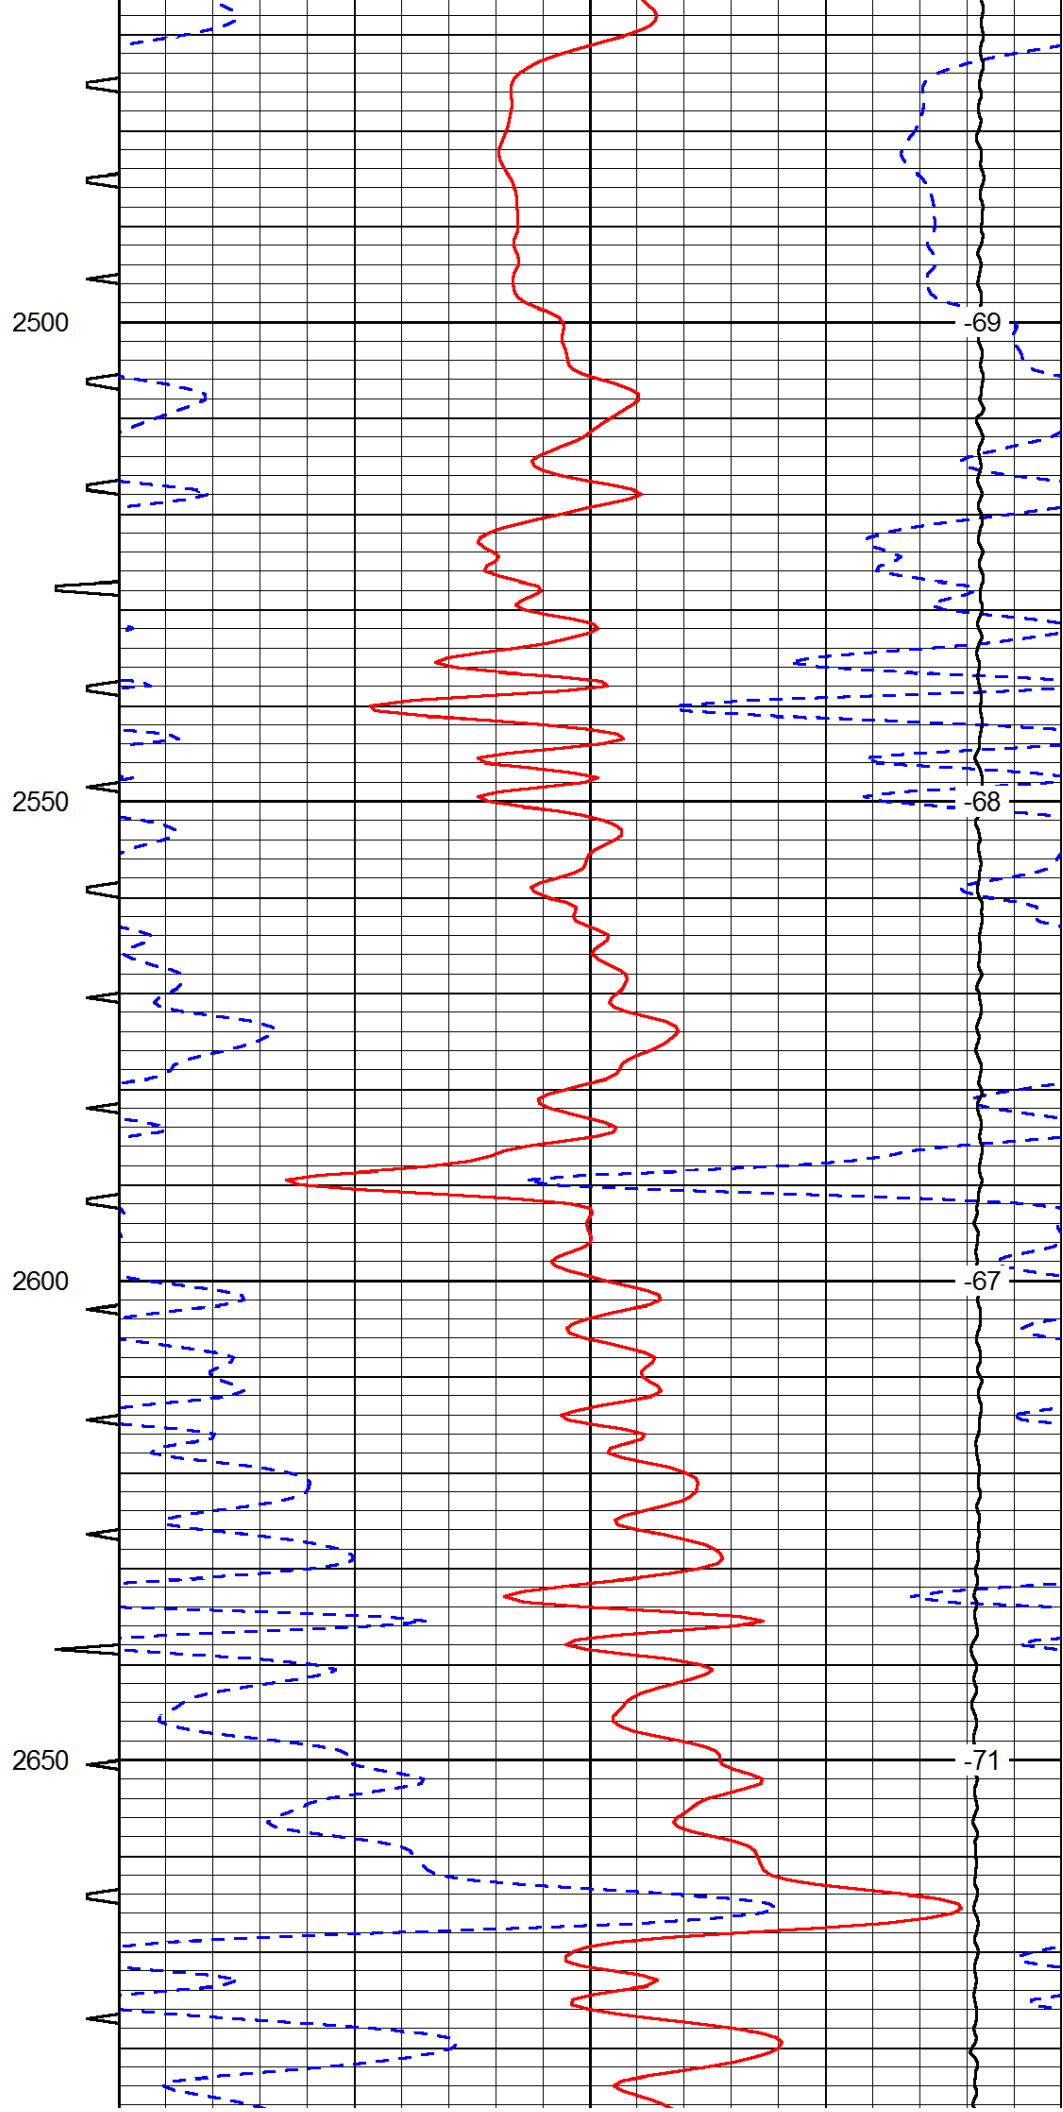
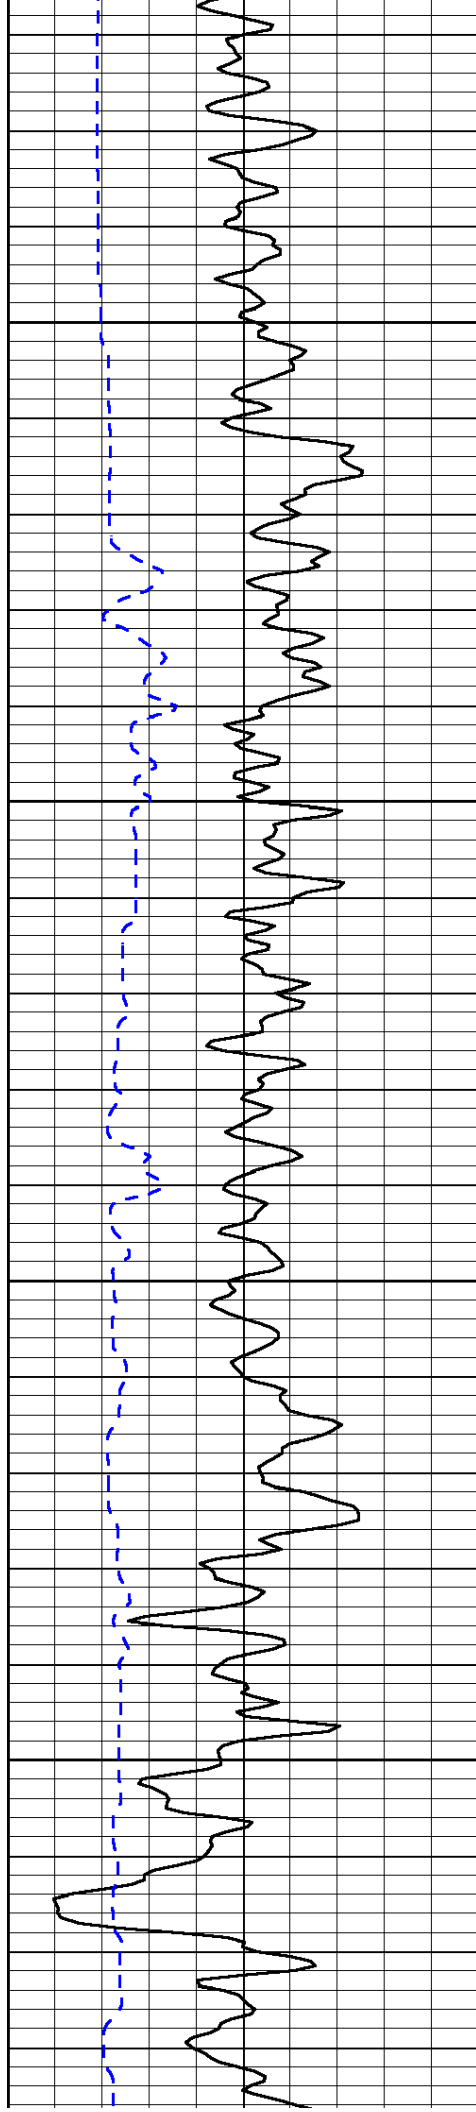


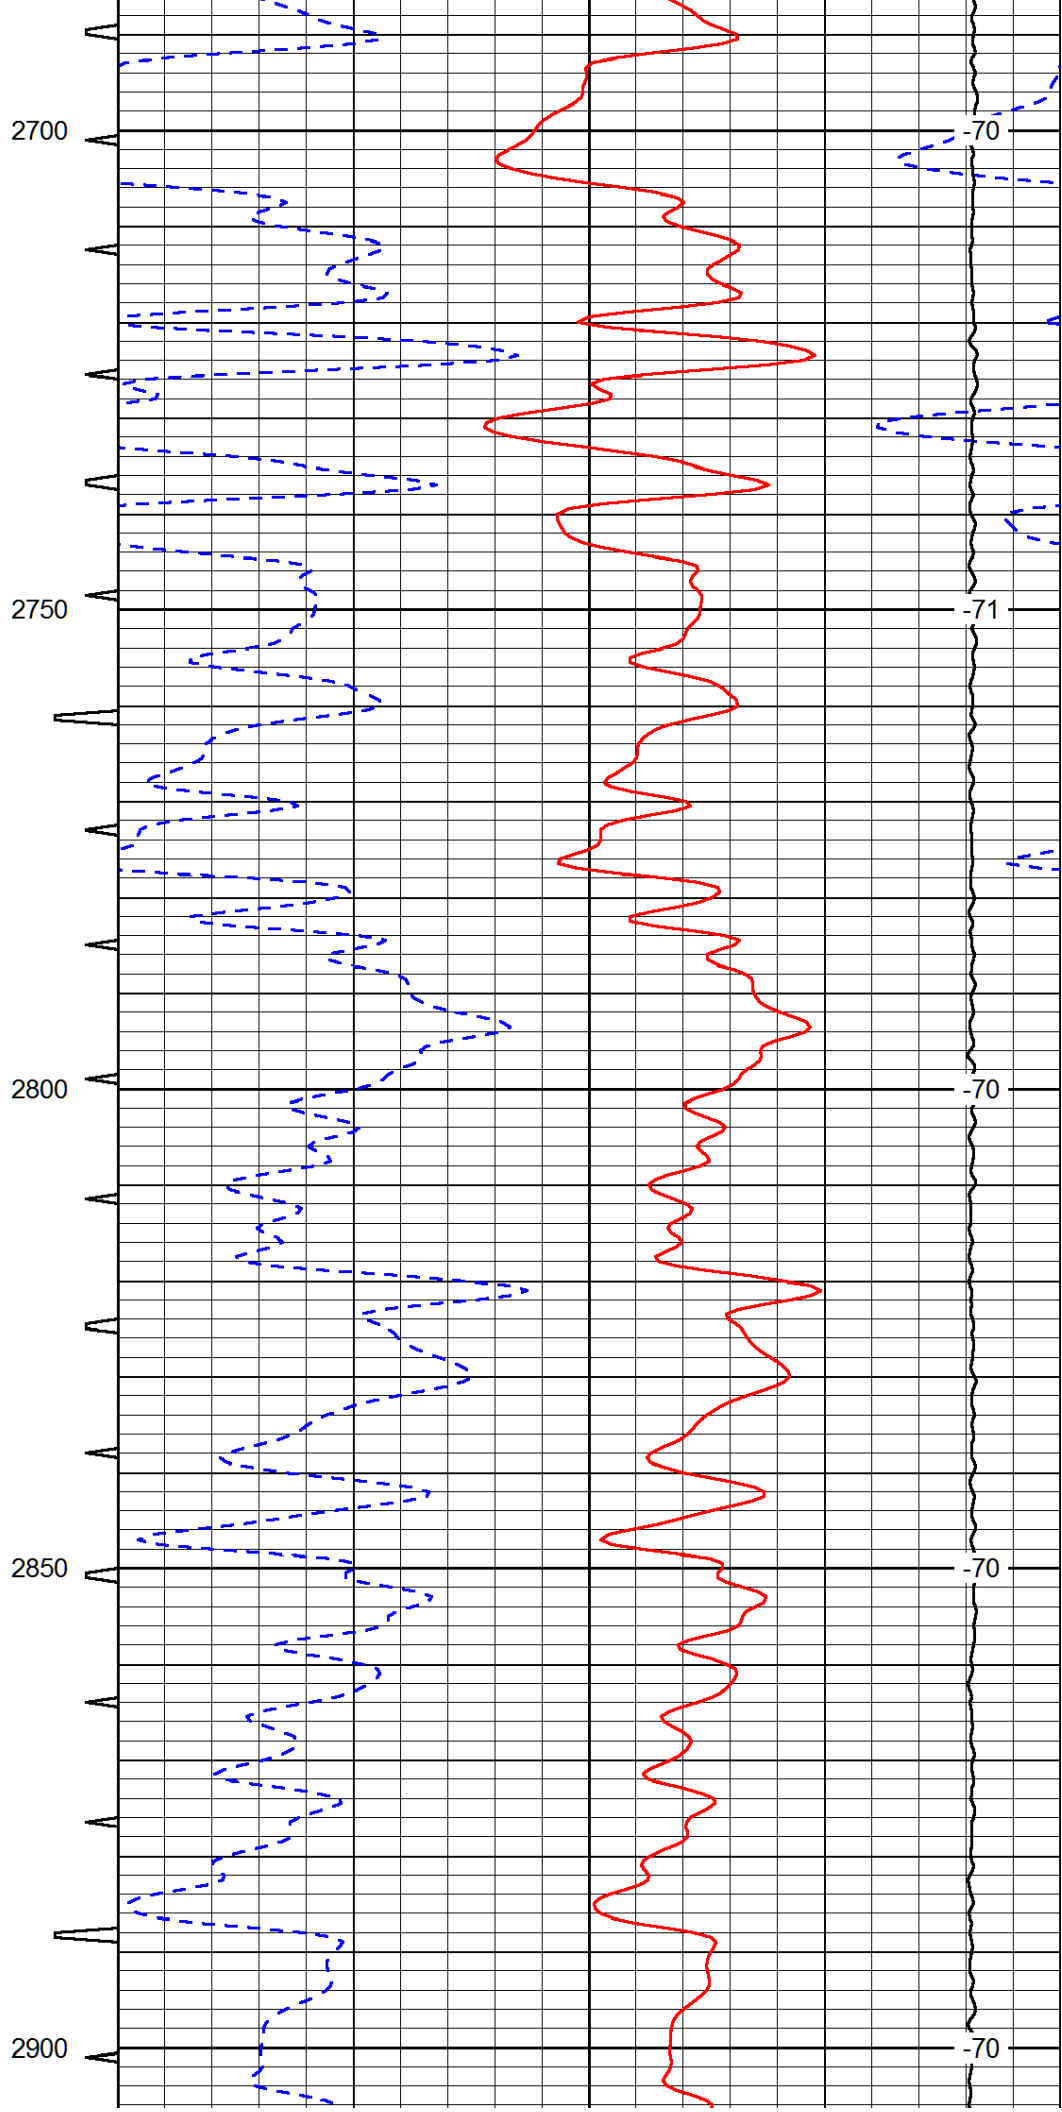
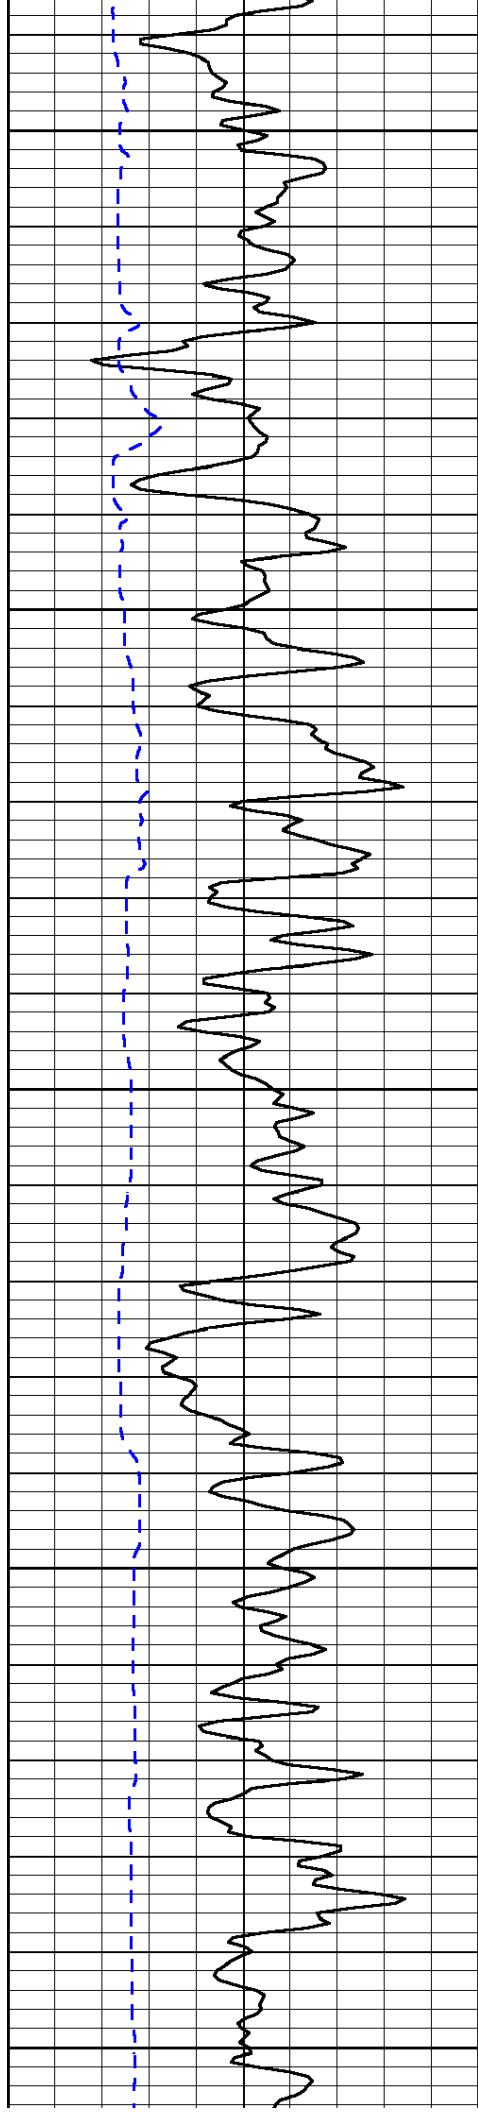


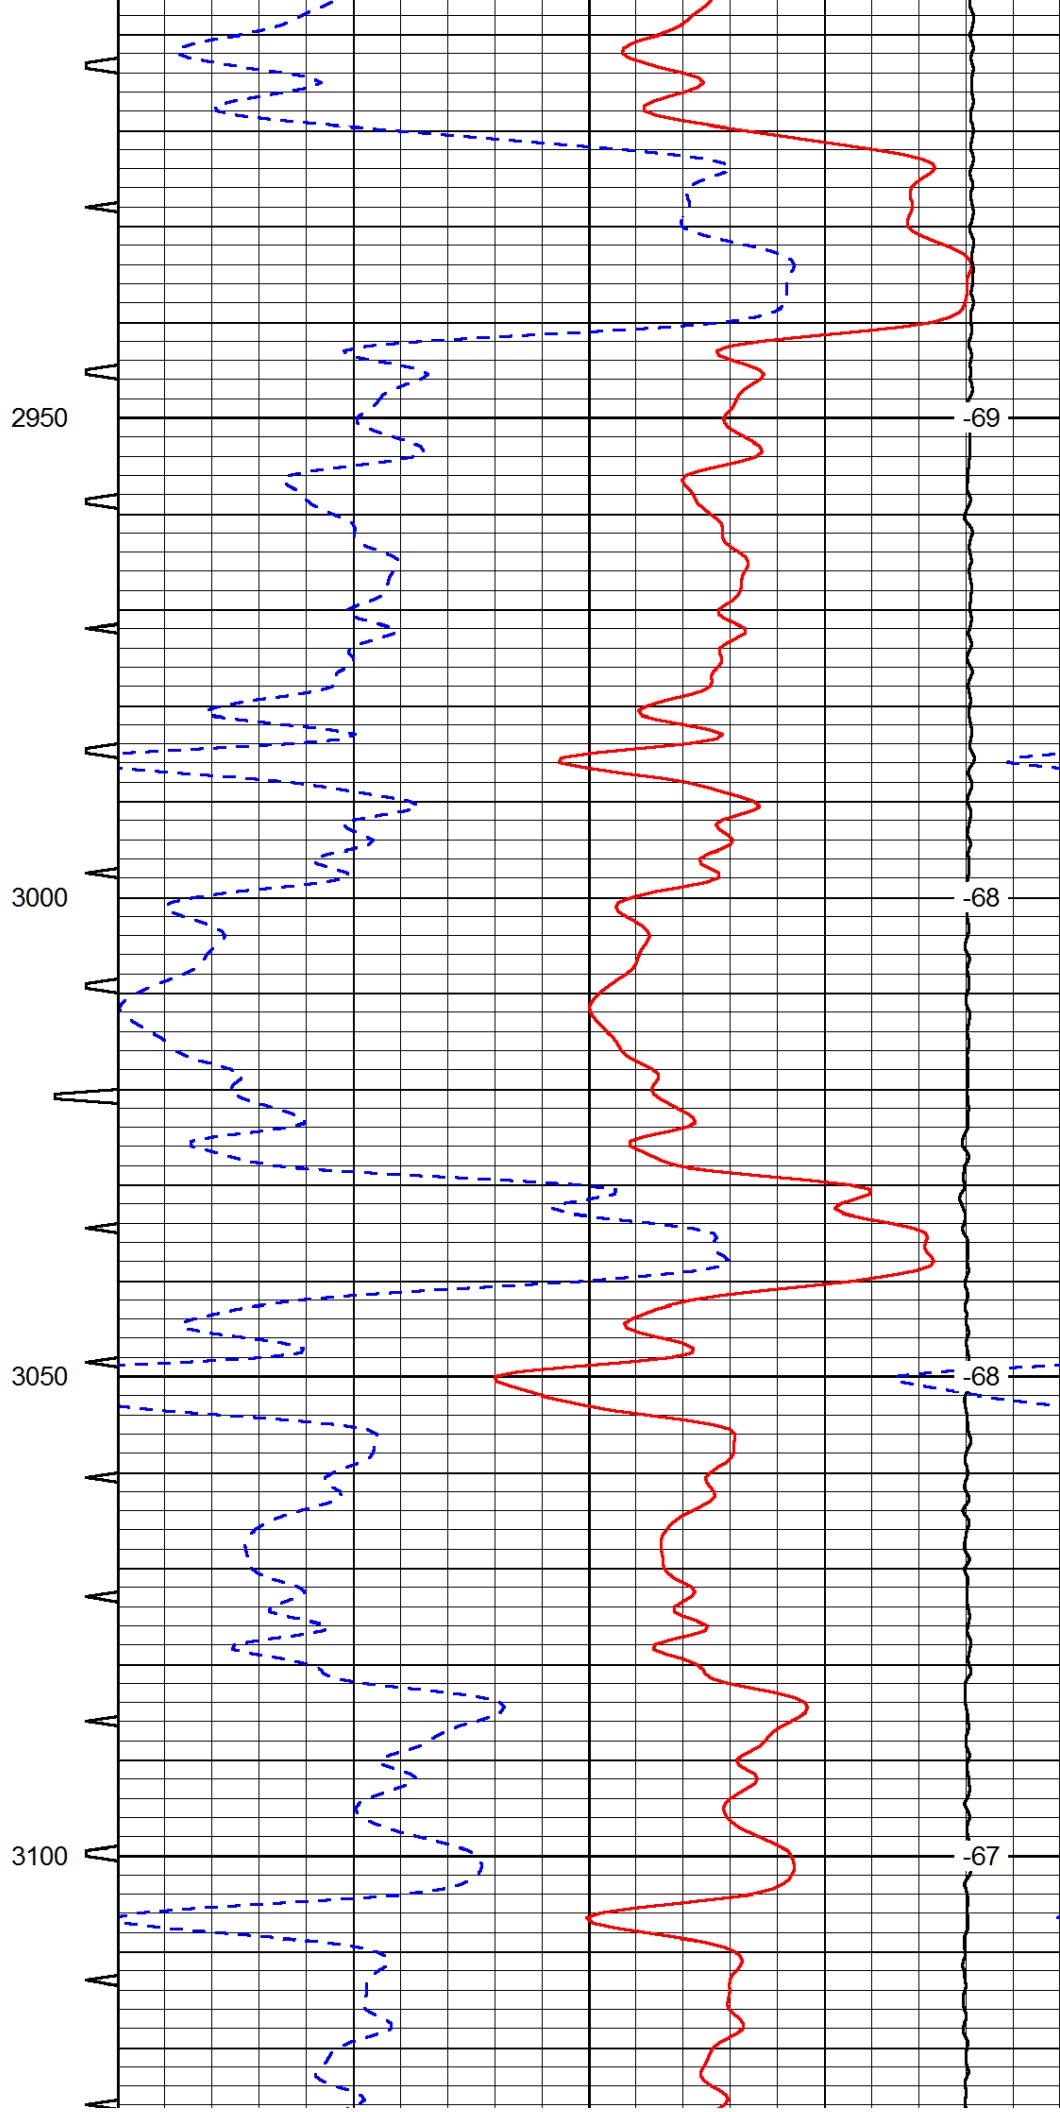
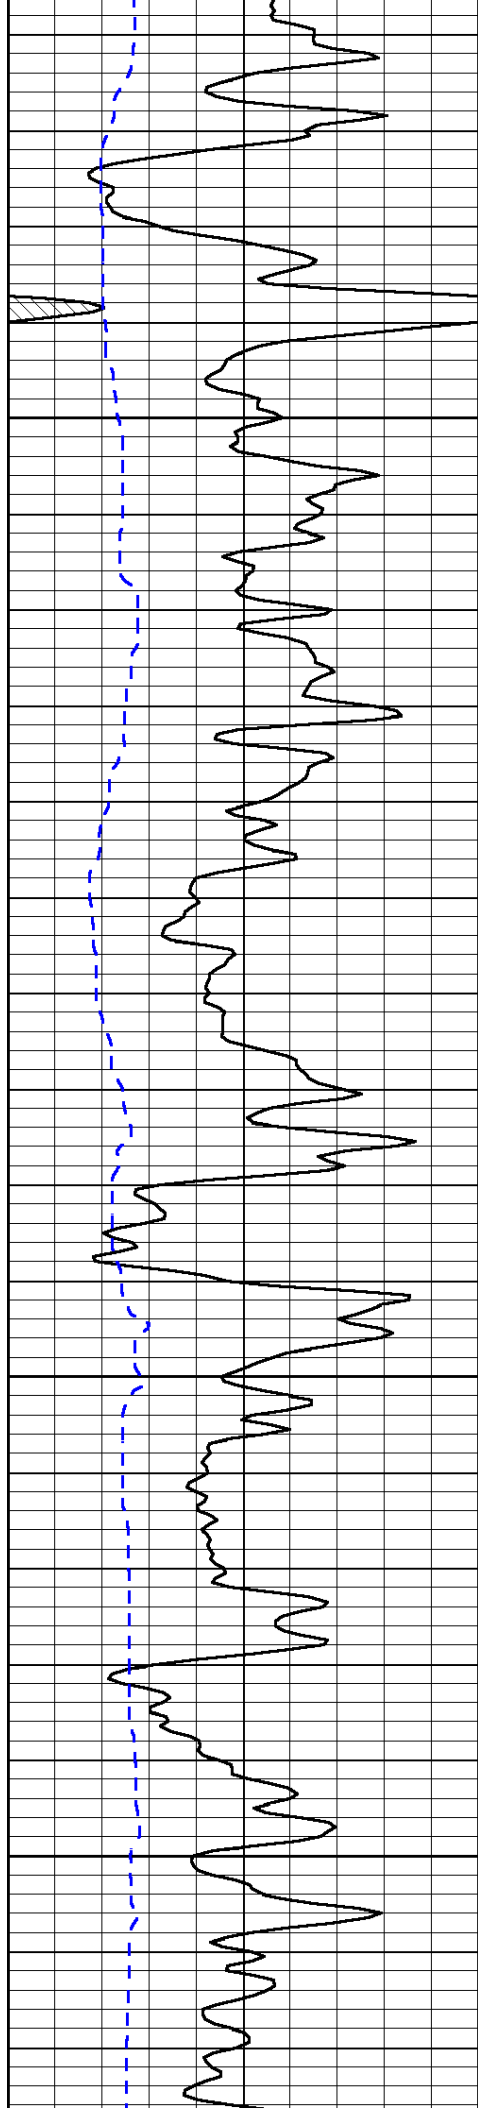


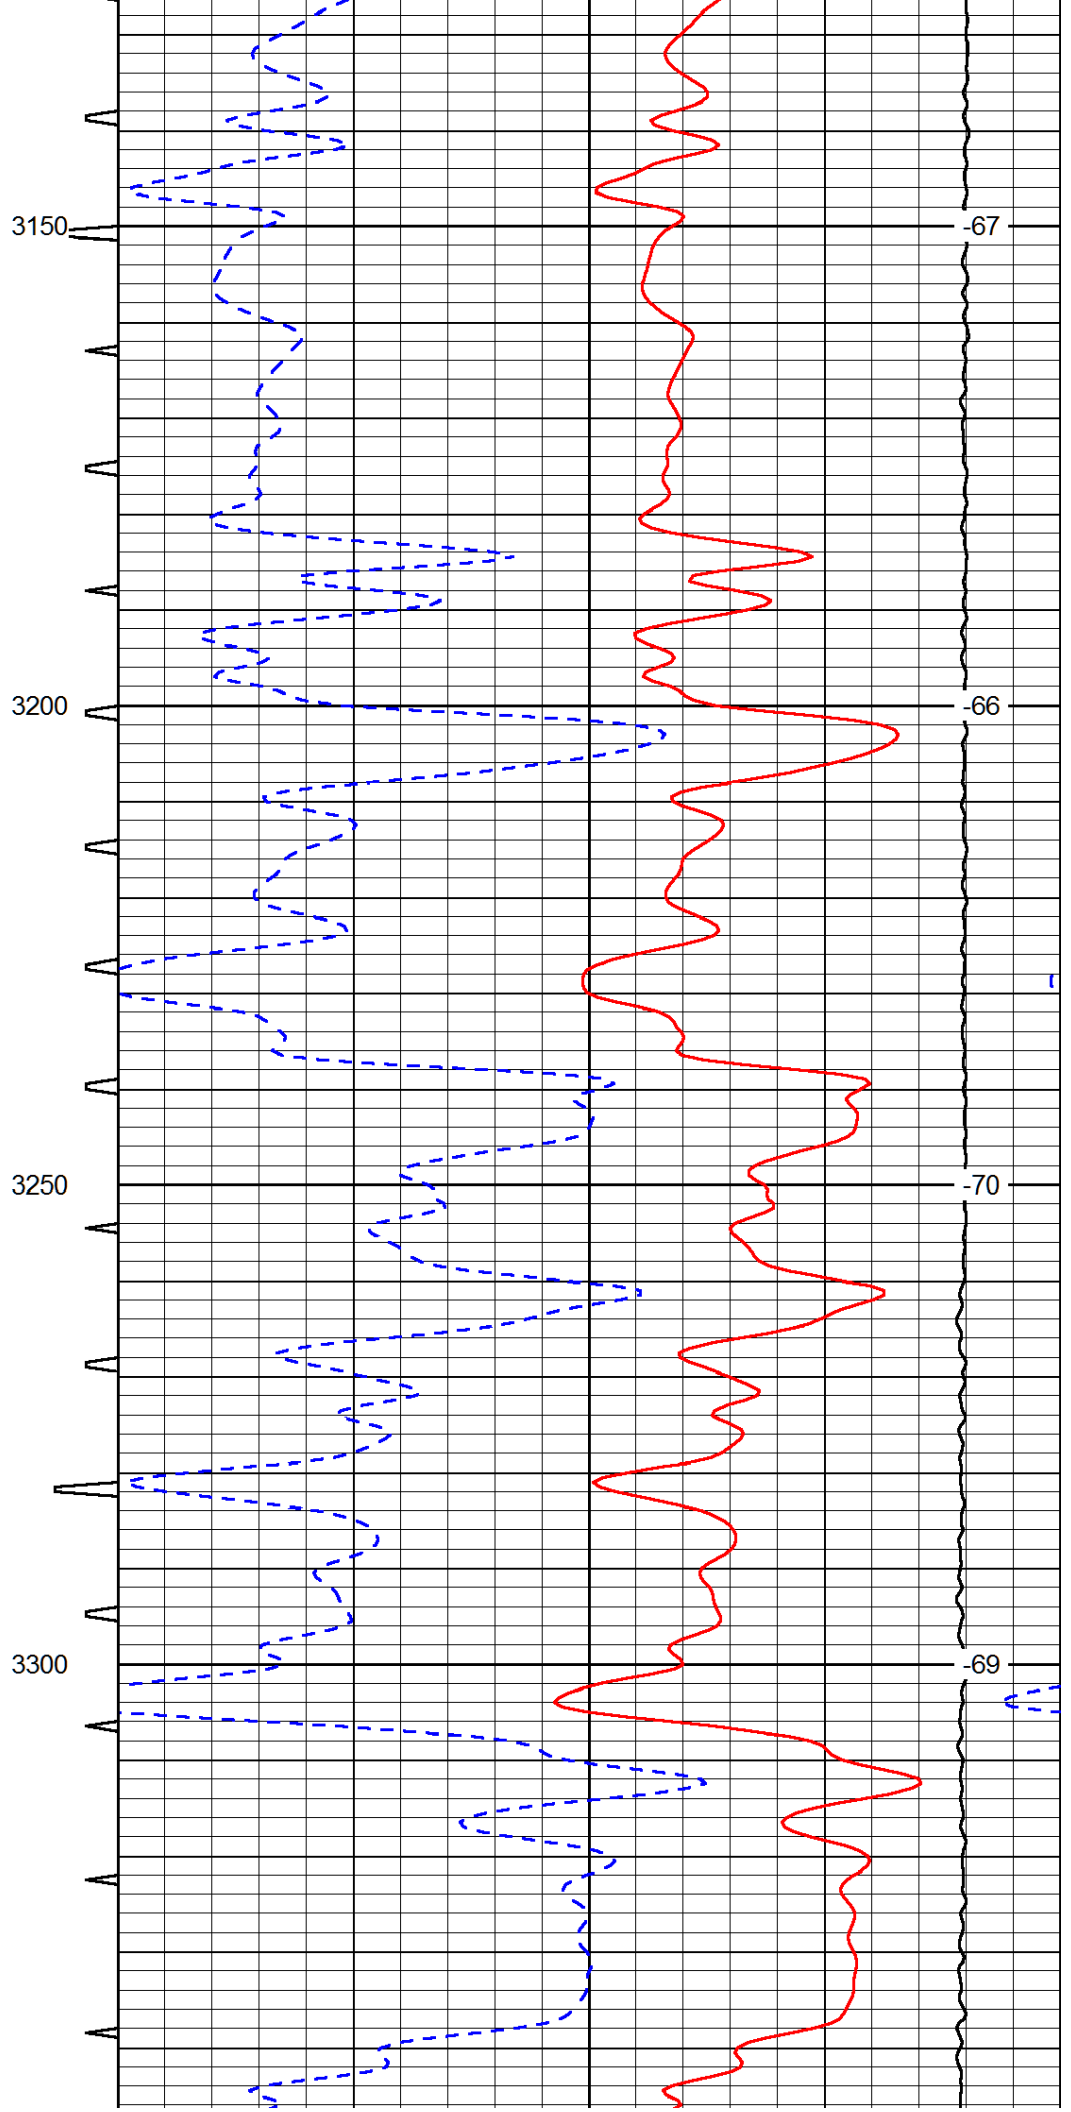
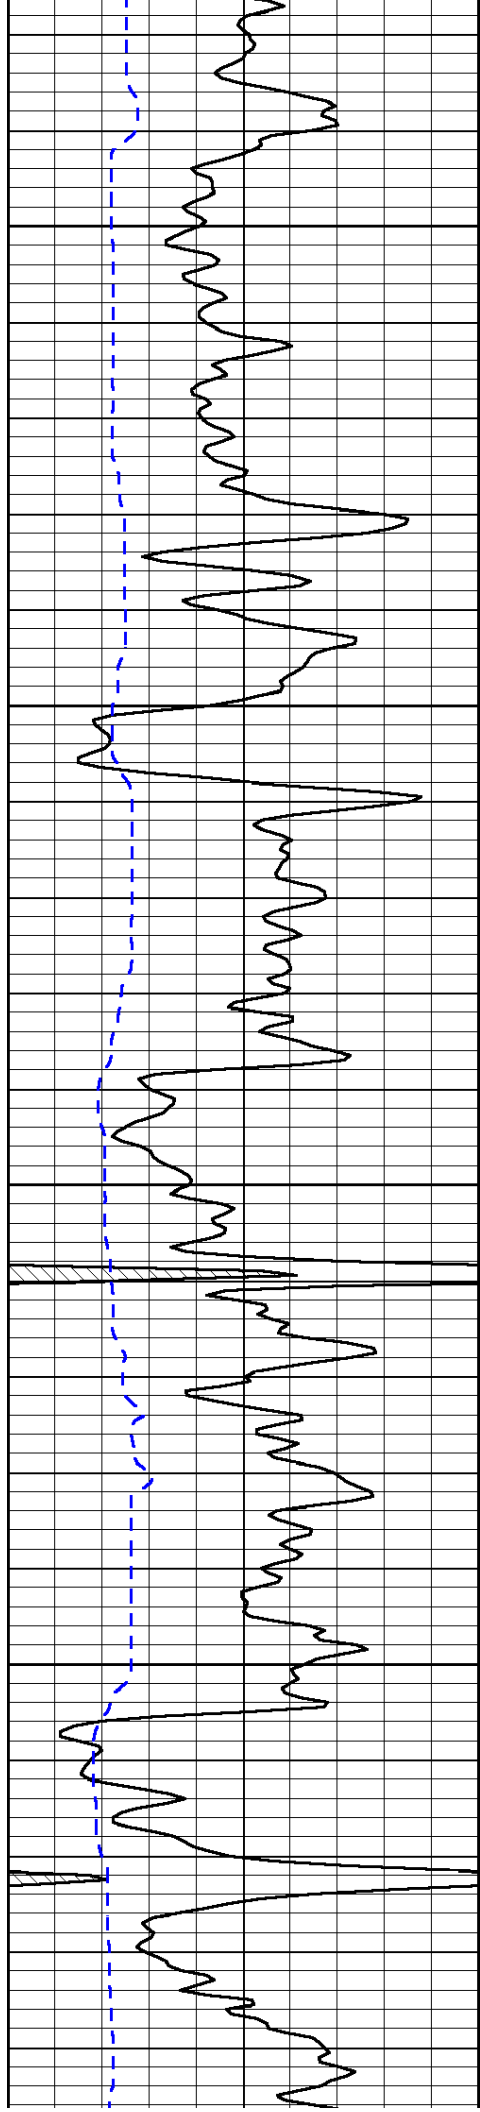


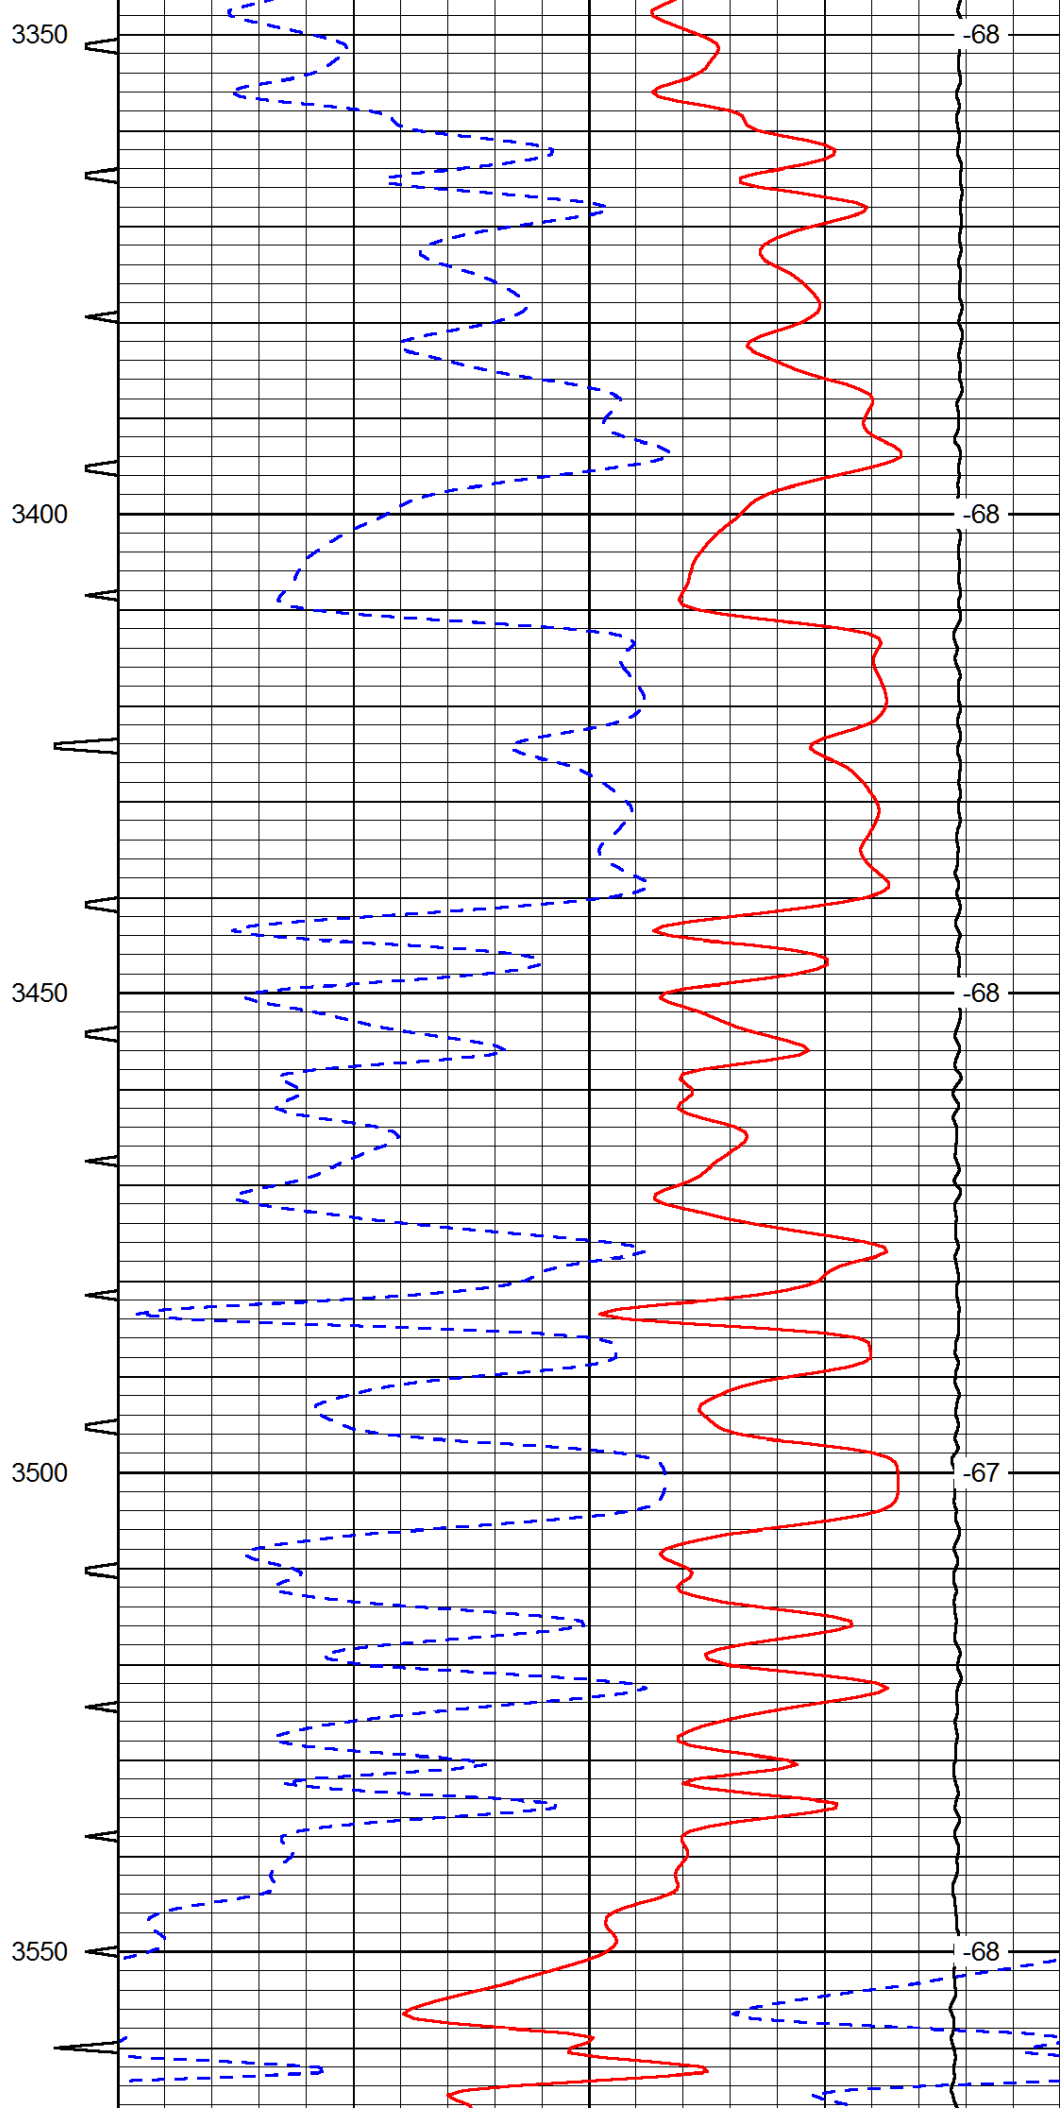
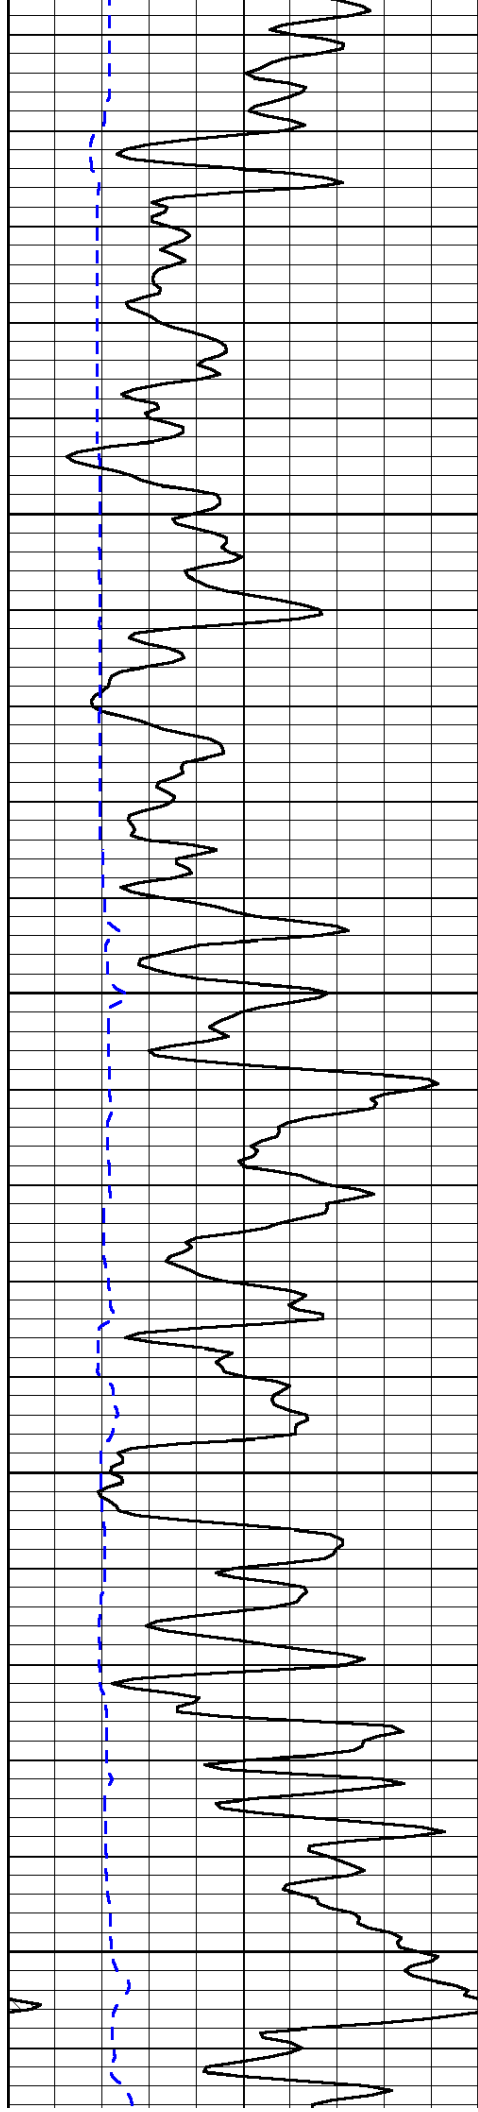


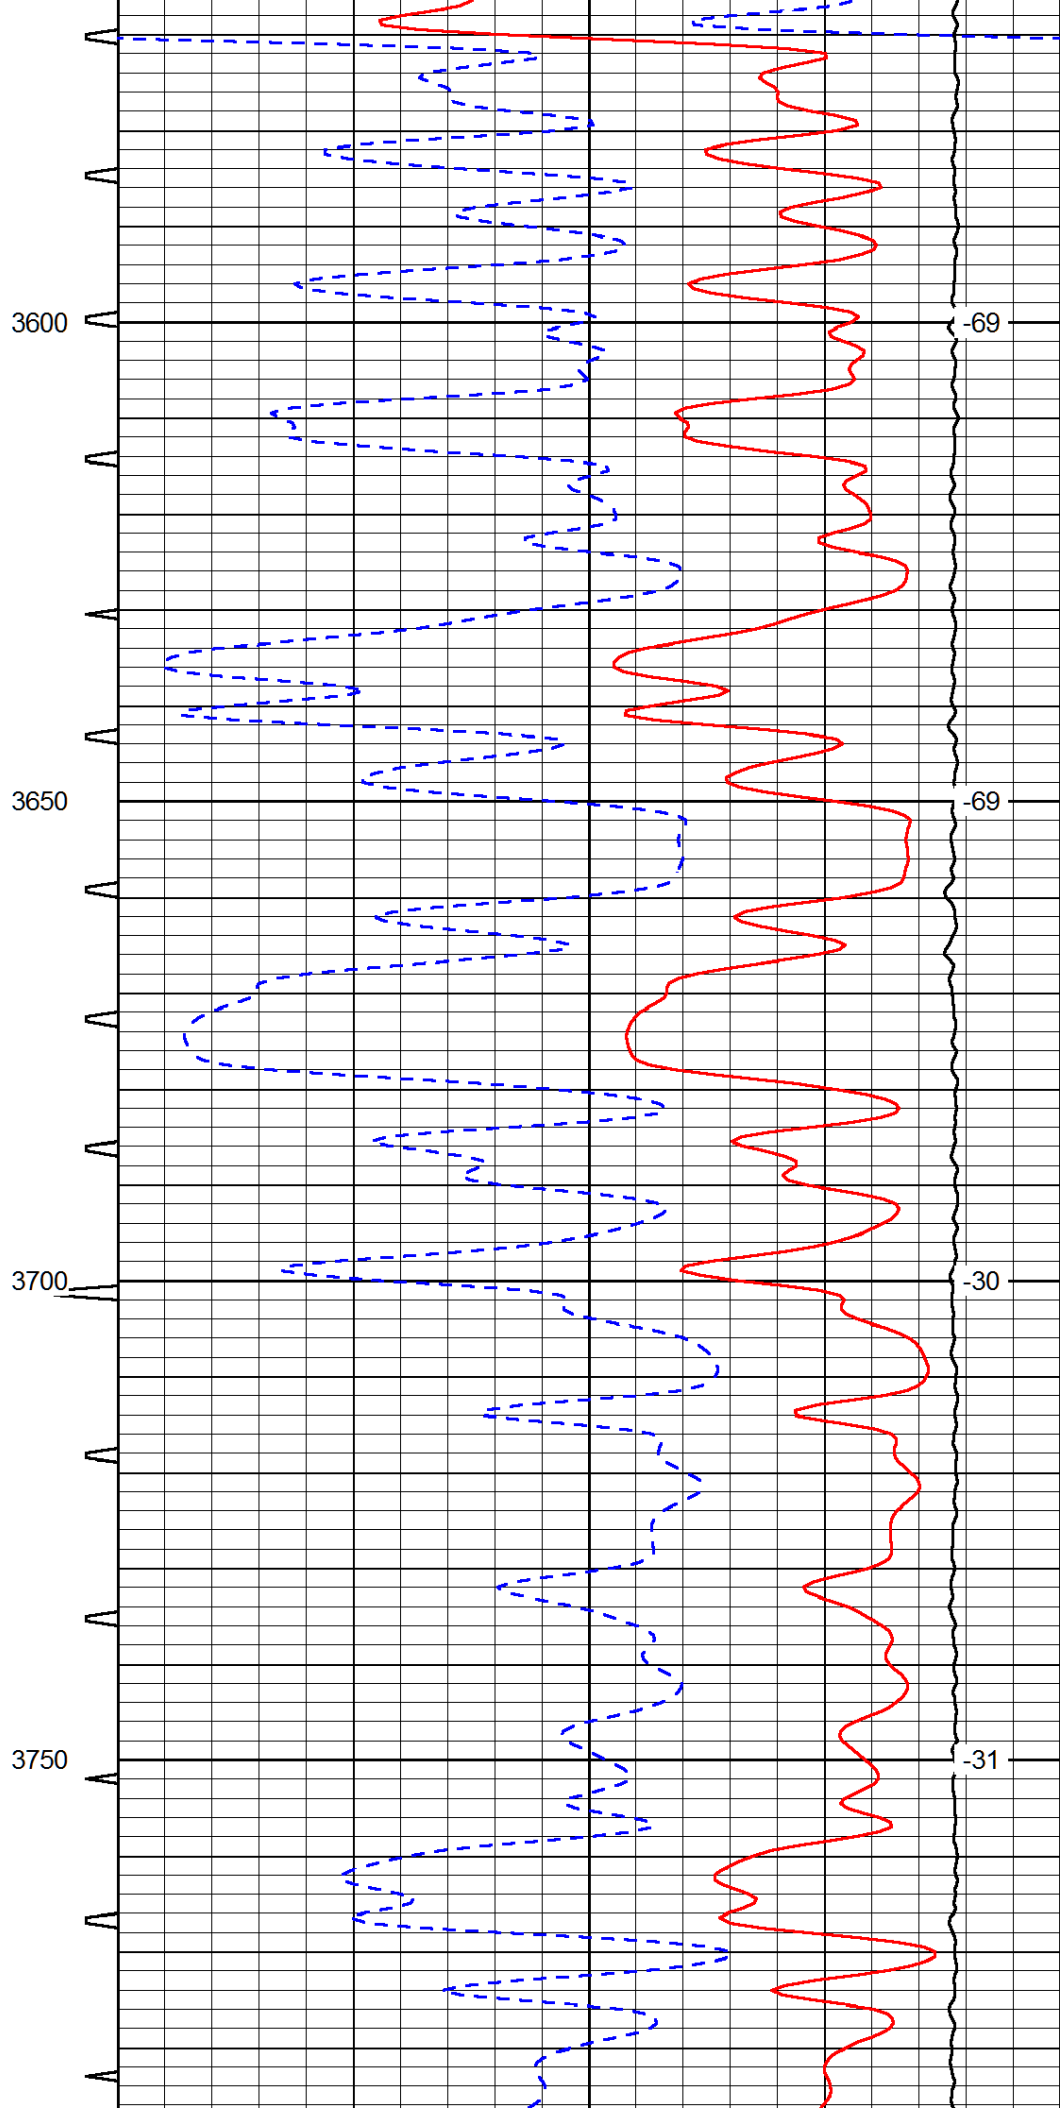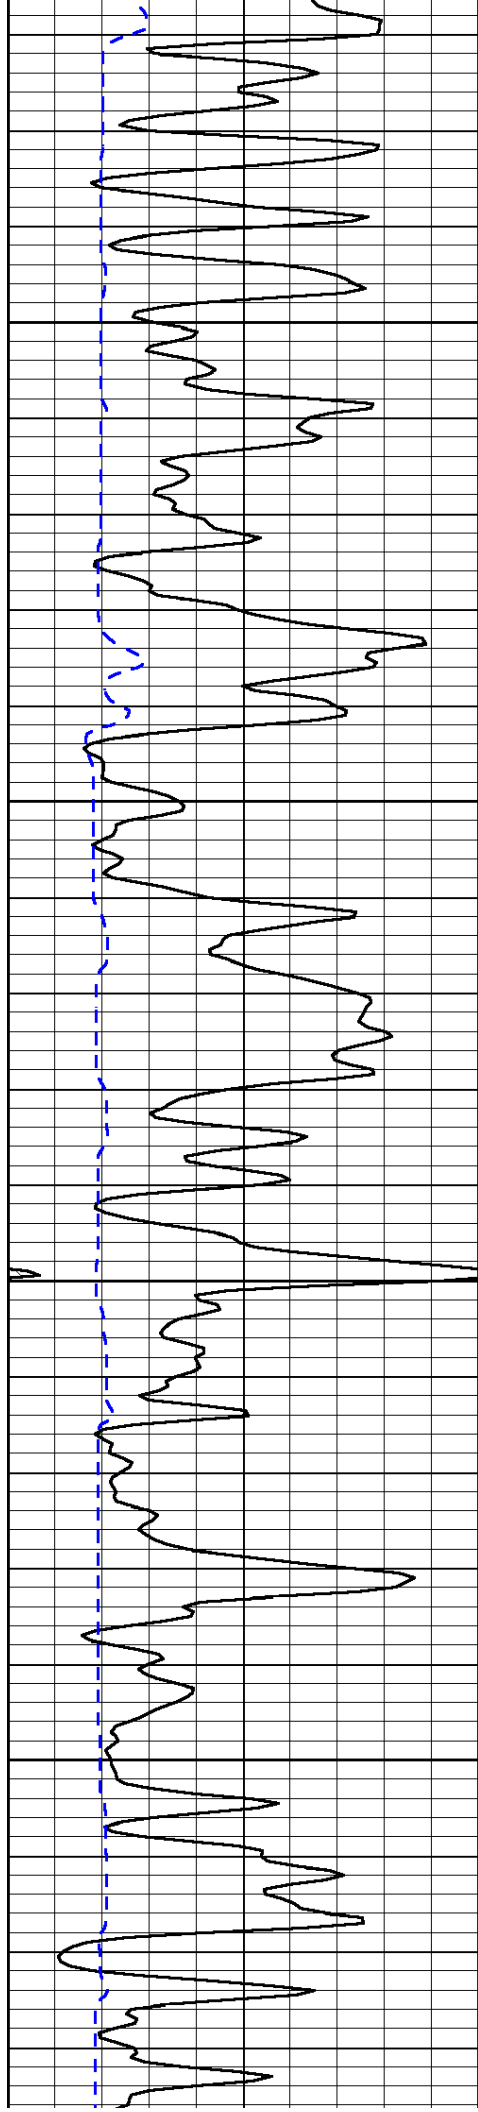


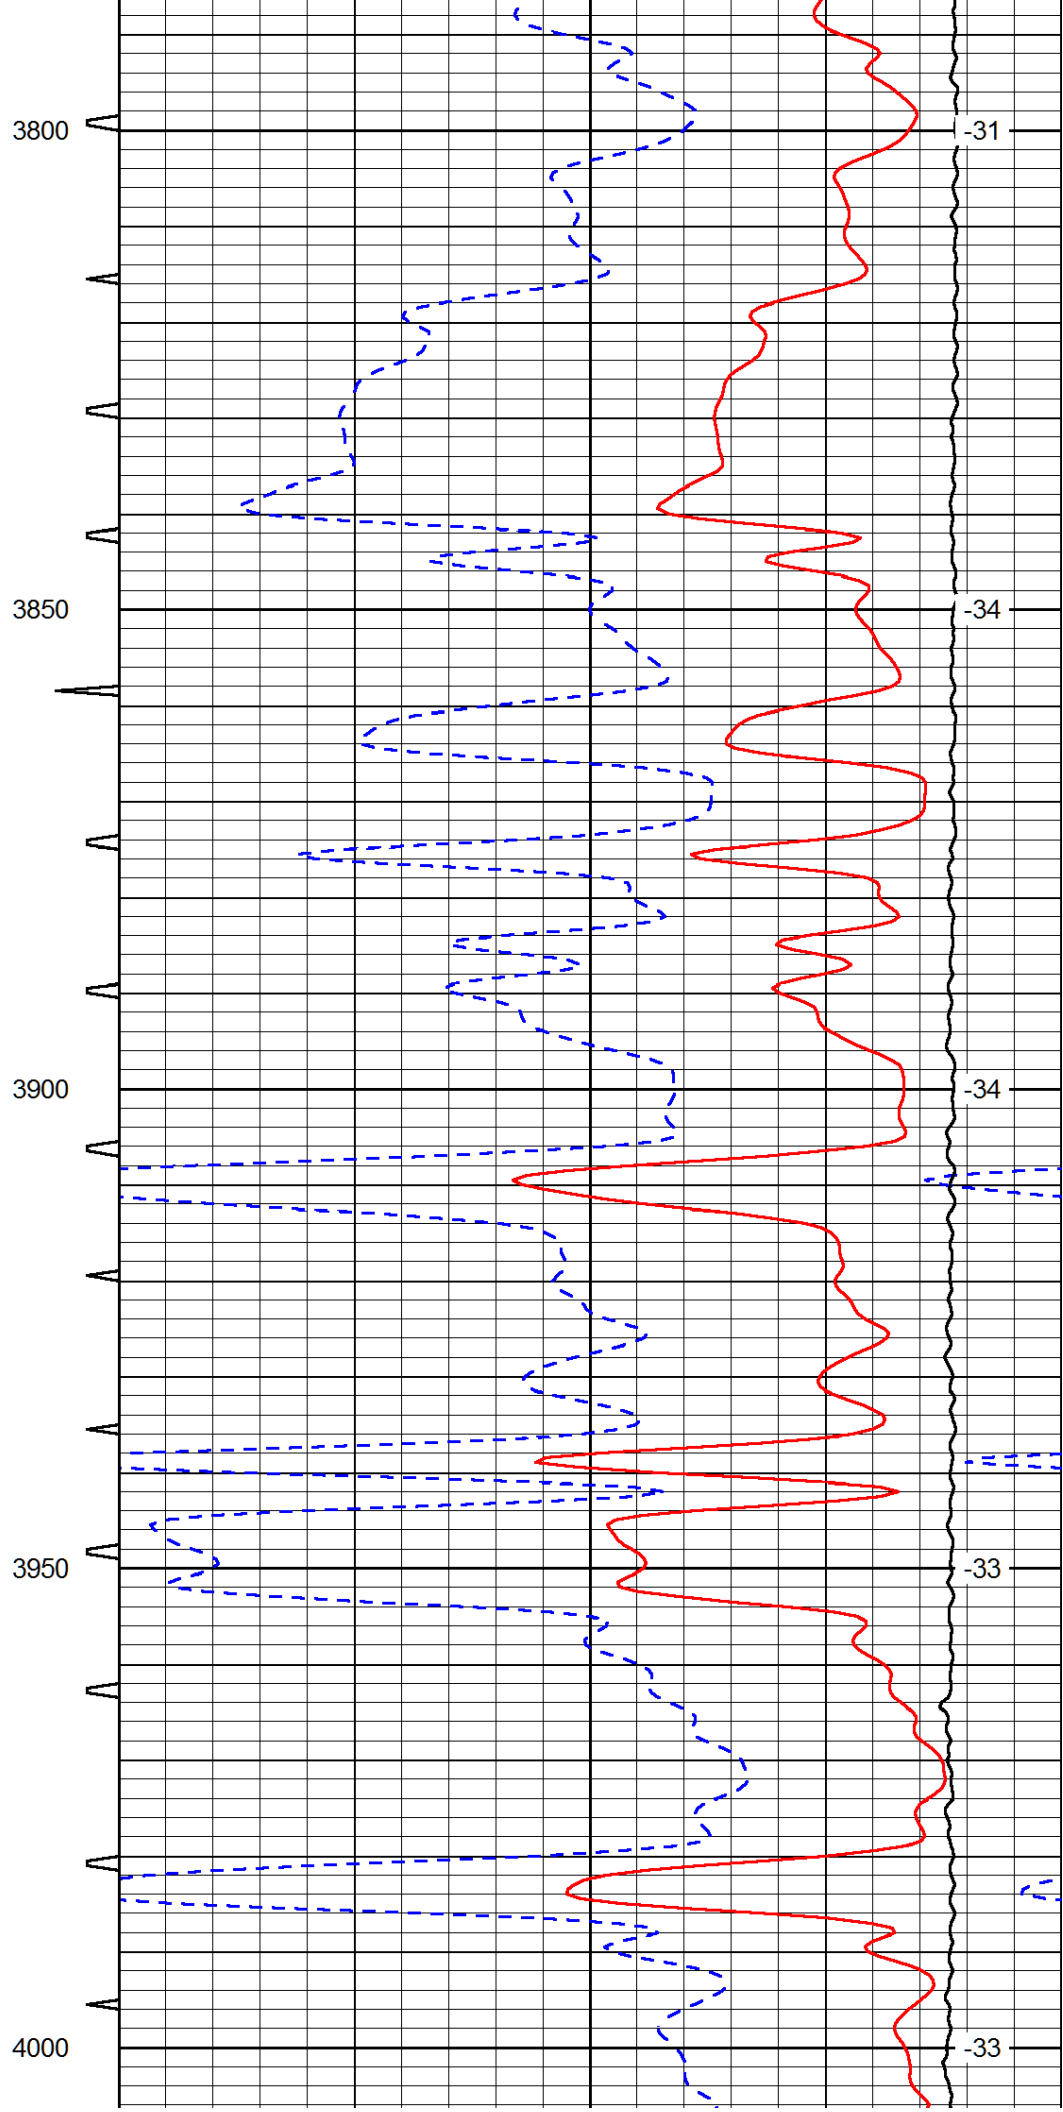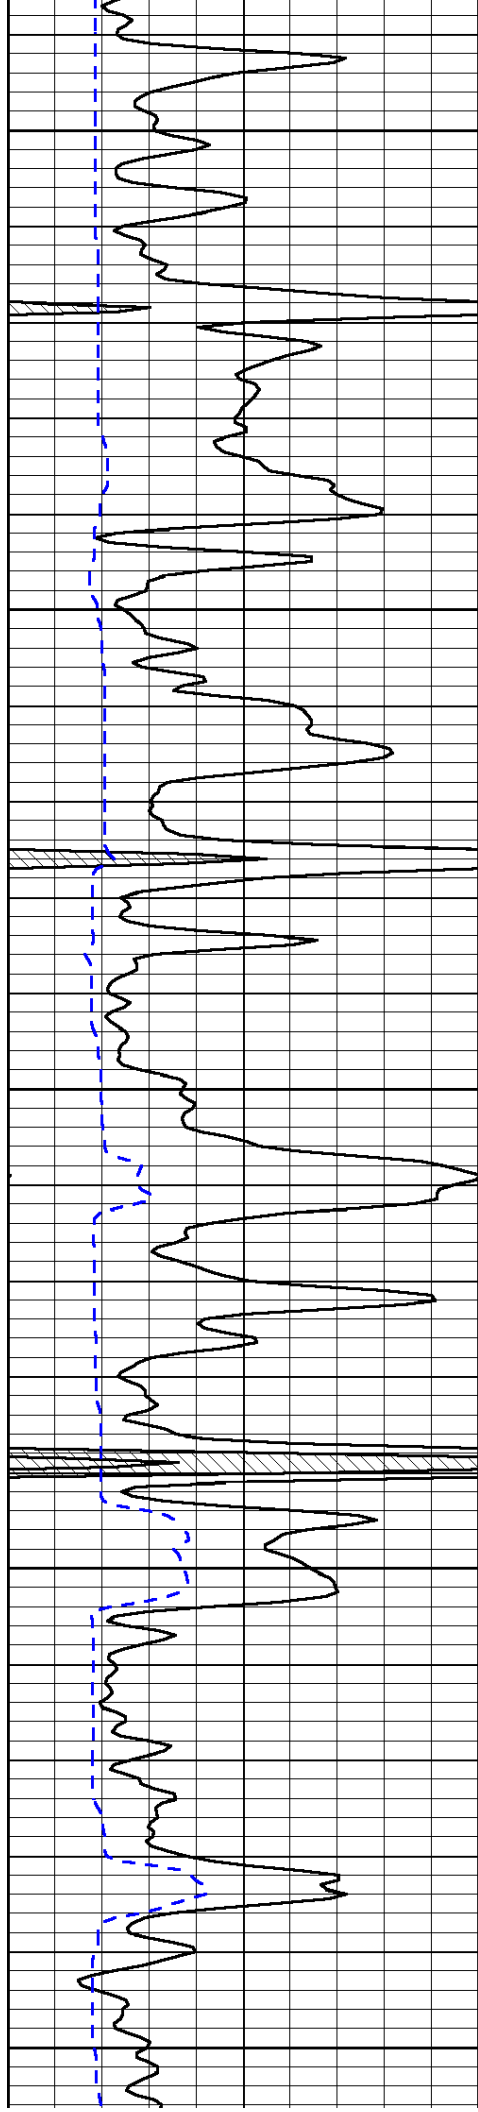

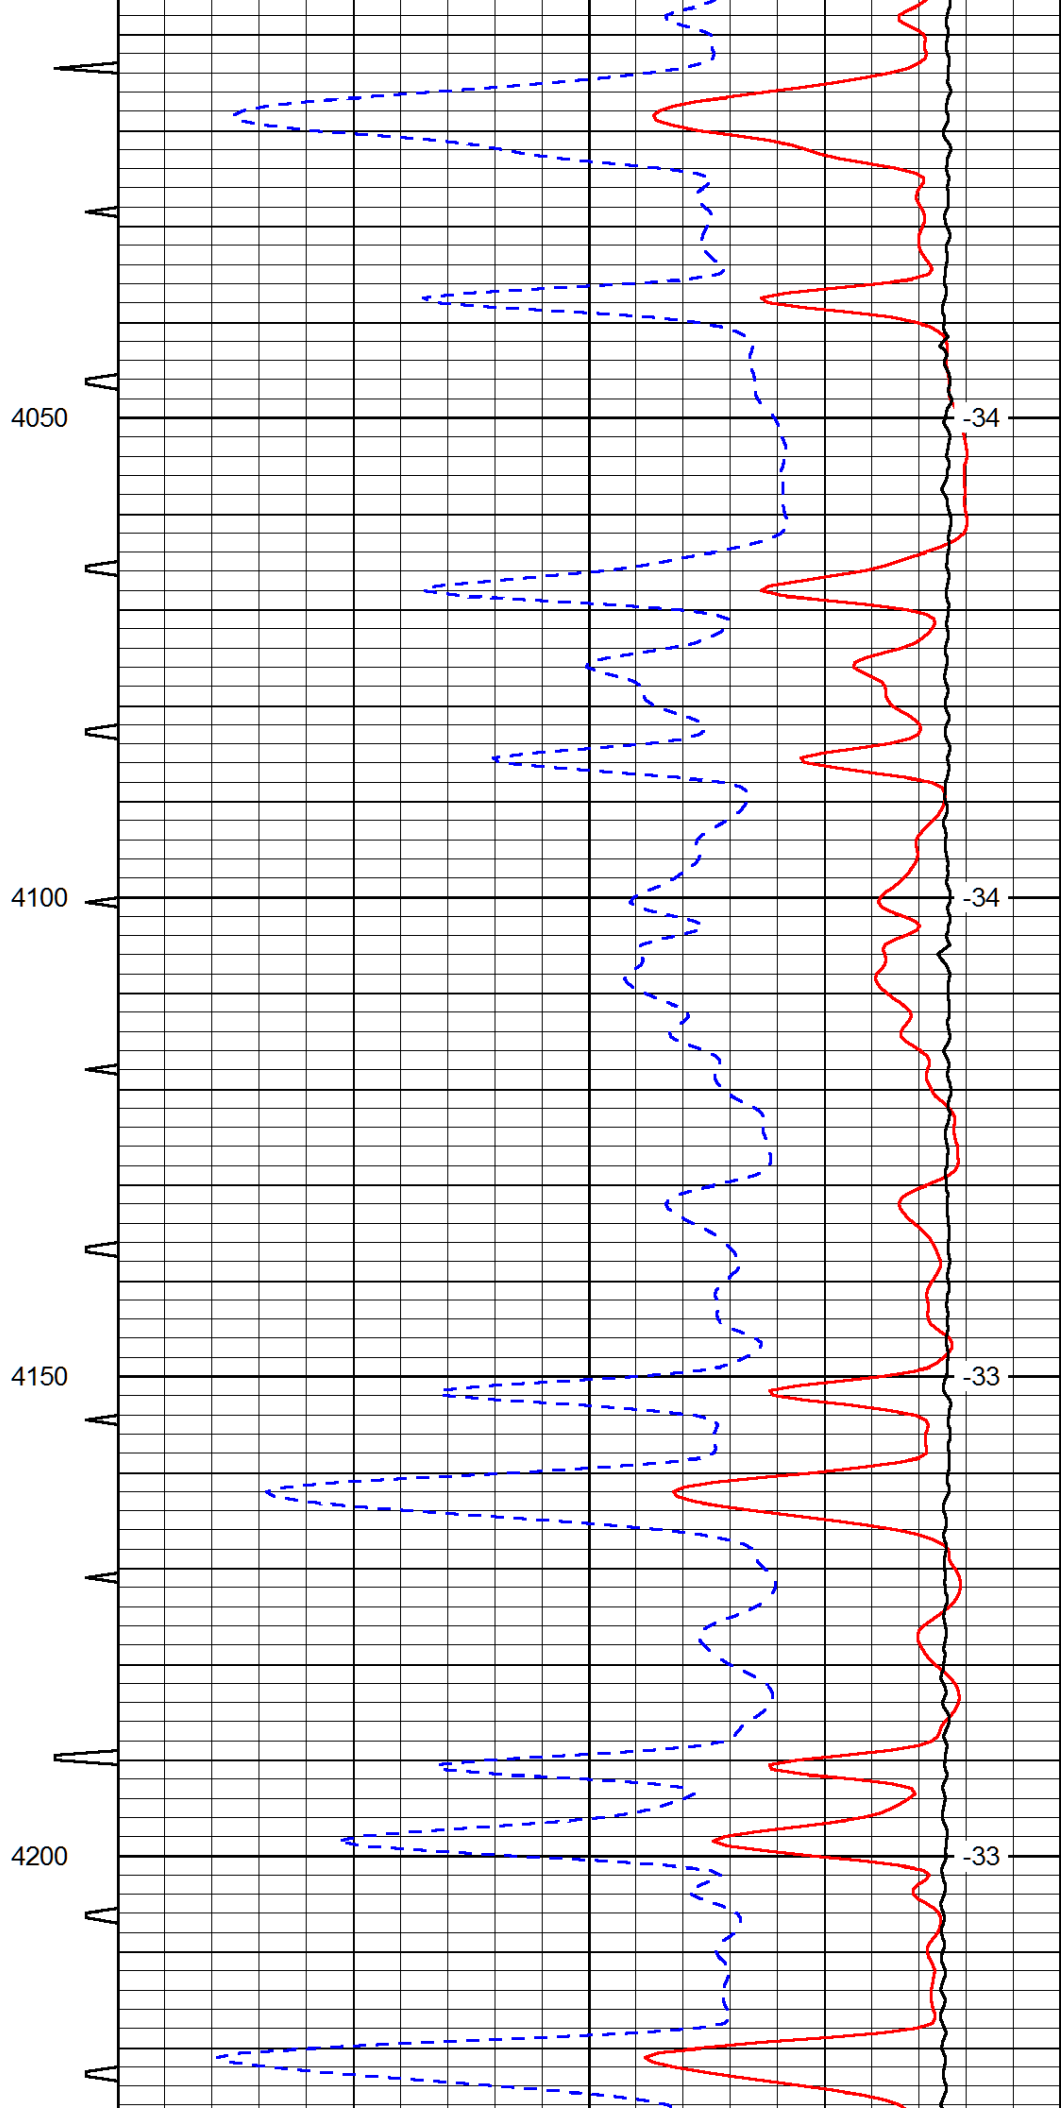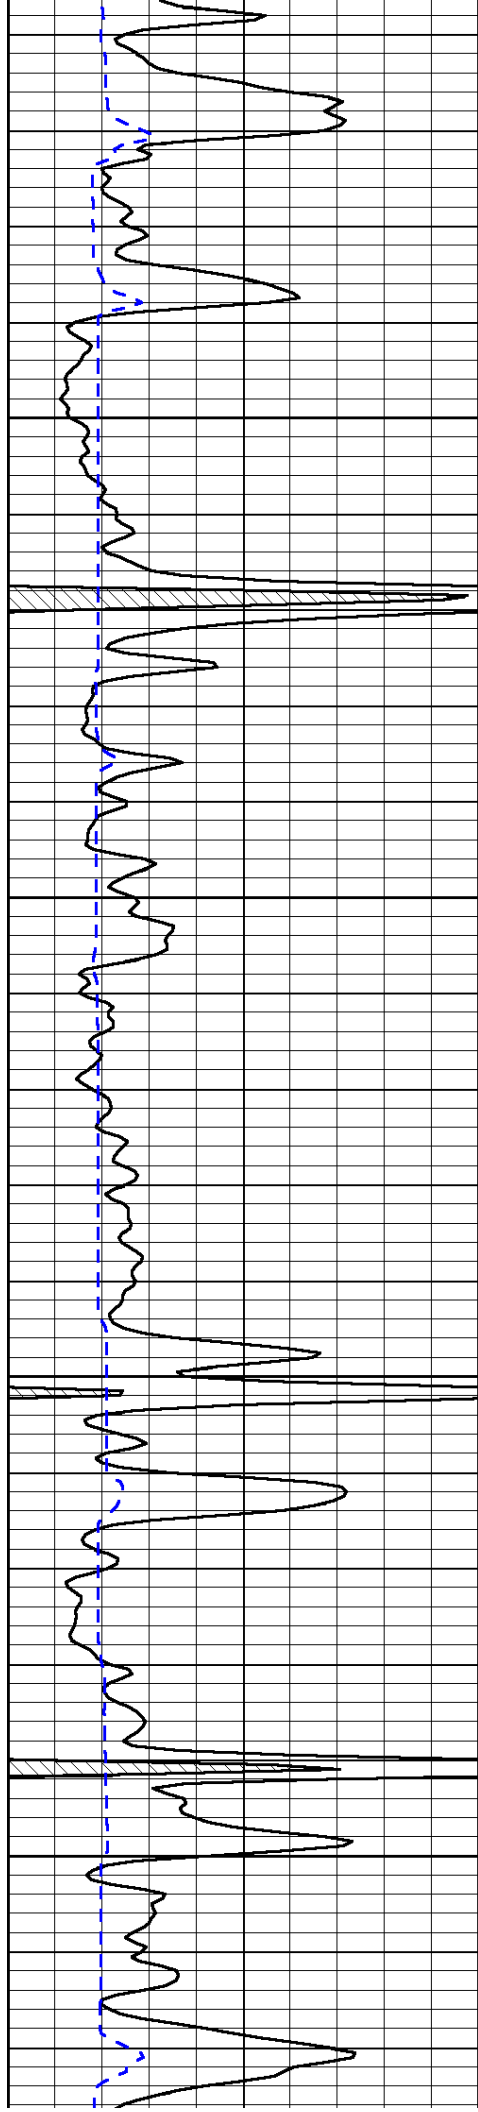


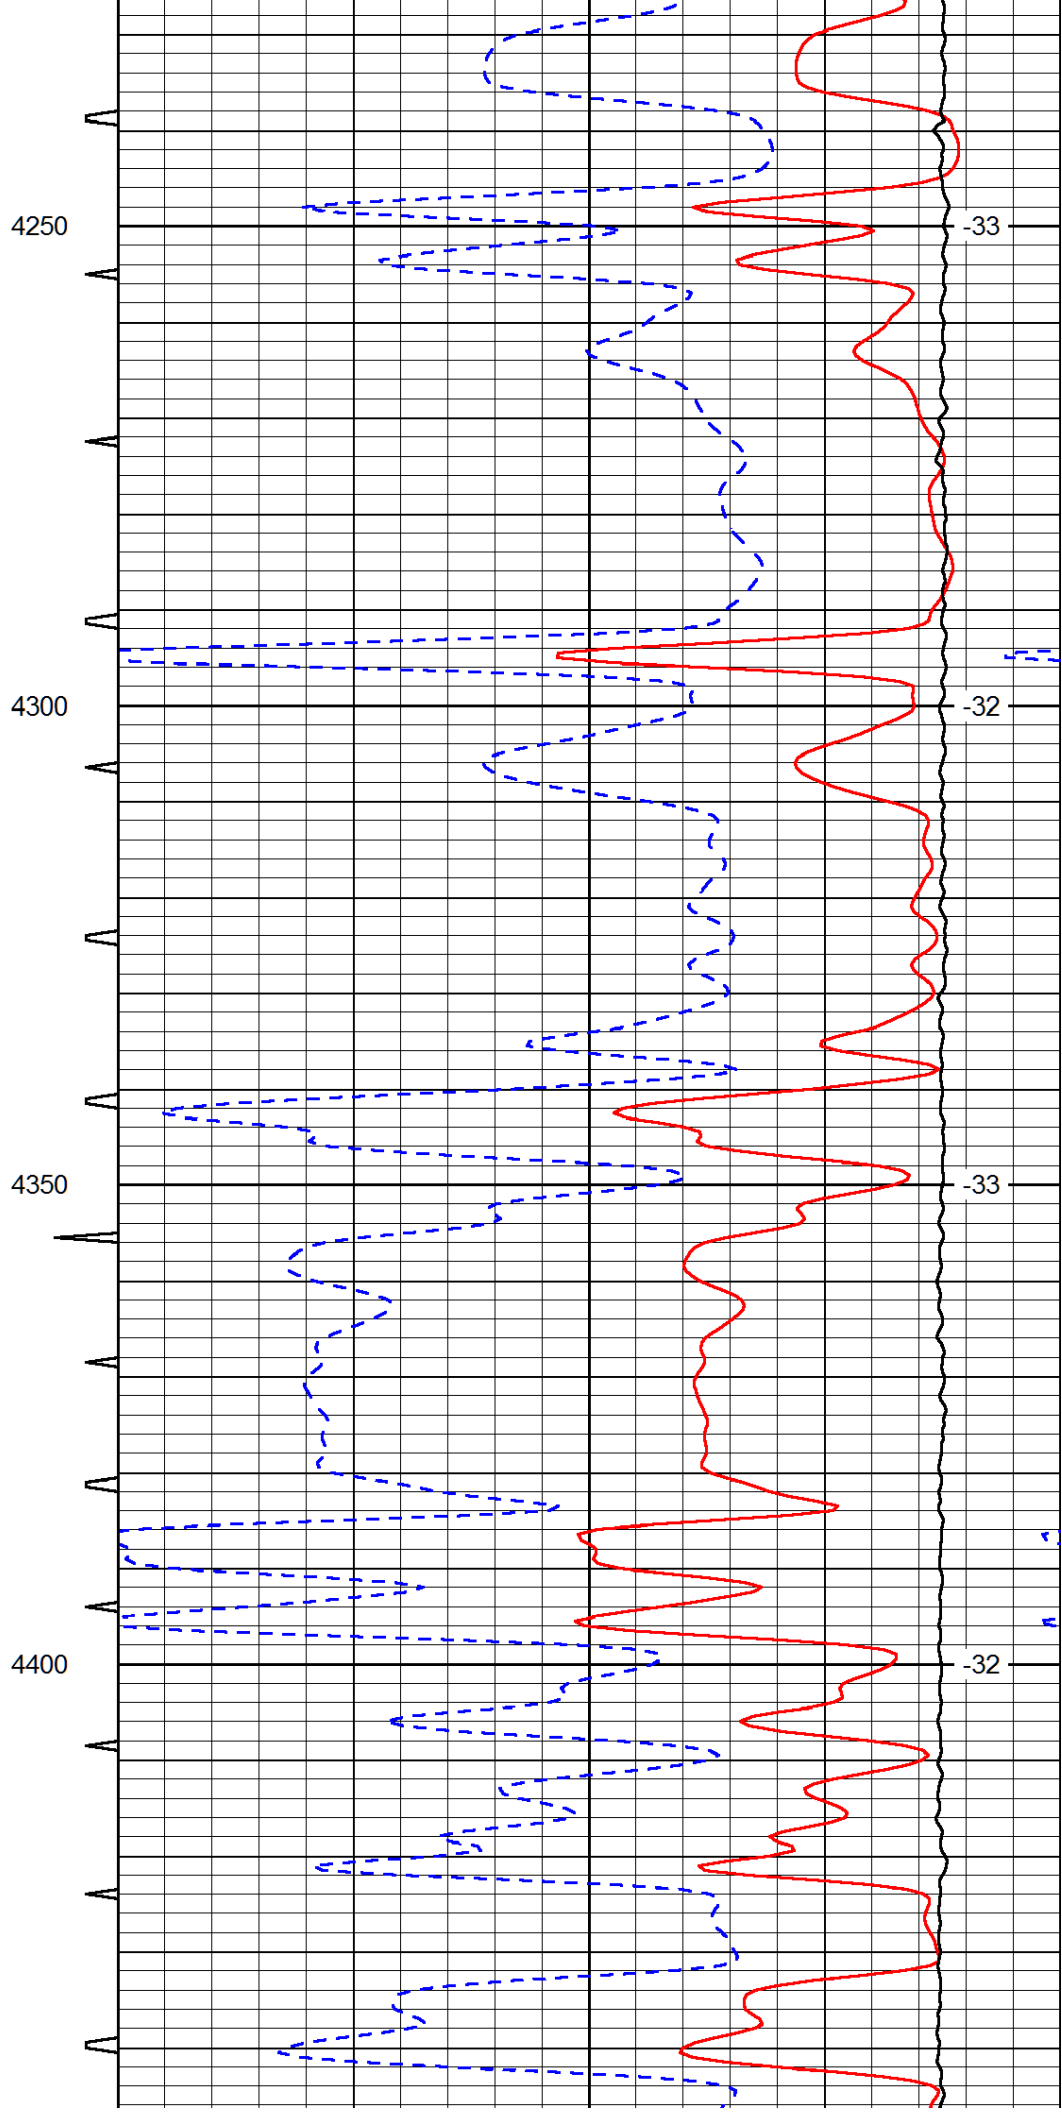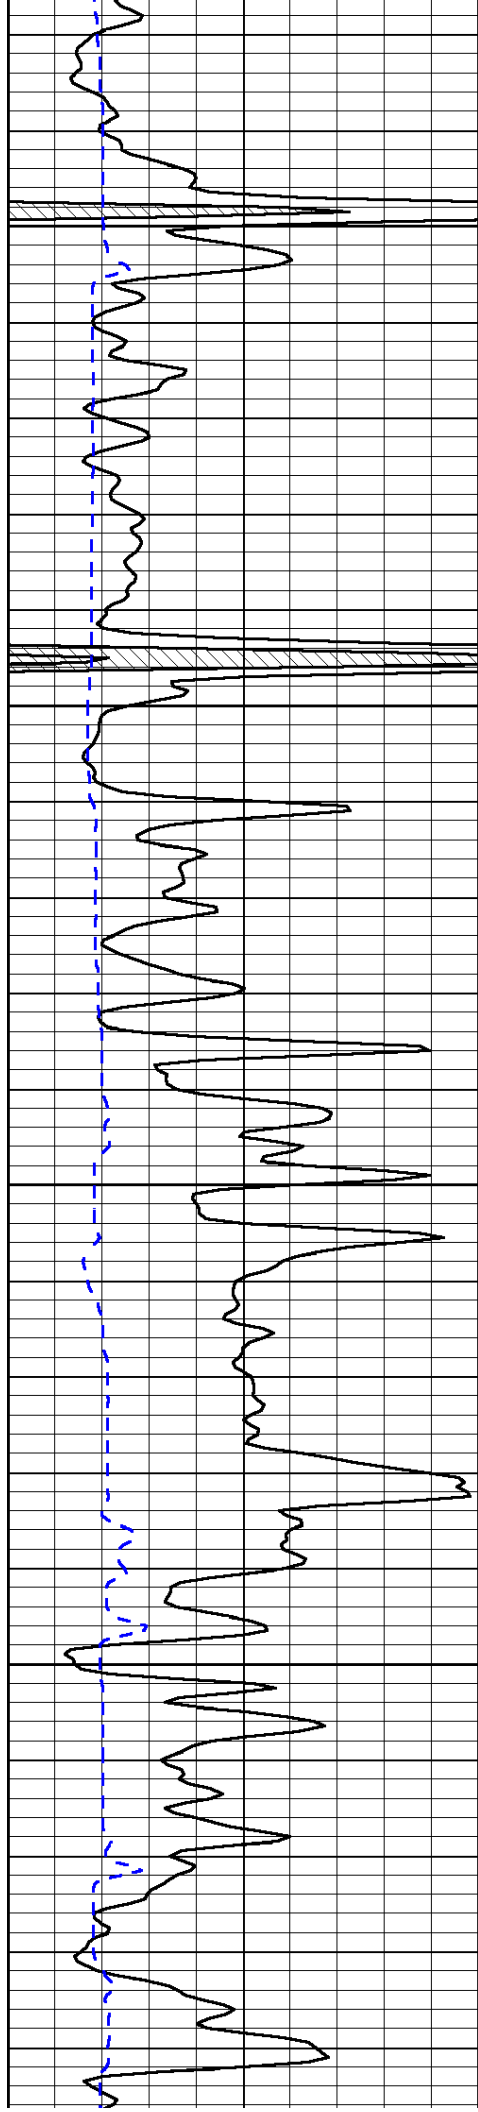

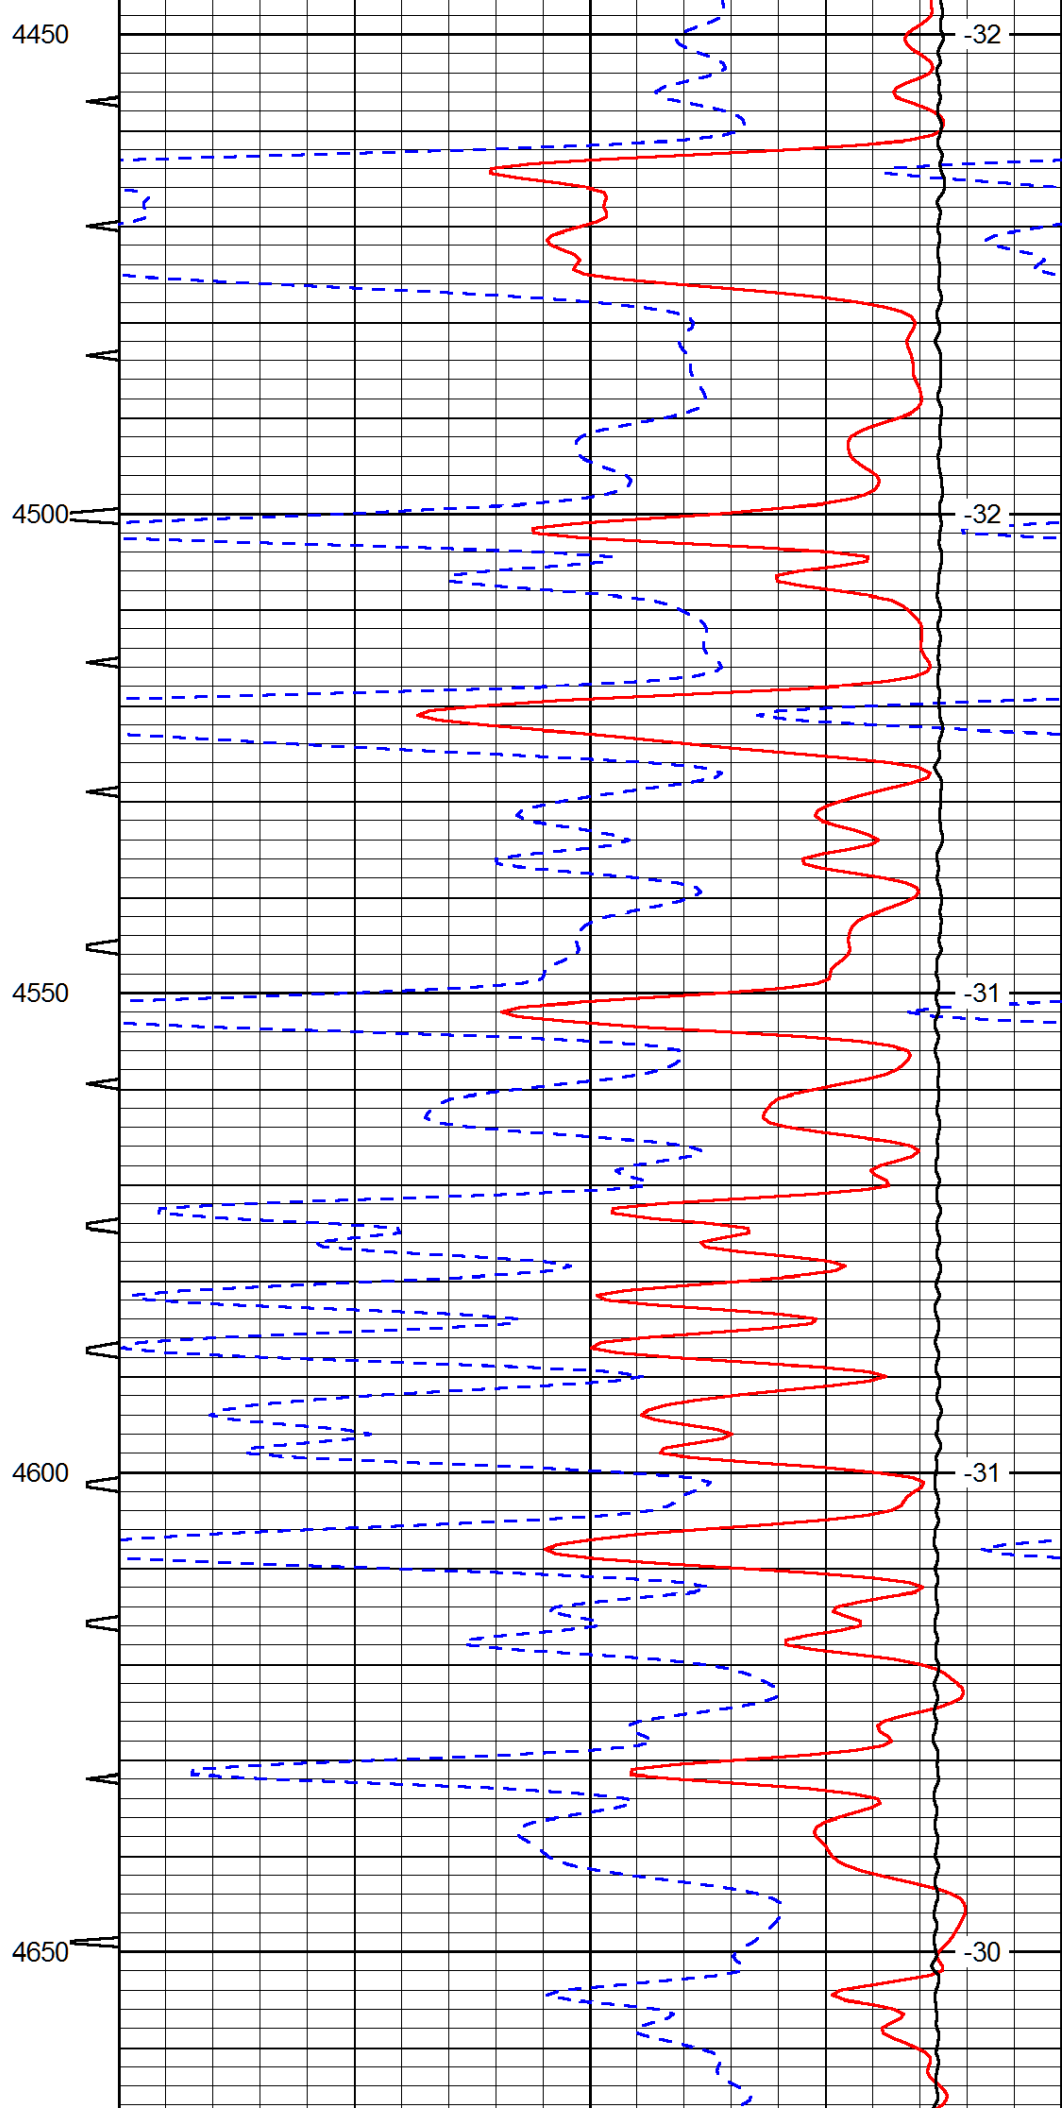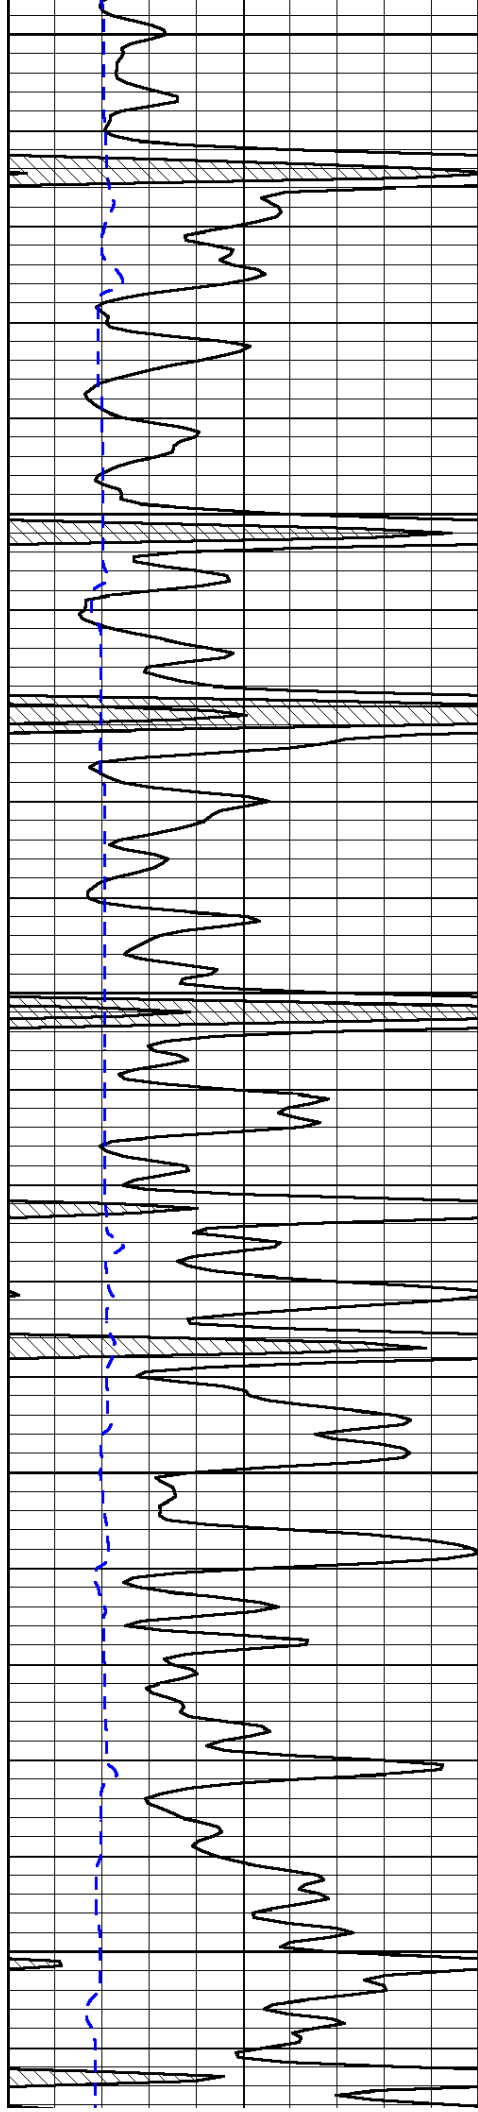

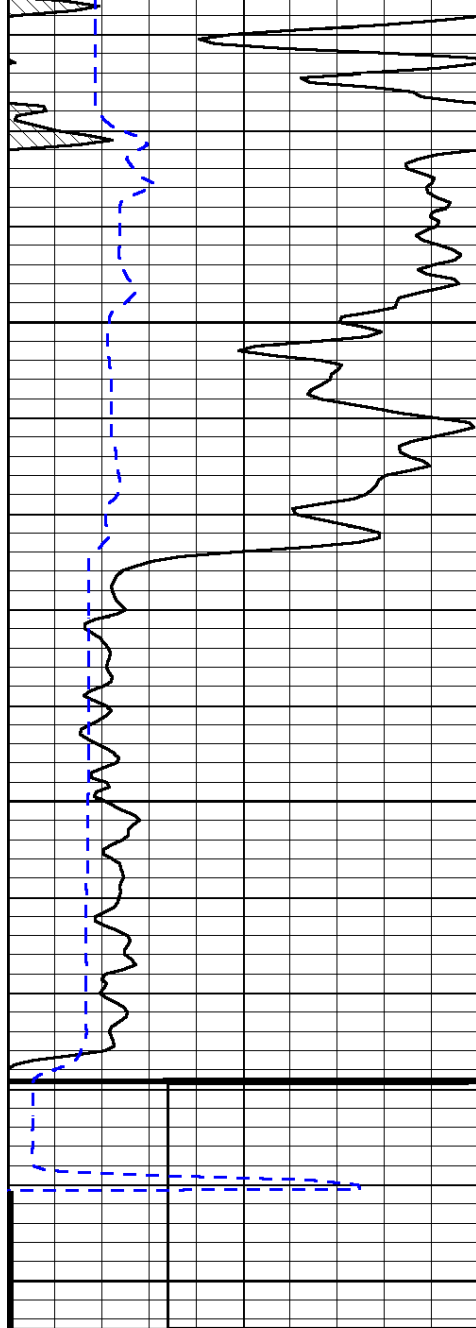

0	Gamma Ray (GAPI)	150
150	Gamma Ray (GAPI)	300
6	dCAL (in)	16

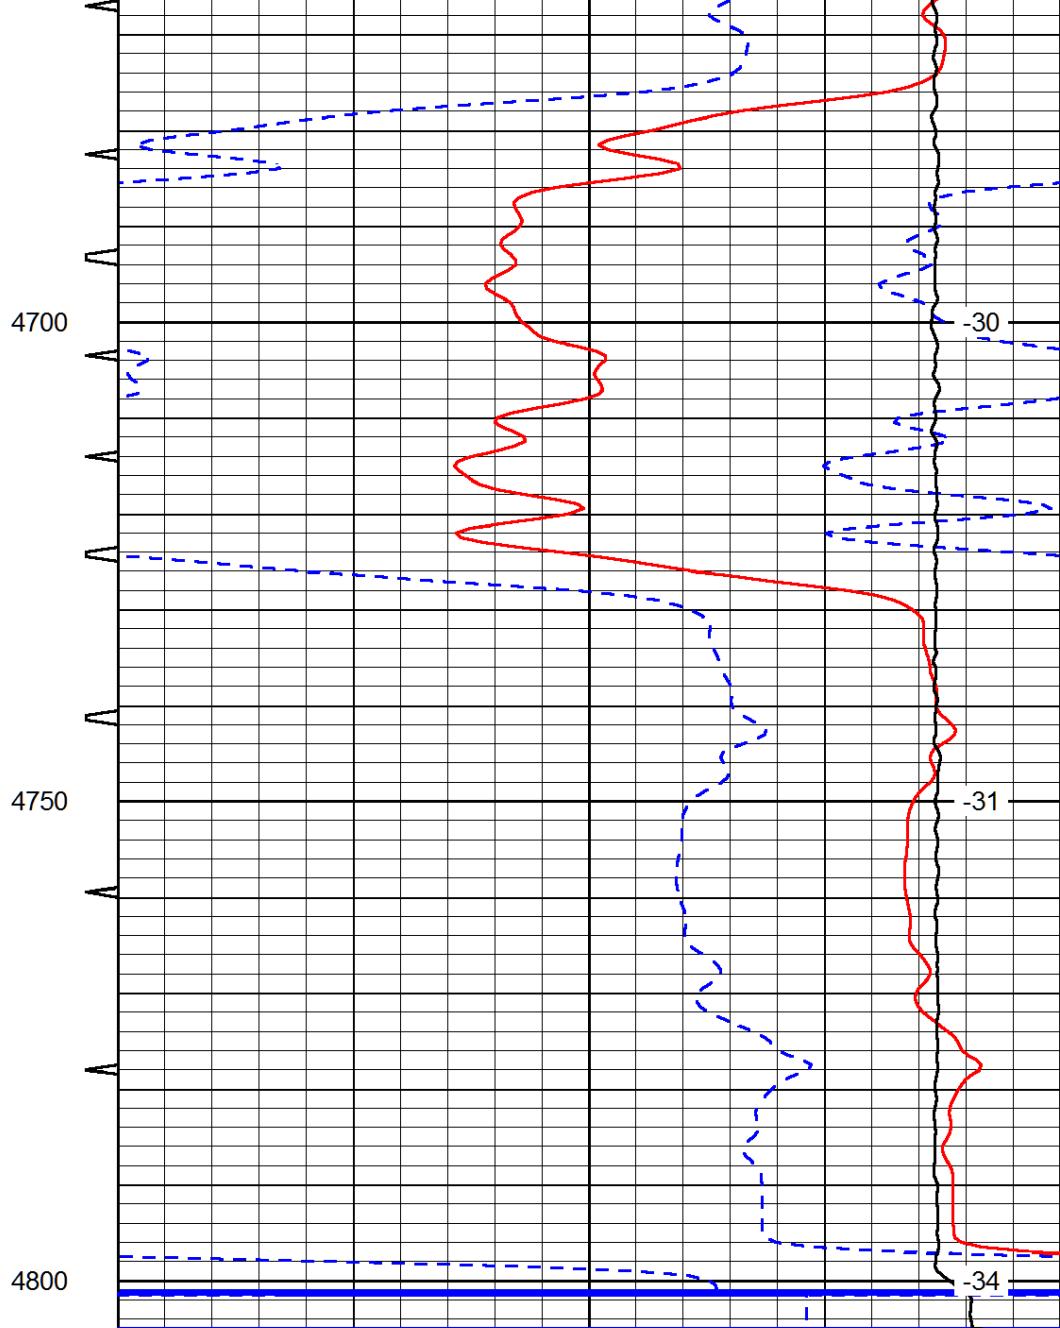

Sonic Int	140	Delta Time (u sec/ft) (u sec/ft)	40
5 (msec) 0	30	Sonic Porosity (pu)	-10
	15000	LTEN (lb) (lb)	0

LSPD
(ft/min)