



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company		TRANS - PACIFIC OIL CORPORATION	
Well		HARPER "B" UNIT #1-13	
Field		WILDCAT	
County		LANE	
State		KANSAS	
Company		TRANS - PACIFIC OIL CORPORATION	
Well		HARPER "B" UNIT #1-13	
Field		WILDCAT	
County		LANE	
State		KANSAS	
Location:		API # : 15-101-22476-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		Elevation 2557	
Drilling Measured From		KELLY BUSHING 9' A.G.L.	
SEC 13 TWP 17S RGE 27W		Elevation	
		K.B. 2566	
		D.F. 2564	
		G.L. 2557	
Date	11/25/13		
Run Number	ONE		
Depth Driller	4600		
Depth Logger	4604		
Bottom Logged Interval	4602		
Top Log Interval	00		
Casing Driller	8 5/8"@224'		
Casing Logger	220		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.5/48		
pH / Fluid Loss	10.5/6.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.900@60F		
Rmf @ Meas. Temp	.675@60F		
Rmc @ Meas. Temp	1.08@60F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.446@121F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	8:45 P.M.		
Maximum Recorded Temperature	121F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JEFF LAWLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS

UTICA, KS. 4W. ON HWY 4 TO (NESS / LANE COUNTY LINE) 4 3/4 S., 3/4W. & S. & W. INTO ON TRAIL


Database File: 011815ddn.db
 Dataset Pathname: pass3.7
 Presentation Format: dil2
 Dataset Creation: Mon Nov 25 22:40:11 2013
 Charted by: Depth in Feet scaled 1:600


0 Gamma Ray (GAPI) 150
 -100 SP (mV) 100

0 RLL3 (Ohm-m) 50
 0 RILD (Ohm-m) 50

1000 CILD (mmho/m) 0

50 RILD X10 (Ohm-m) 500
 50 RLL3 X10 (Ohm-m) 500

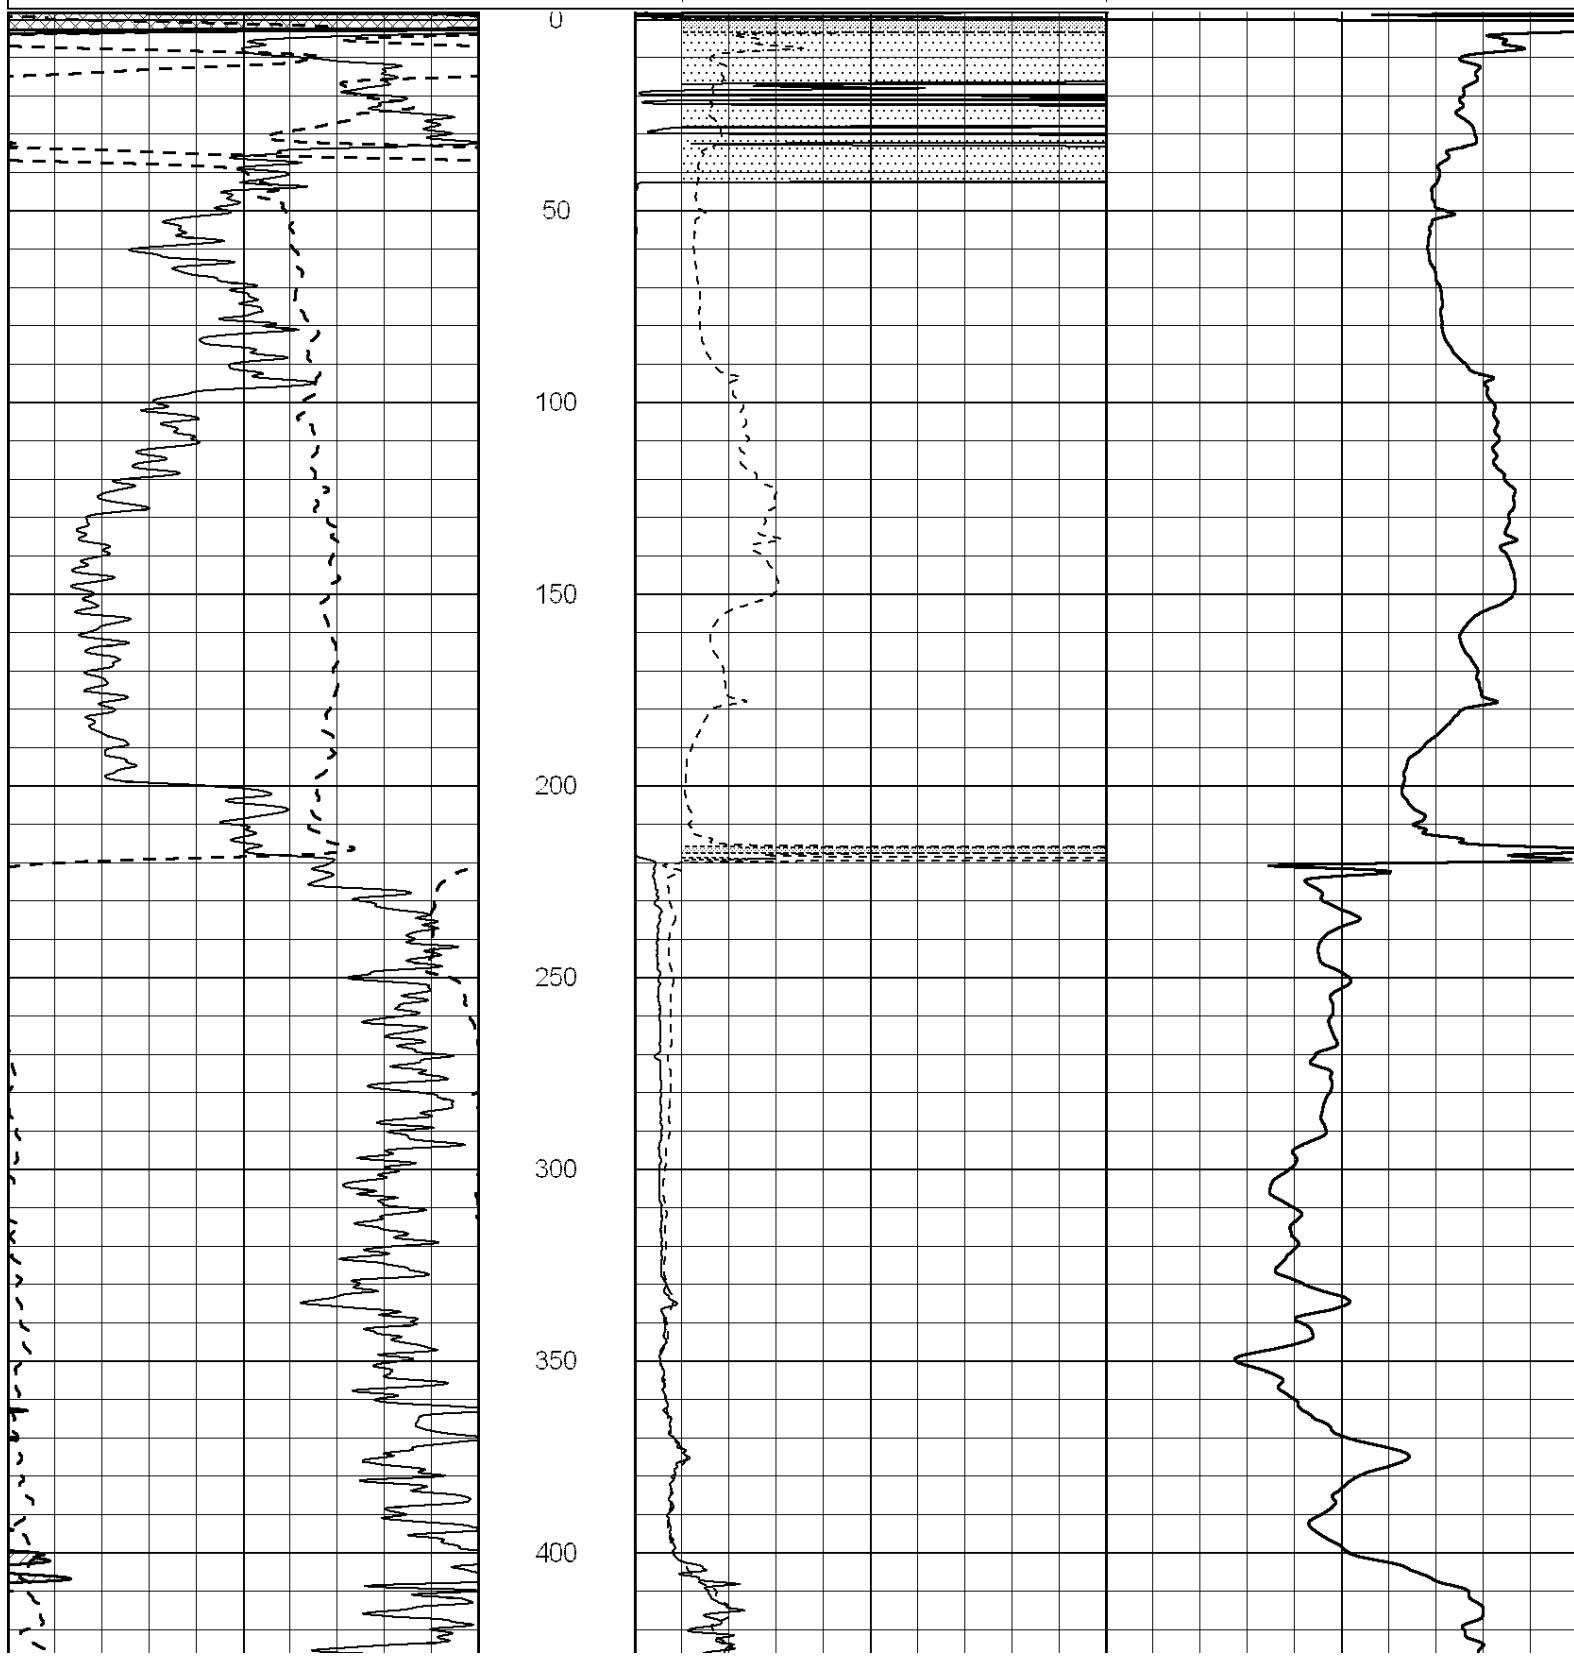

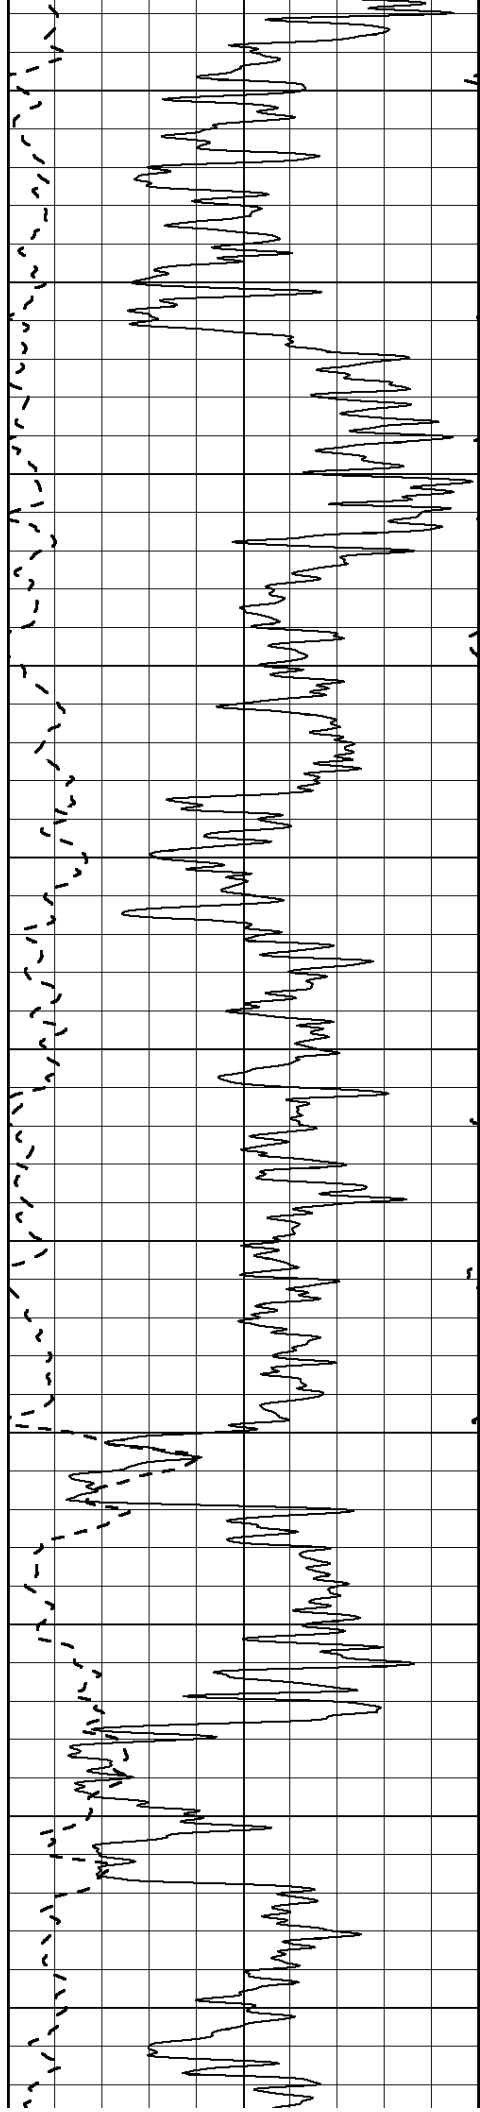

450

500

550

600

650

700



750


800

850


900


950

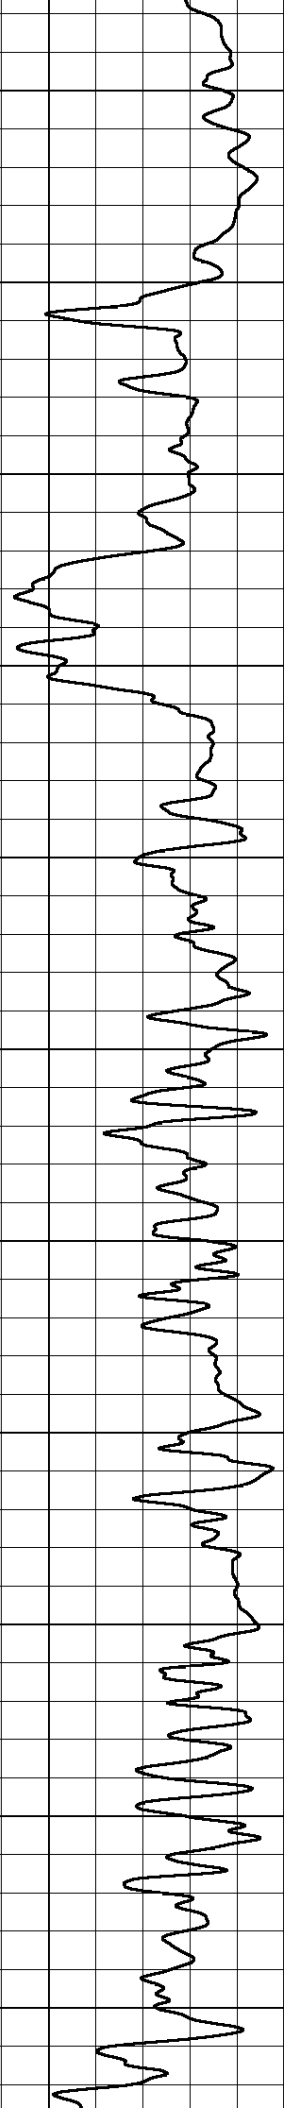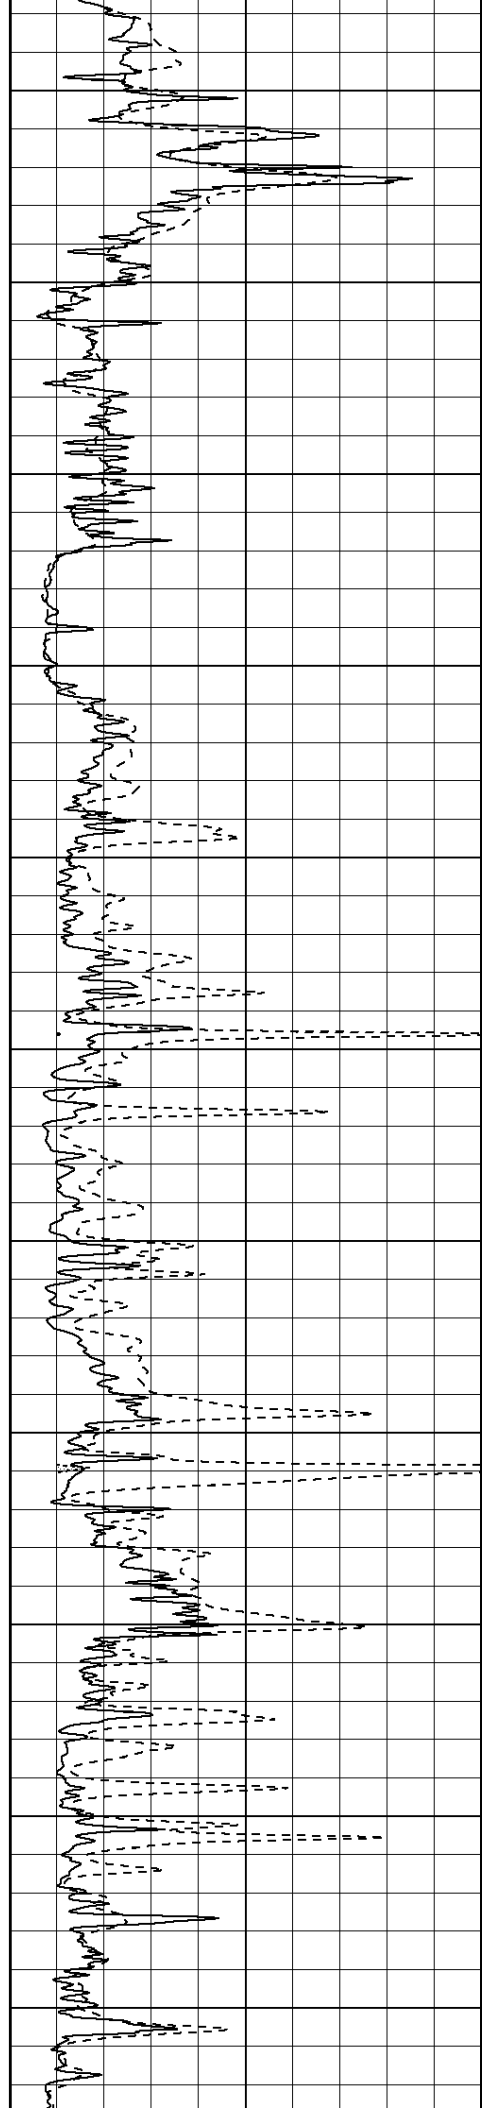

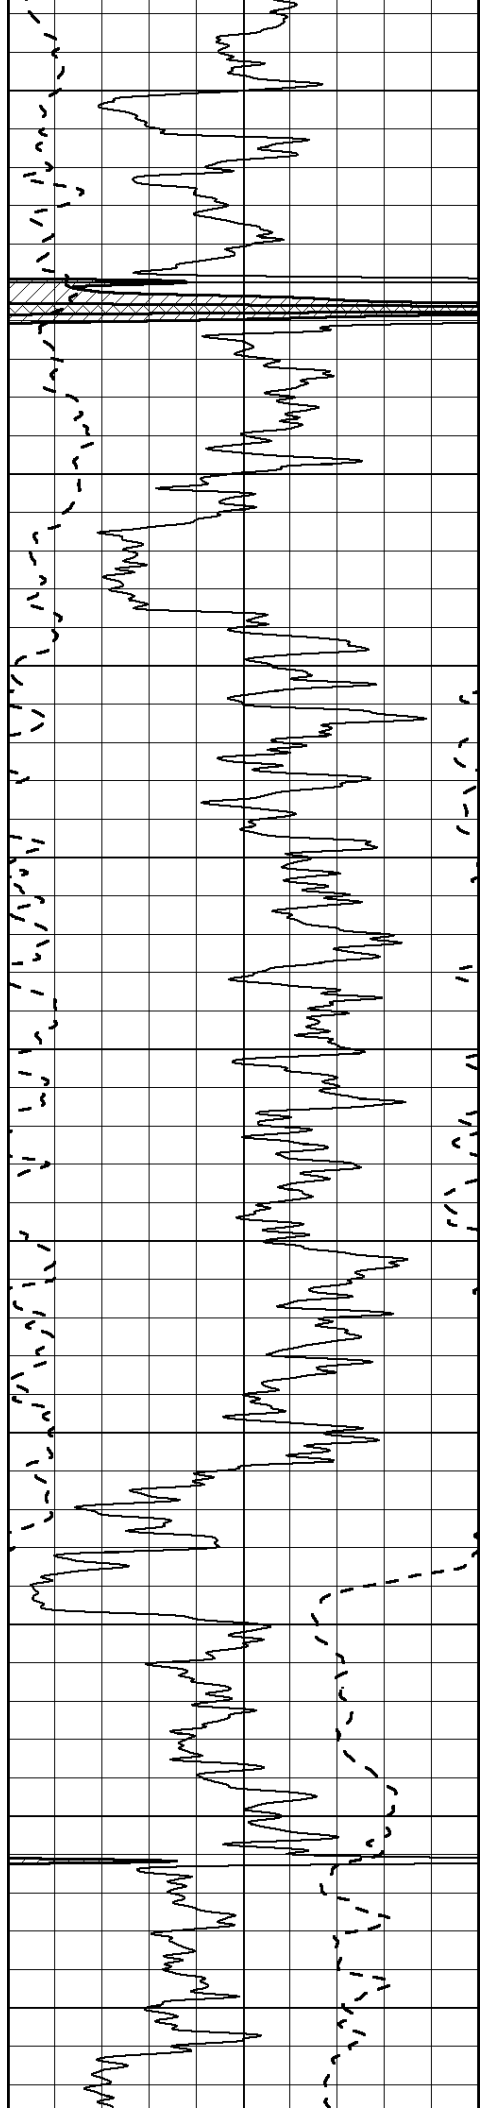



1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

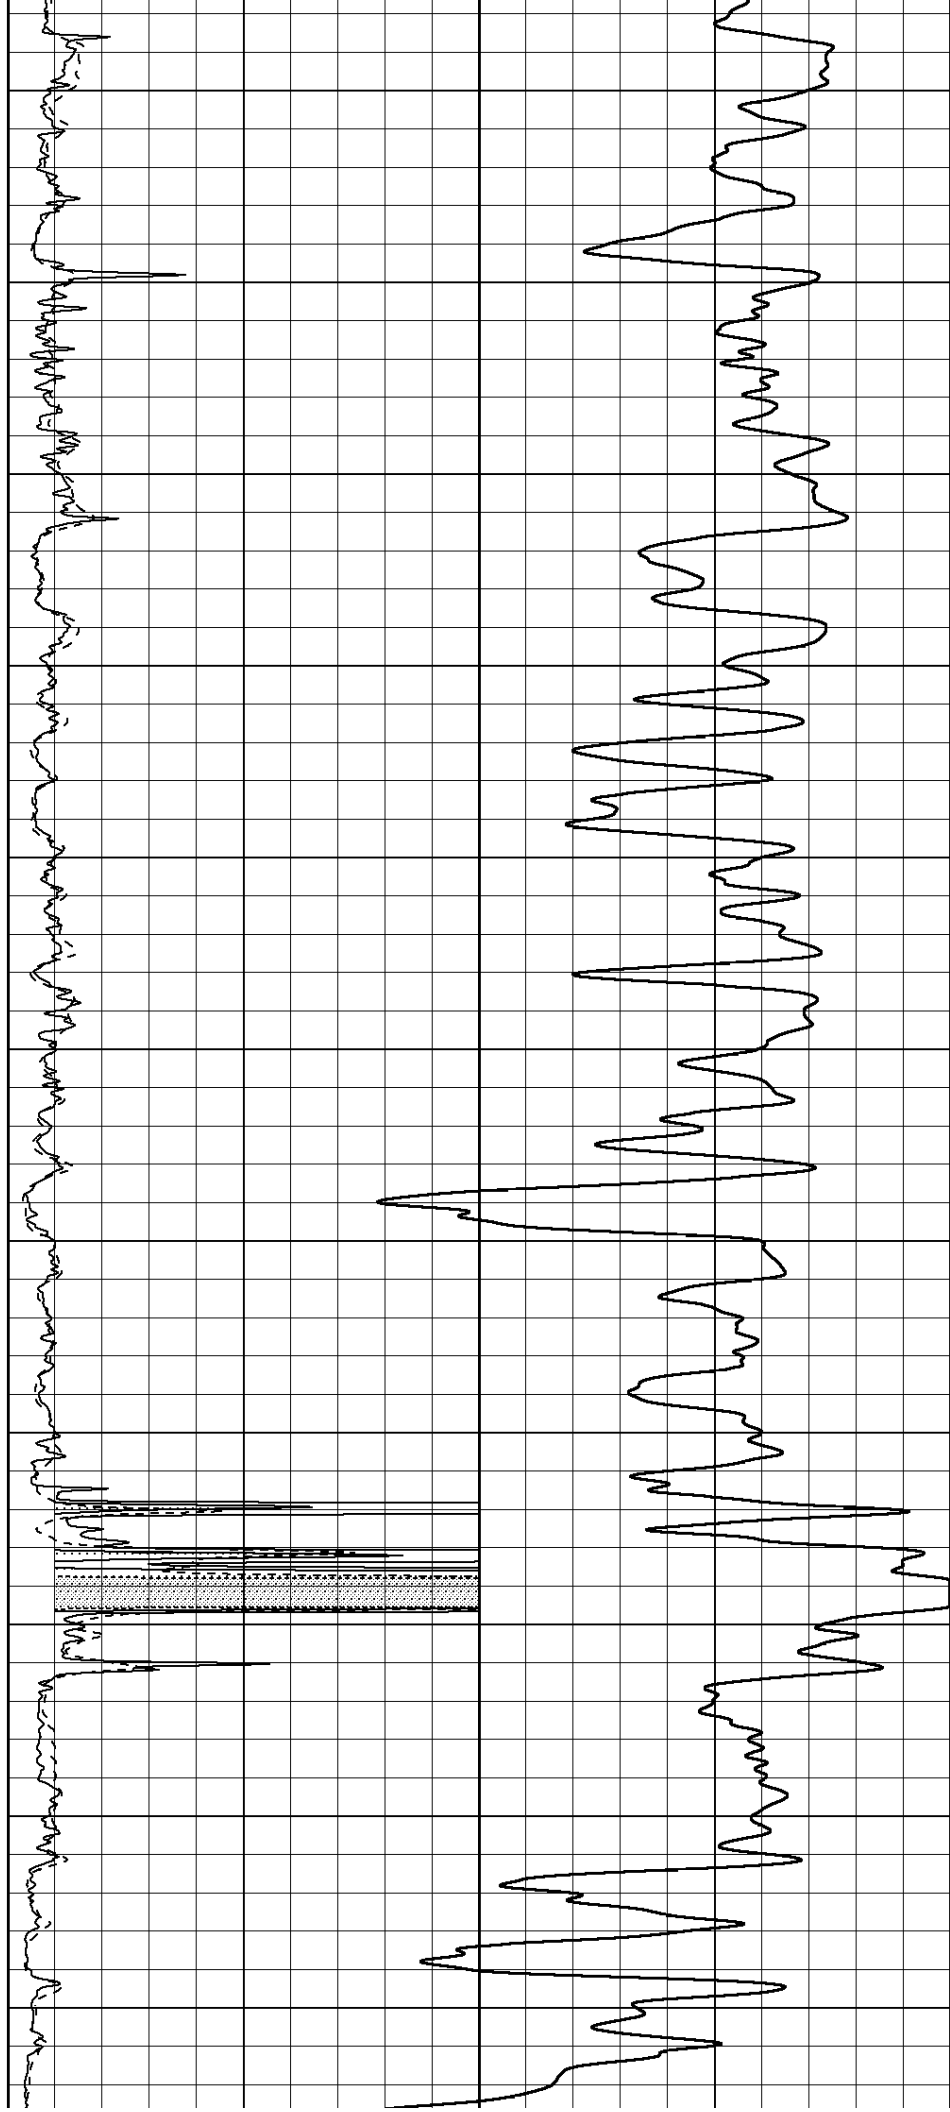

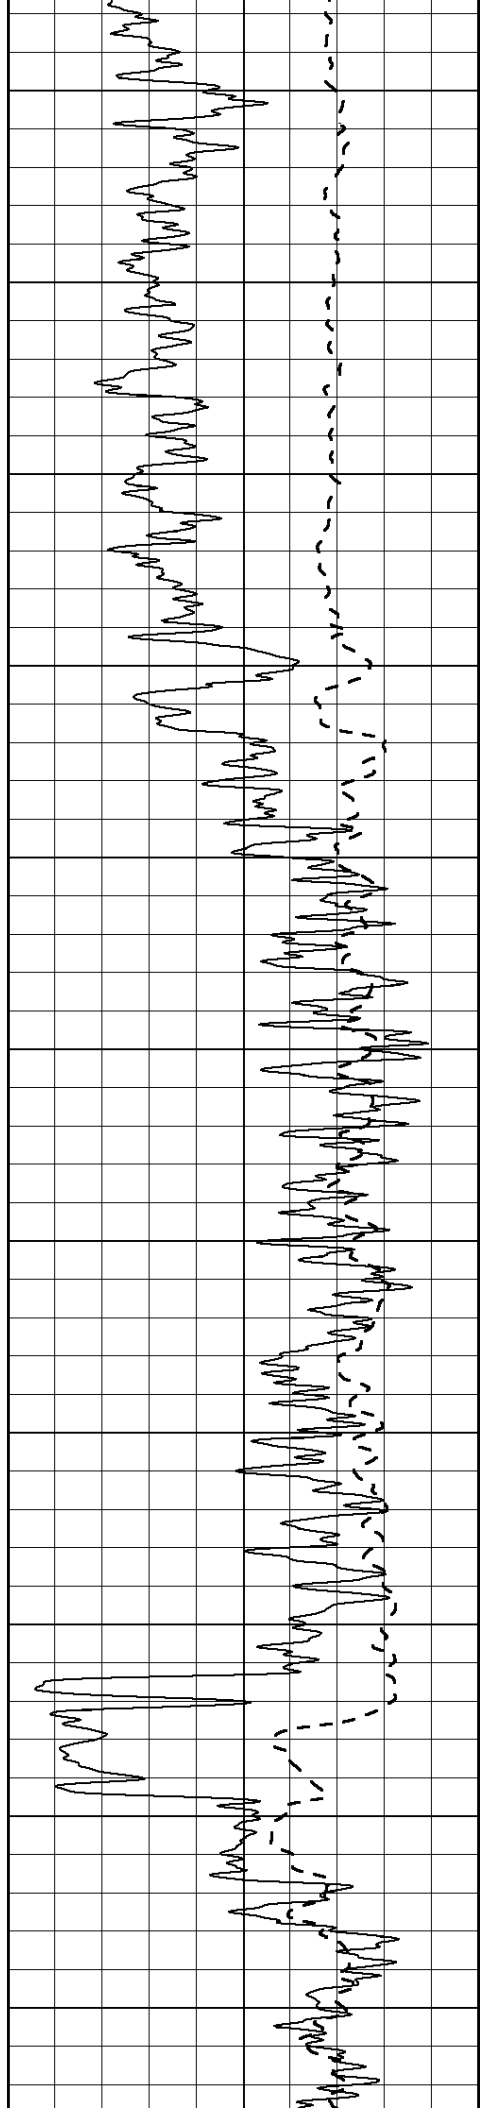

1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050

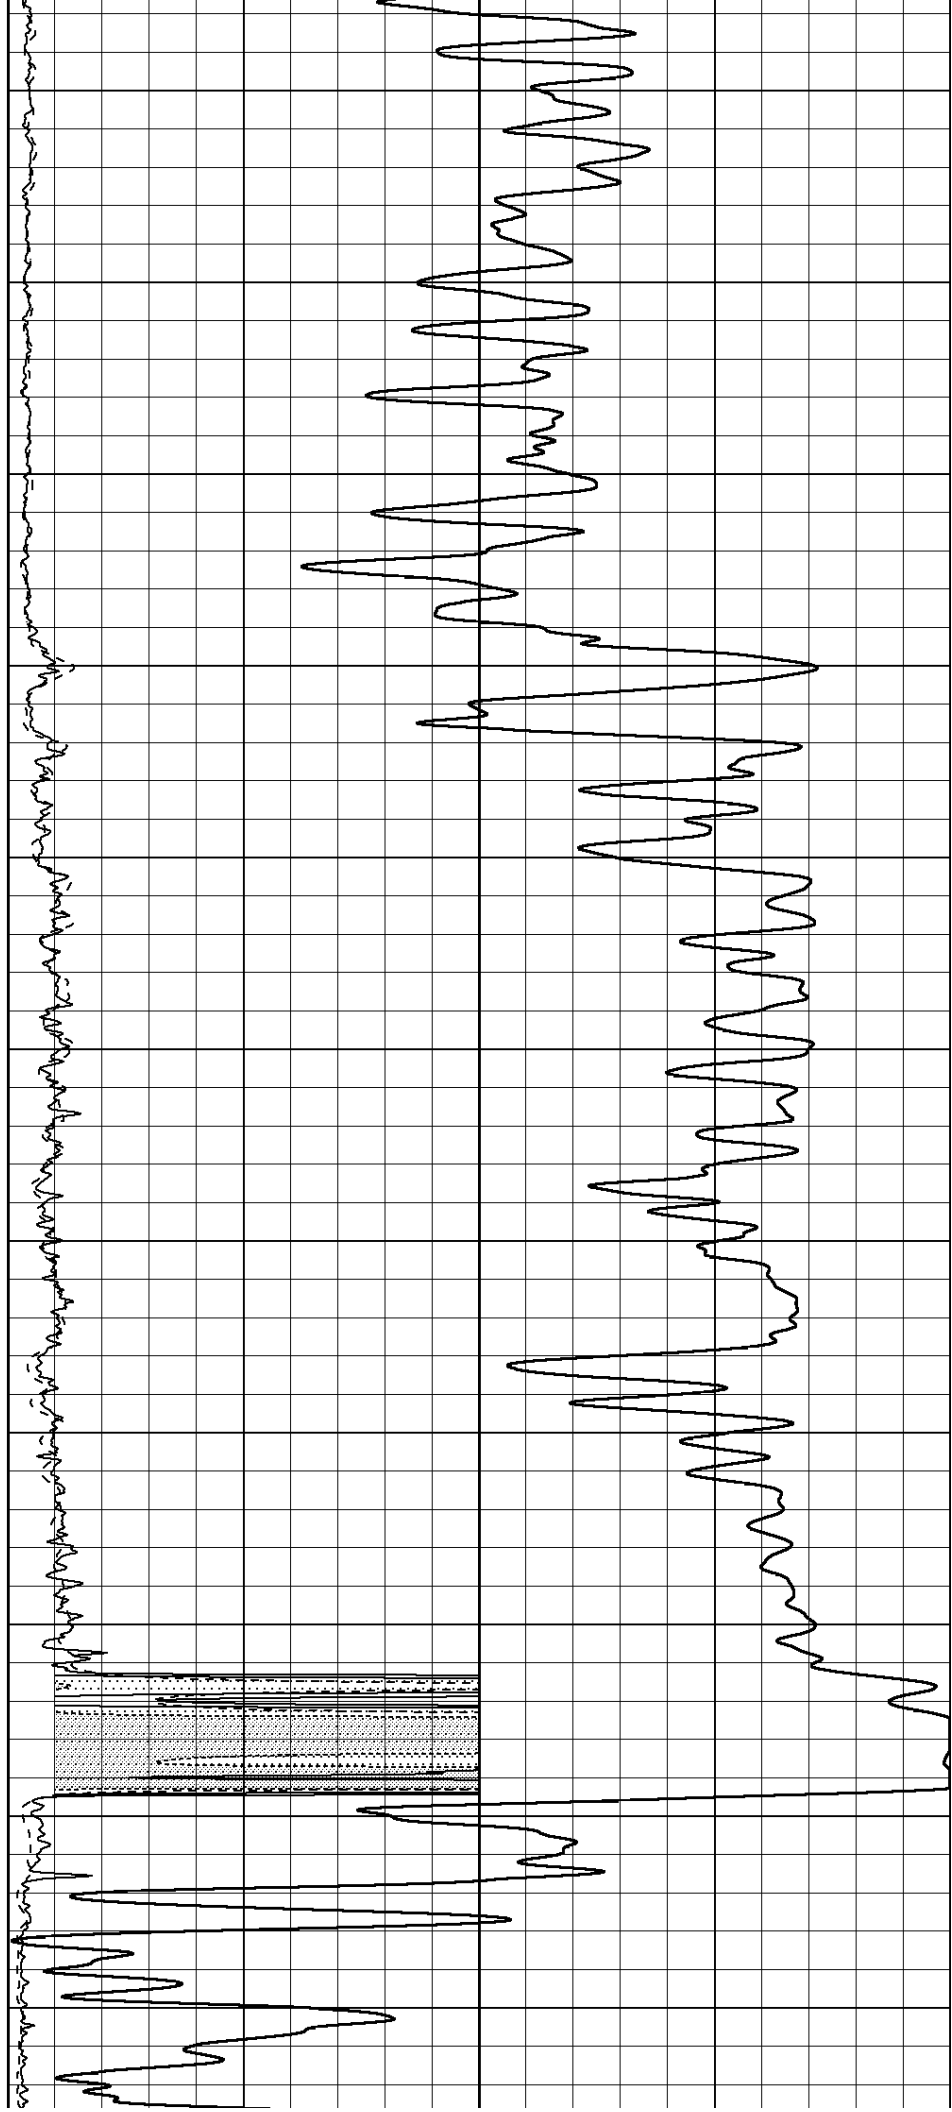

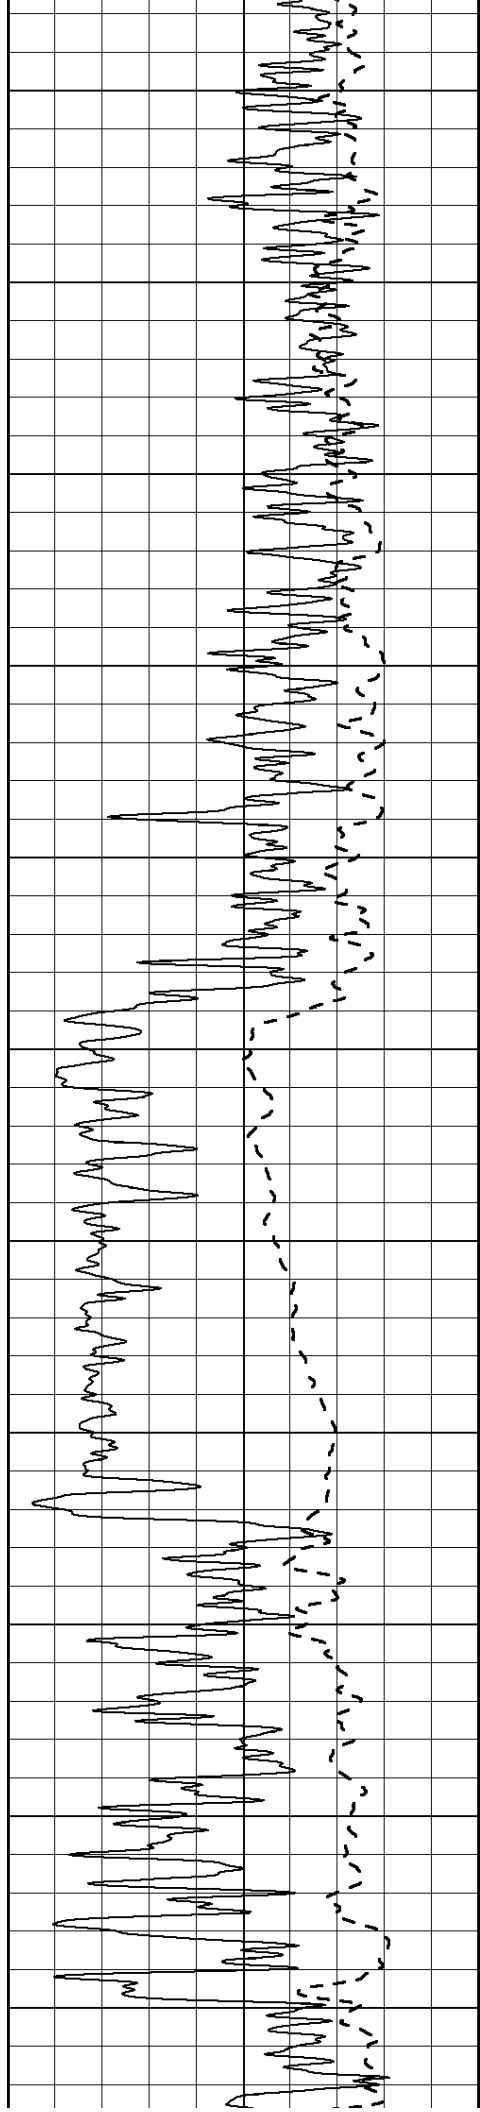

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

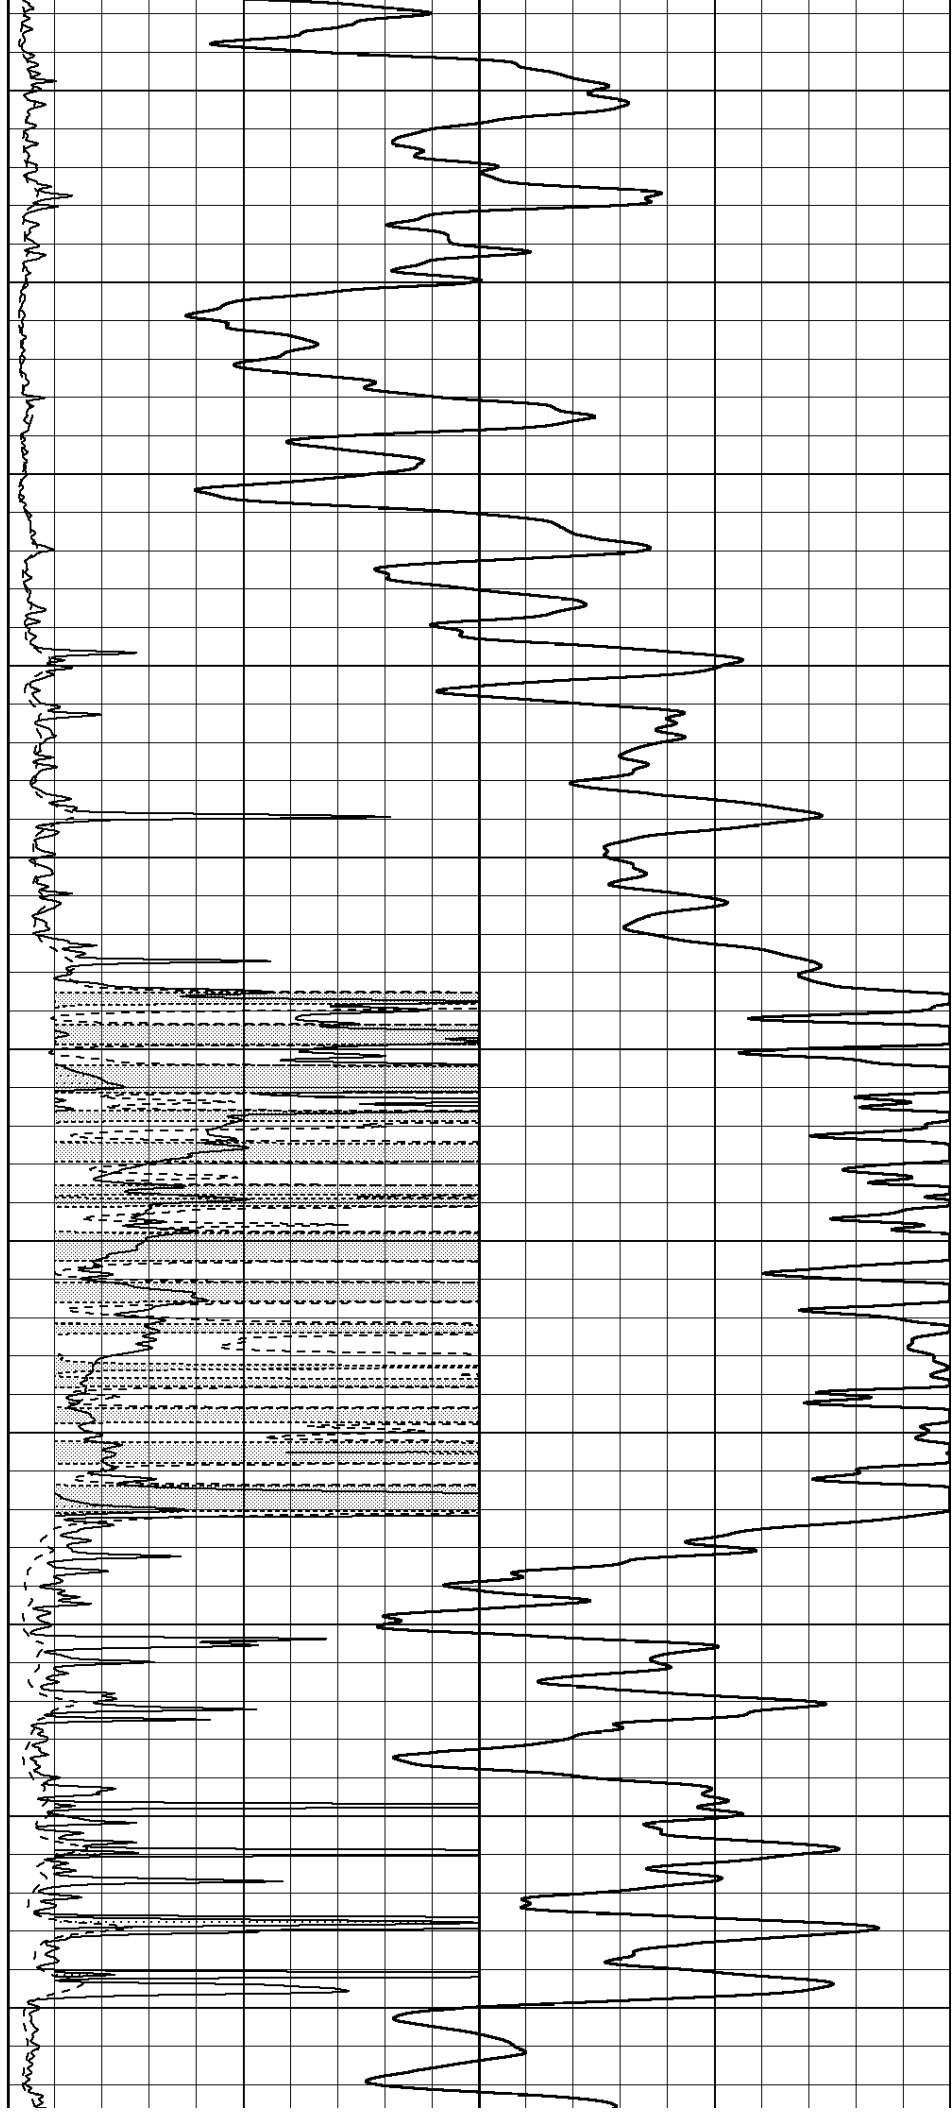

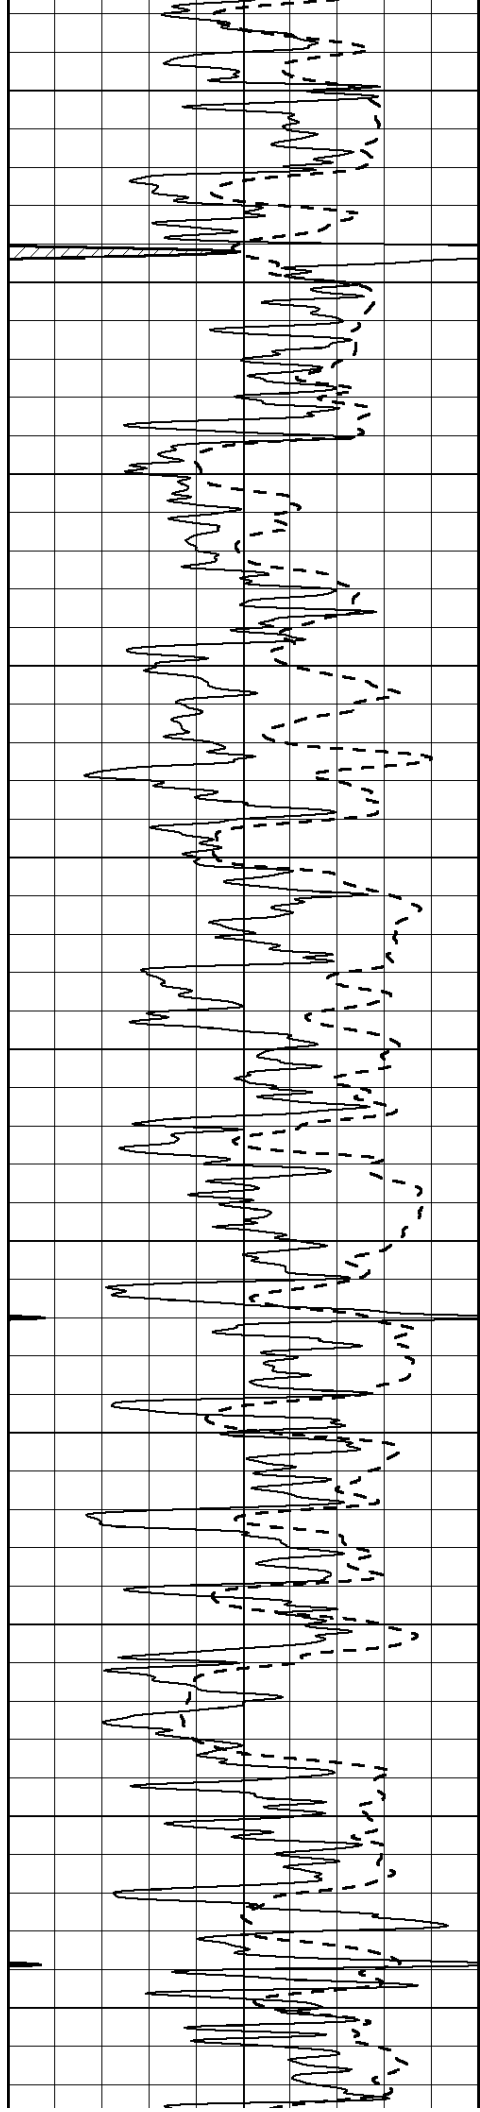

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

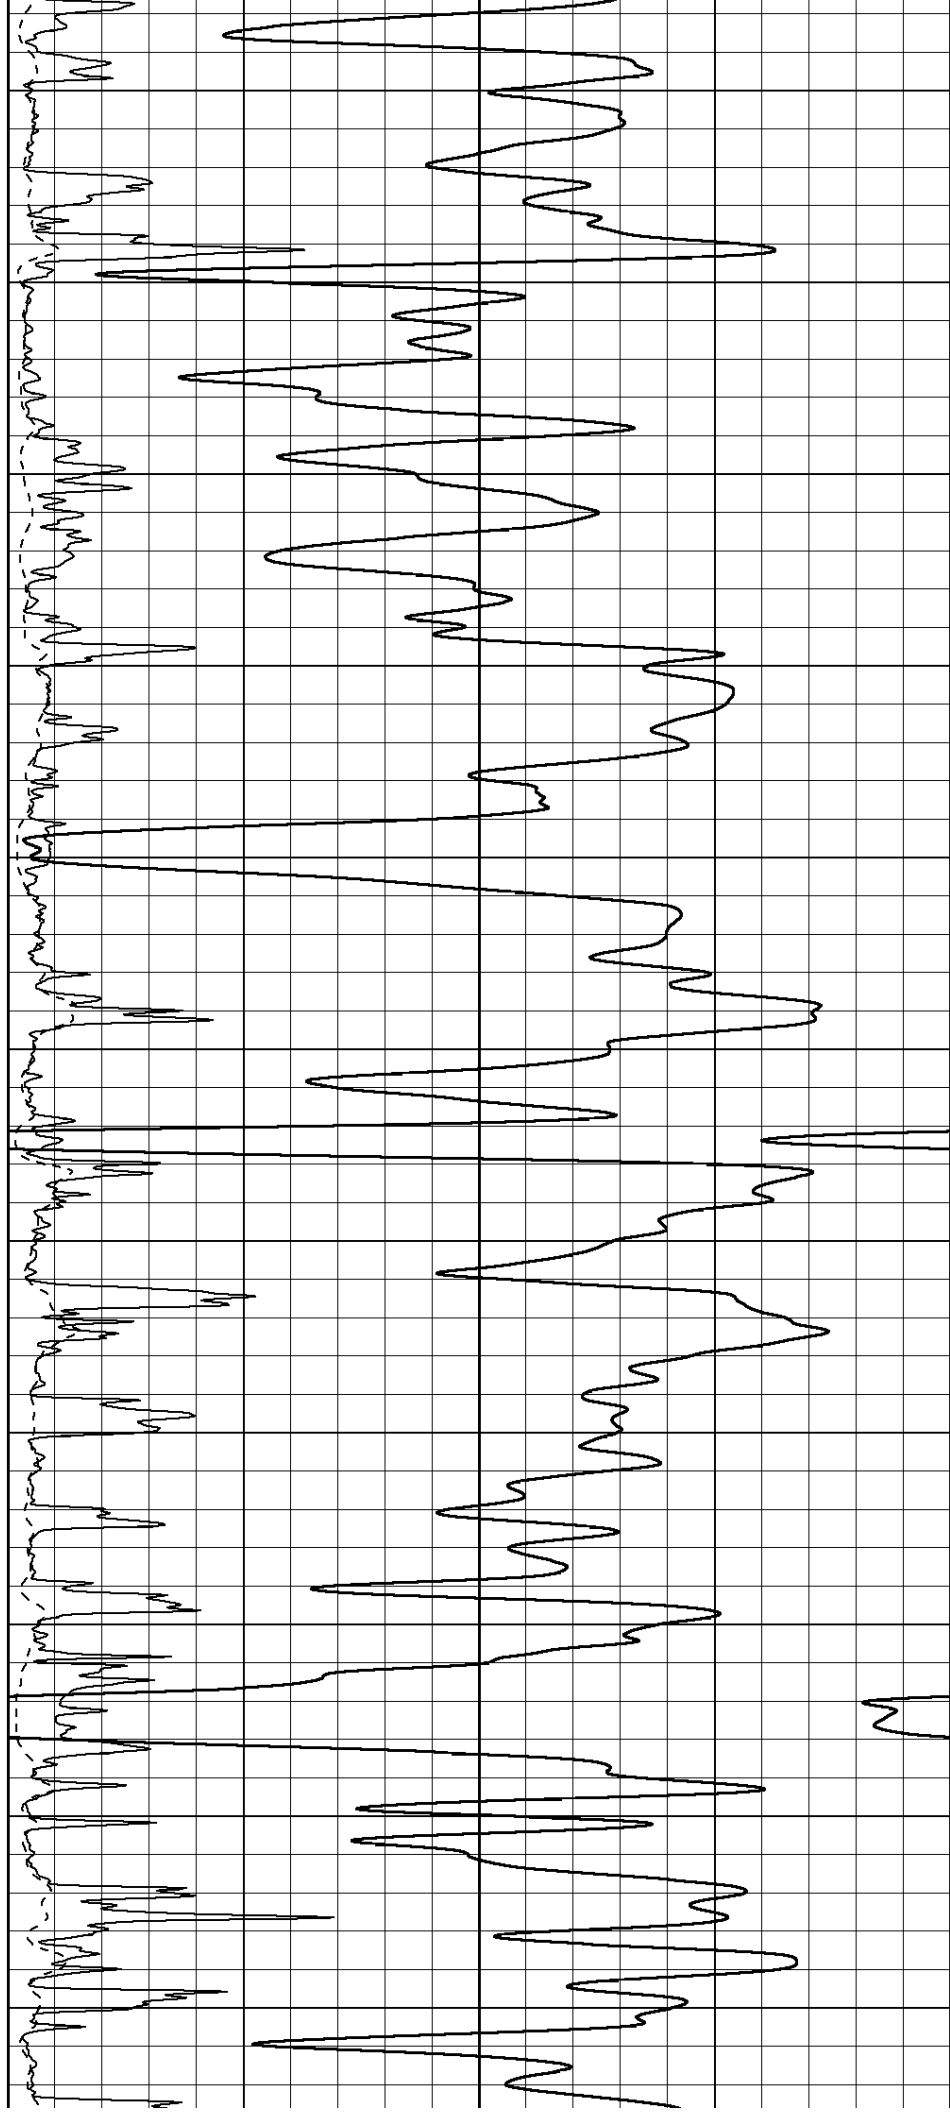

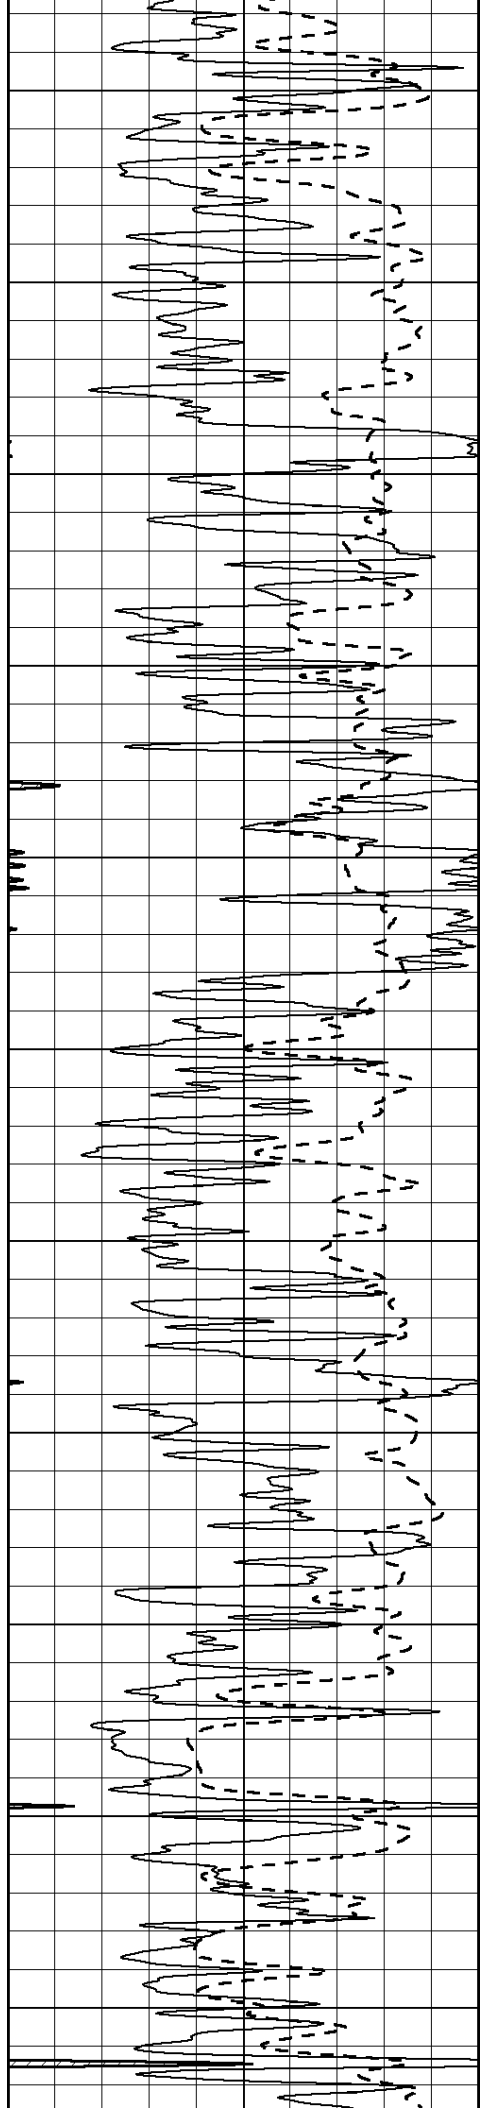

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

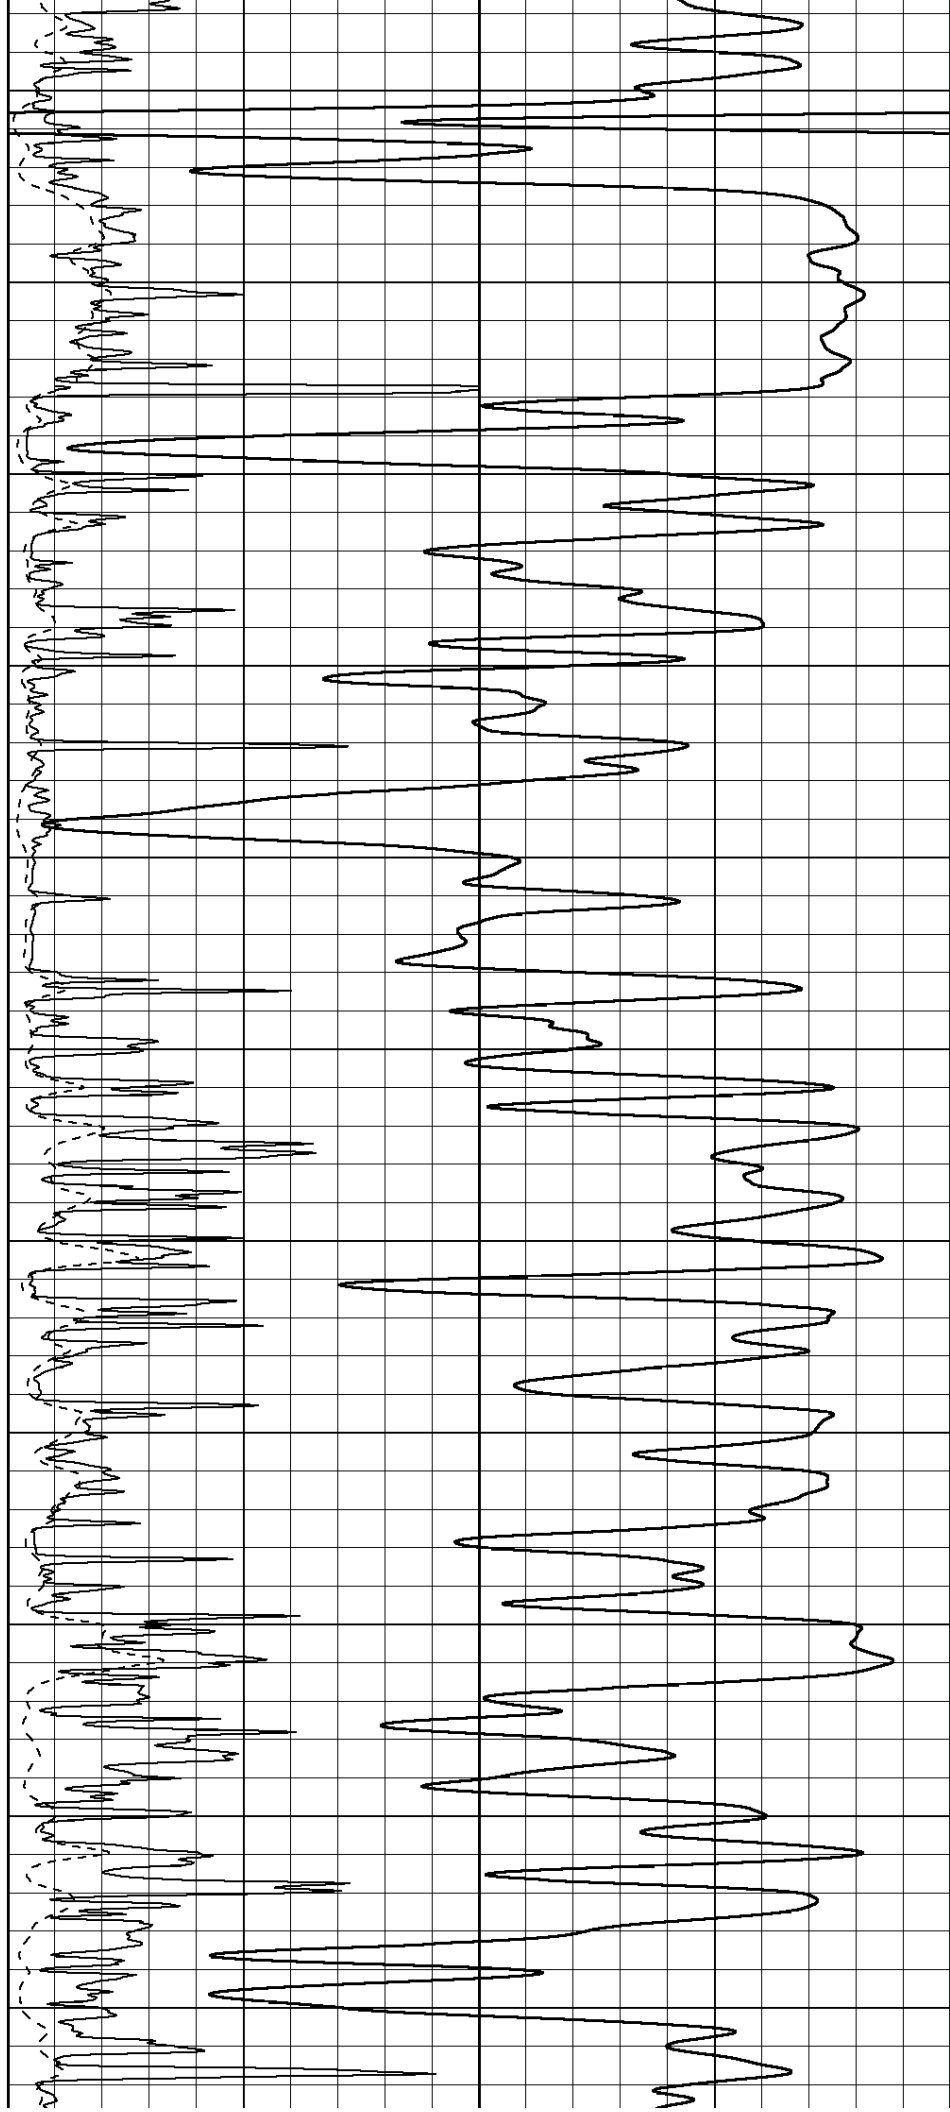

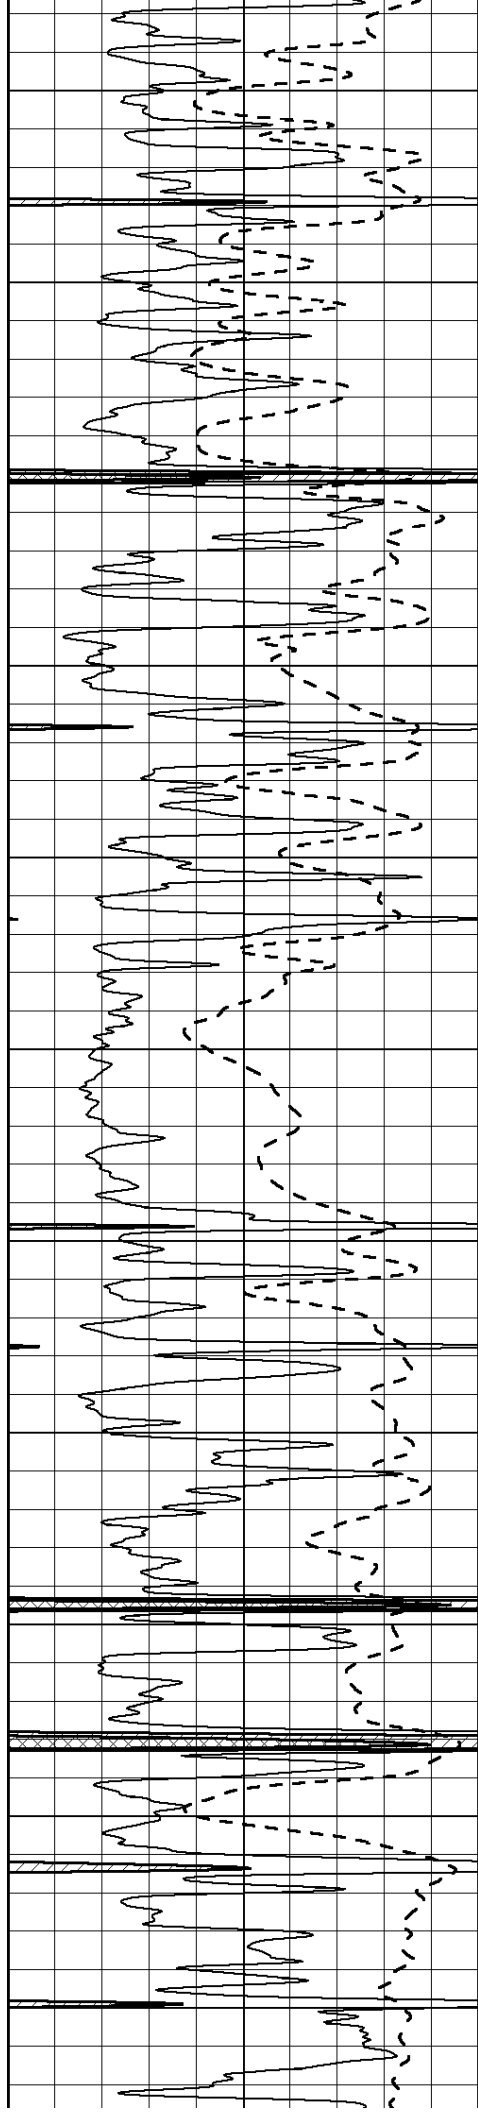

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

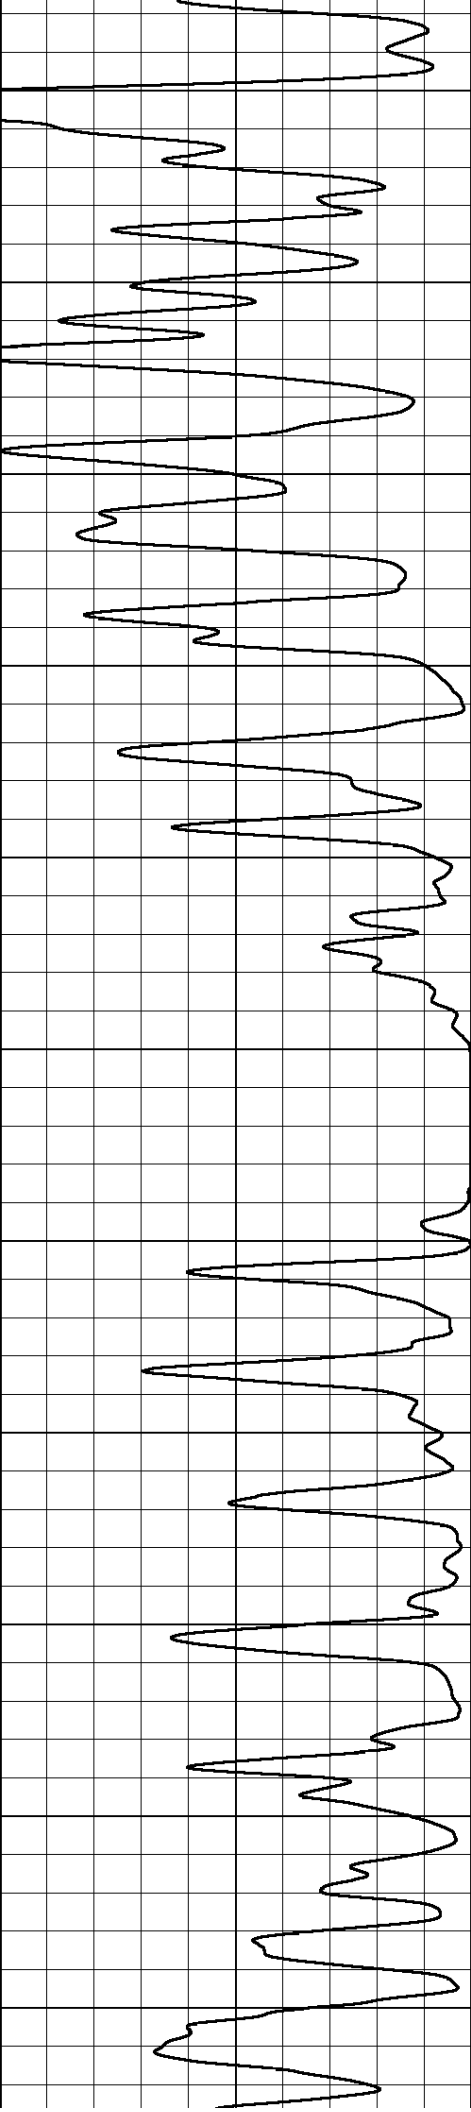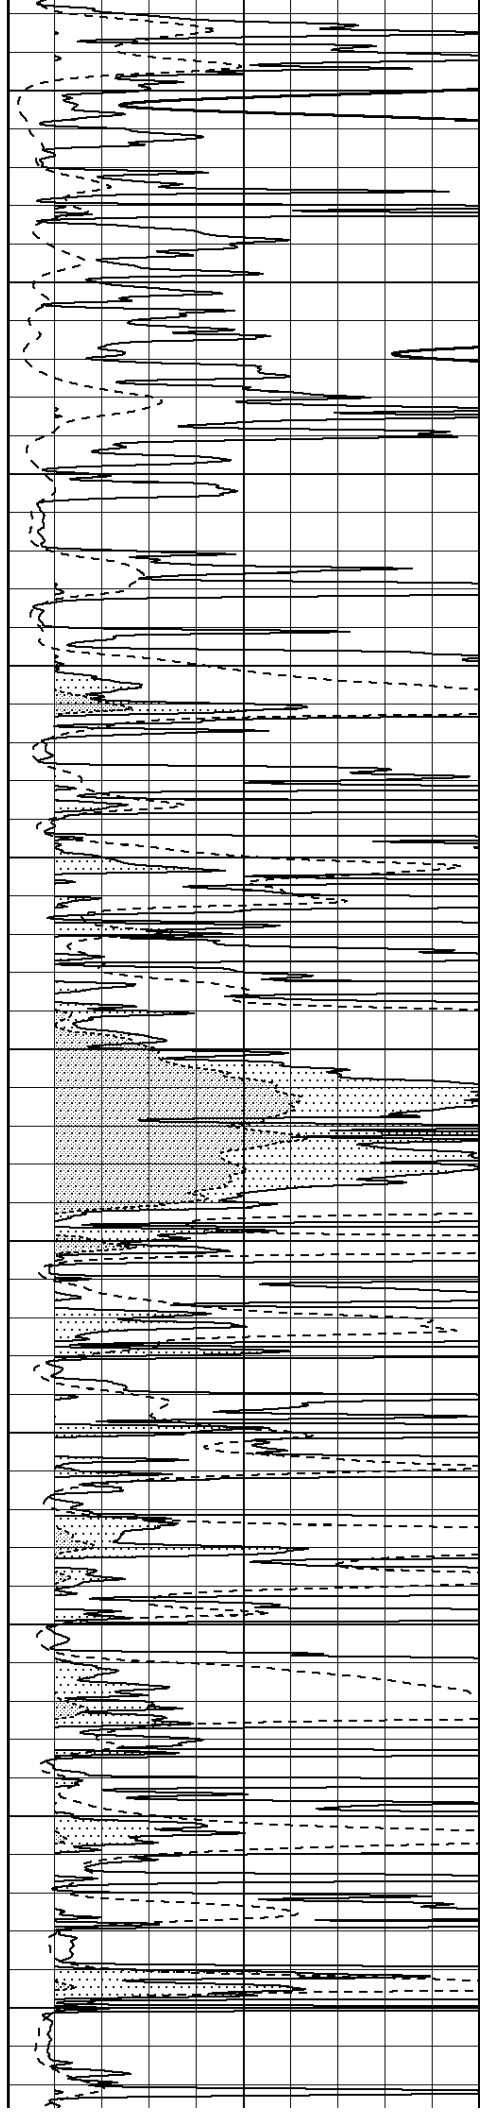

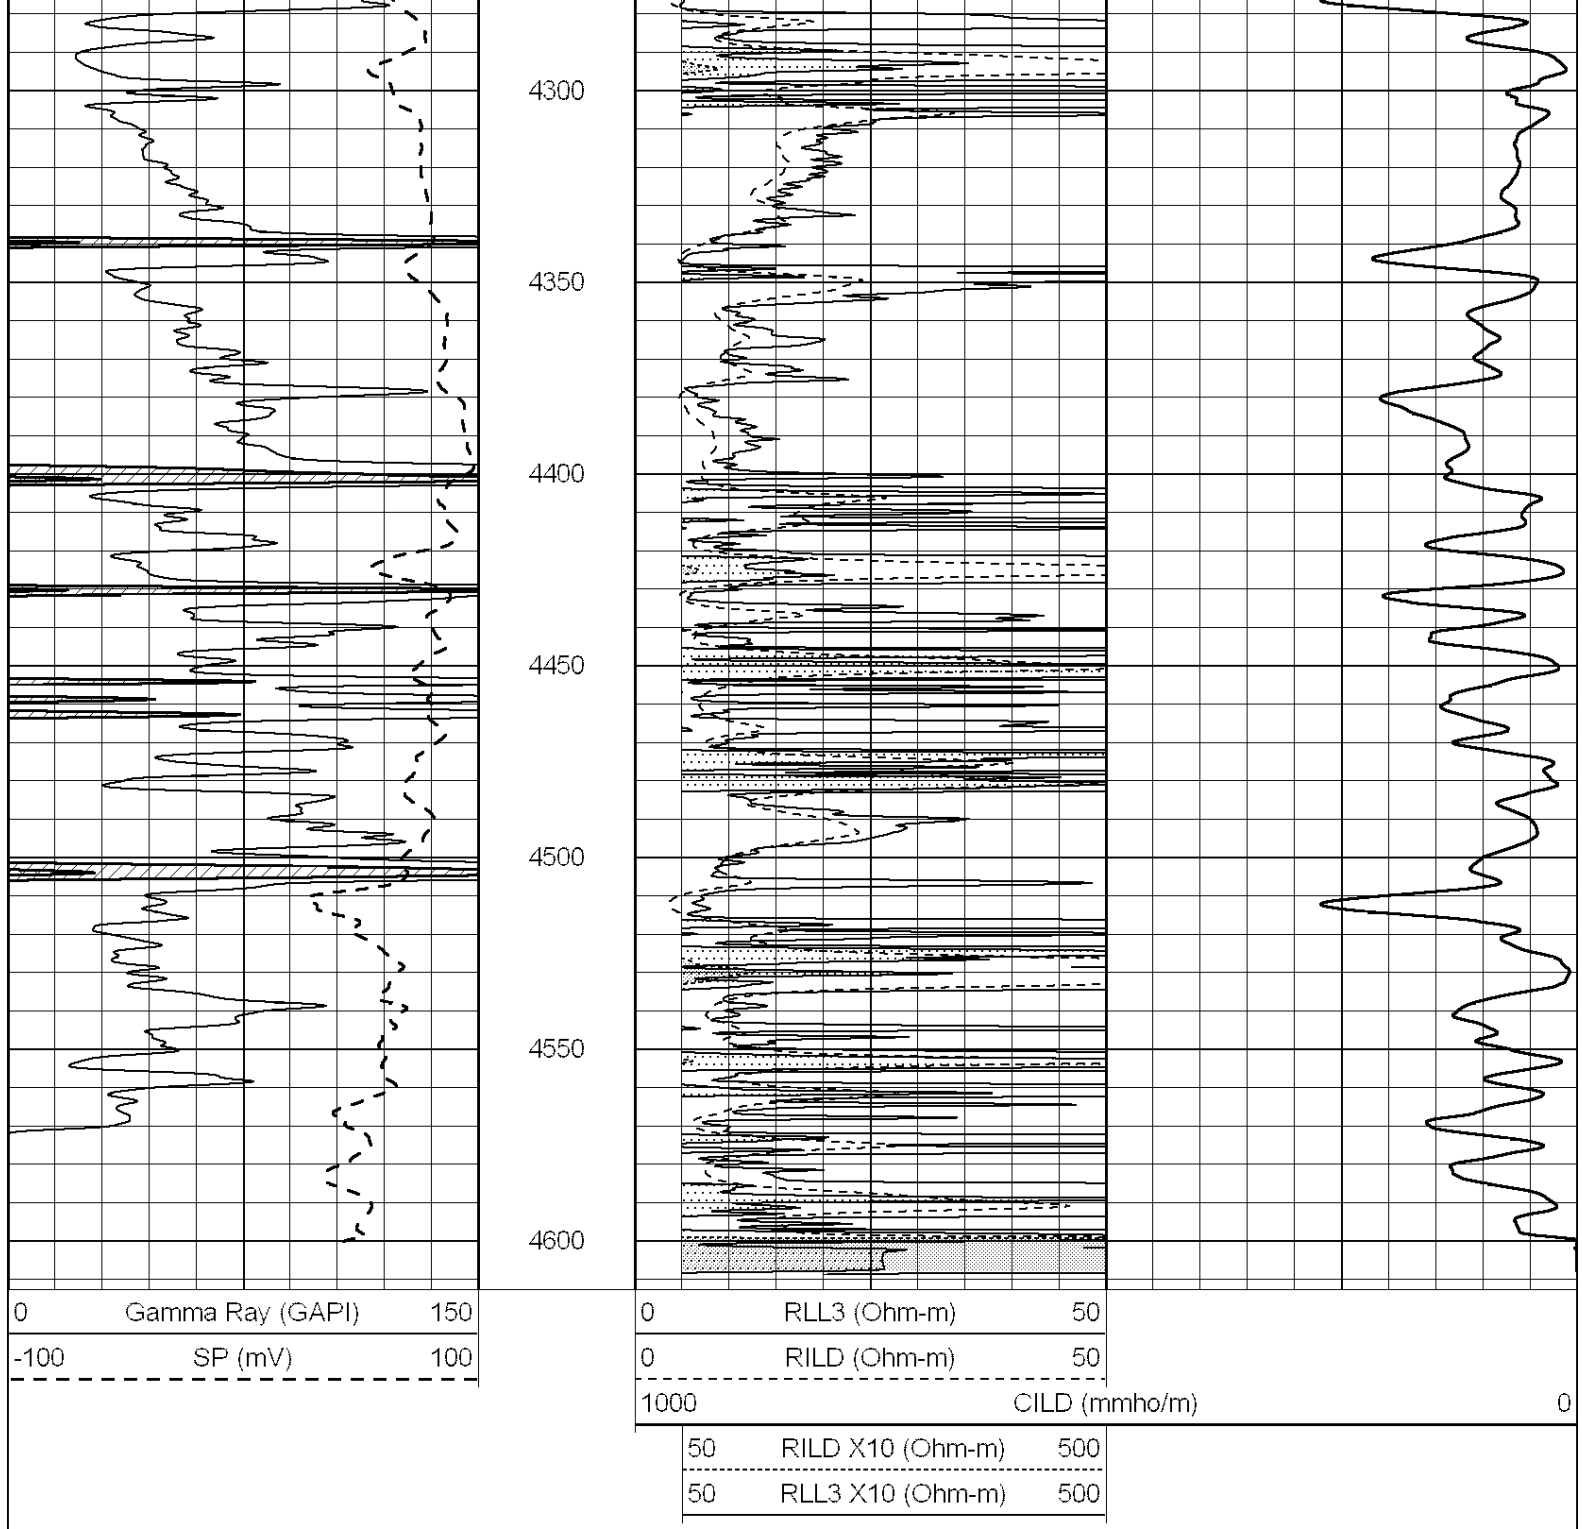


NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

ANHYDRITE

Database File: 011815ddn.db
Dataset Pathname: pass3.8
Presentation Format: _dil
Dataset Creation: Mon Nov 25 22:40:26 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

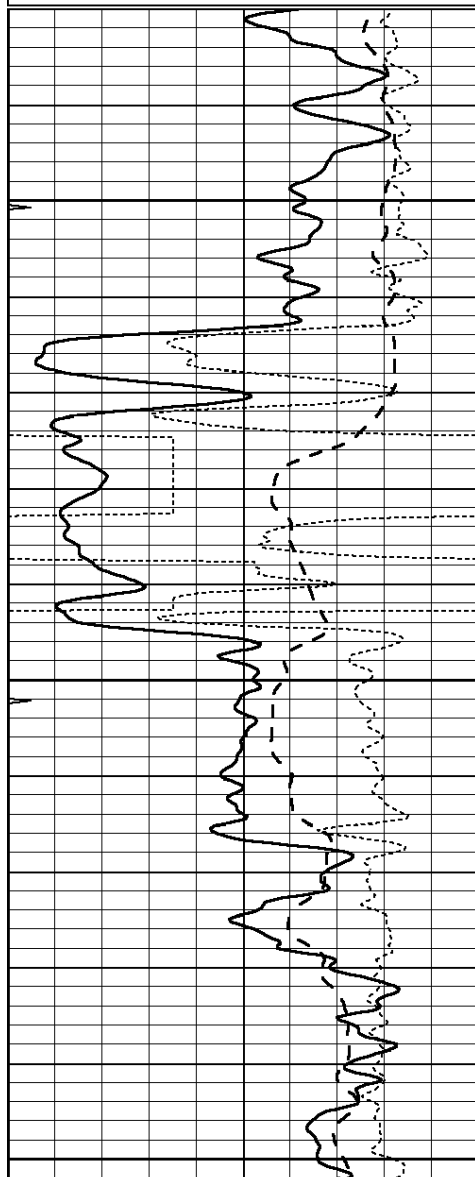


1950

2000

2050

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

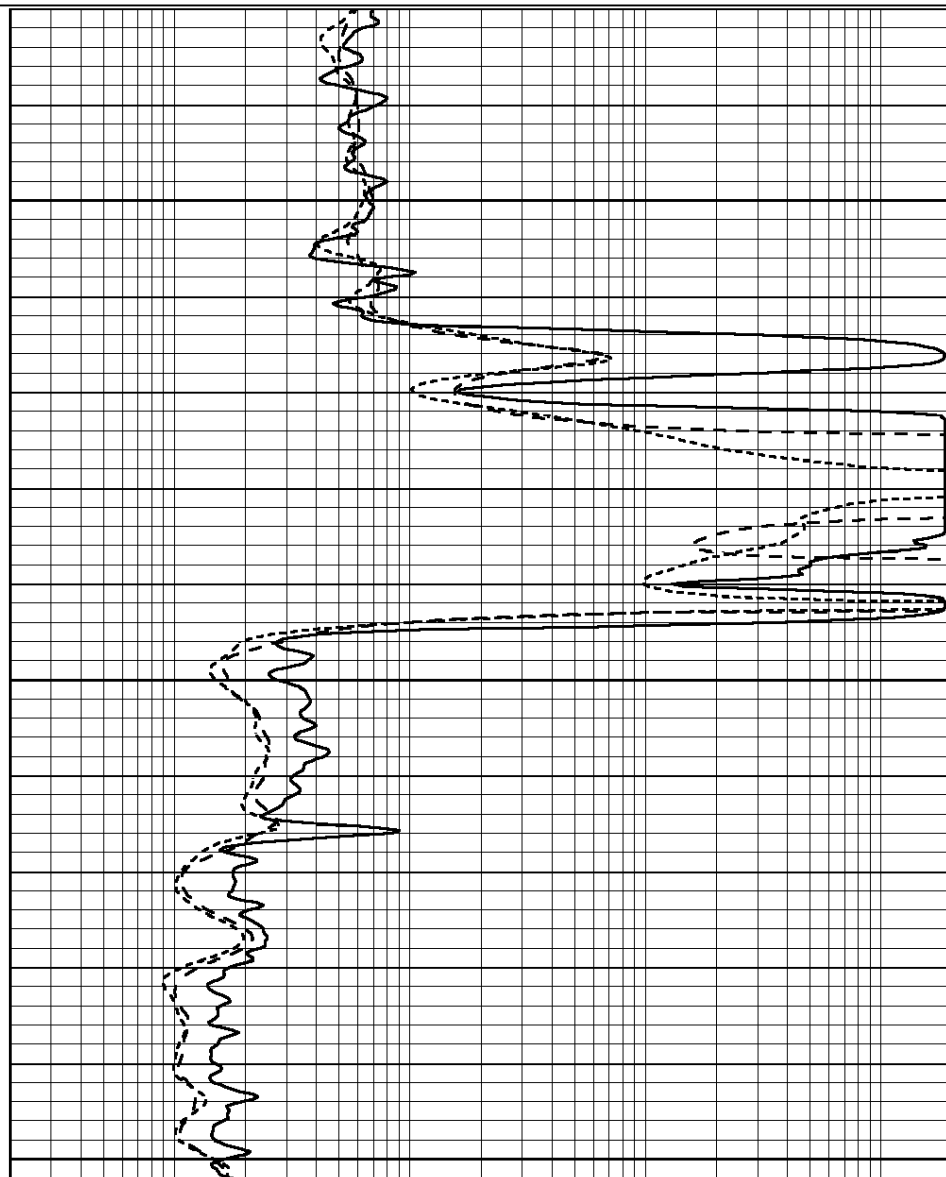

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

MAIN SECTION

Database File: 011815ddn.db
Dataset Pathname: pass3.7
Presentation Format: dil
Dataset Creation: Mon Nov 25 22:40:11 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

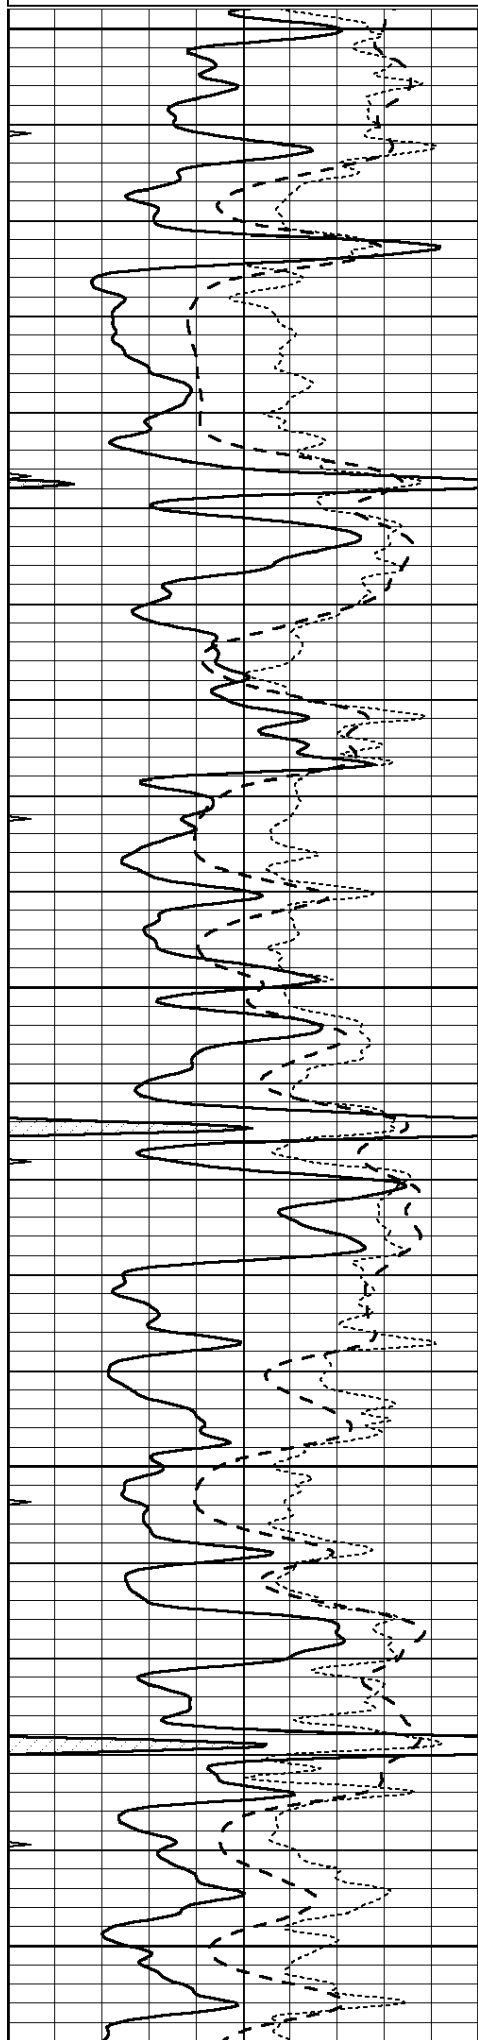


3600


3650

3700

3750

3800

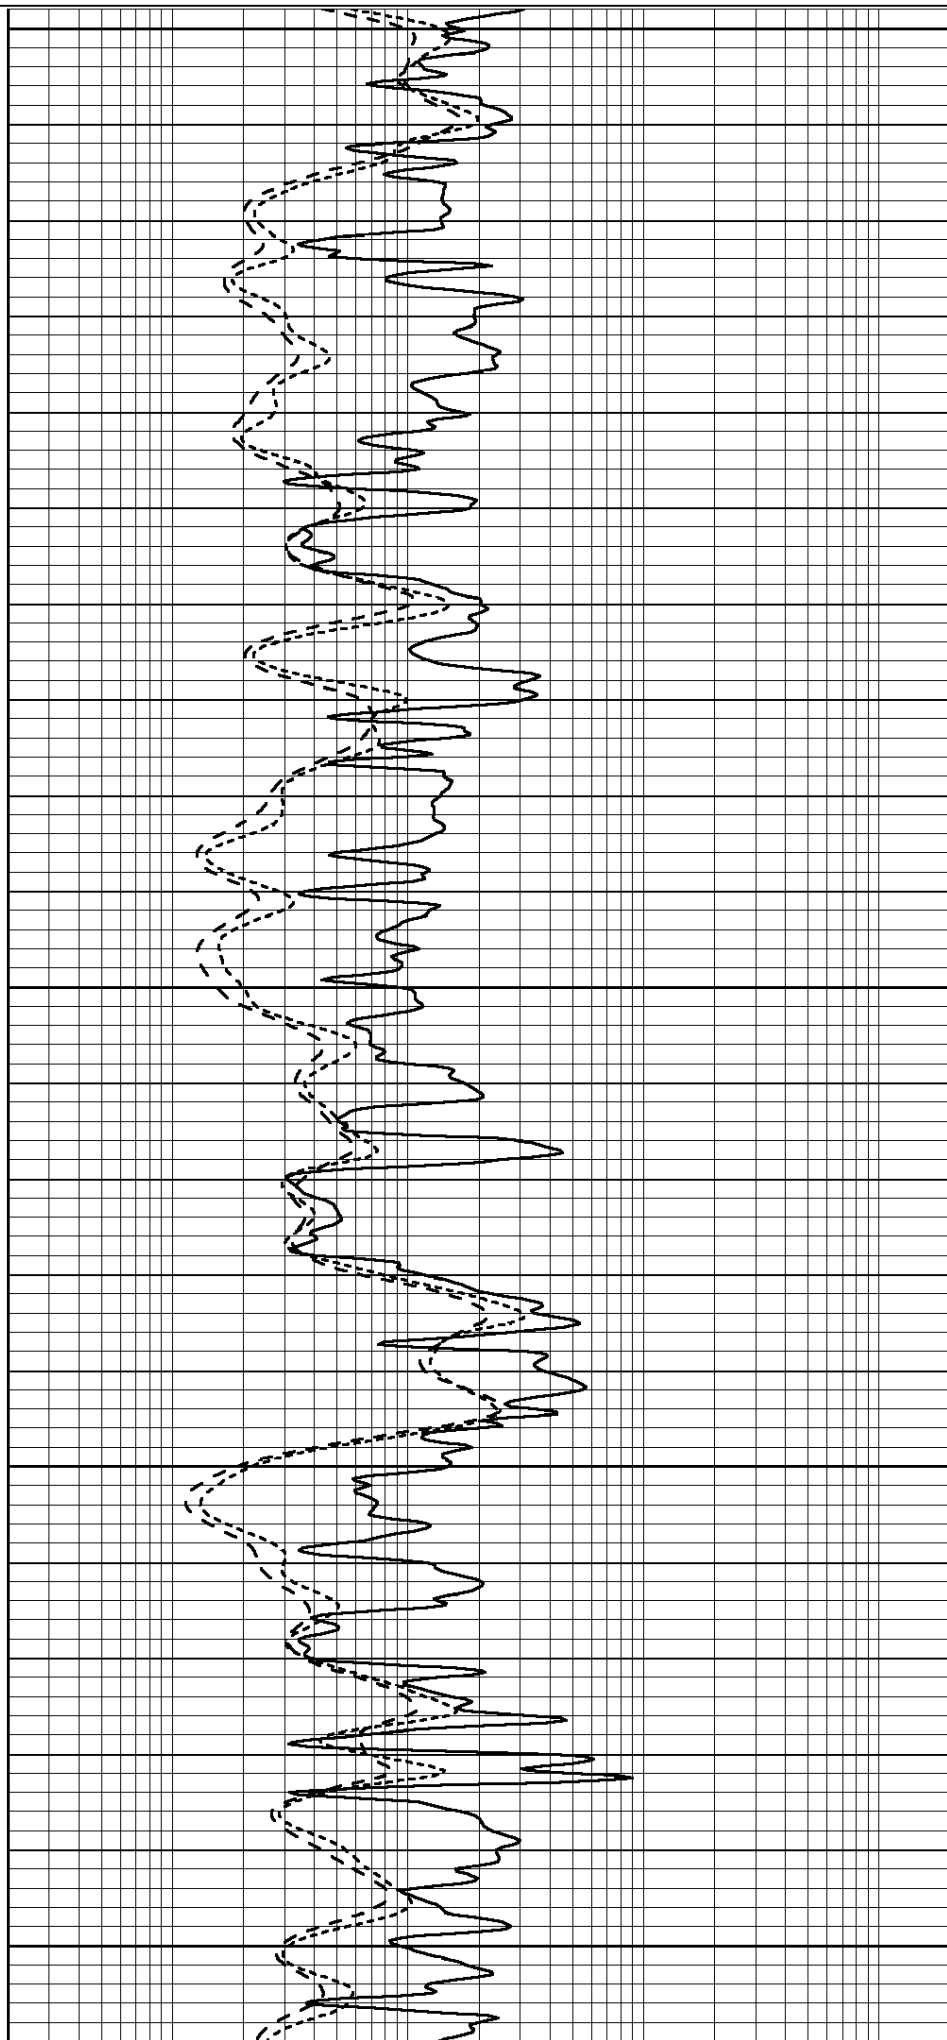

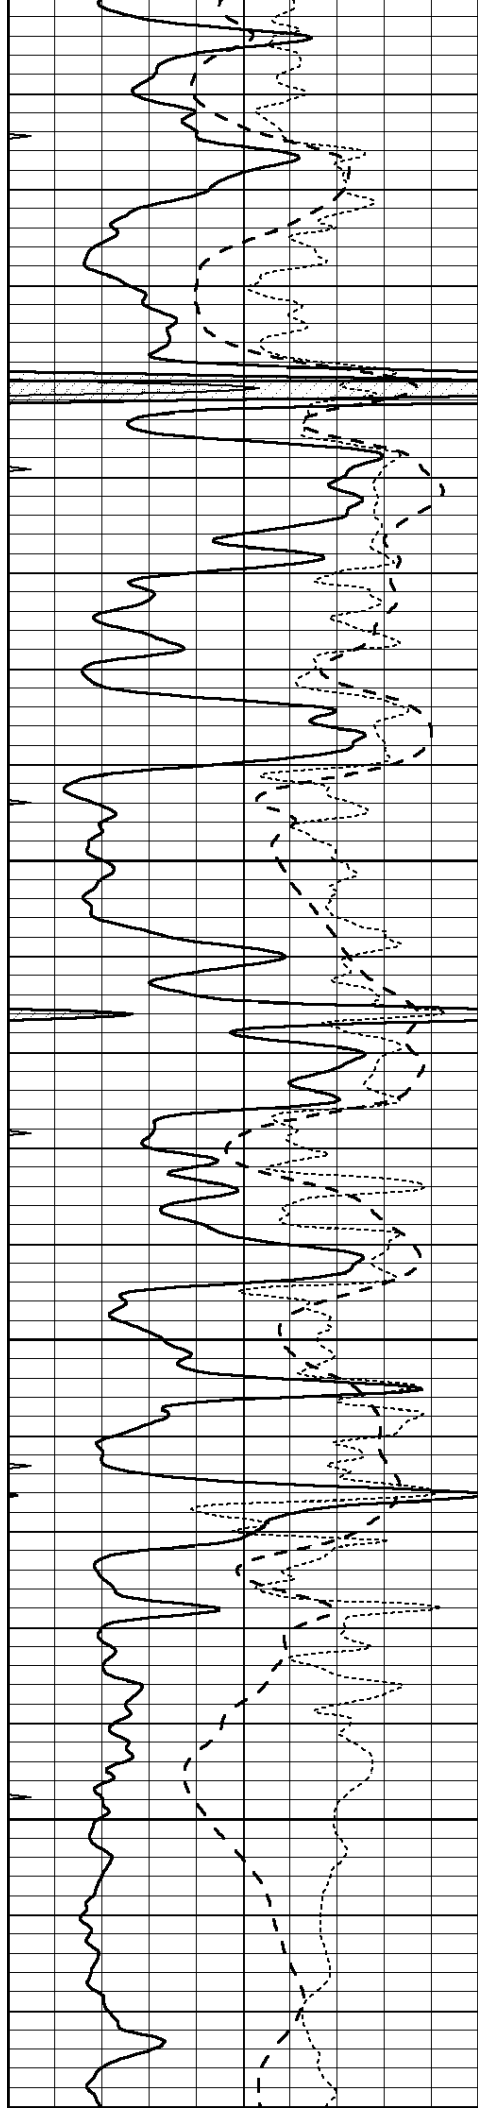



3850

3900

3950

4000

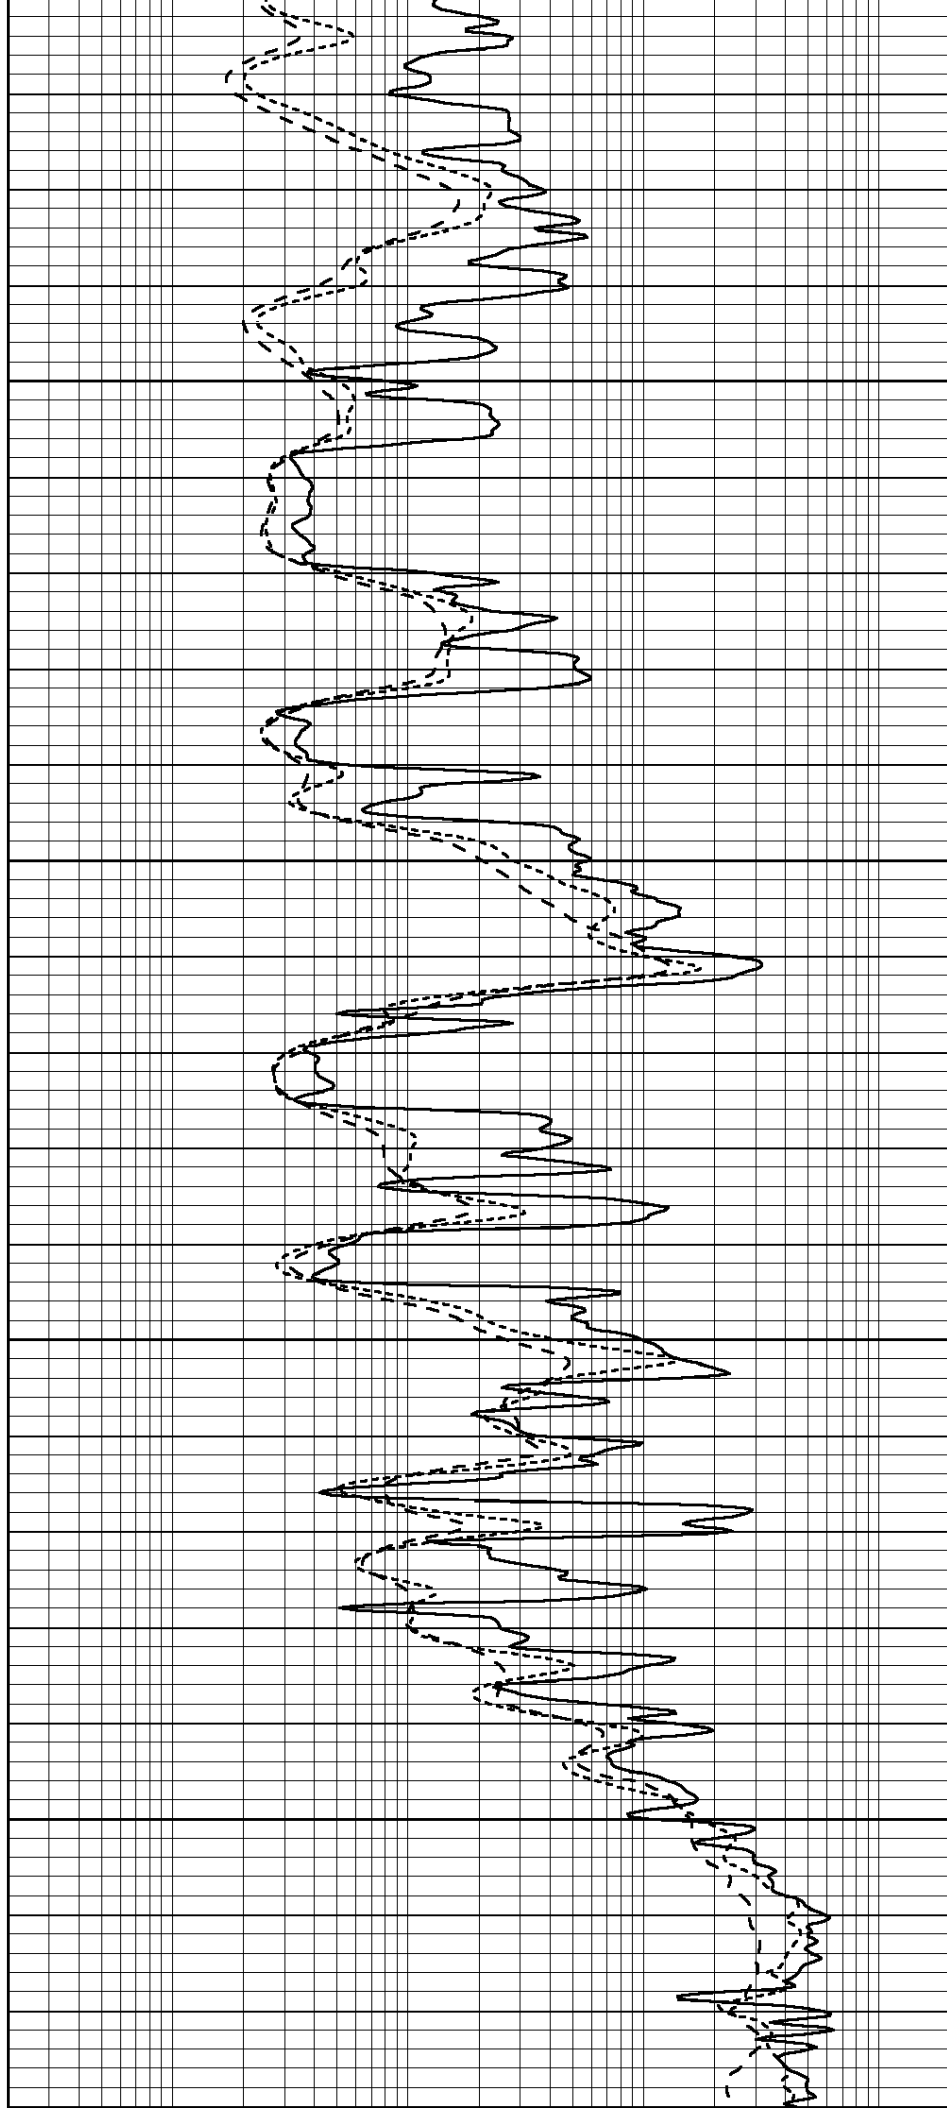

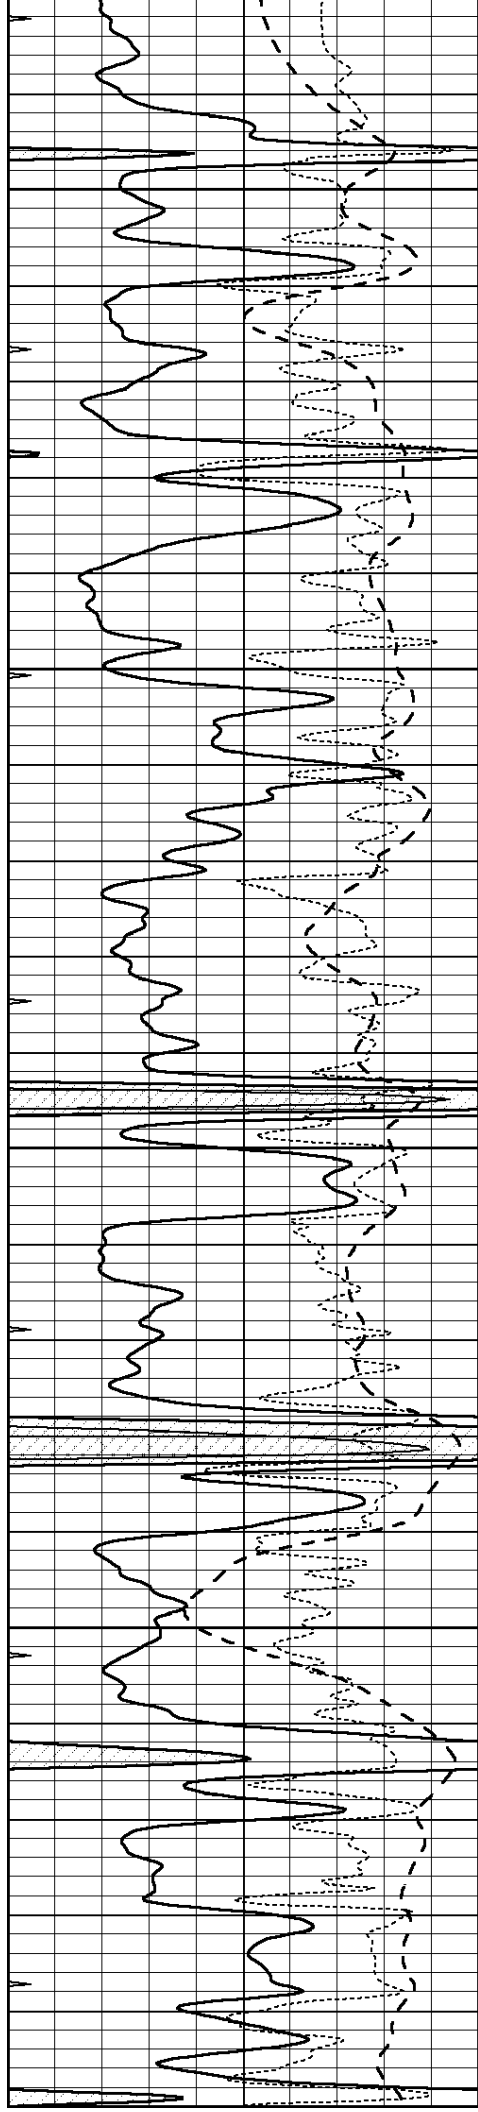


4050


4100

4150

4200

4250

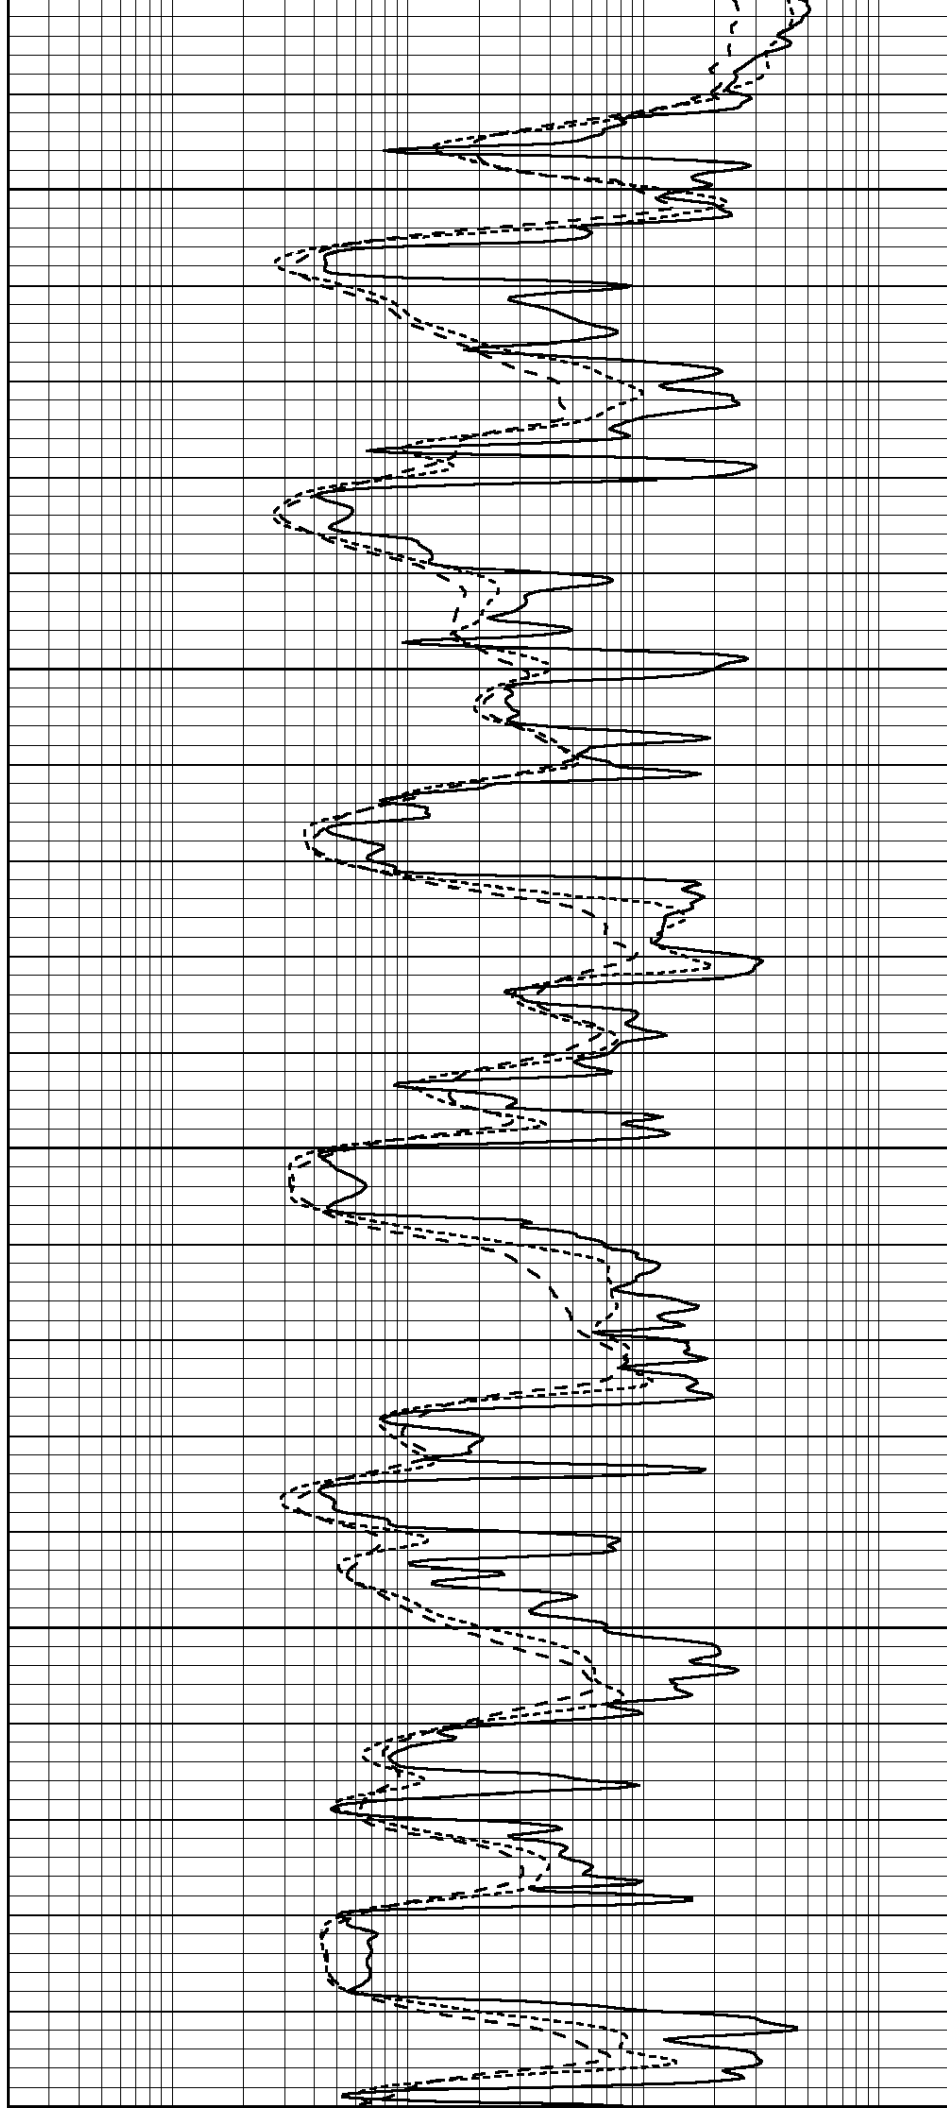

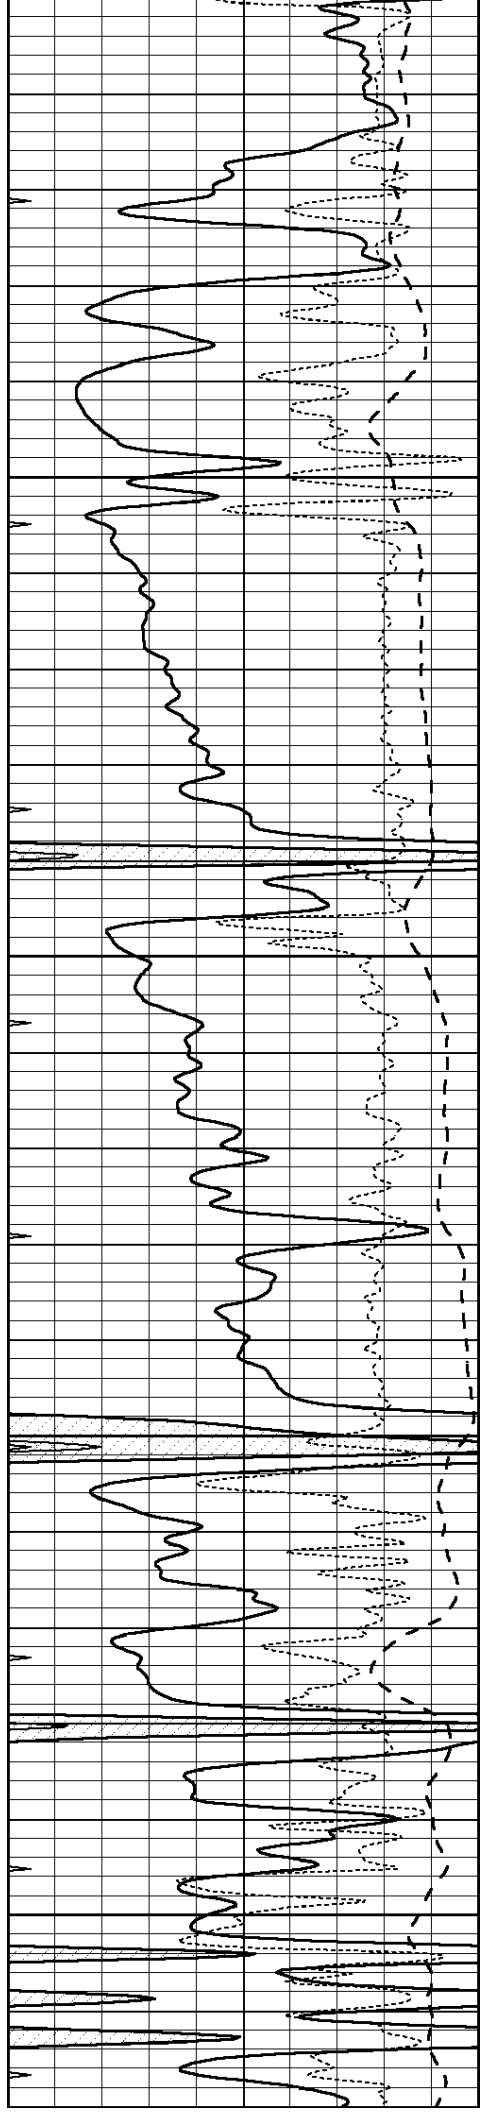


4250


4300

4350

4400

4450

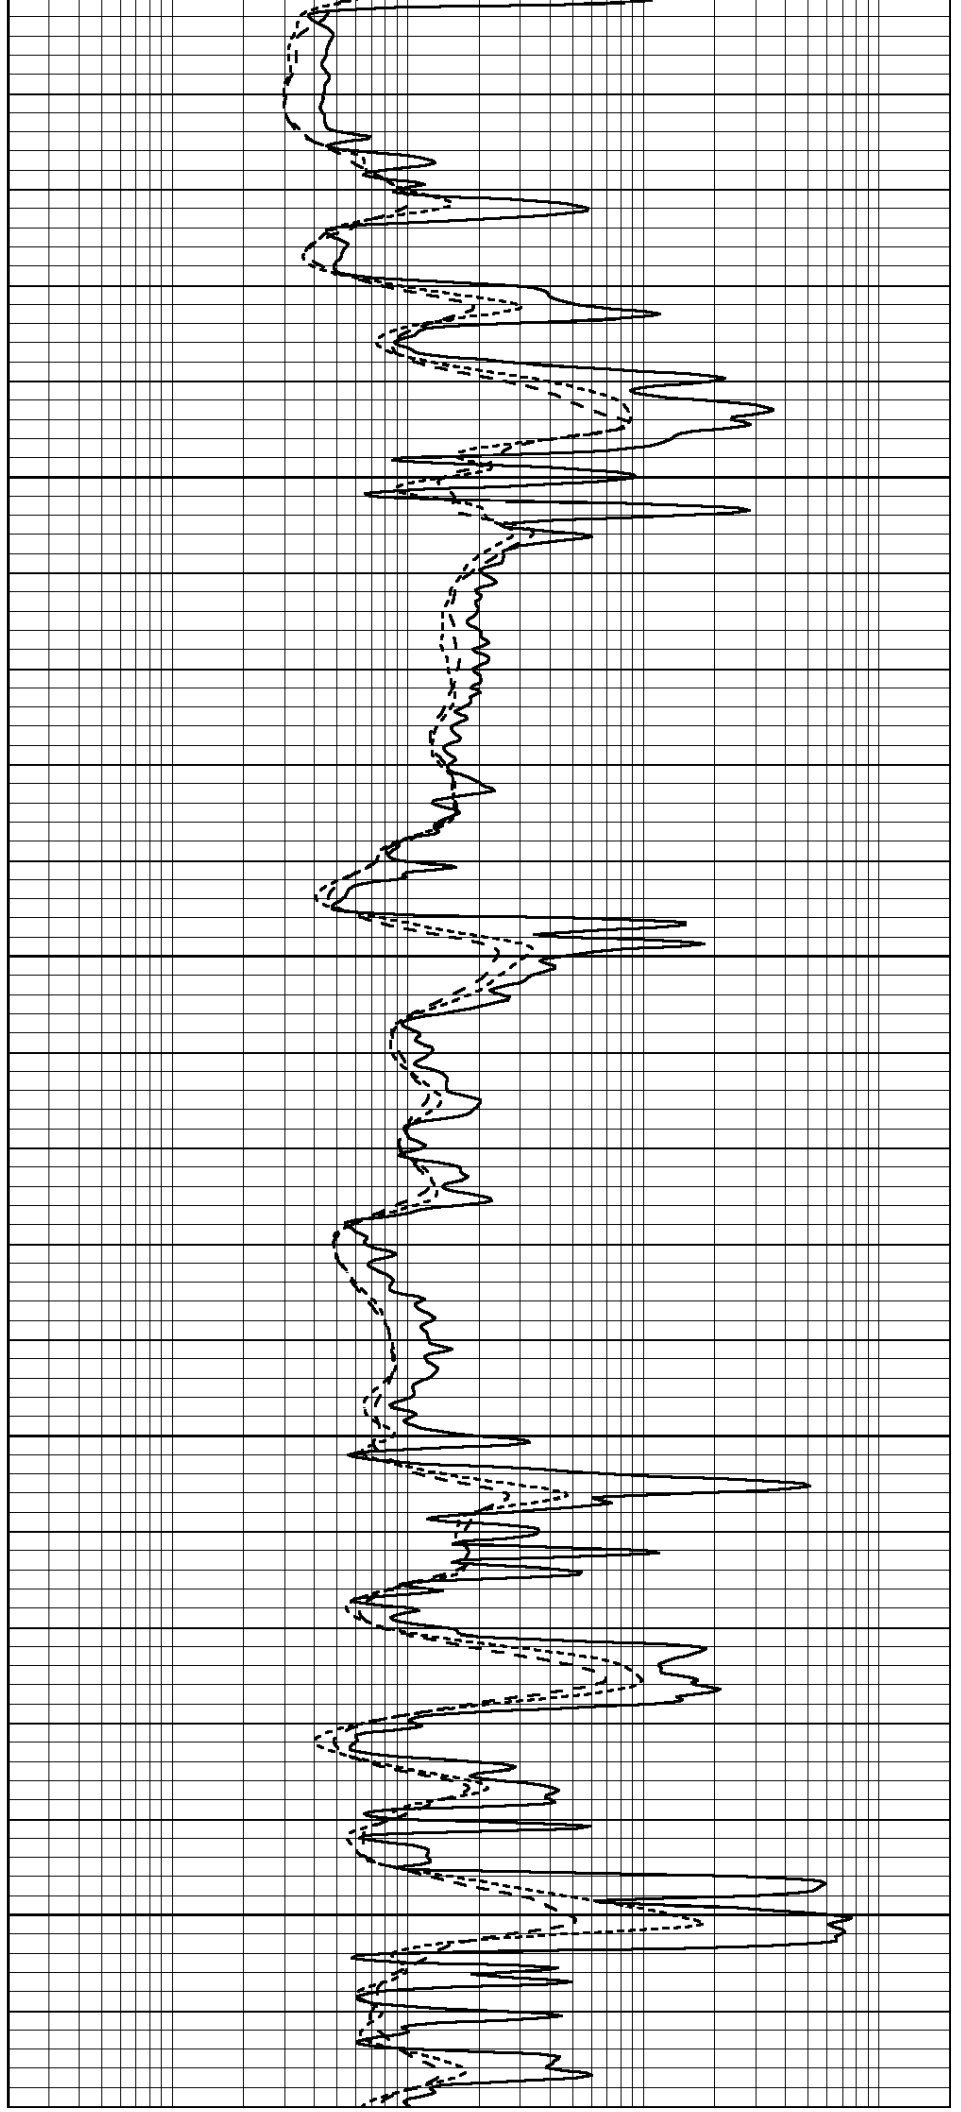

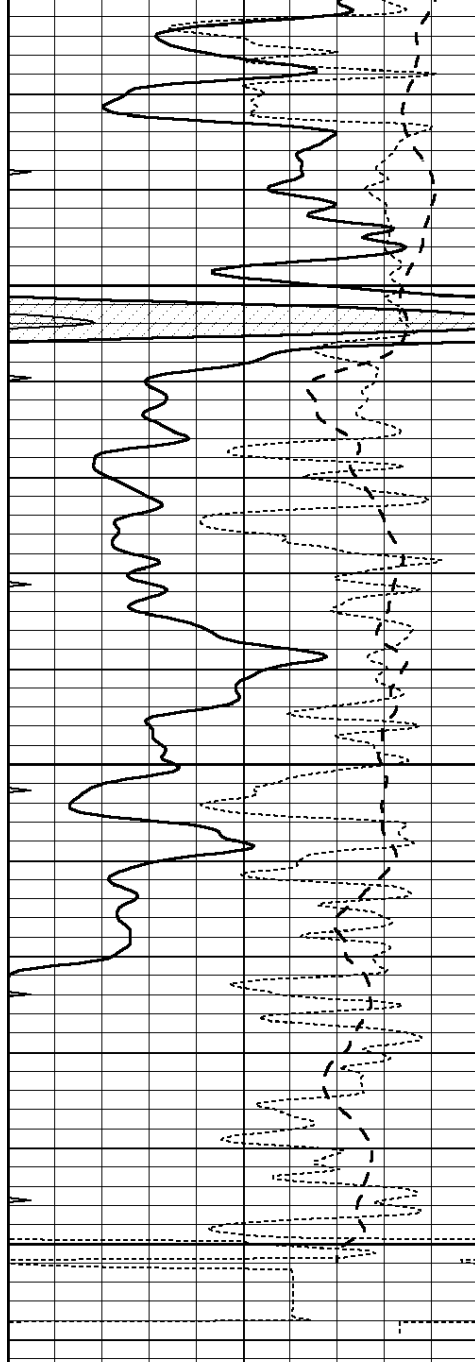


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4500

4550

4600

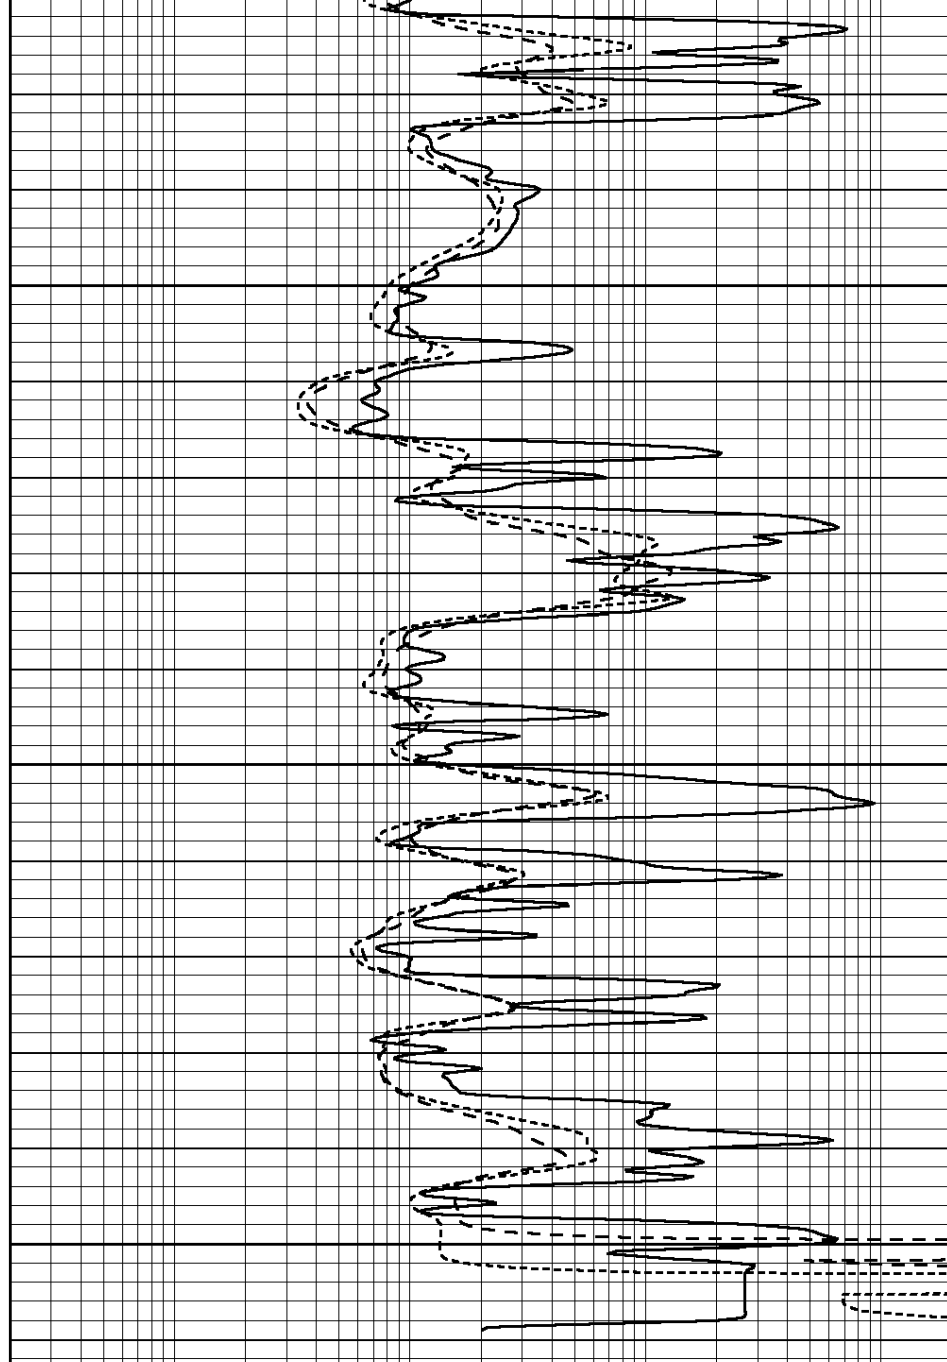

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



REPEAT SECTION


Database File: 011815ddn.db
 Dataset Pathname: pass2.2
 Presentation Format: _dil
 Dataset Creation: Mon Nov 25 22:41:58 2013 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

100	CT (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

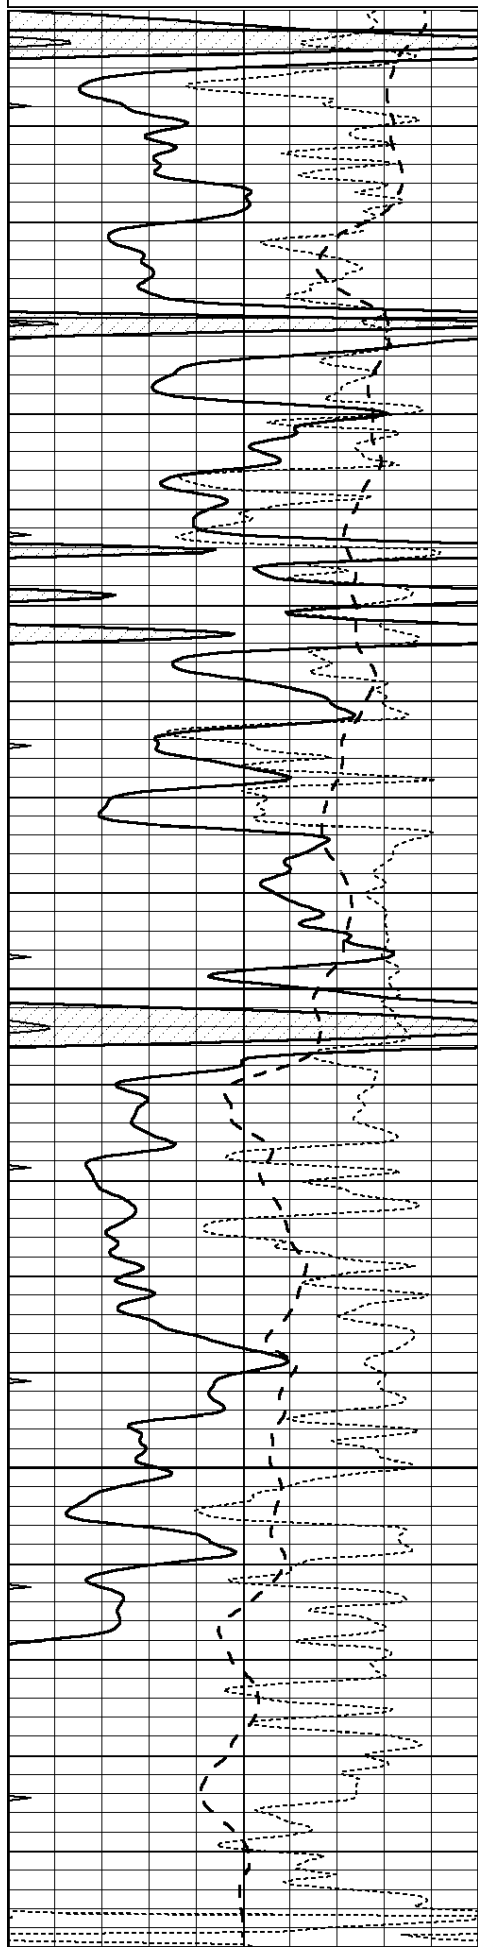


4400

4450

4500

4550

4600

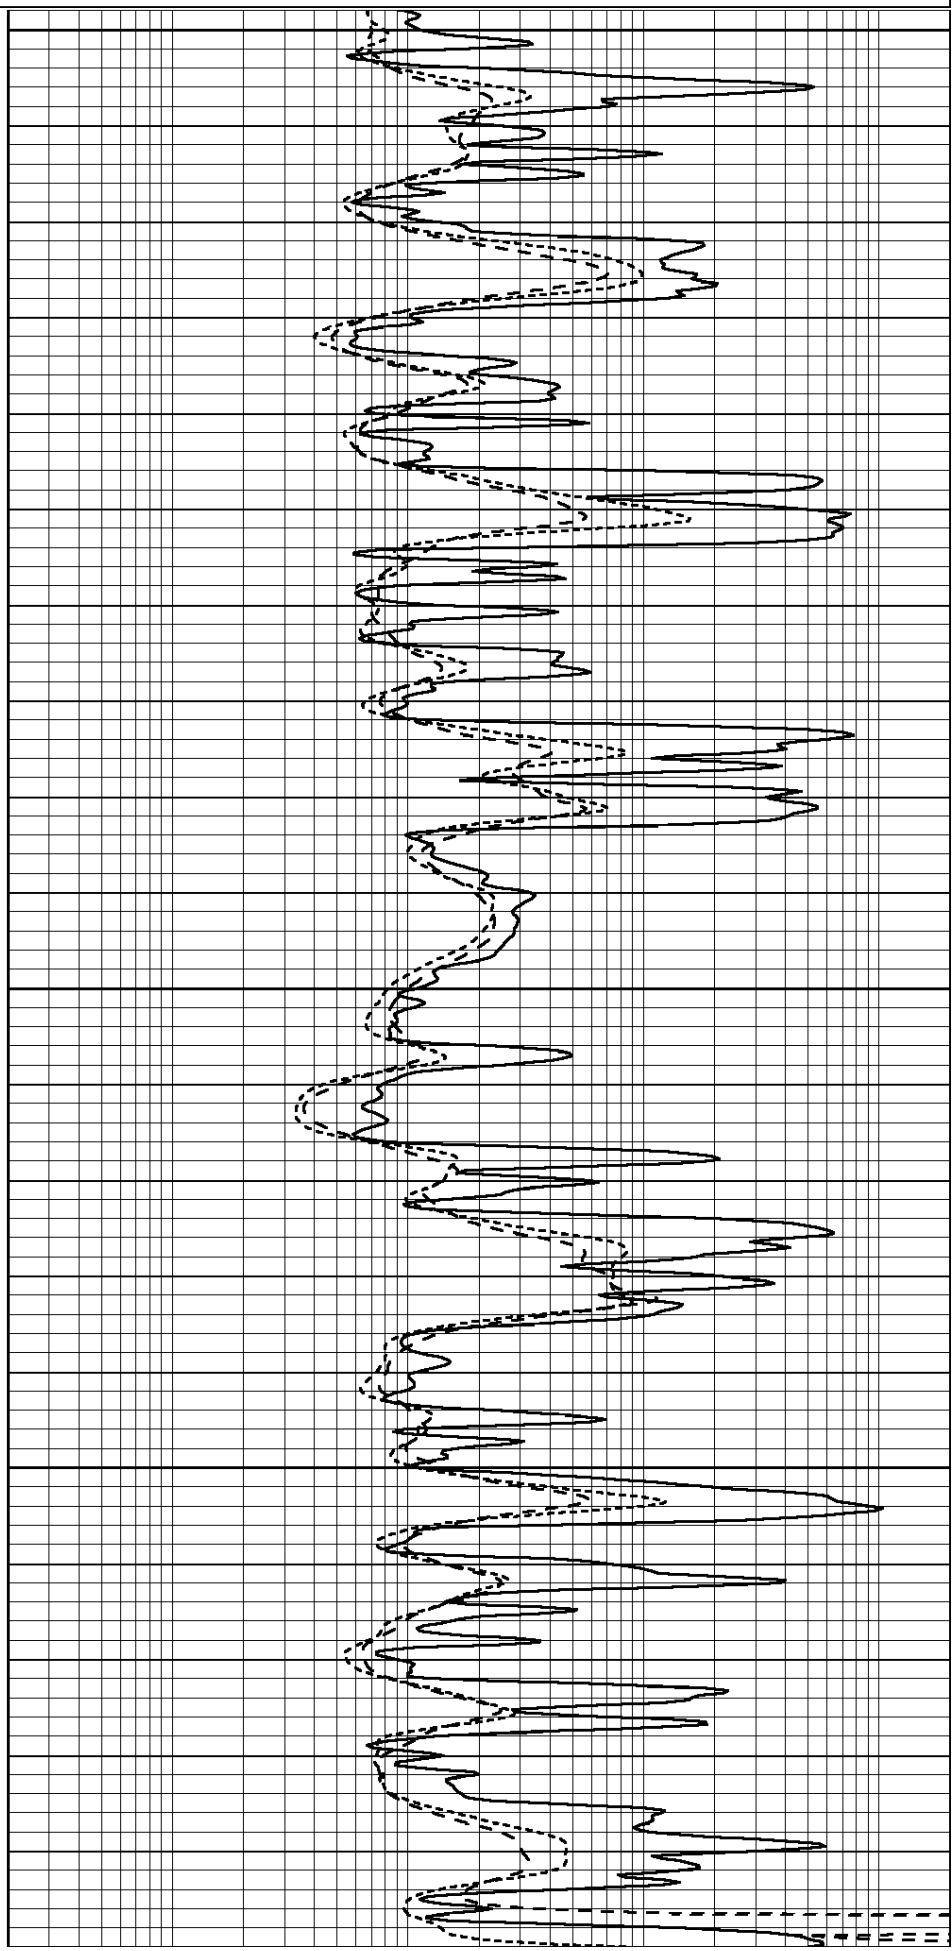

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

Calibration Report								
Database File:		011815ddn.db						
Dataset Pathname:		pass3.7						
Dataset Creation:		Mon Nov 25 22:40:11 2013						
Dual Induction Calibration Report								
Serial-Model:			PROBE9-DILG					
Surface Cal Performed:			Tue Nov 19 06:44:33 2013					
Downhole Cal Performed:			Mon Jul 28 12:02:56 2008					
After Survey Verification Performed:			Mon Jul 28 12:02:56 2008					
Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	650.000	-15.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-14.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		
After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report					
Serial: 004N			Model: PRB		
Master Calibration			Performed Mon Jun 03 09:36:56 2013		
	Background	Magnesium	Aluminum	Sandstone	
Window 1	1417.6	10391.4	3464.6	11537.5	cps
Window 2	1295.0	8959.7	3050.1	9816.4	cps
Window 3	1105.1	5464.2	2051.0	5838.8	cps
Window 4	915.0	3477.7	1410.0	3410.0	cps

Window 4	315.0	317.7	312.9	319.8	cps
Long Space	0.0	7664.6	1755.0	8521.3	cps
Short Space	1.8	1582.4	1040.8	1699.4	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.1	Rib Slope	: 0.970	Density/Spine Ratio	: 0.574
Spine Angle	: 74.1	Spine Slope	: 3.519	Spine Intercept	: -17.0

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification			Performed Wed Dec 31 18:00:00 1969		
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report
--

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sun Nov 03 21:08:13 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:

0.3000

GAPI/cps