



ARRAY COMPENSATED
TRUE RESISTIVITY
LOG

----- Fold here -----

LOGGING DATA

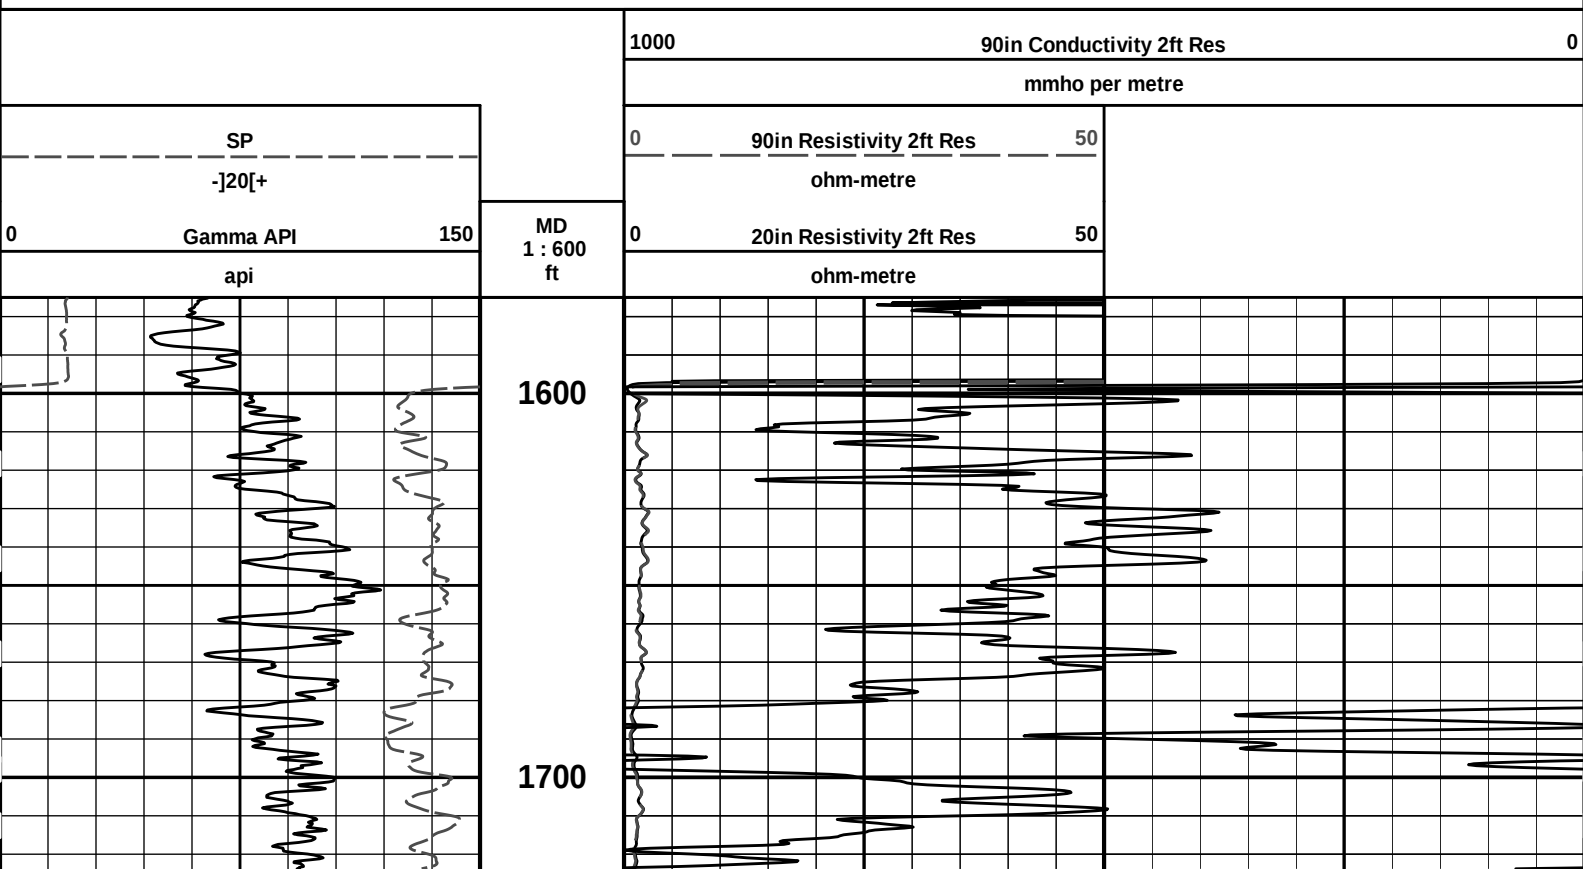

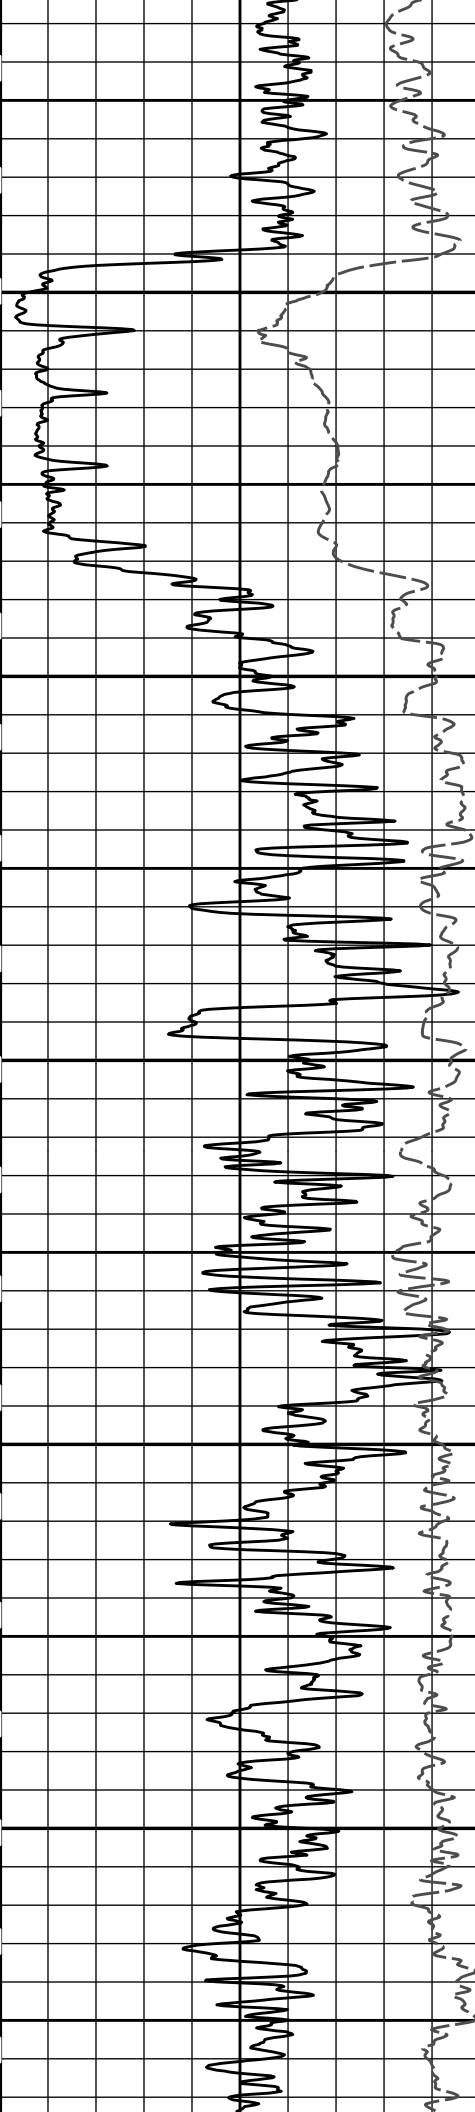


1800


1900

2000

2100

2200

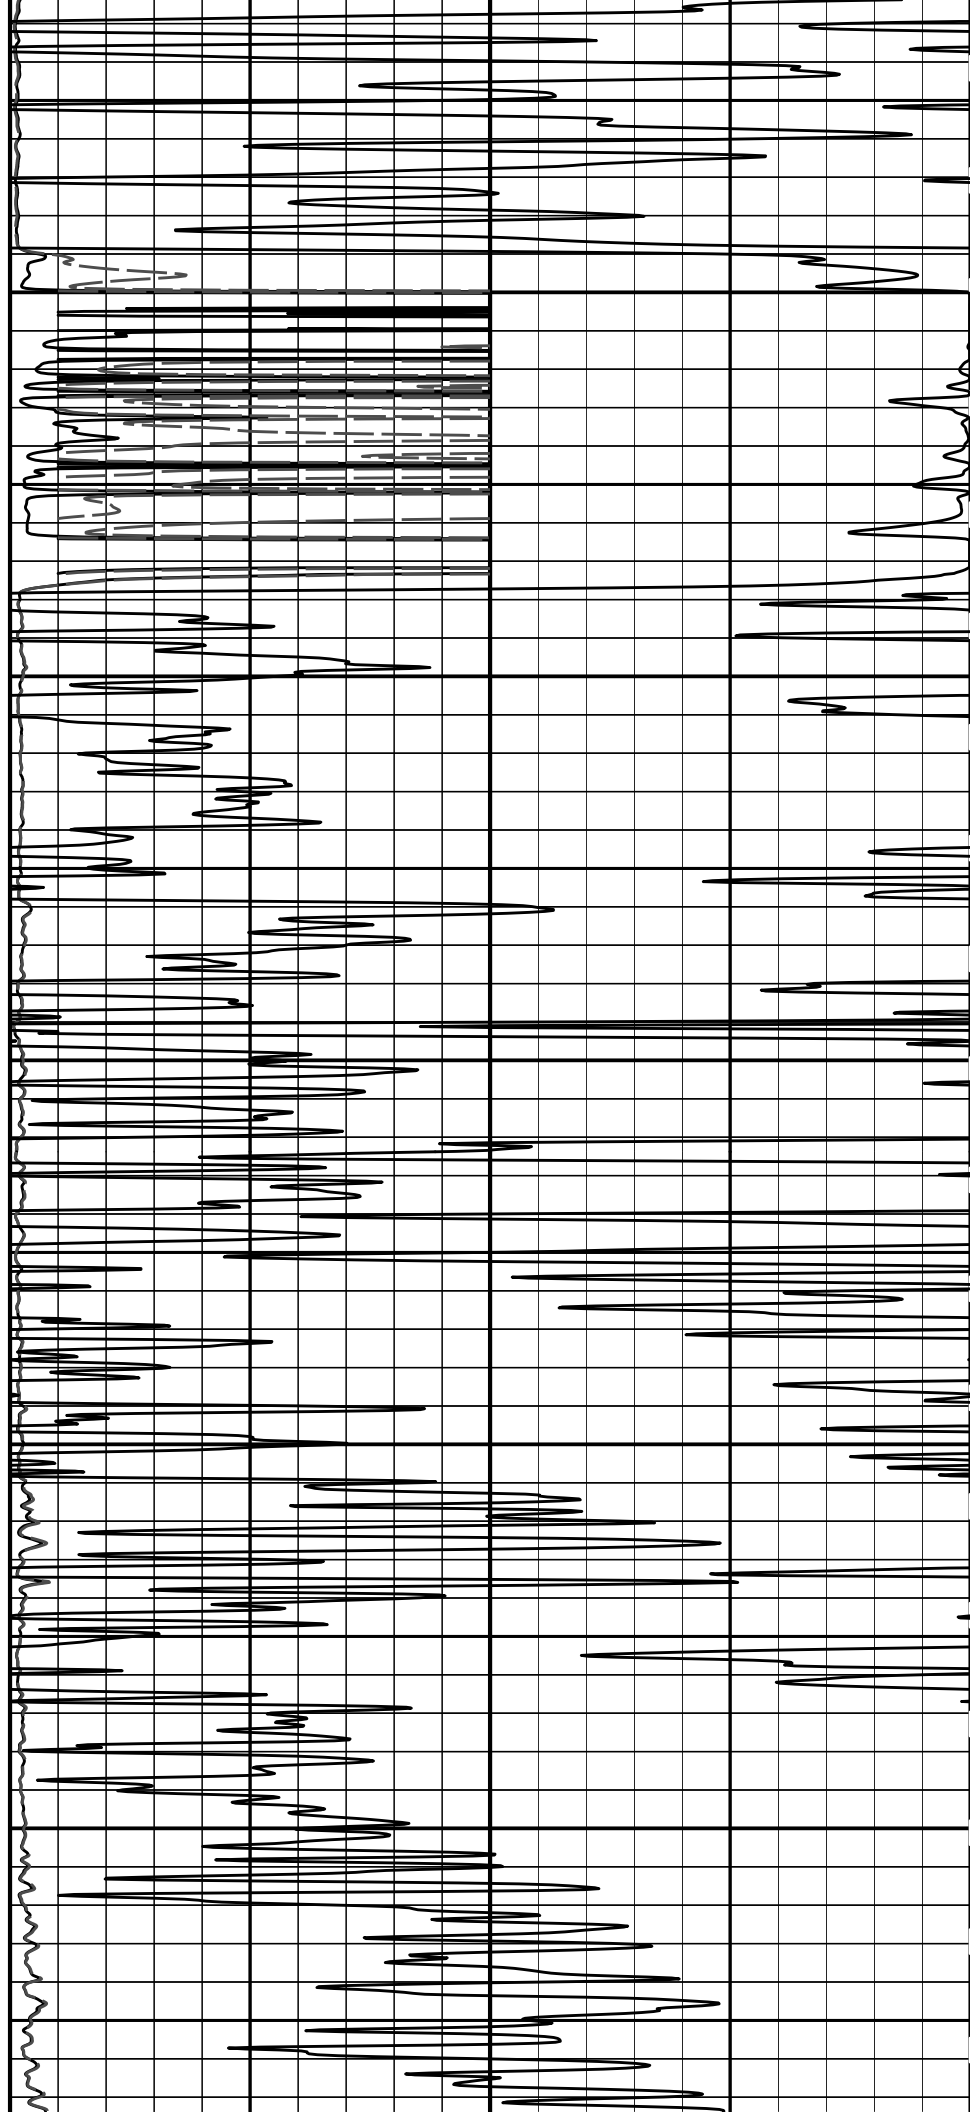

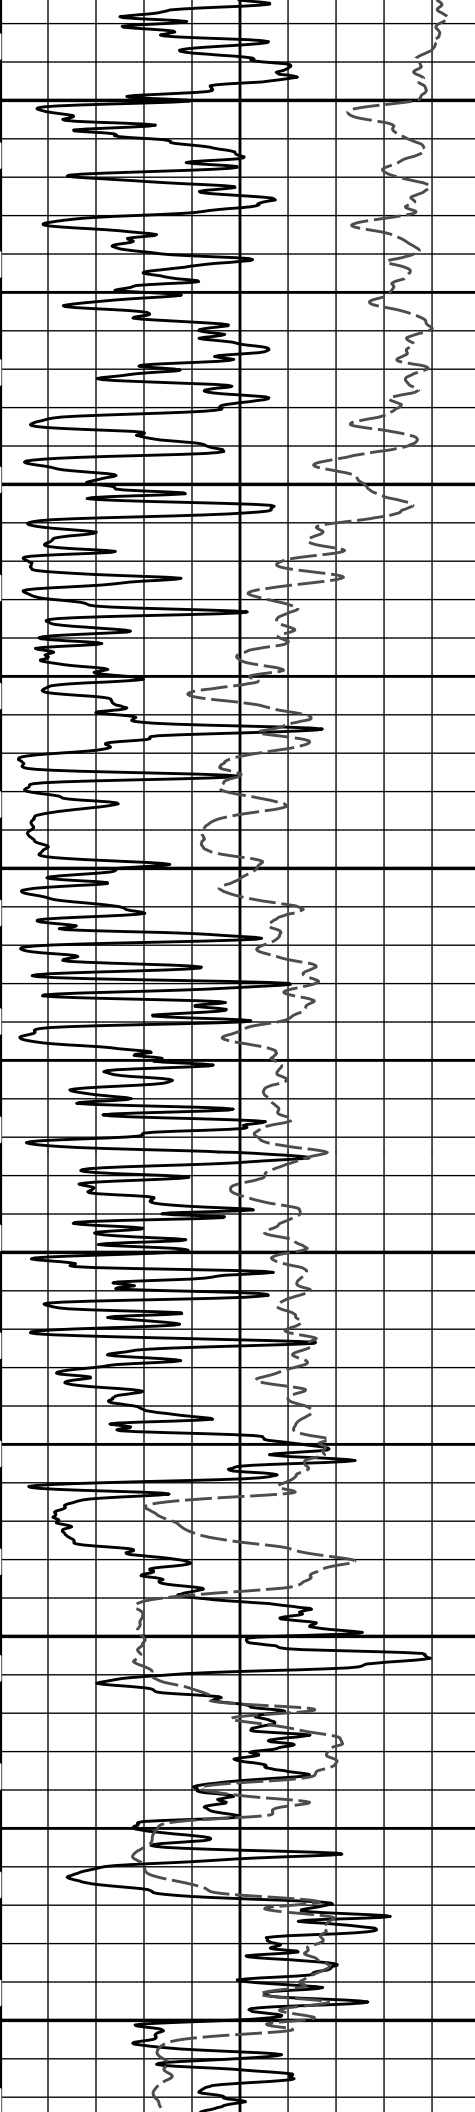

2300


2400


2500

2600

2700

2800

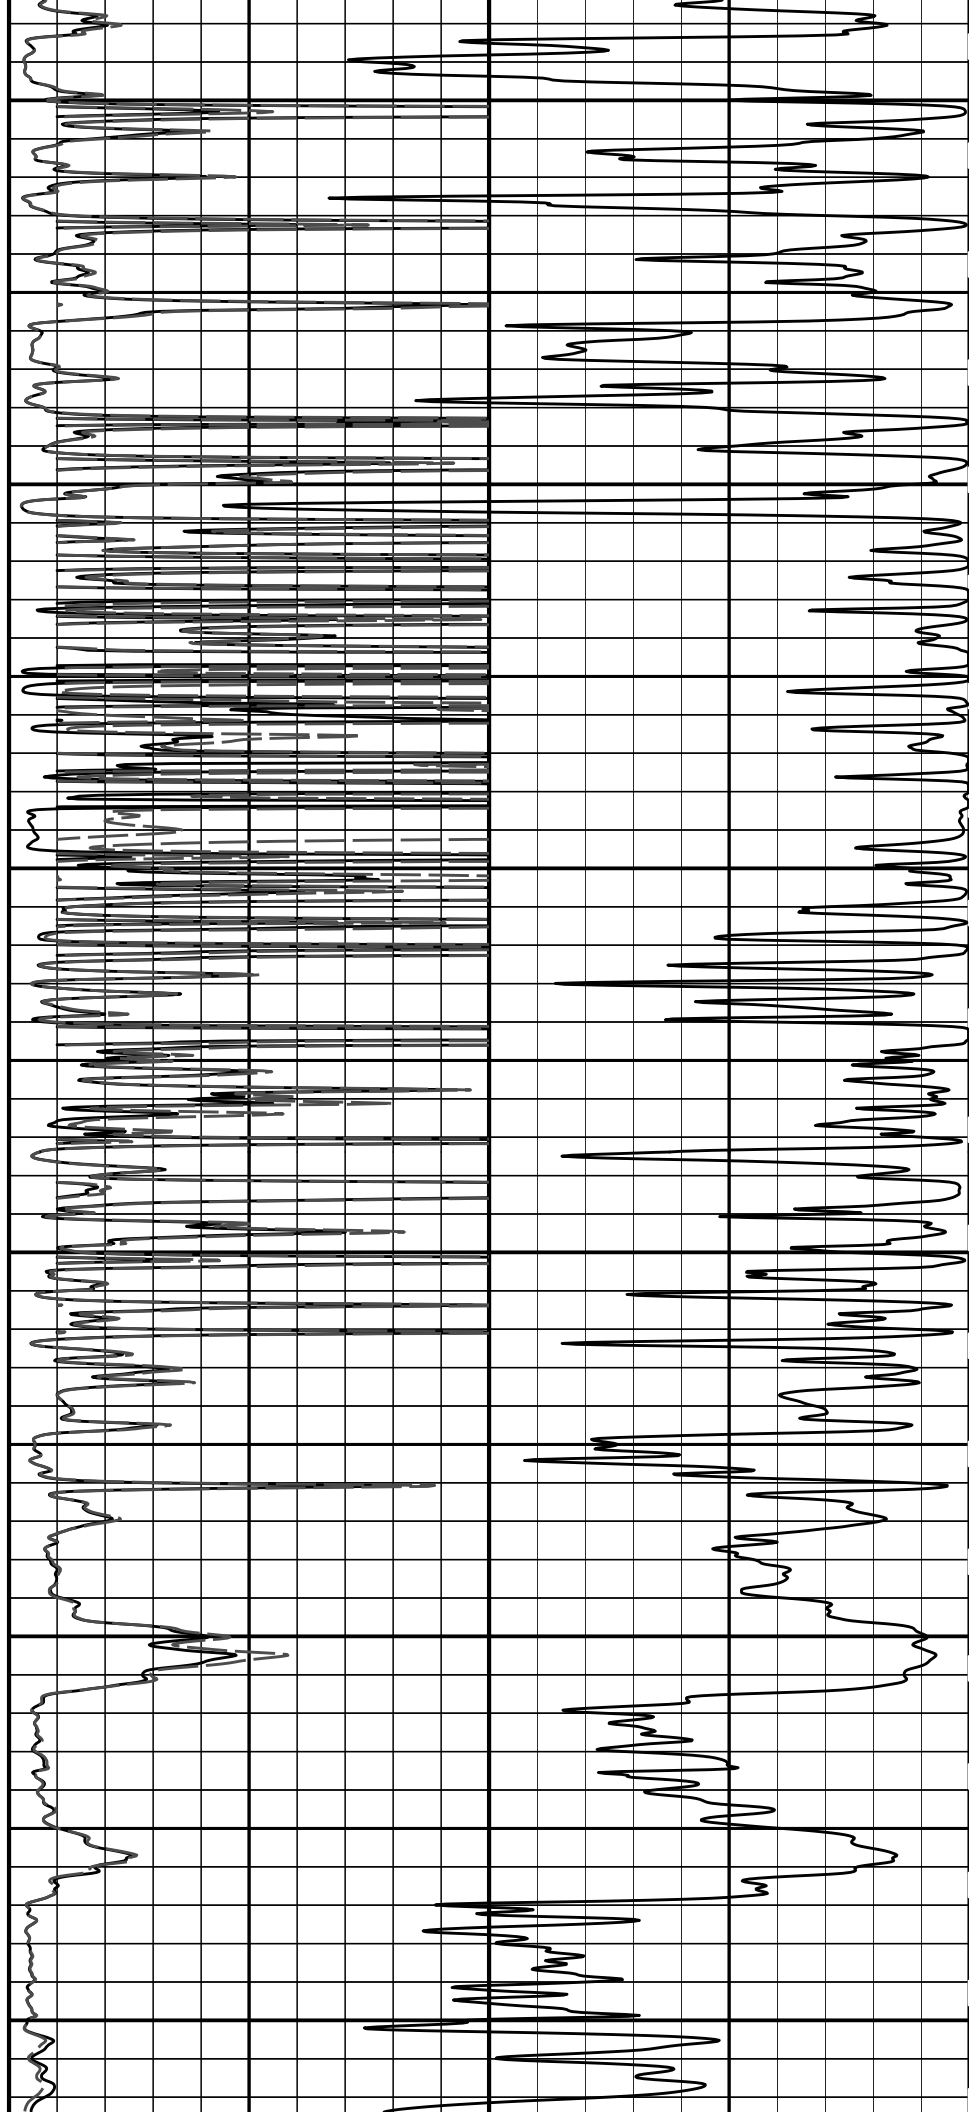

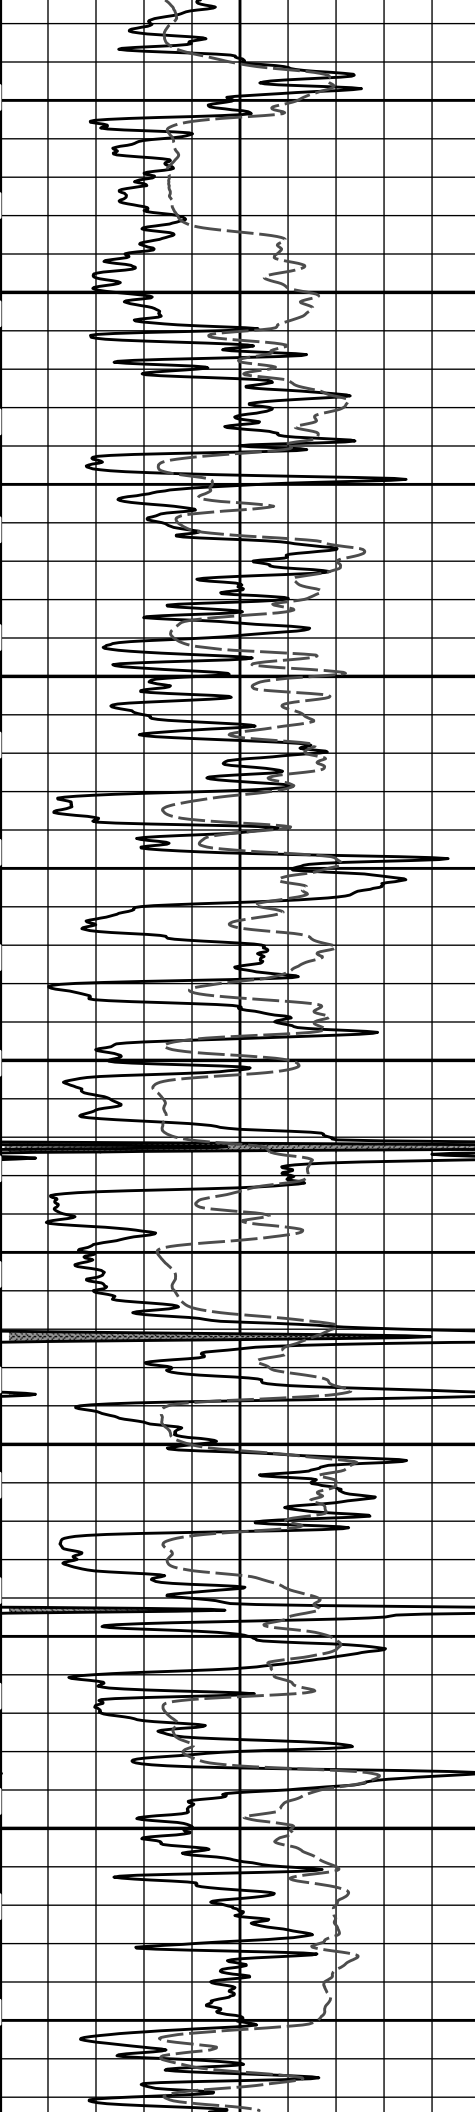


2900


3000

3100

3200

3300

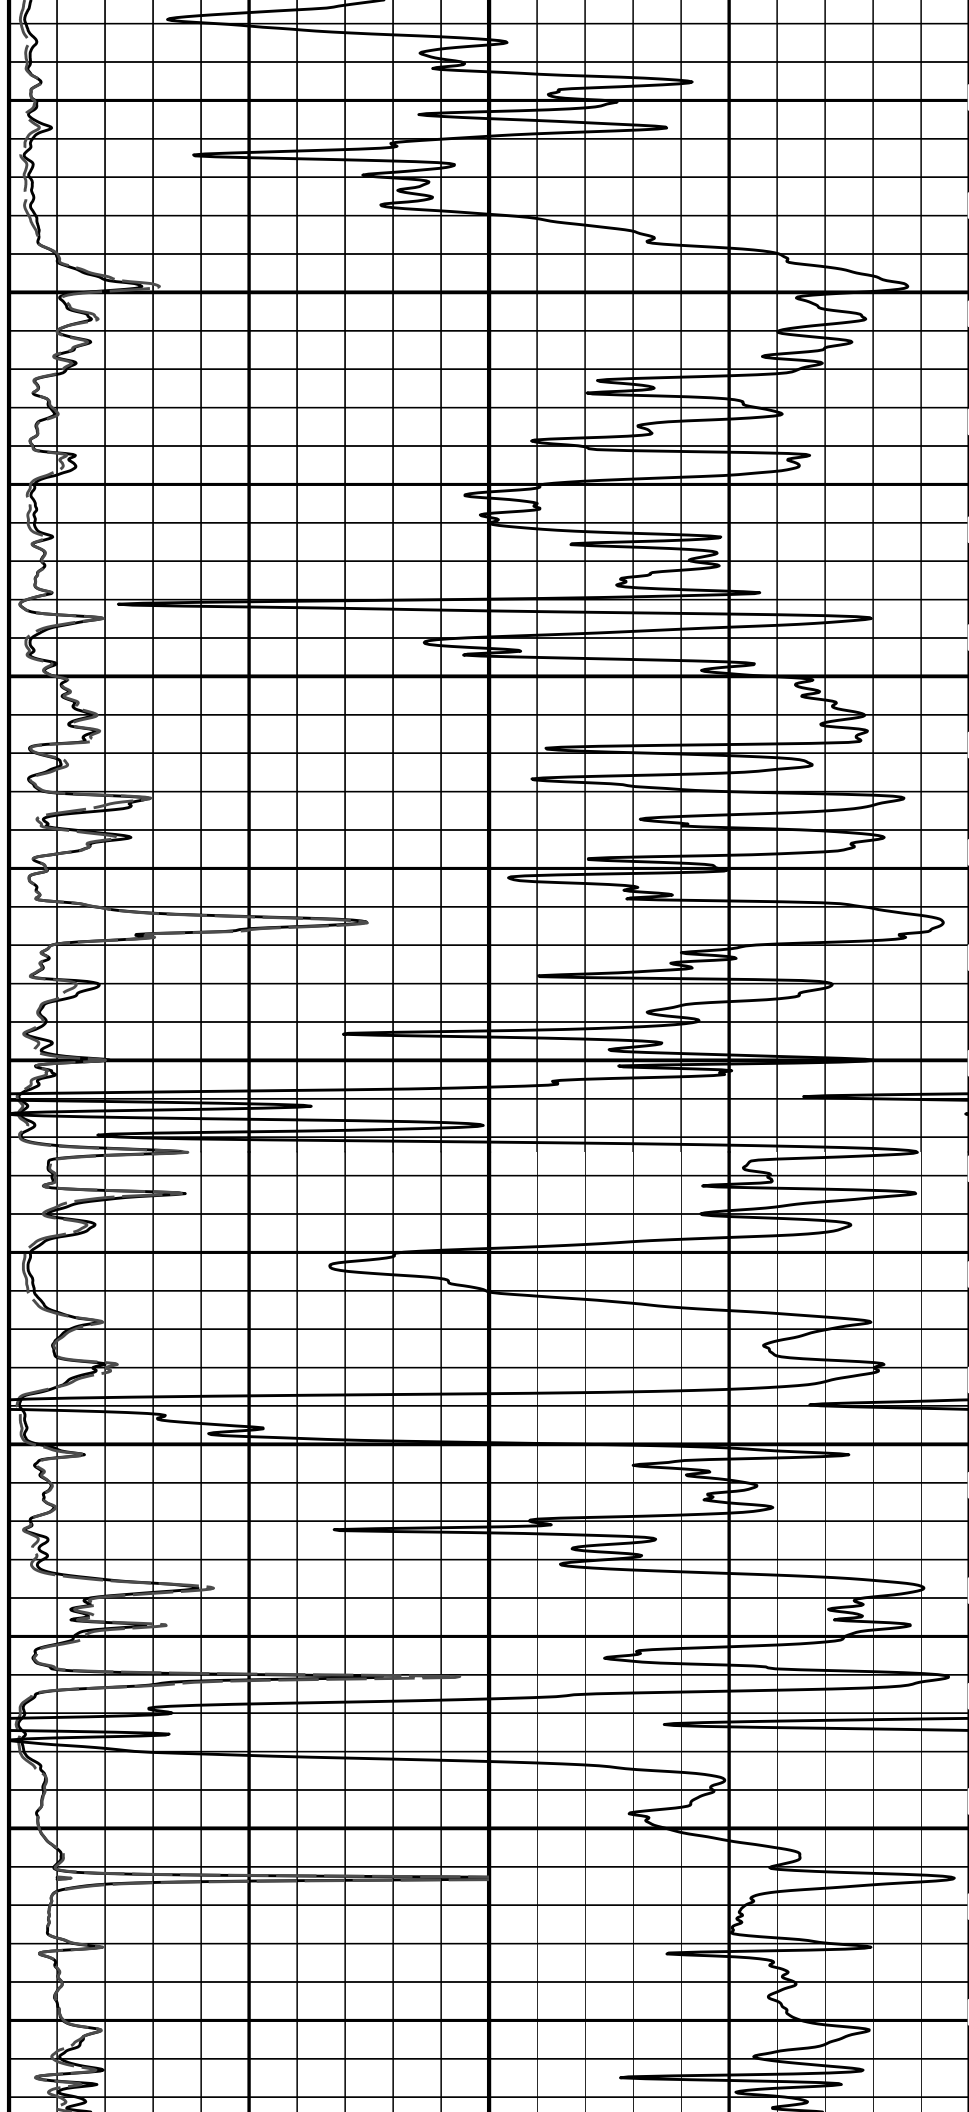

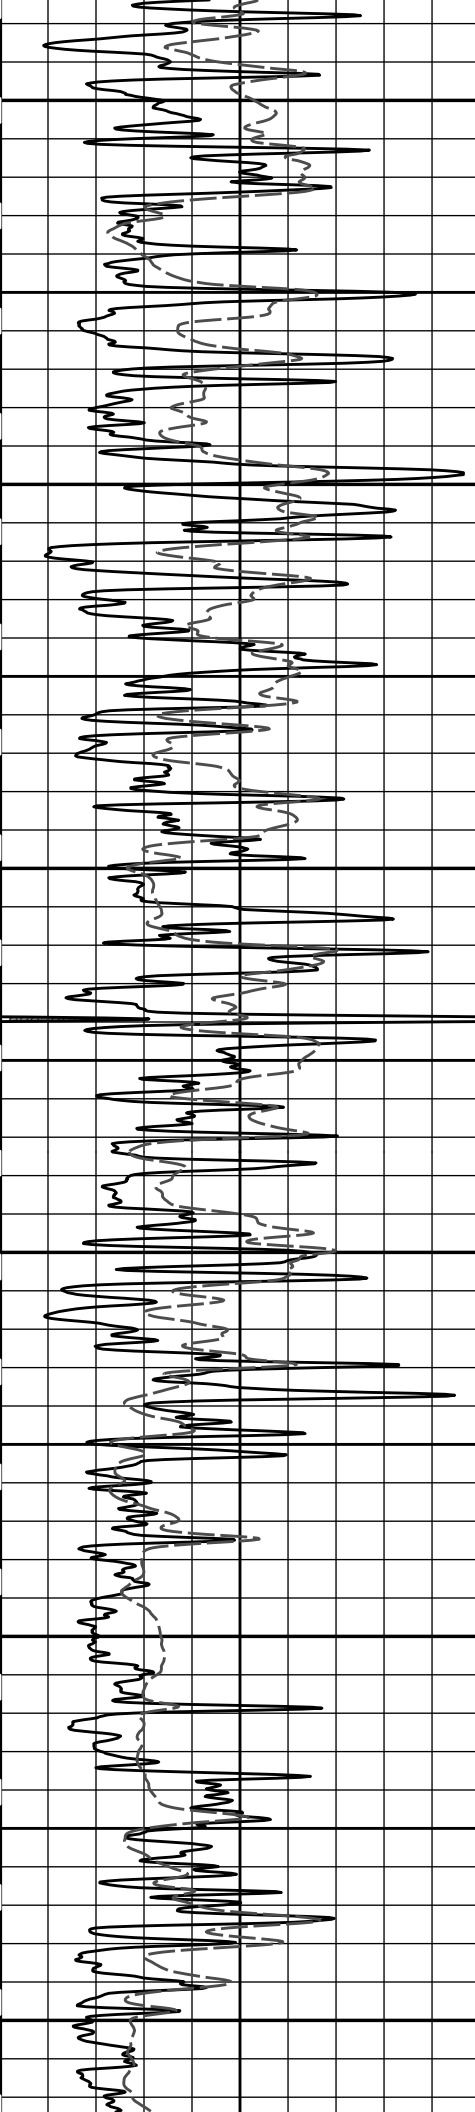

3400


3500


3600

3700

3800

3900

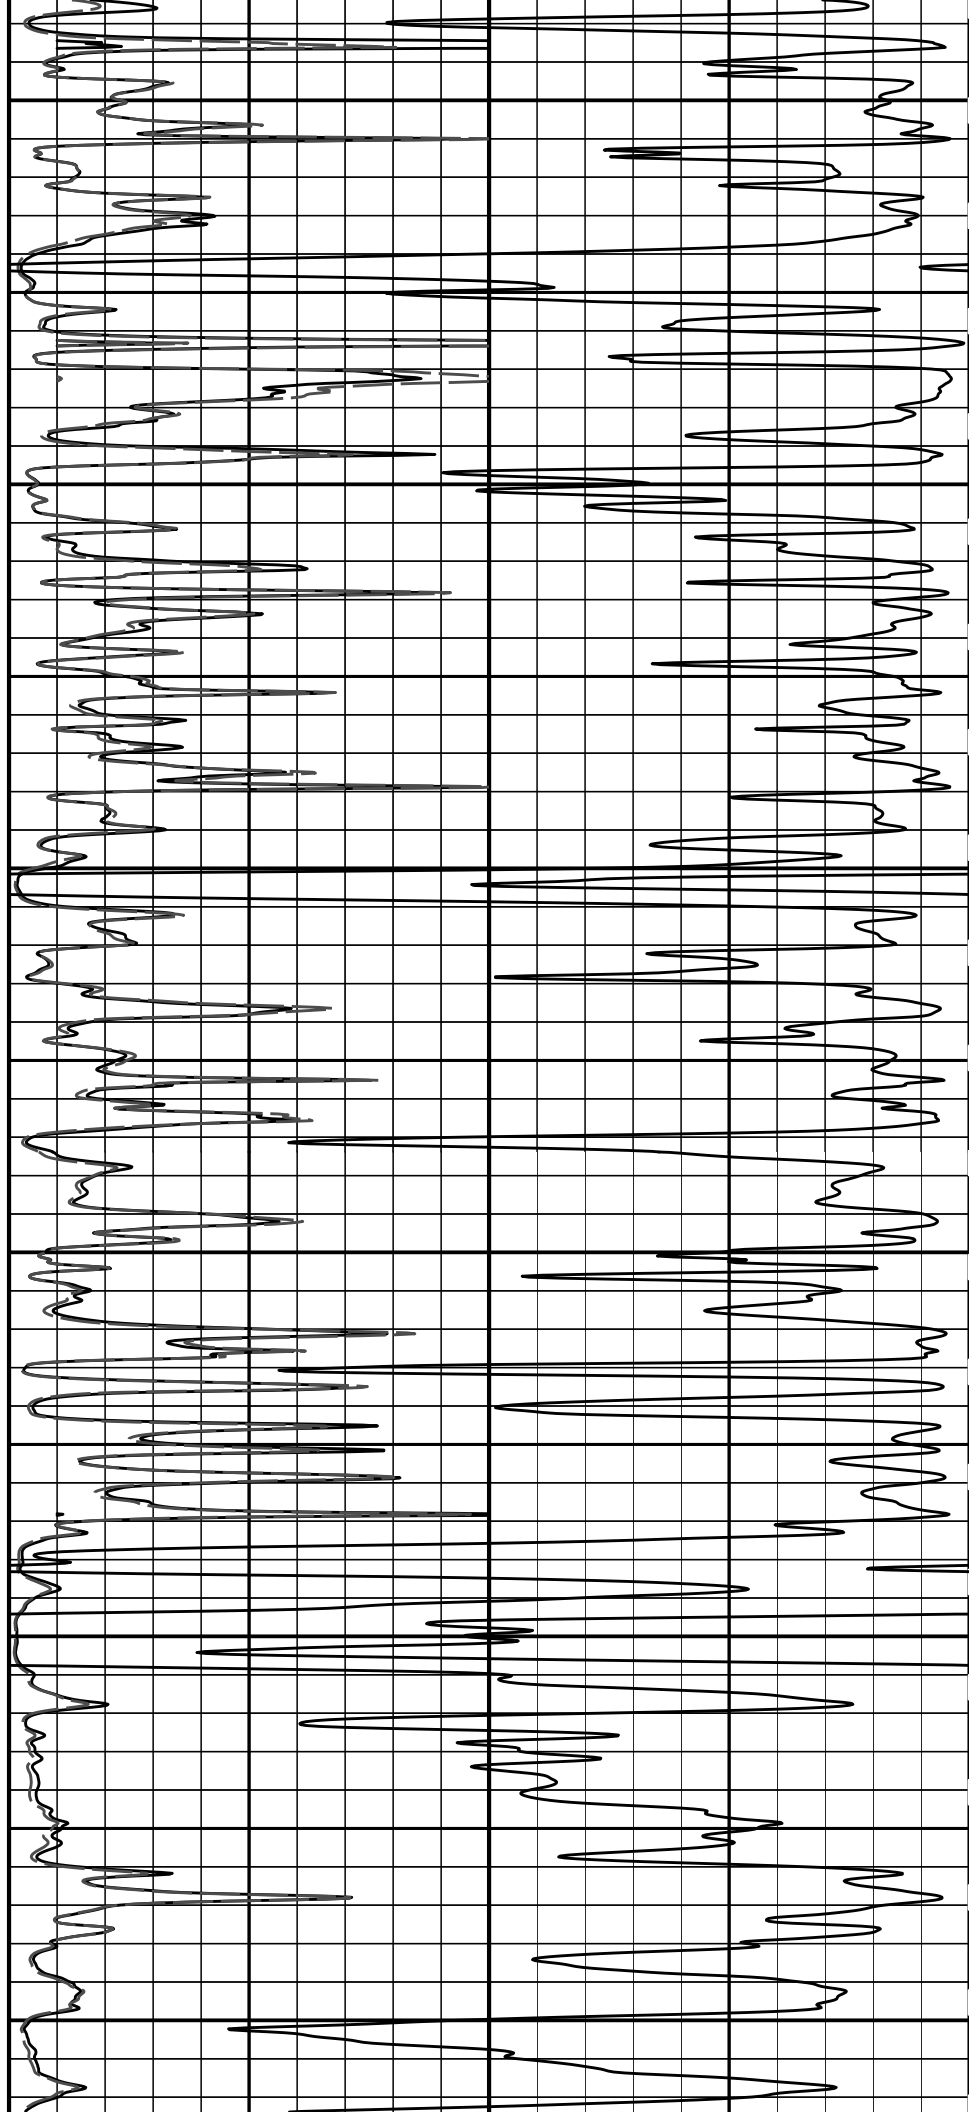

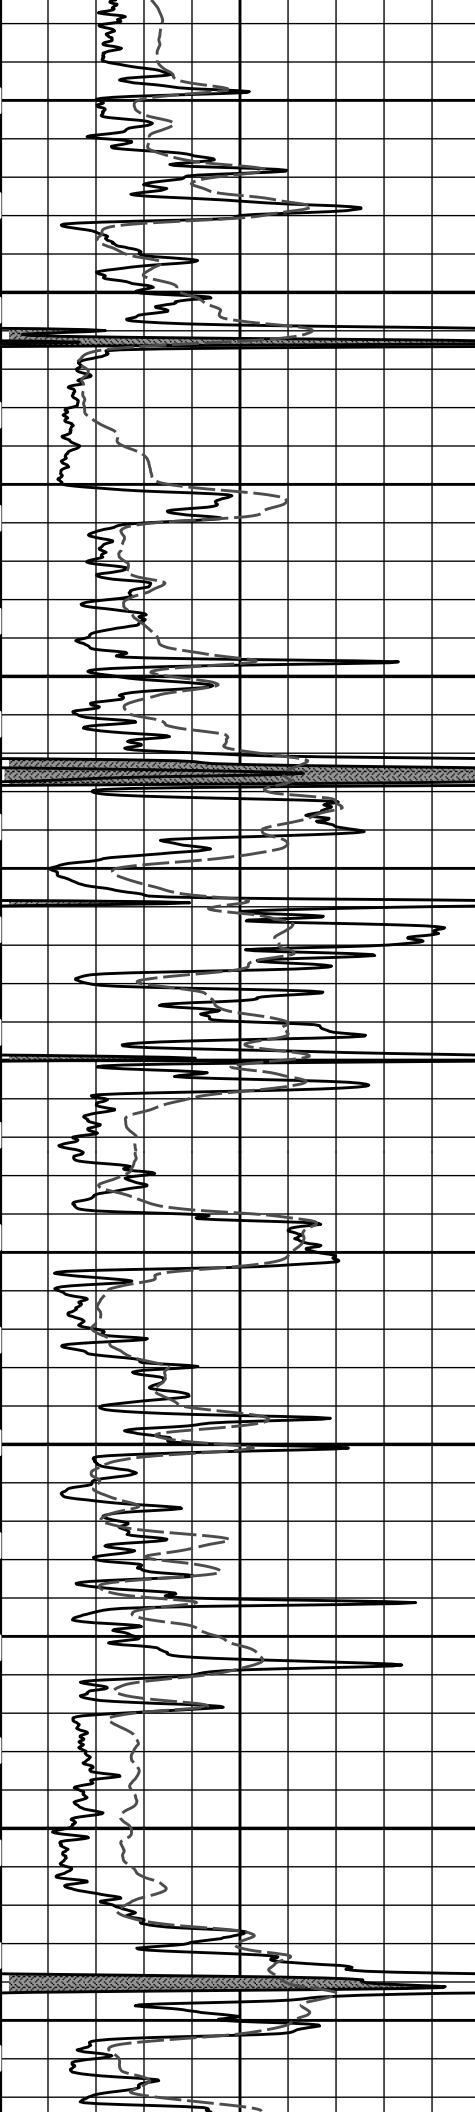


4000


4100

4200

4300

4400

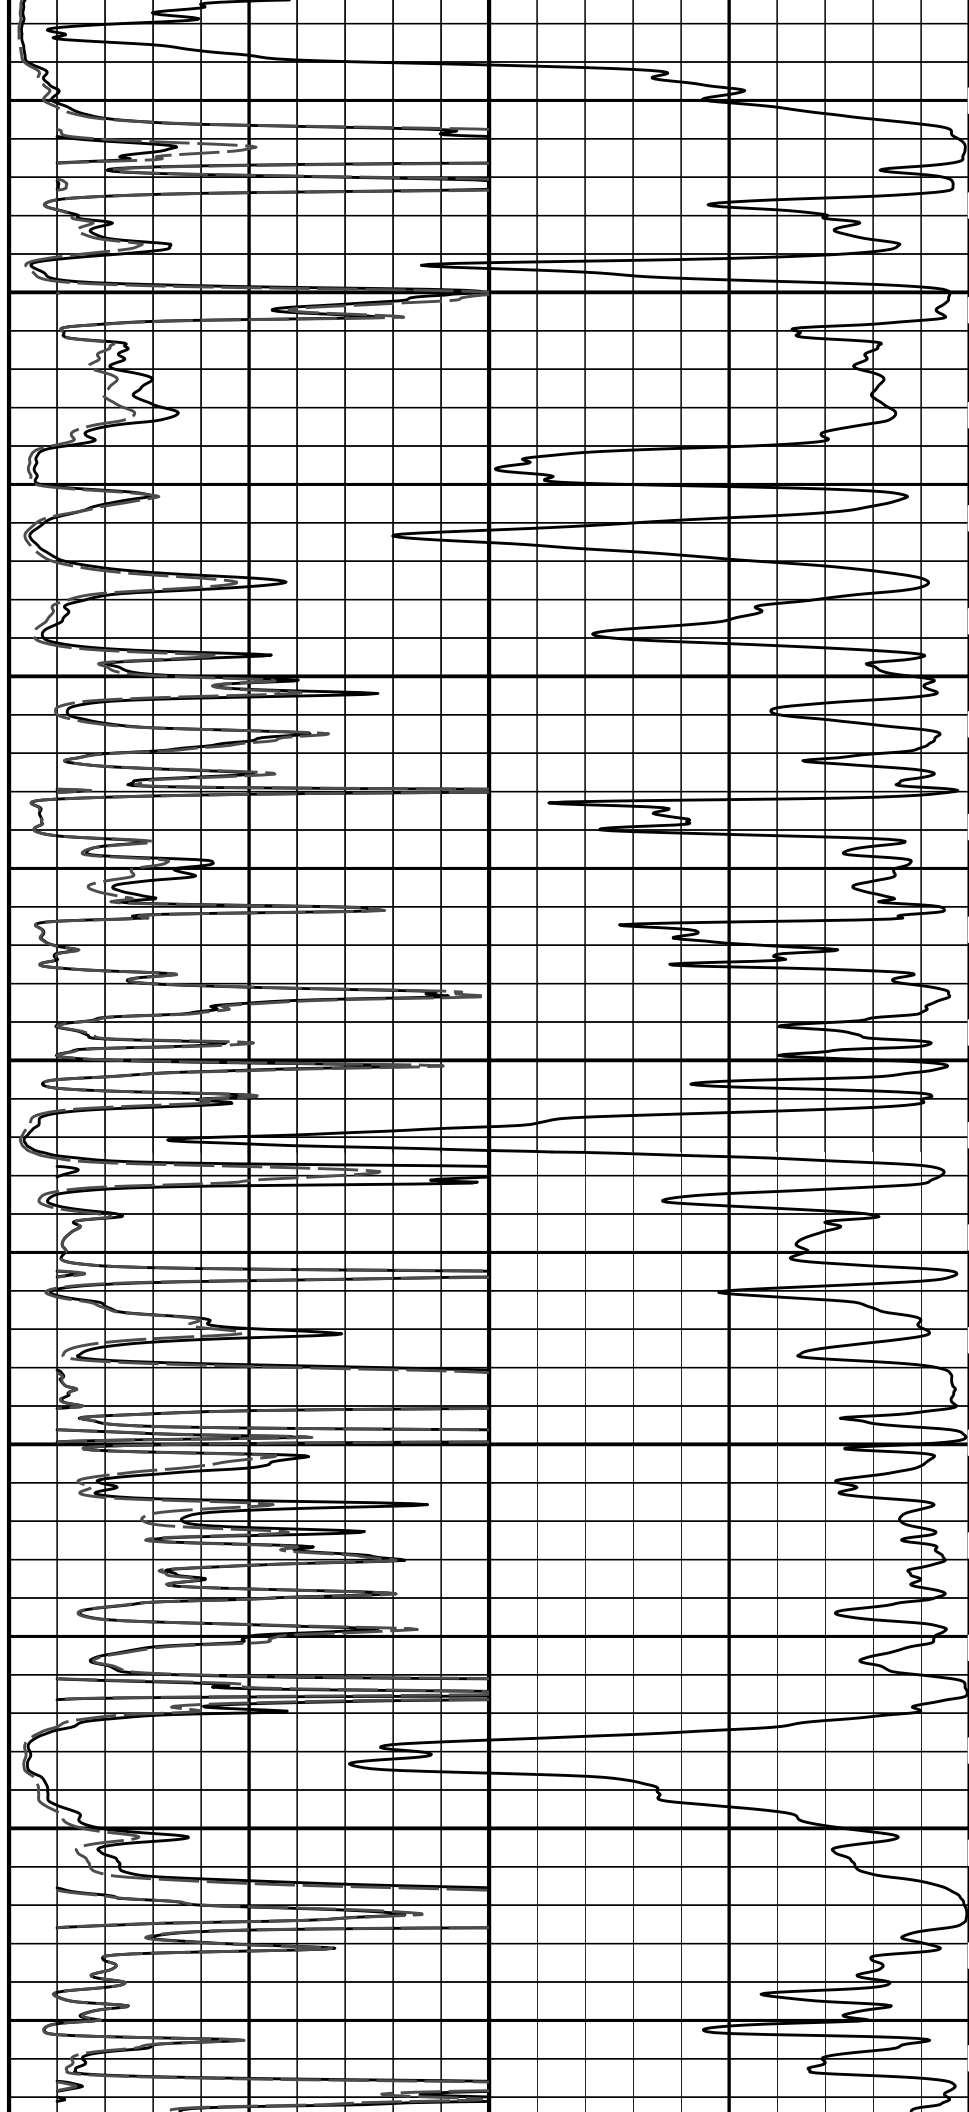

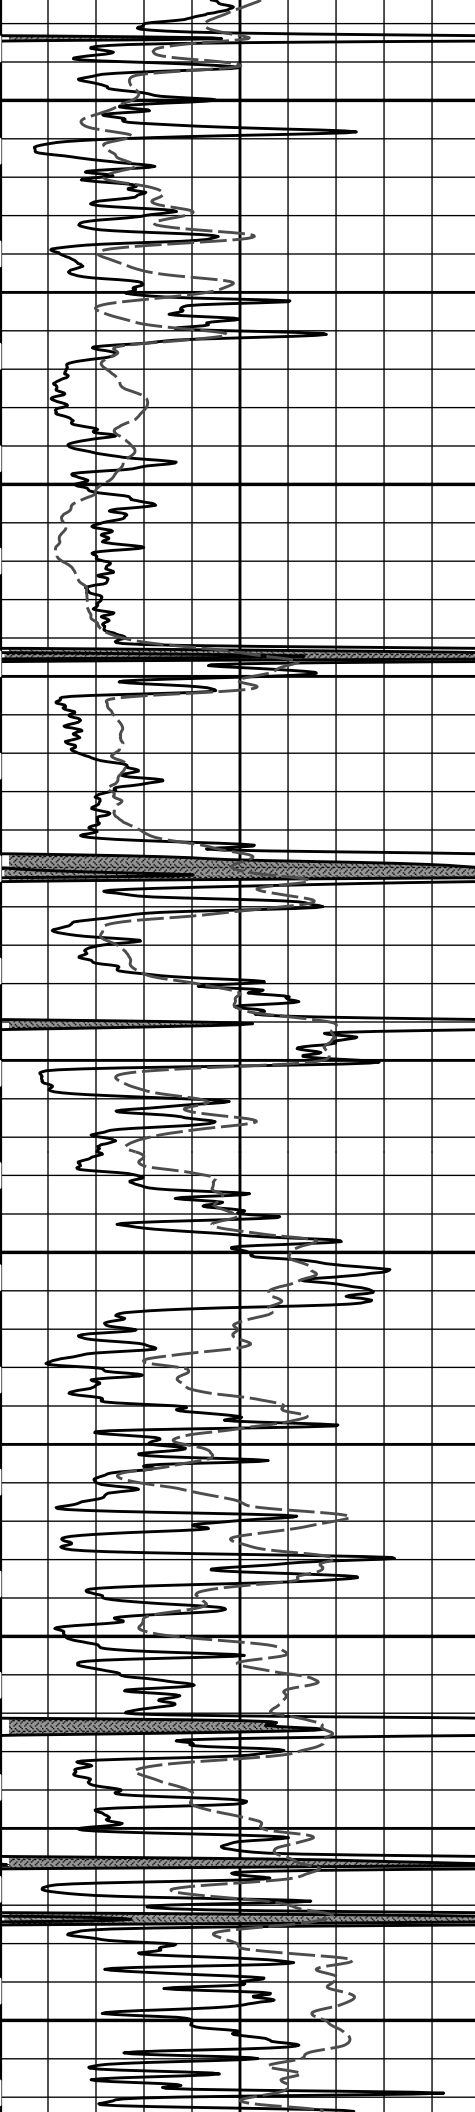

4500


4600


4700

4800

4900

5000

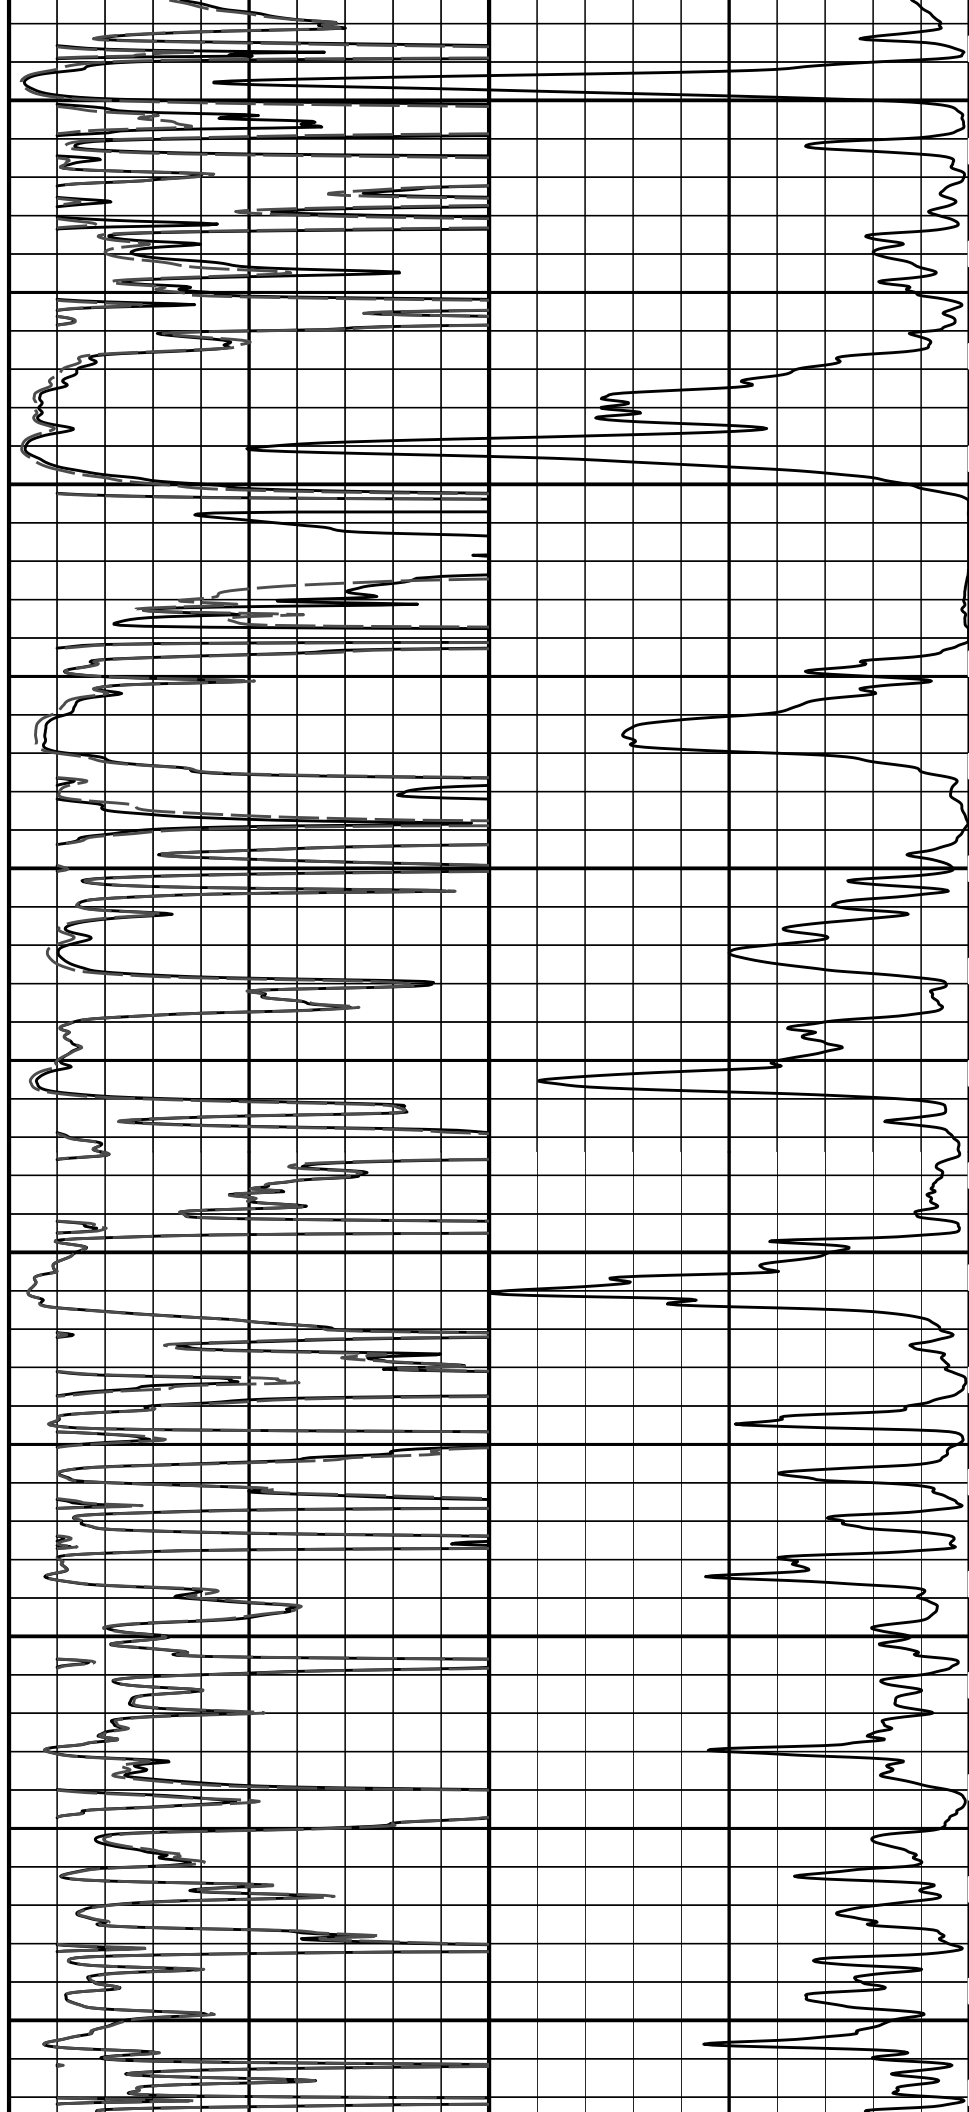

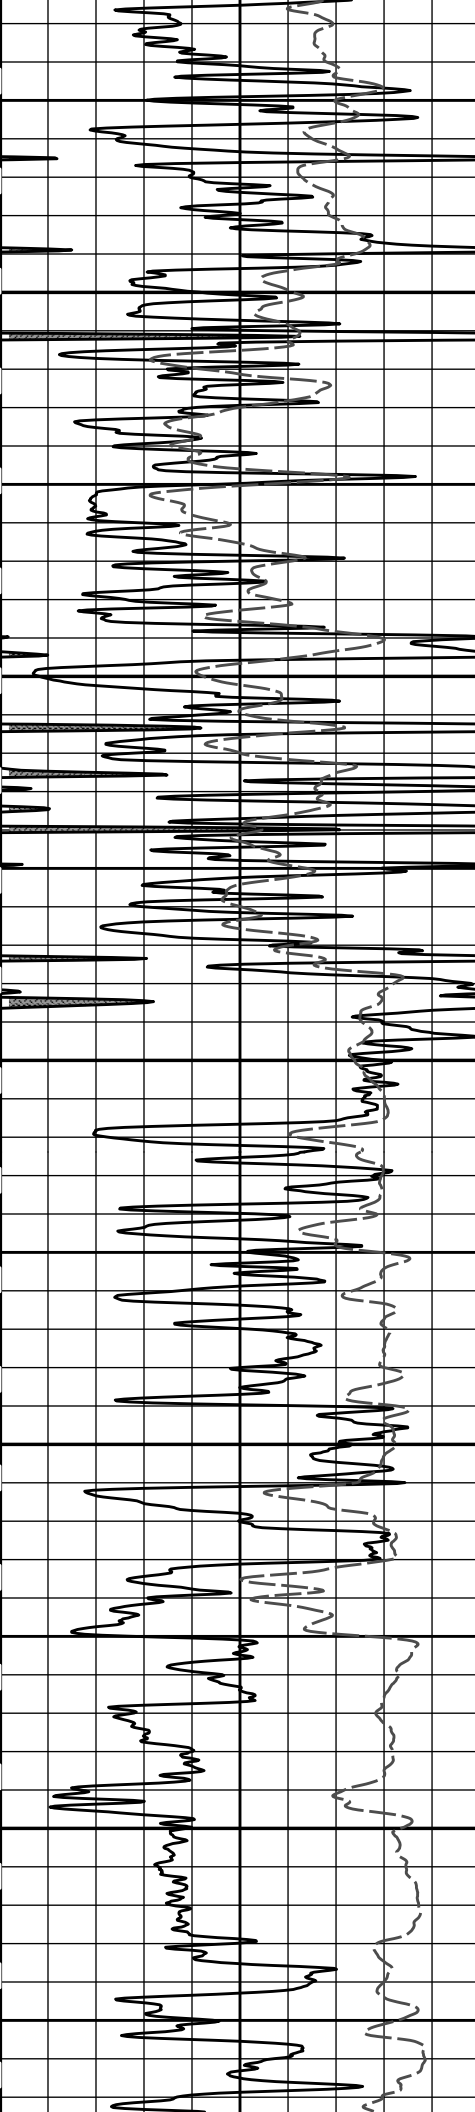


5100


5200


5300


5400

5500

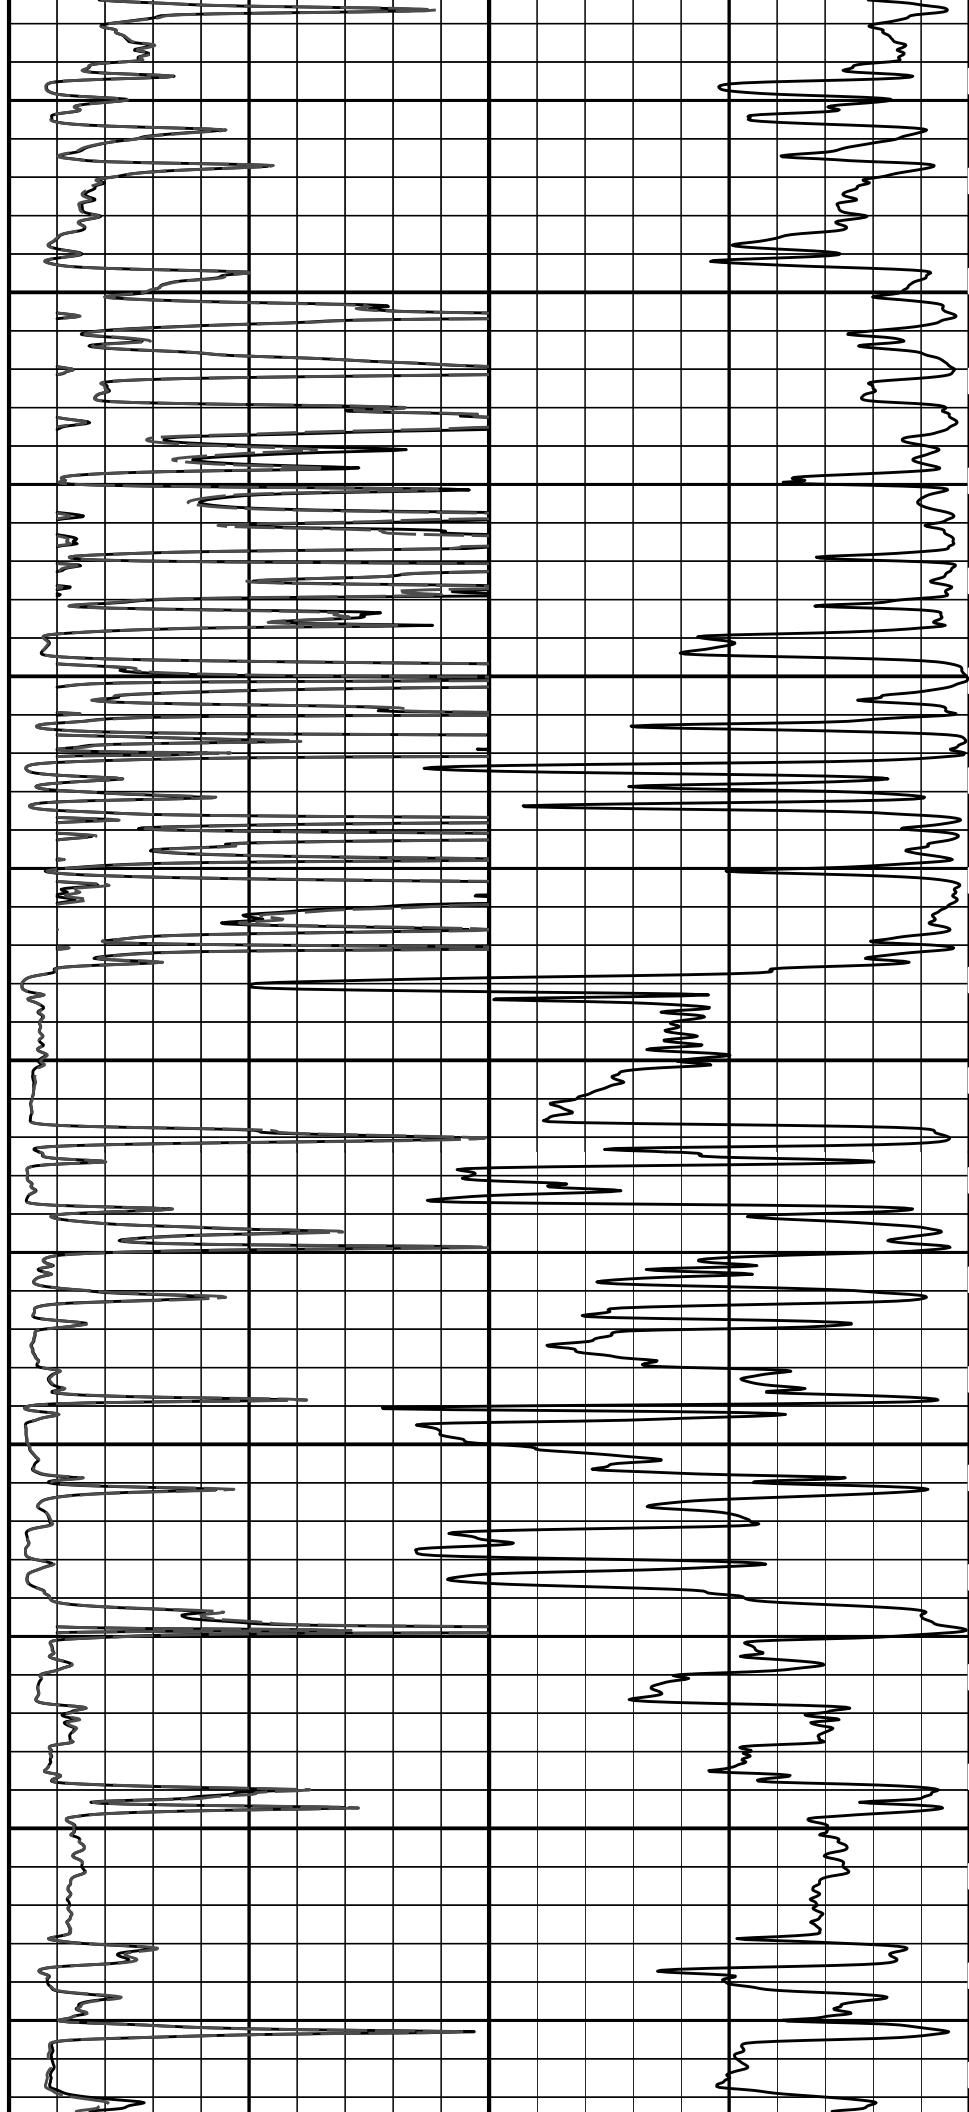

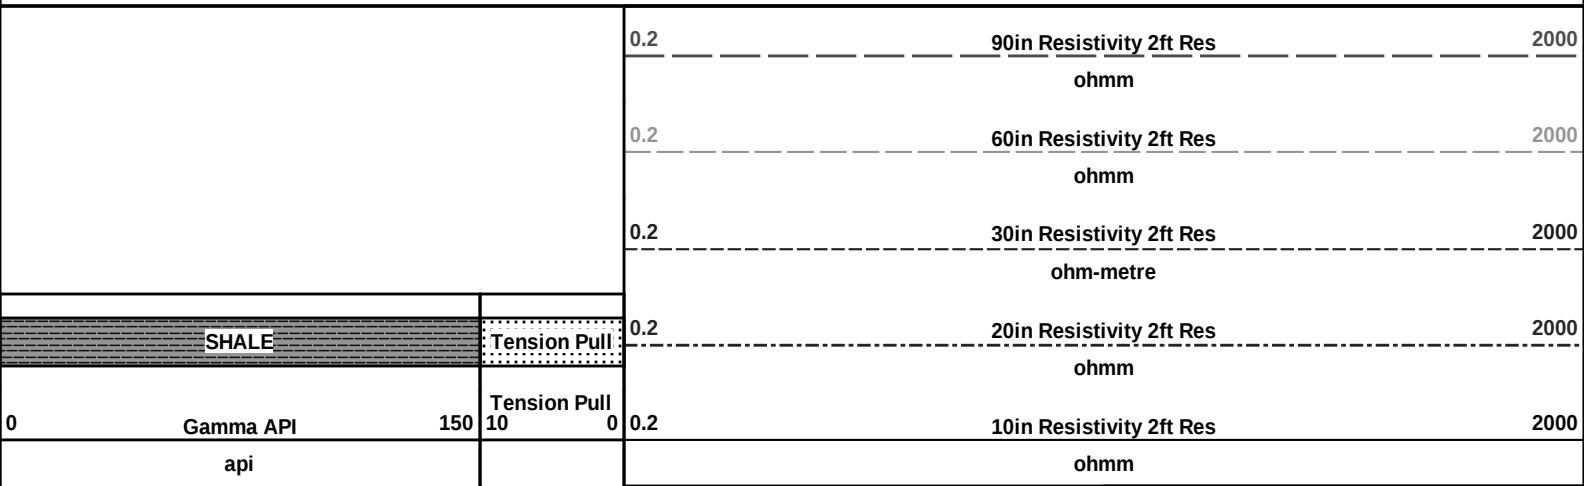

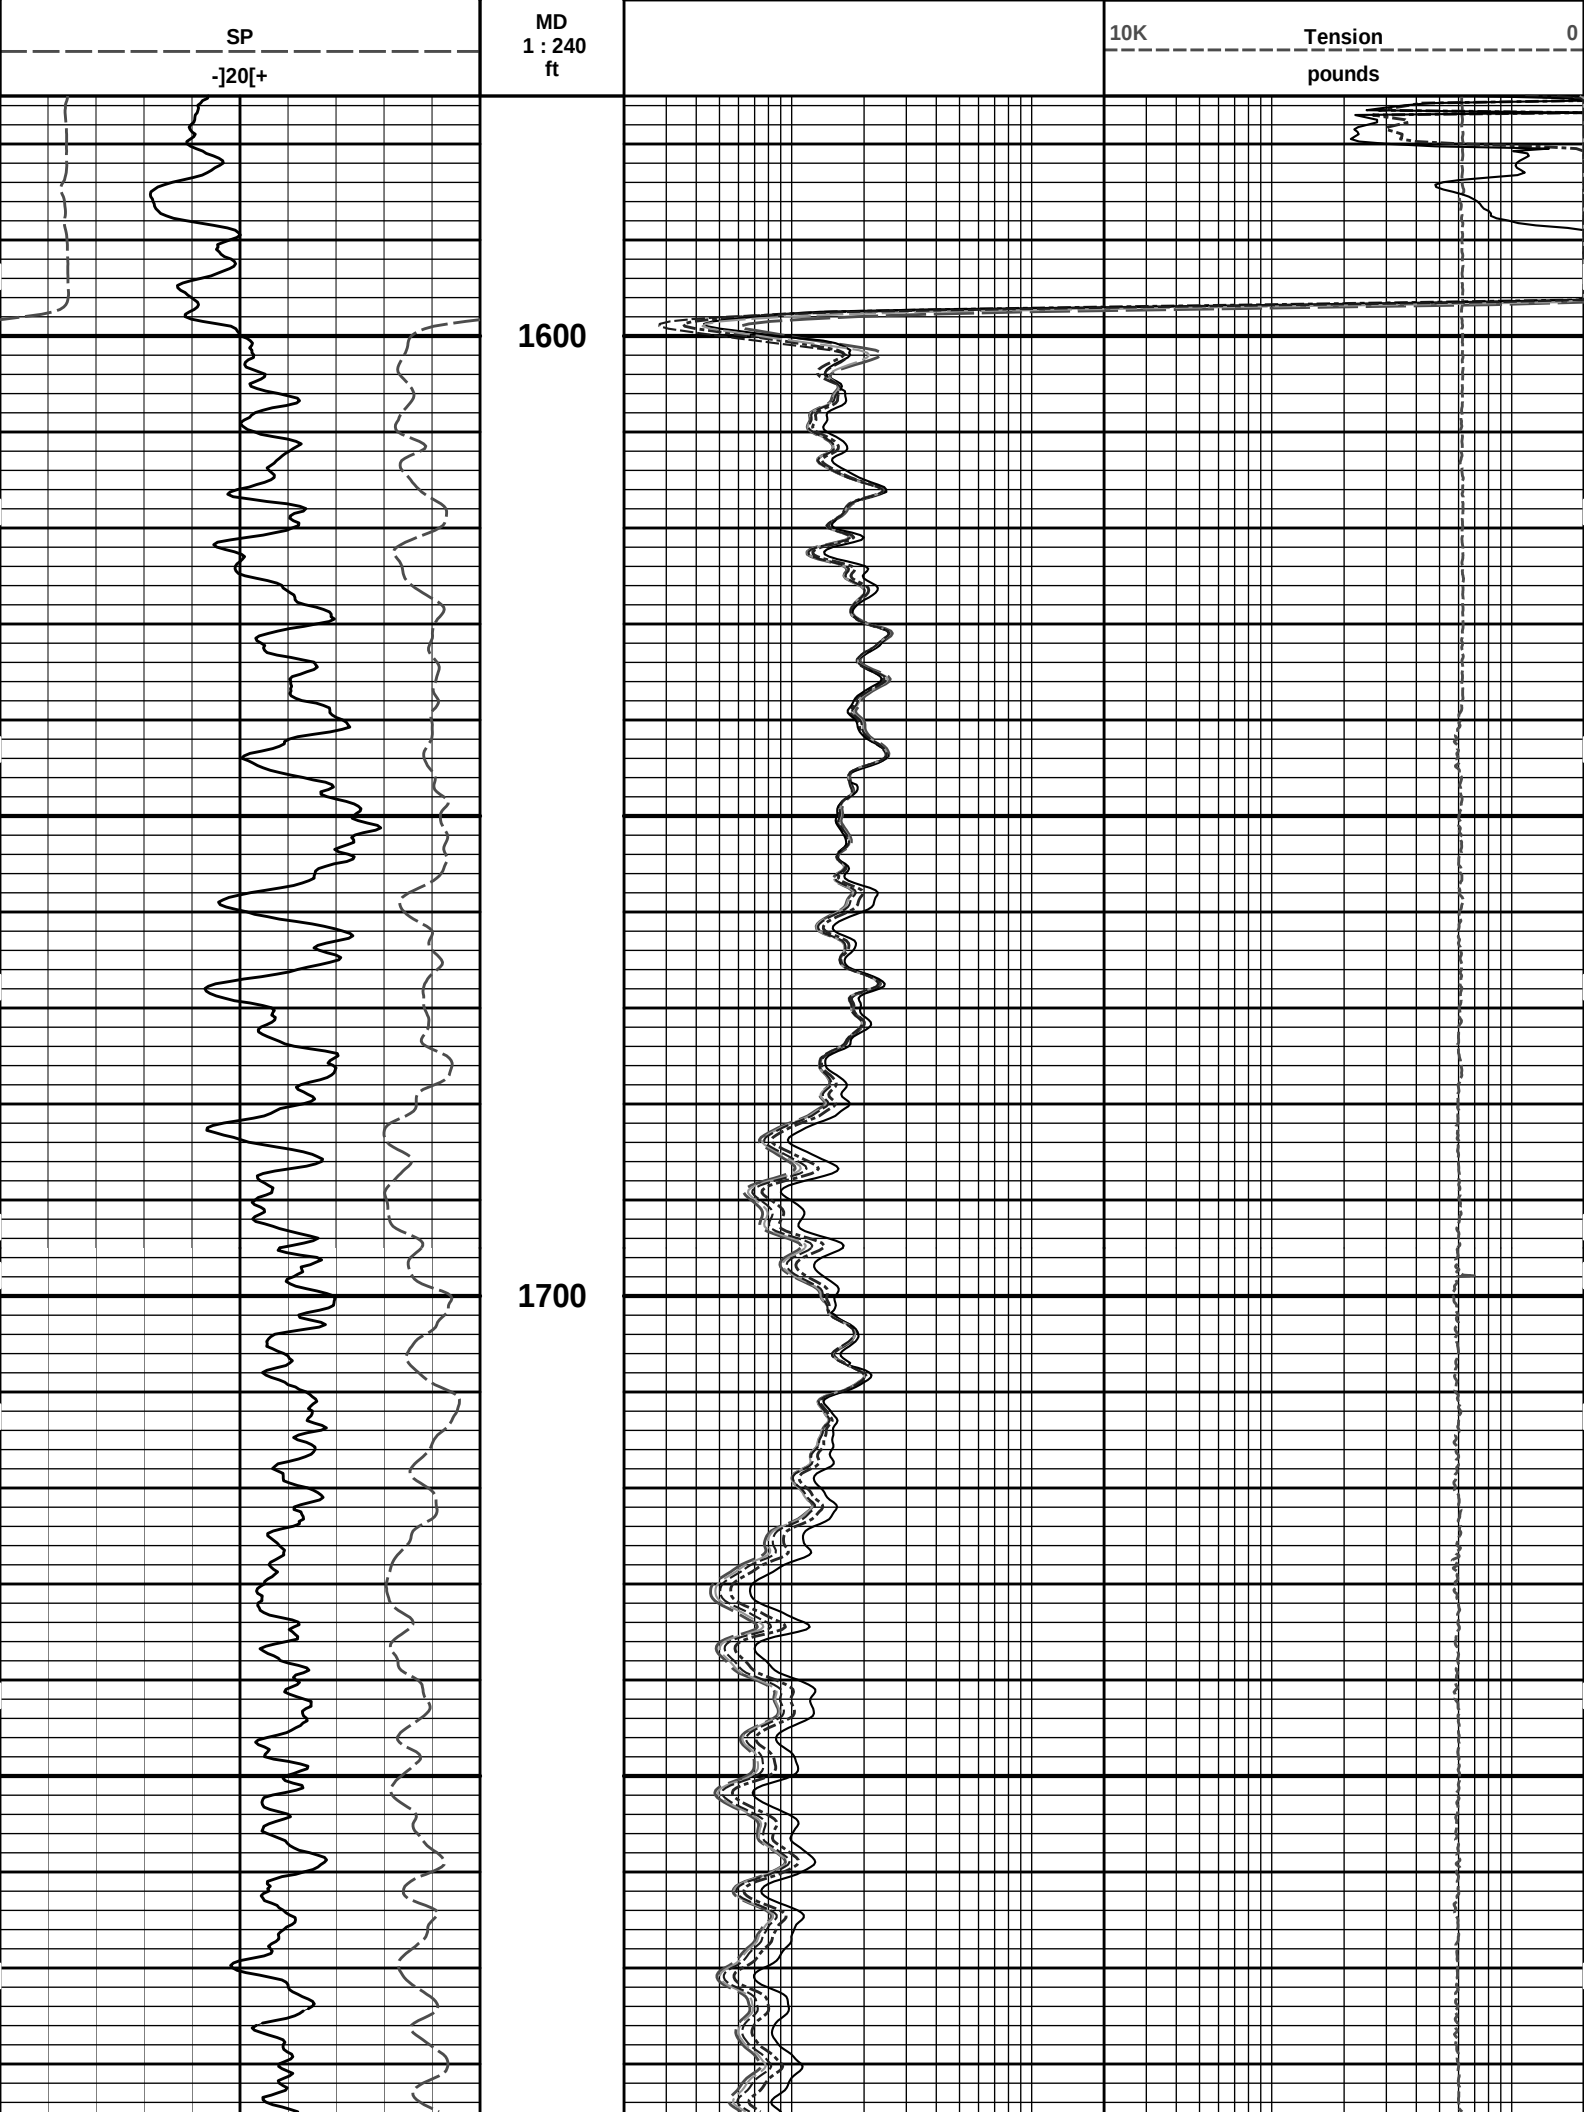


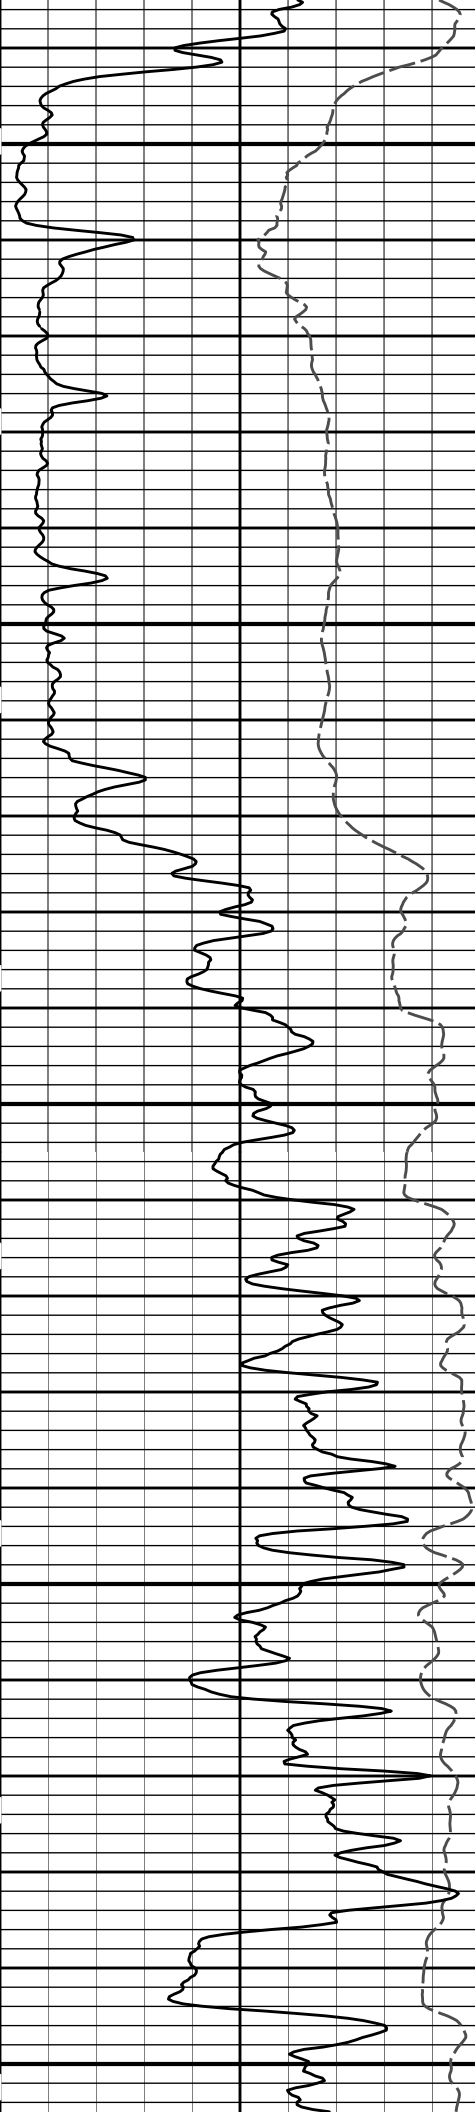

1800

1900


2000

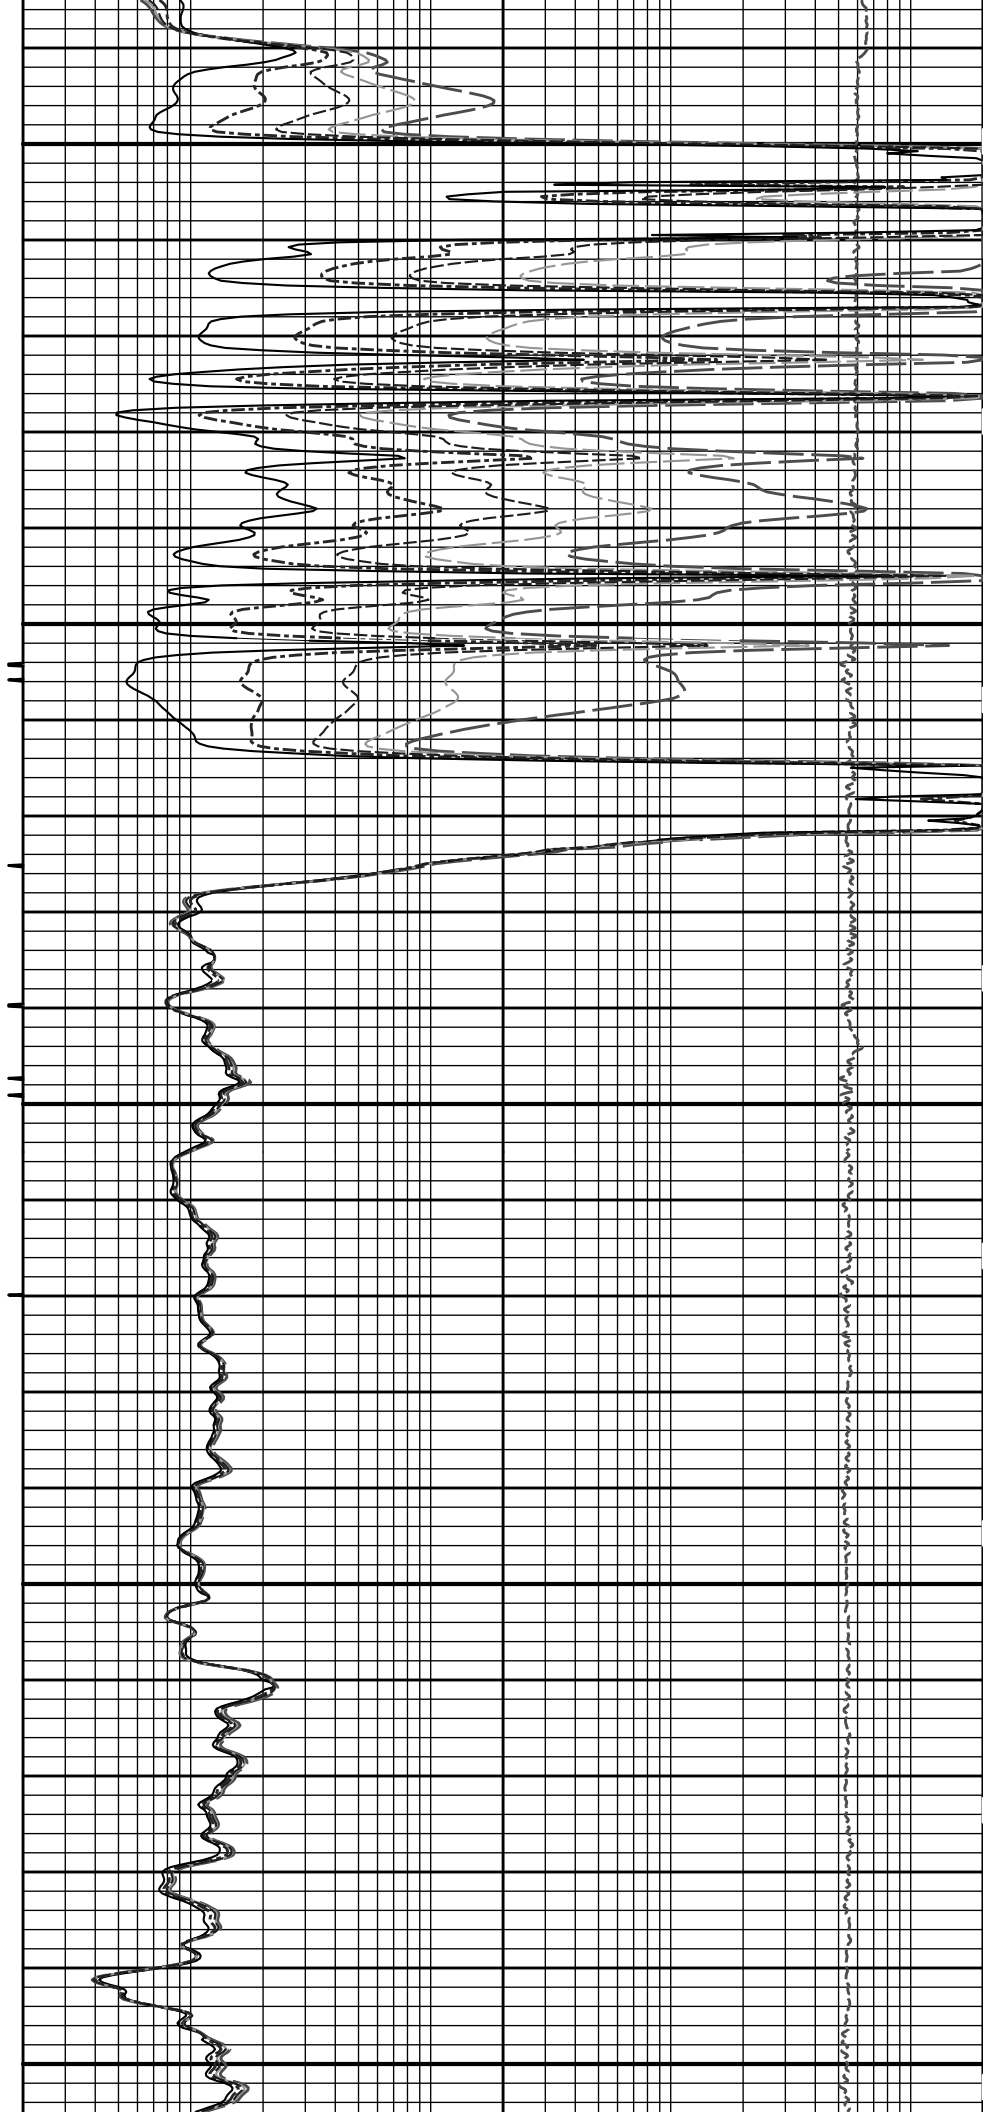




2100


2200

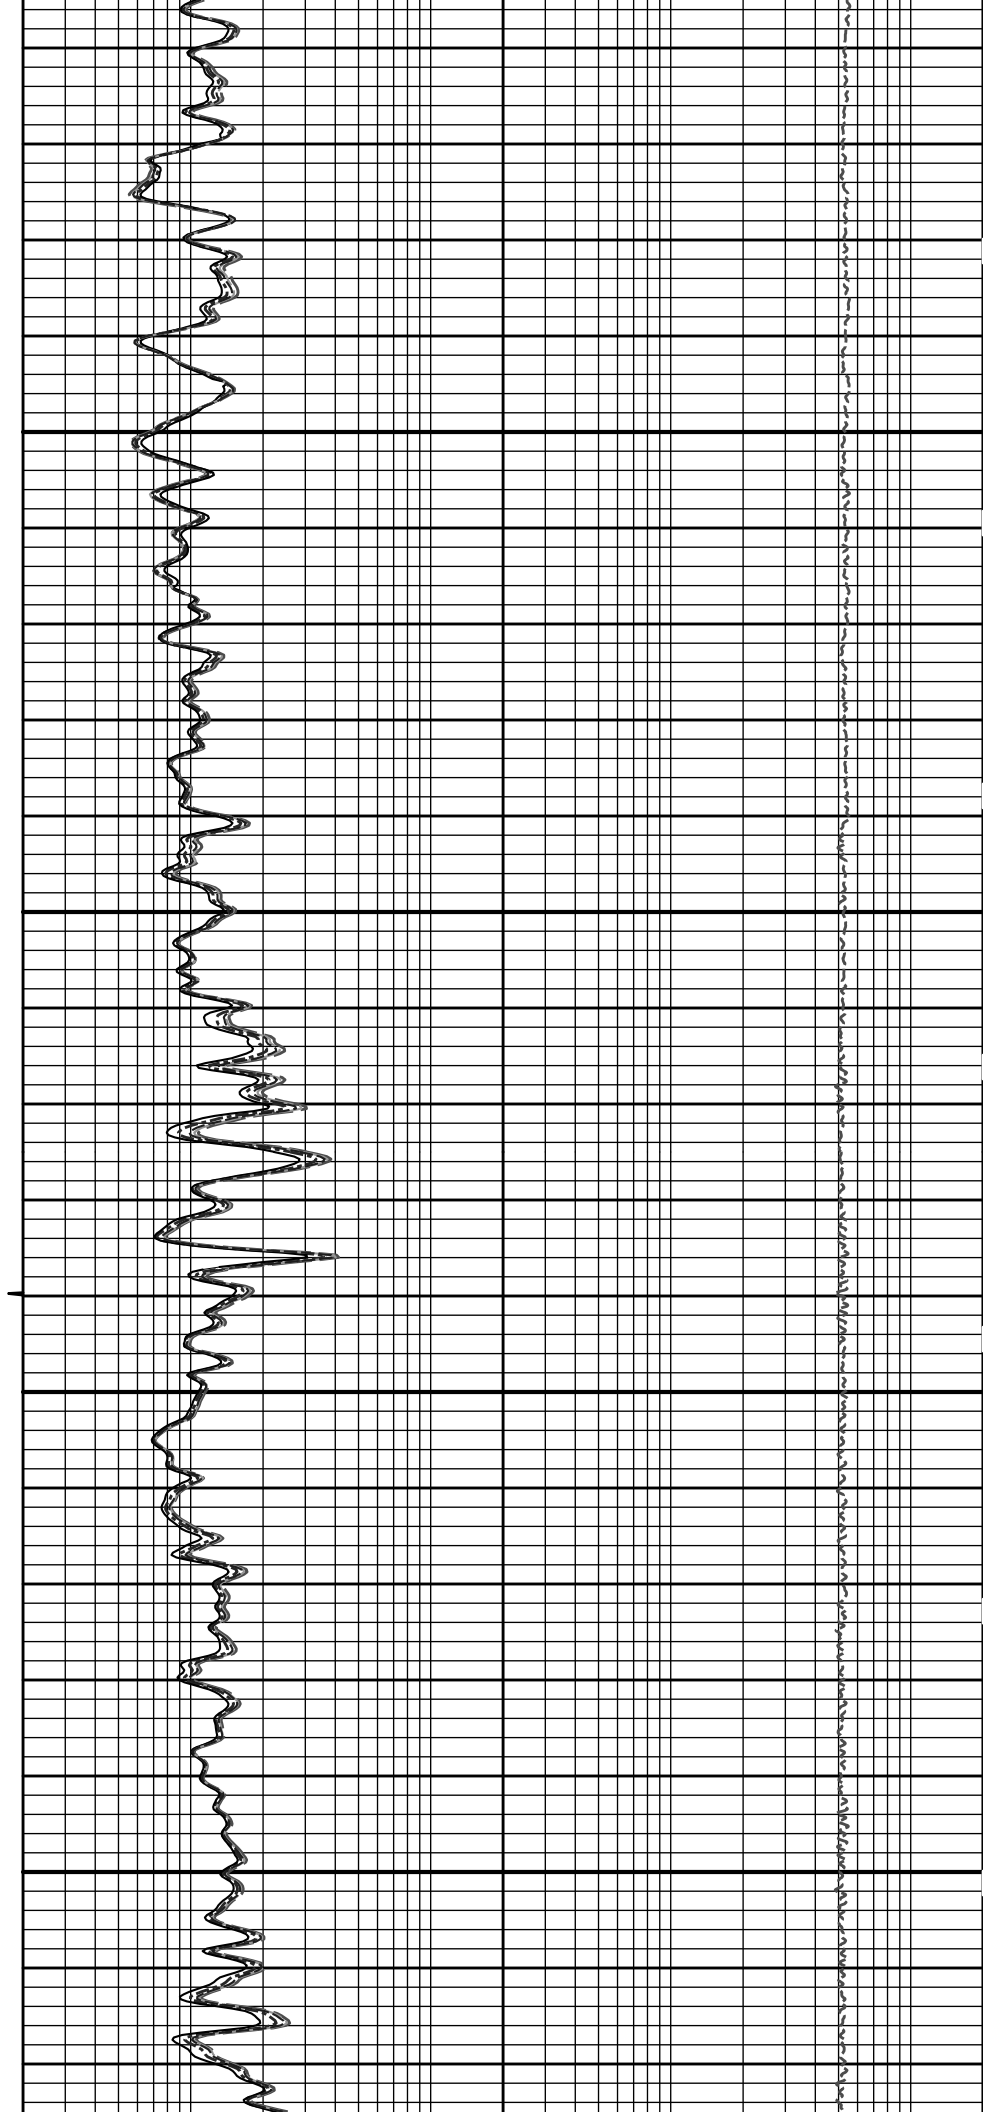


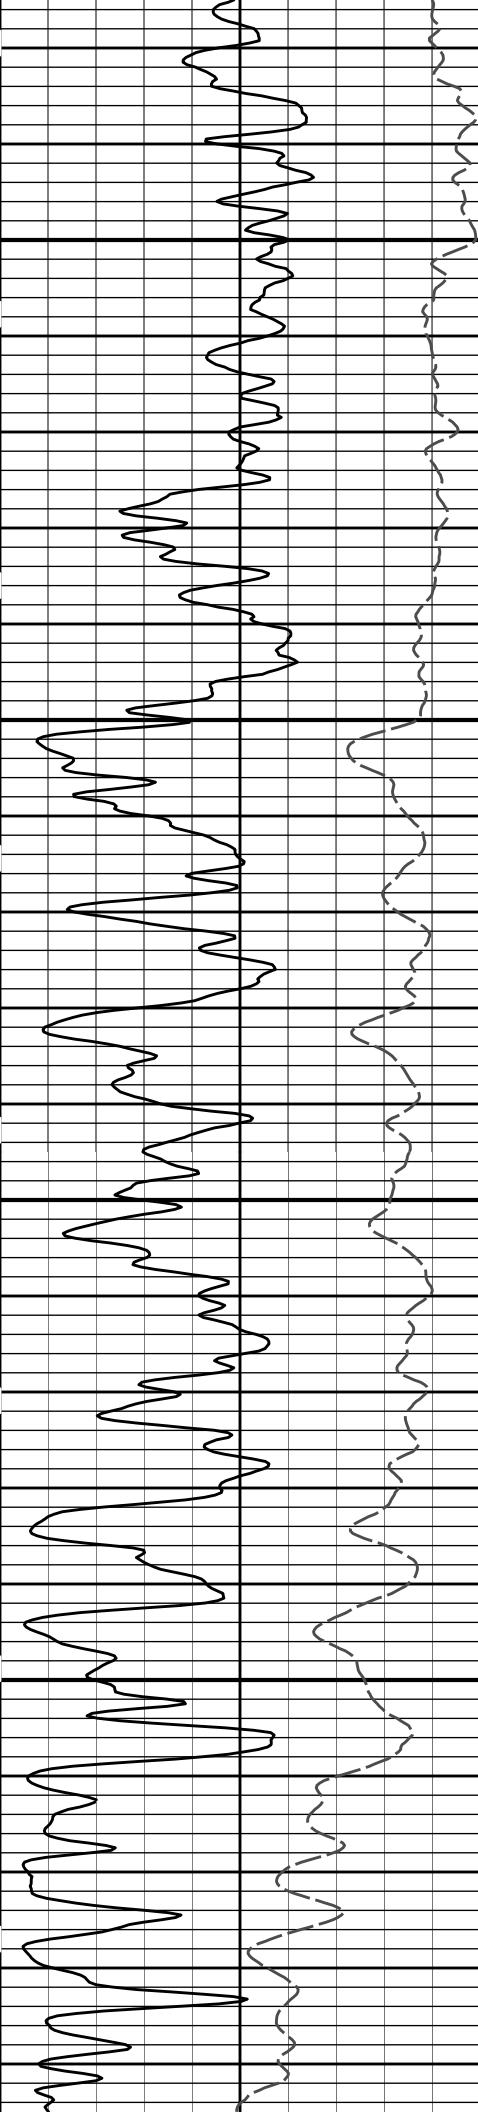

2300


2400

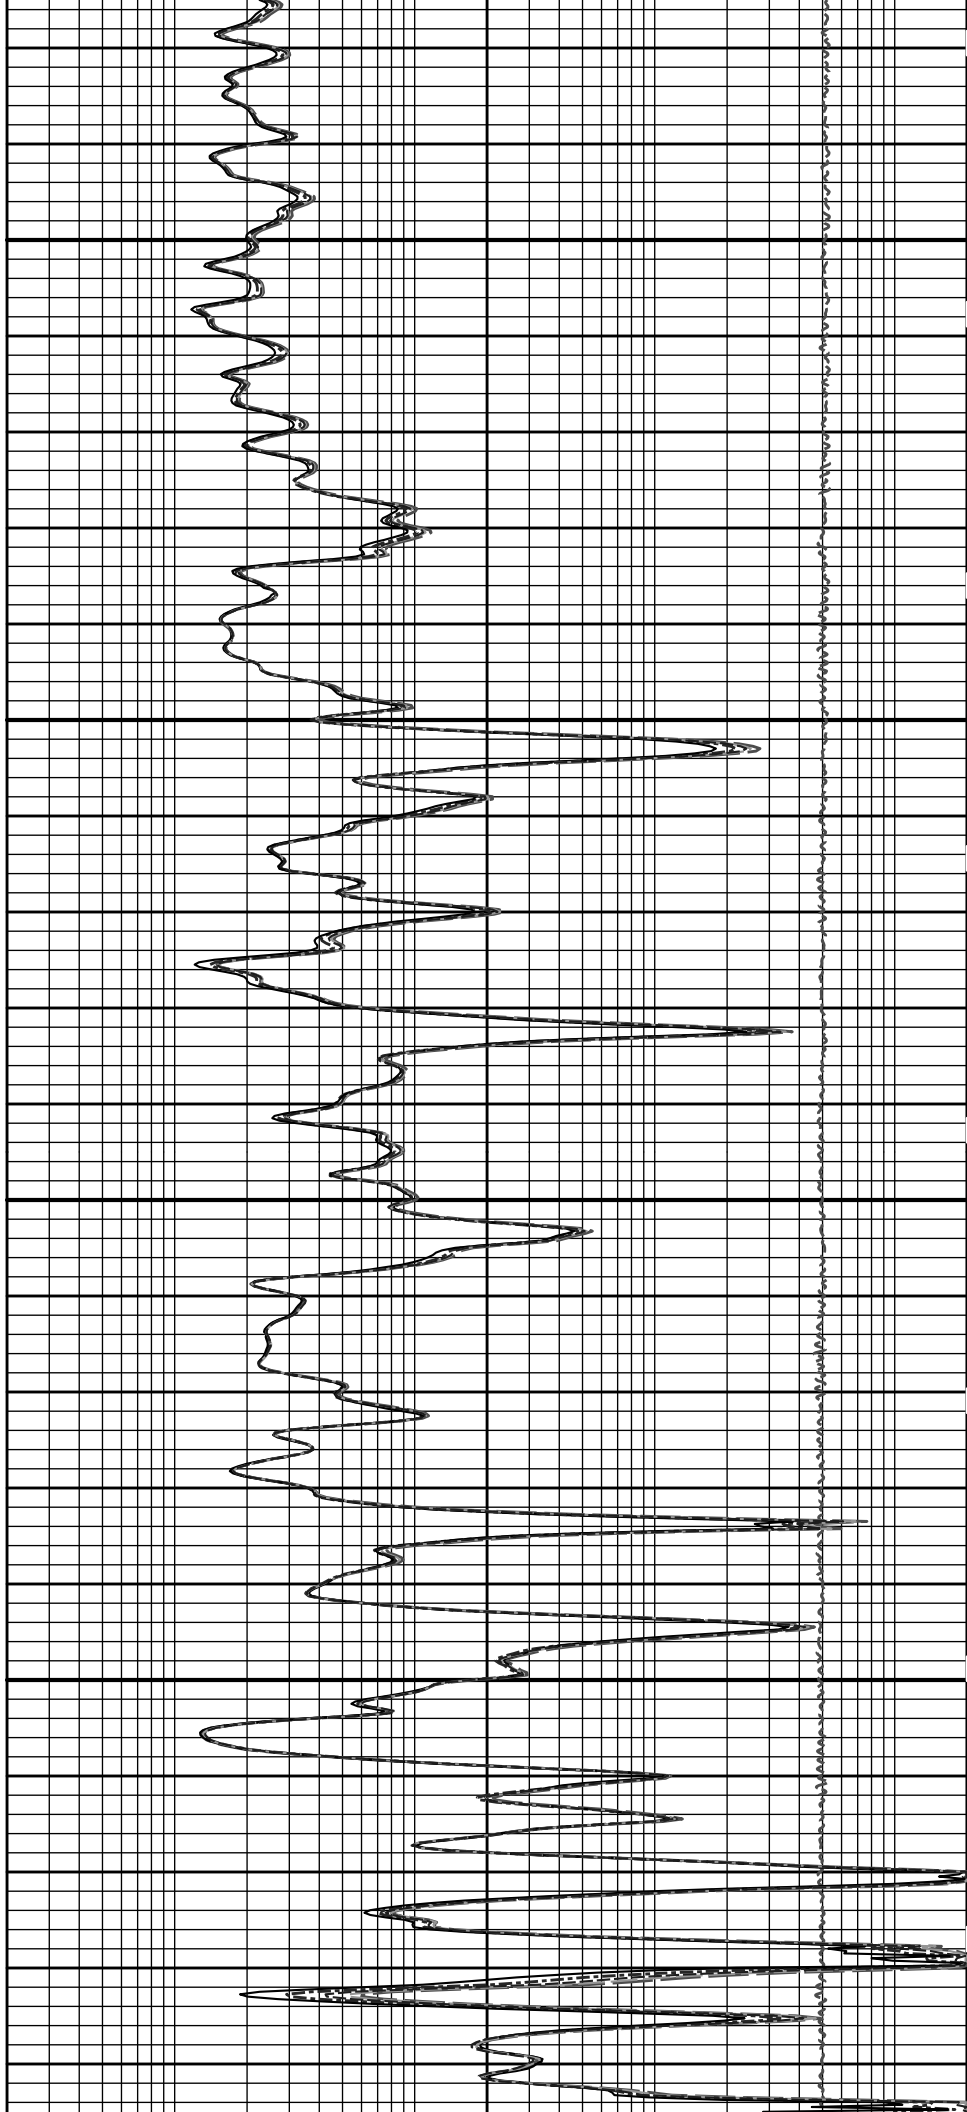


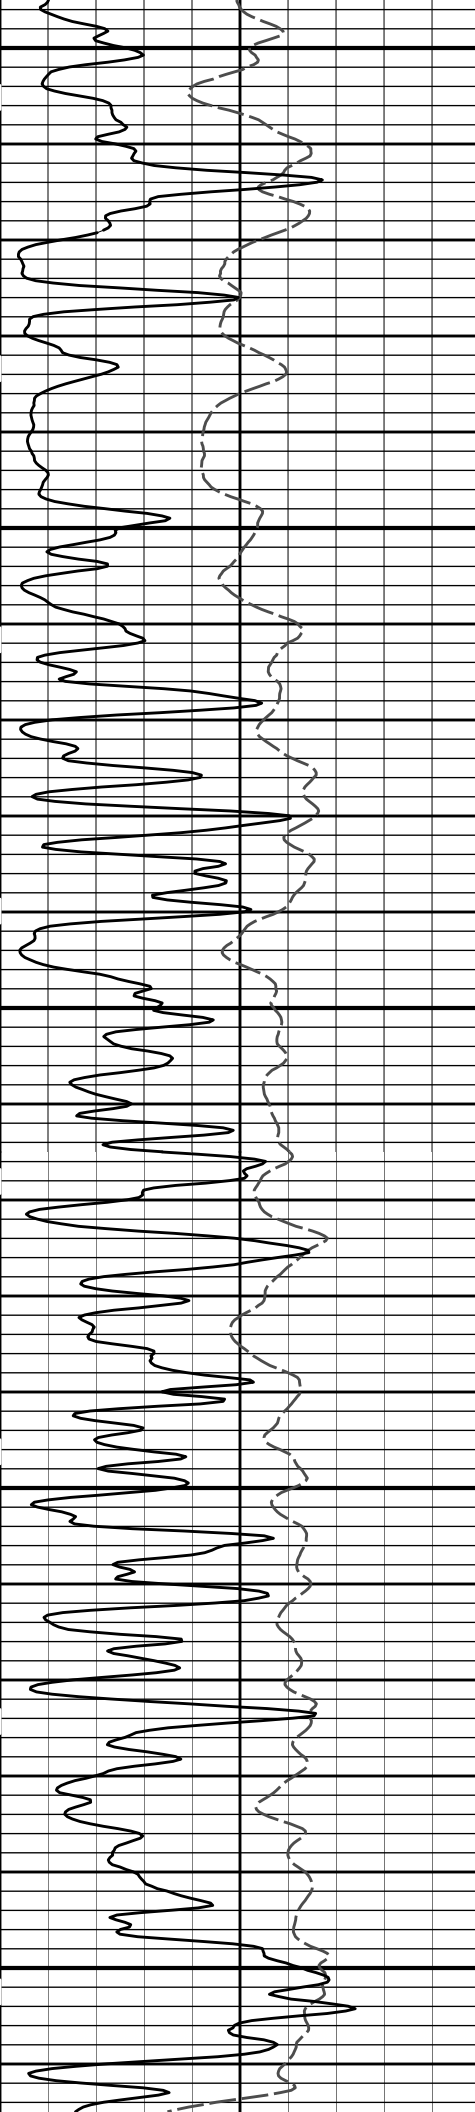

2500


2600

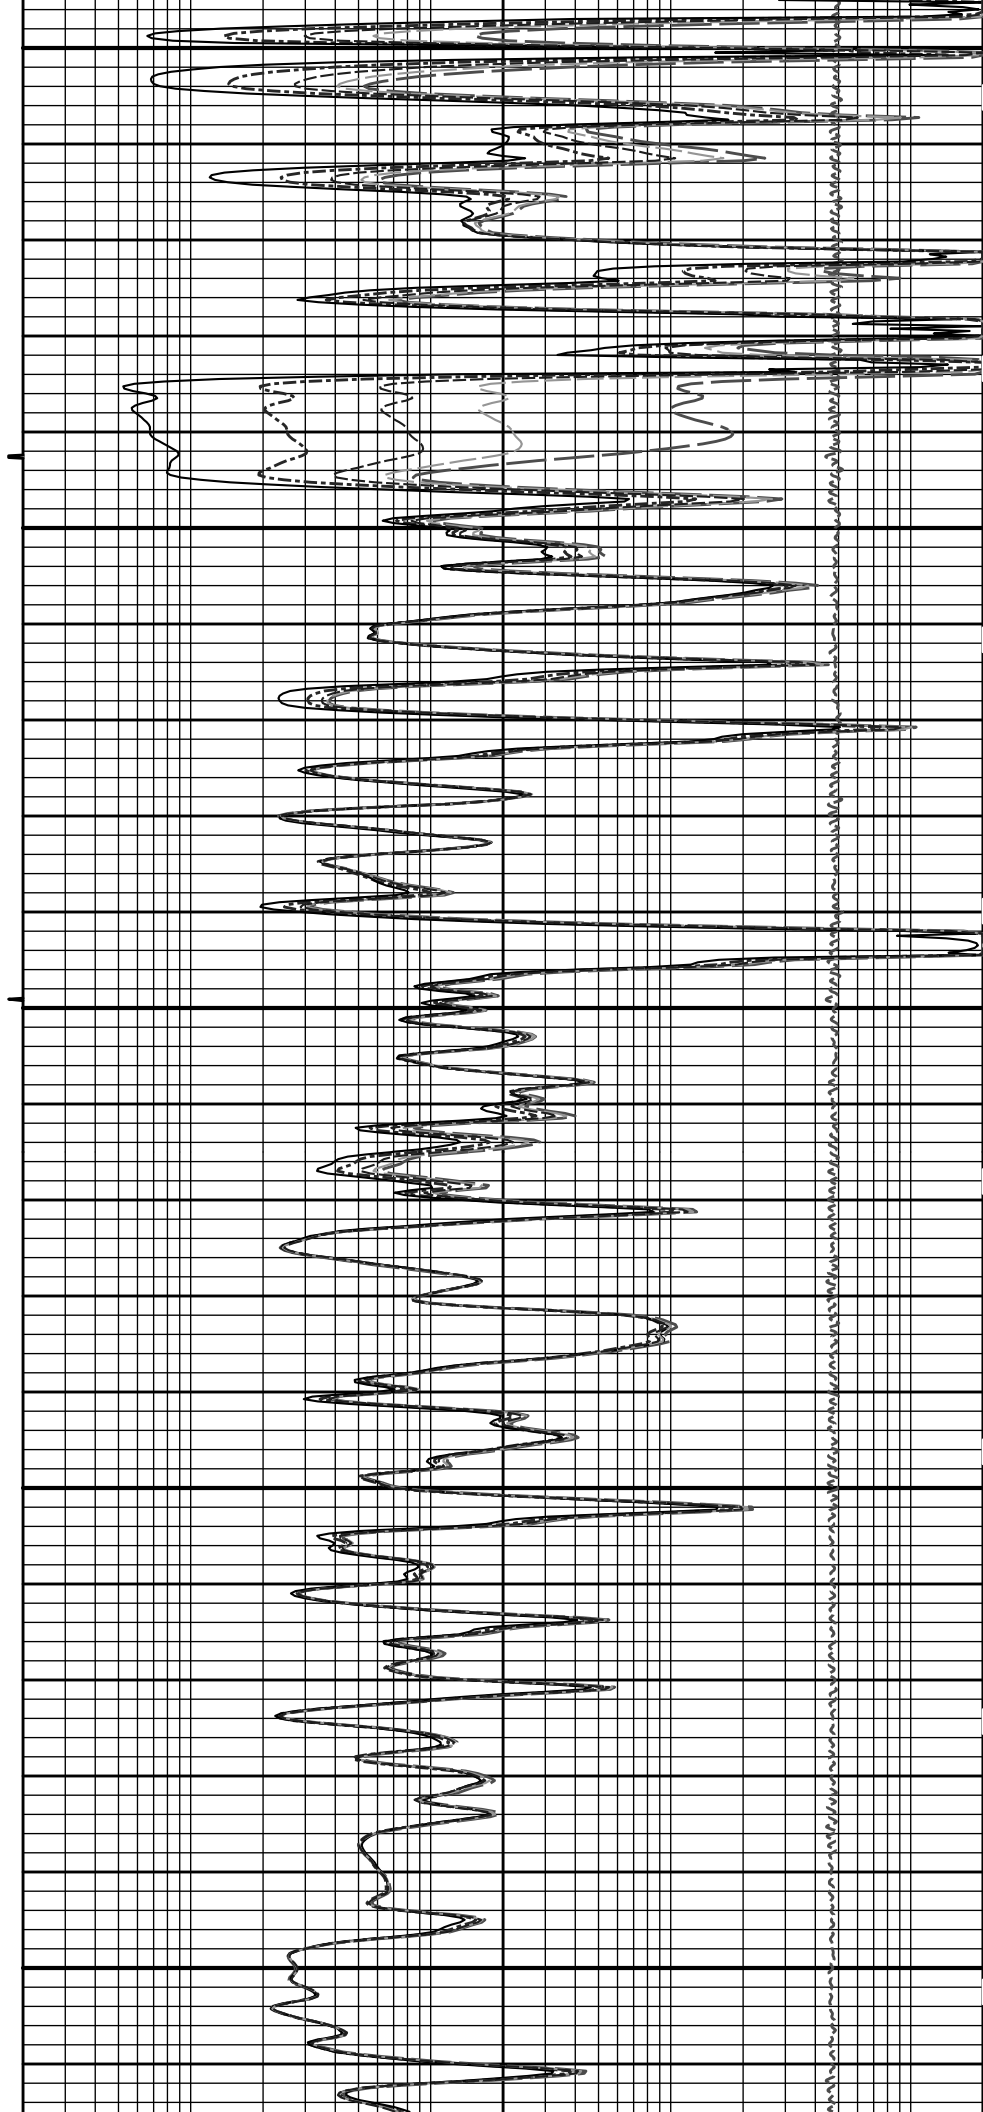


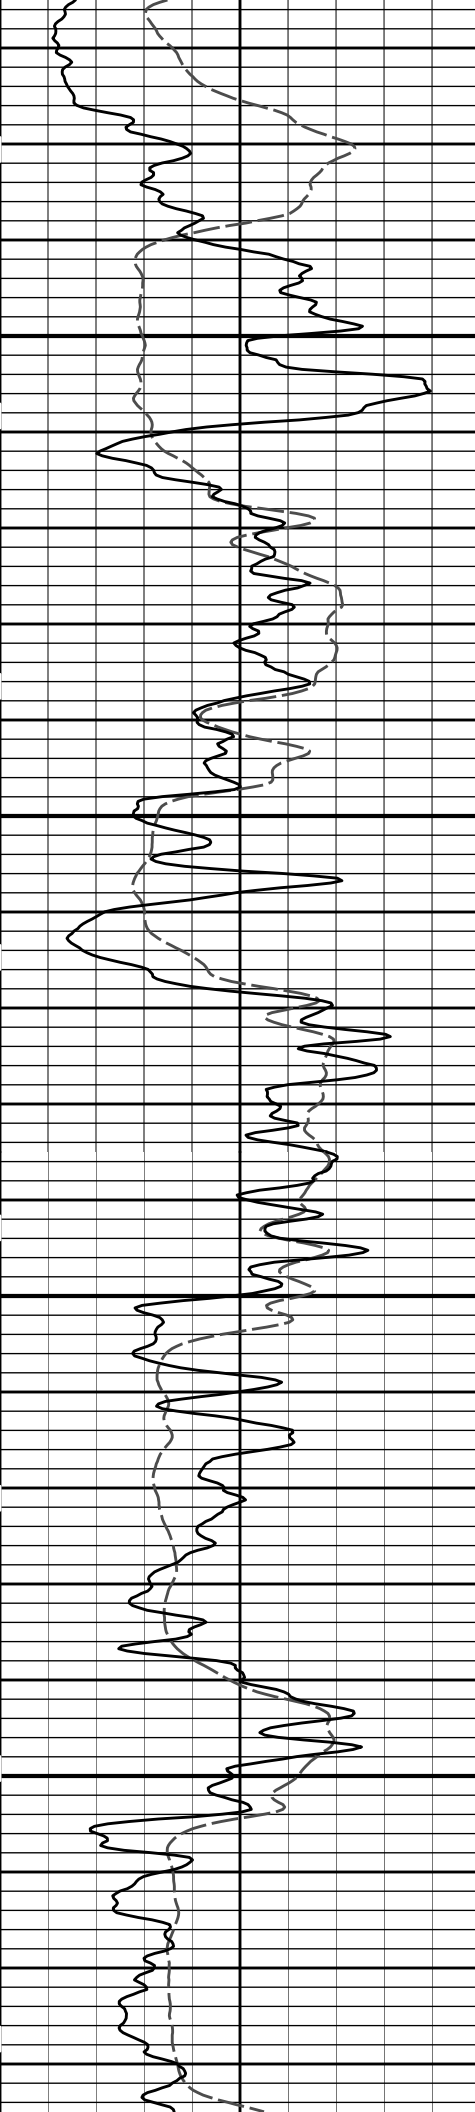

2700

2800

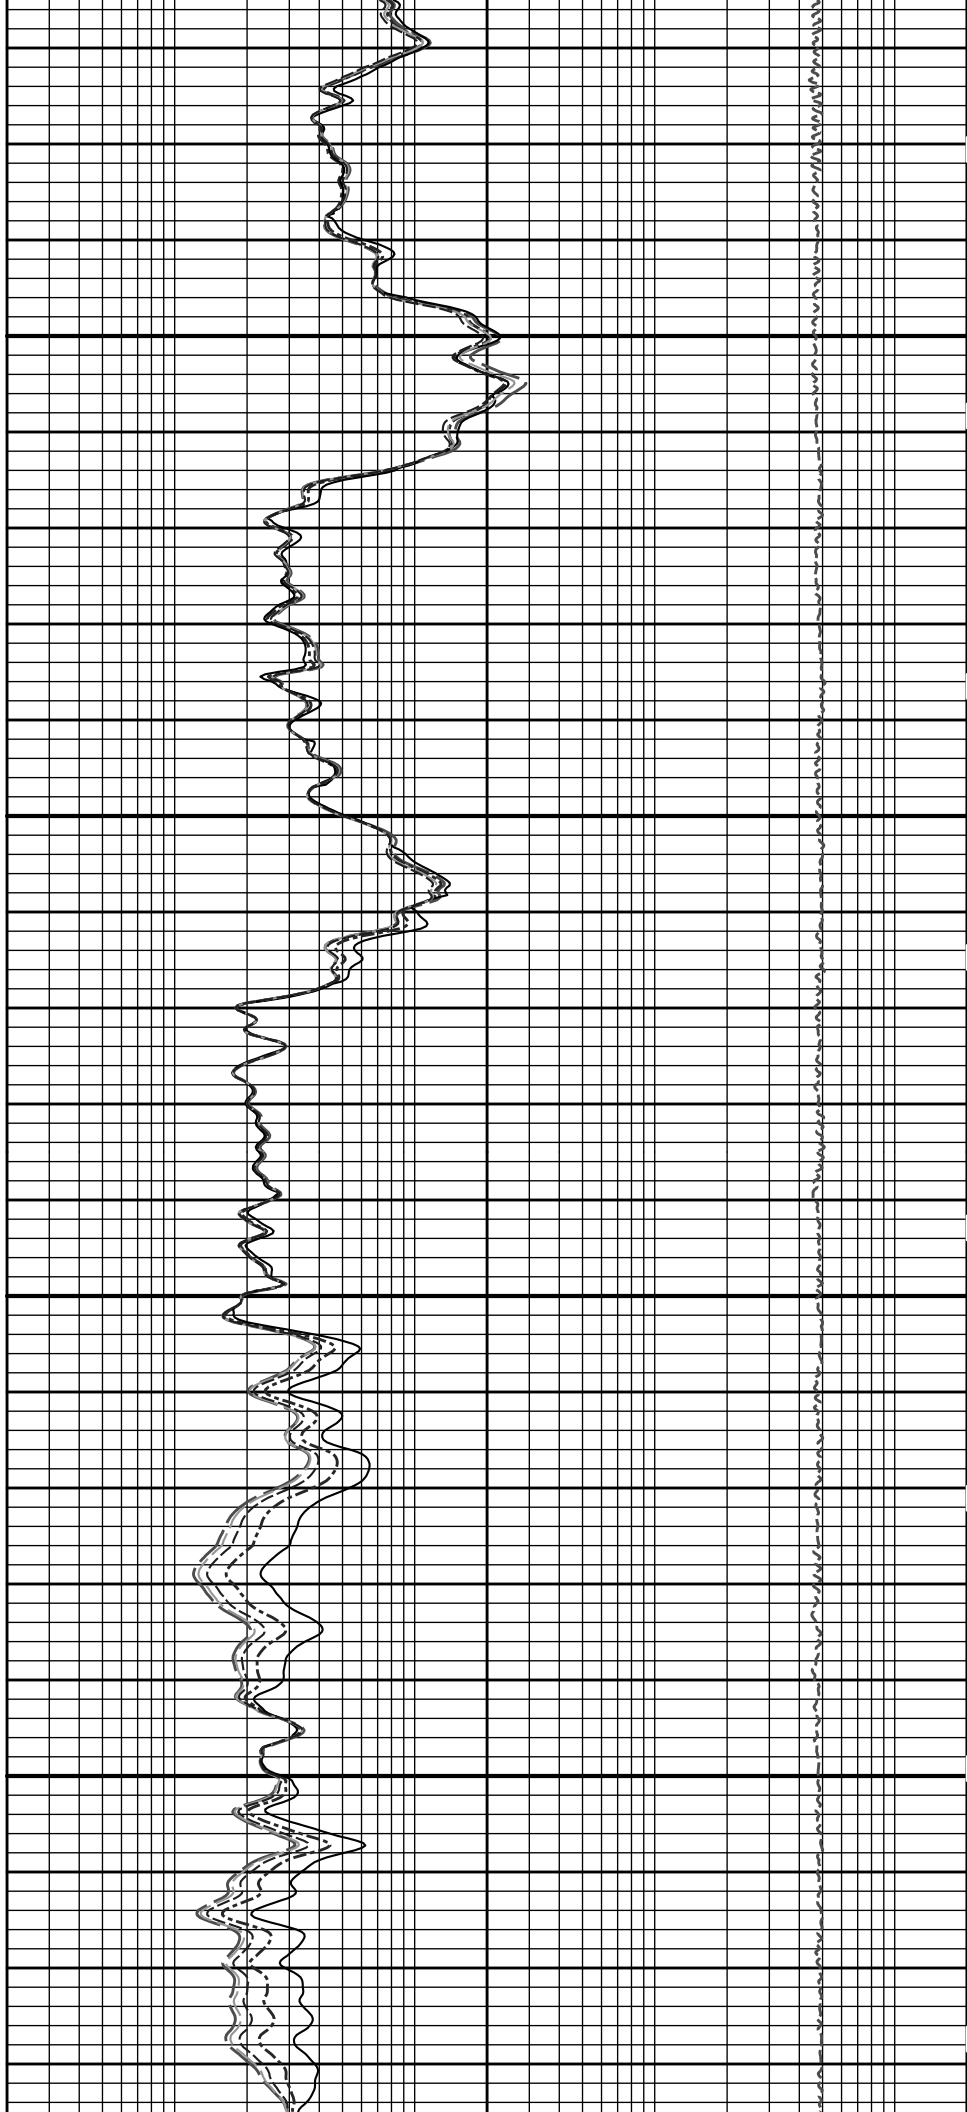


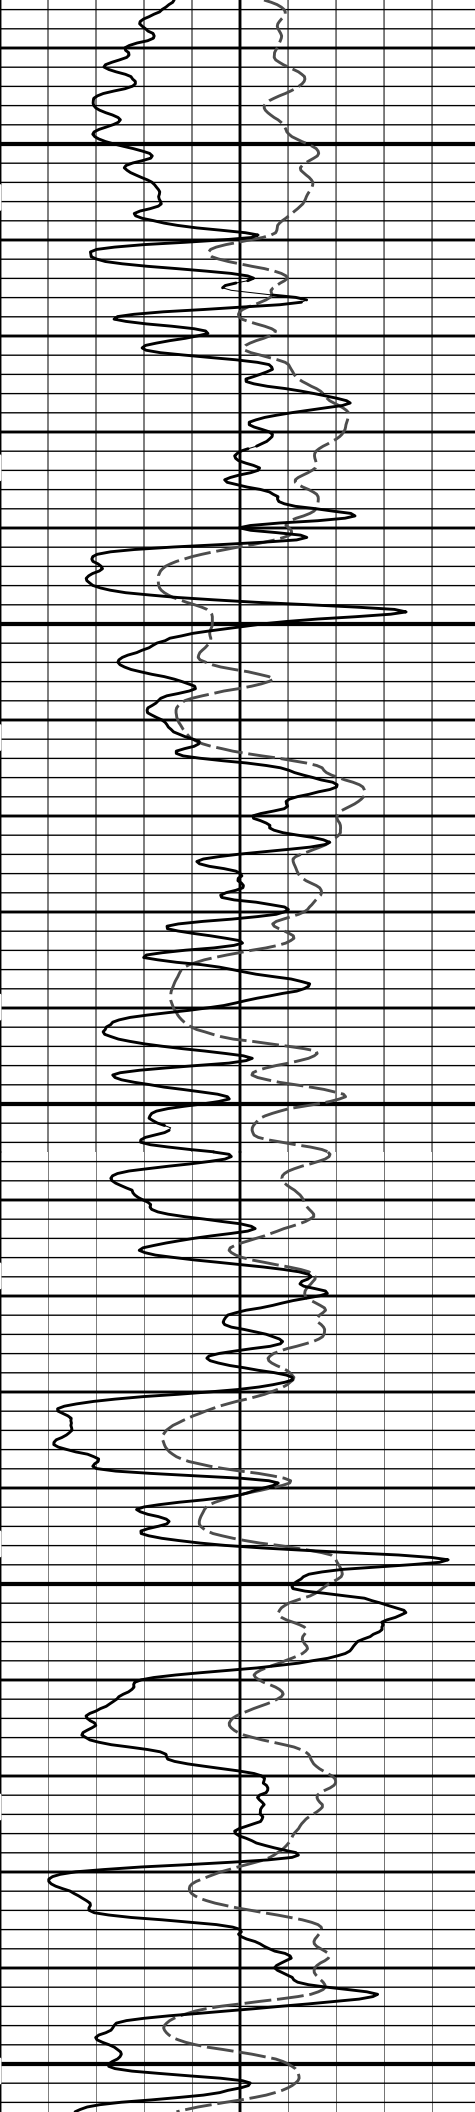


2900

3000


3100

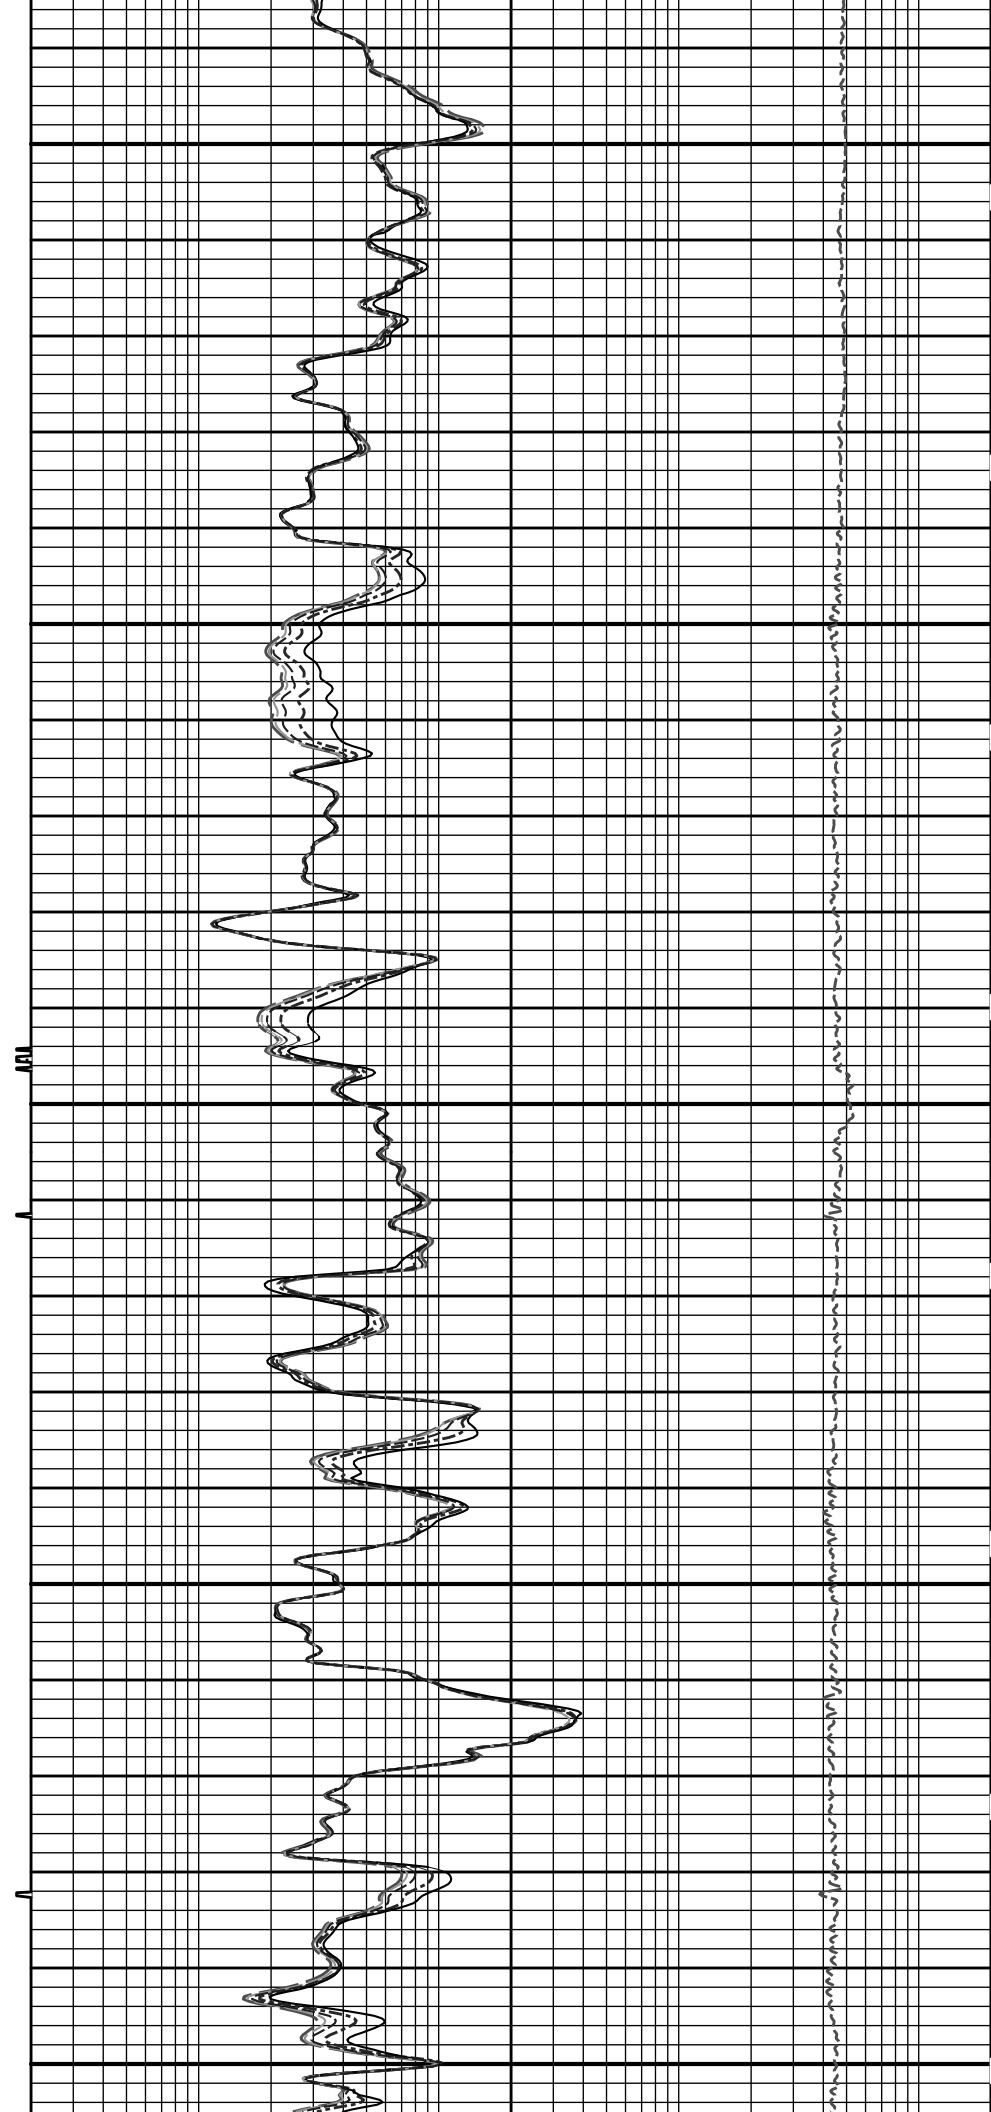


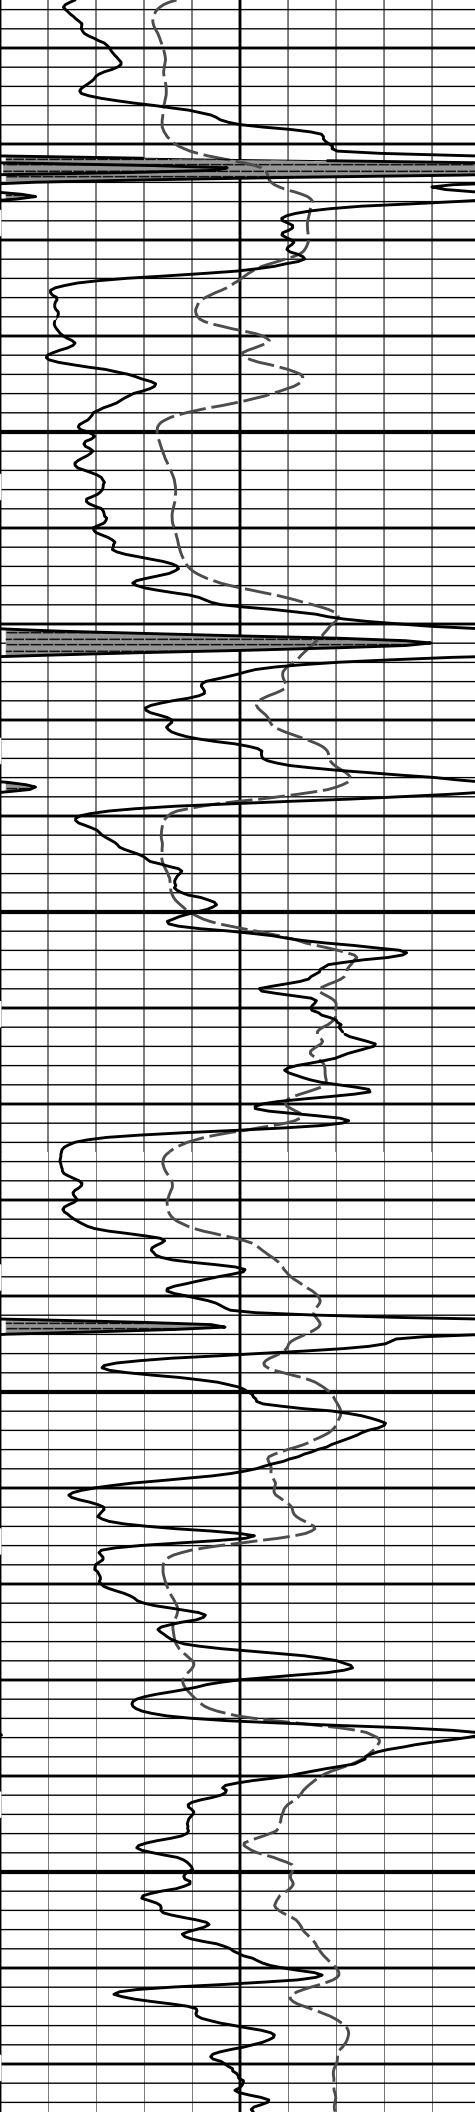


3200

3300

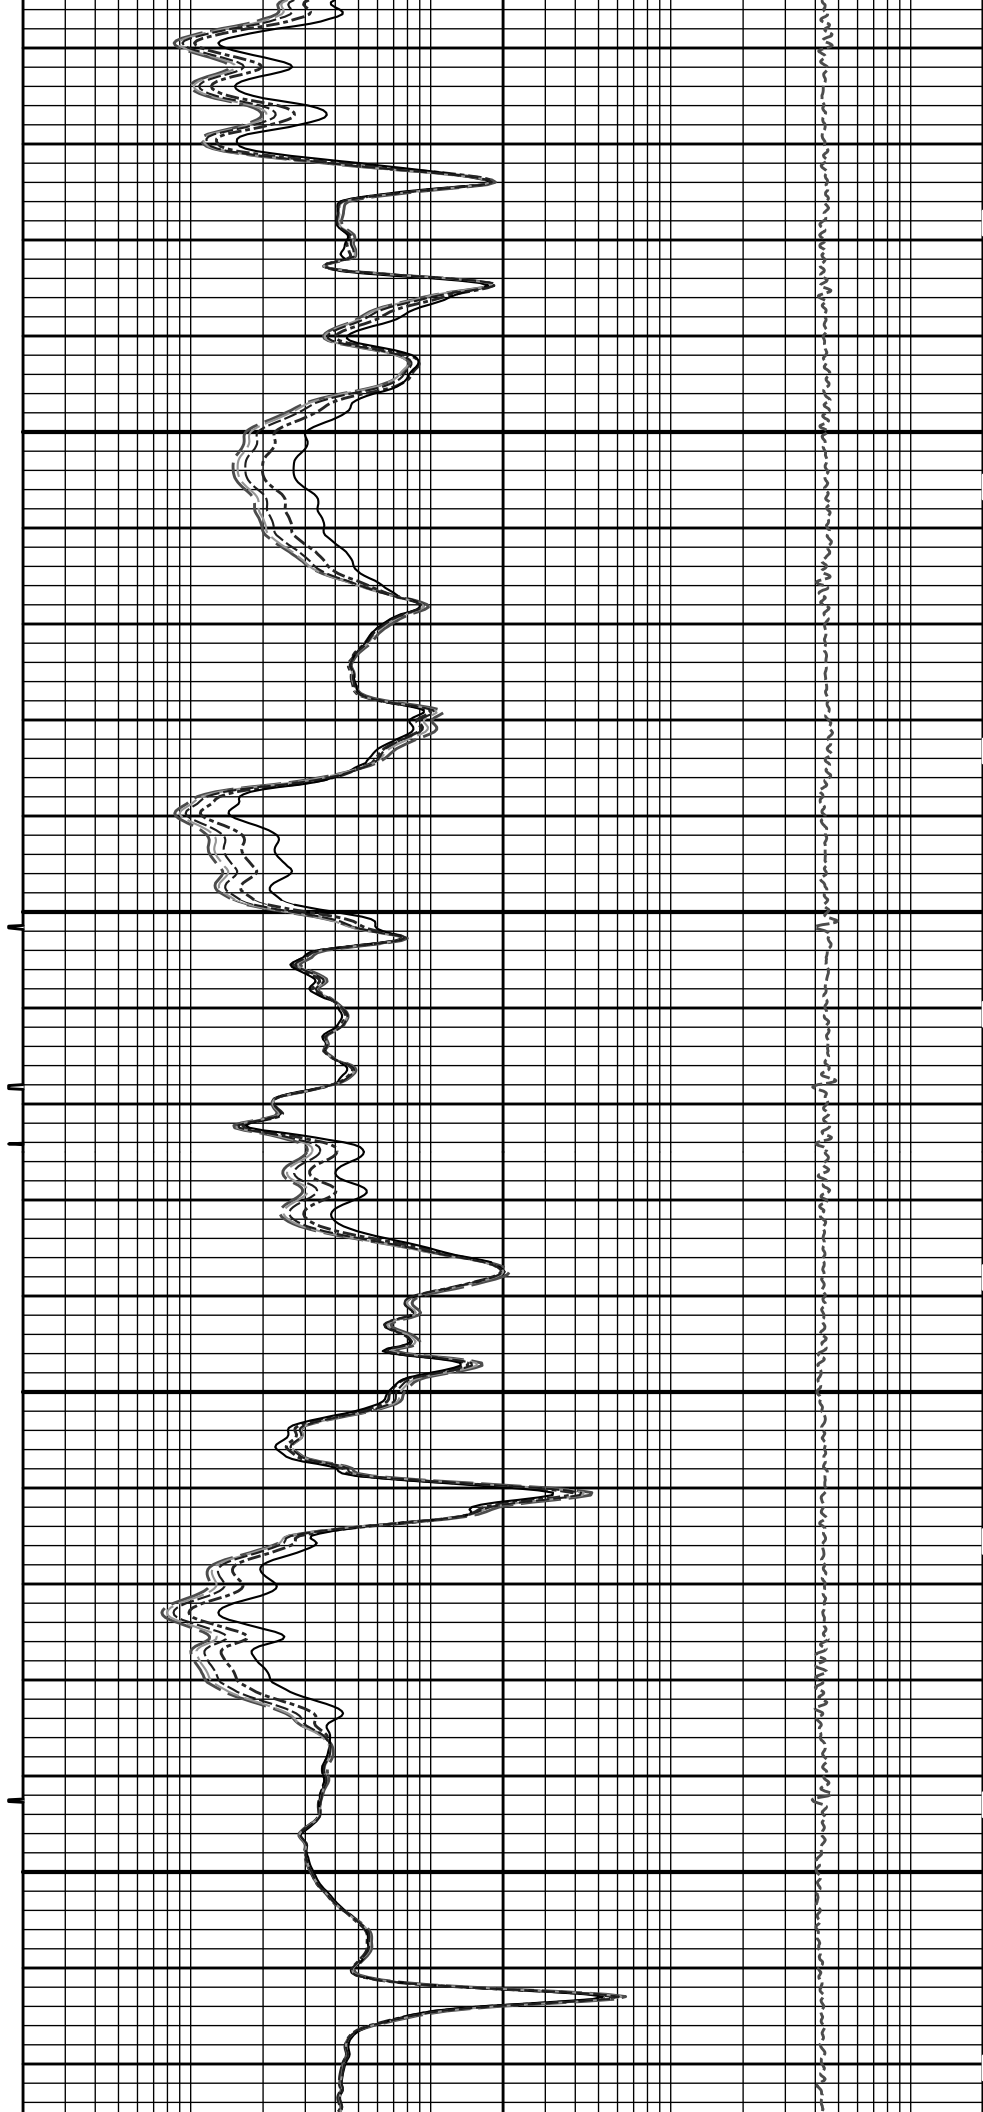


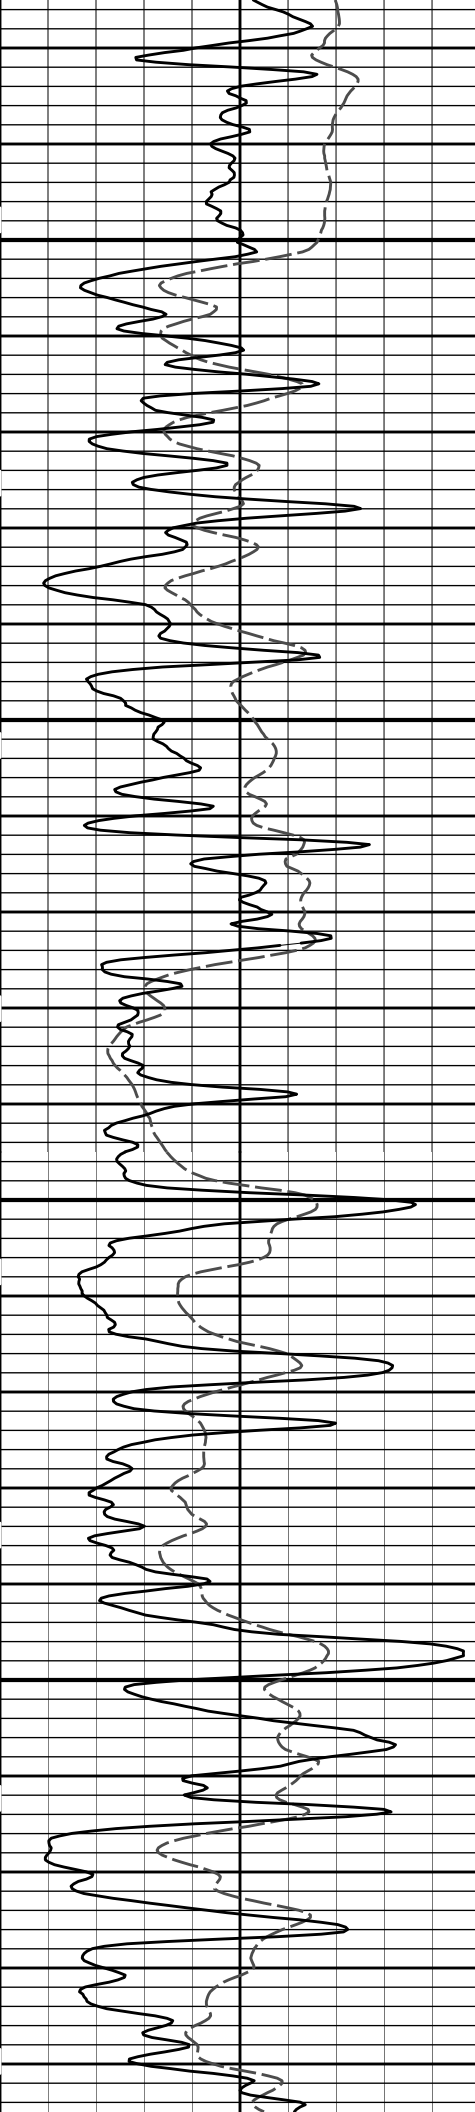


3400

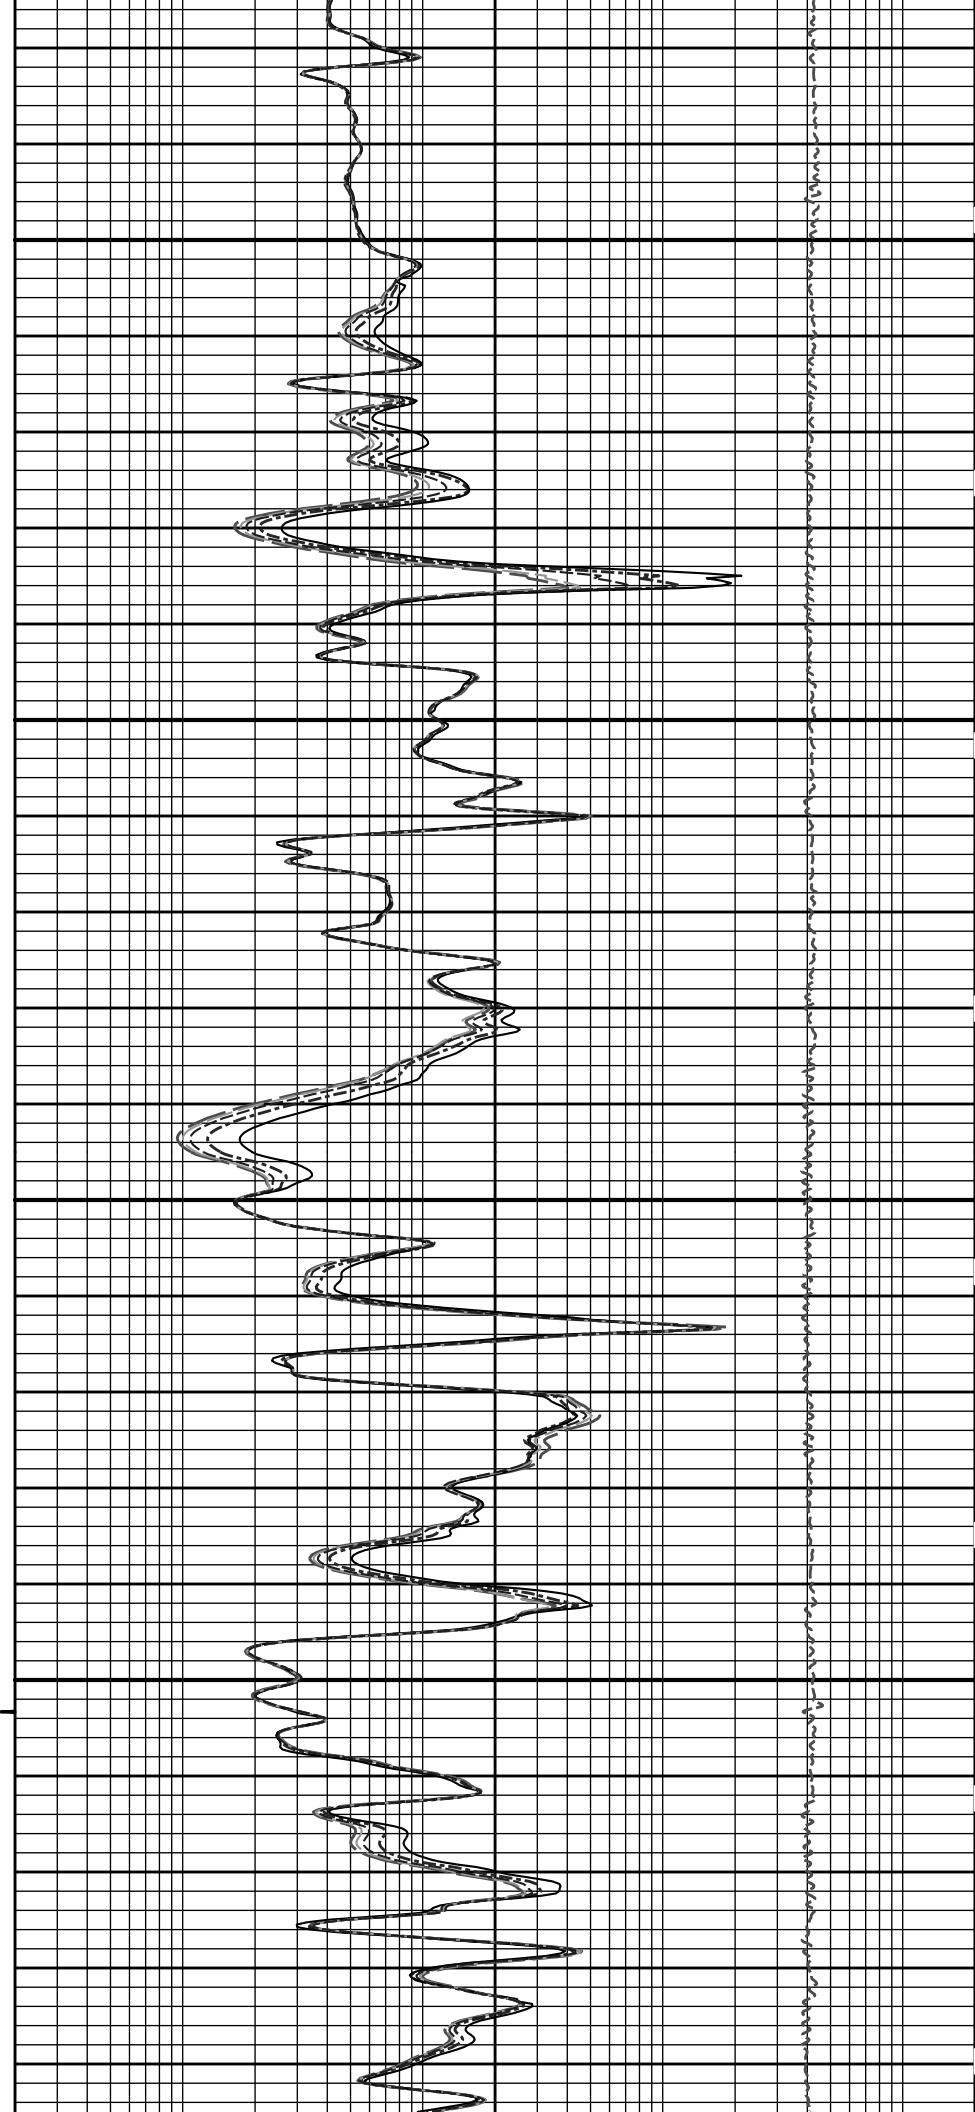

3500

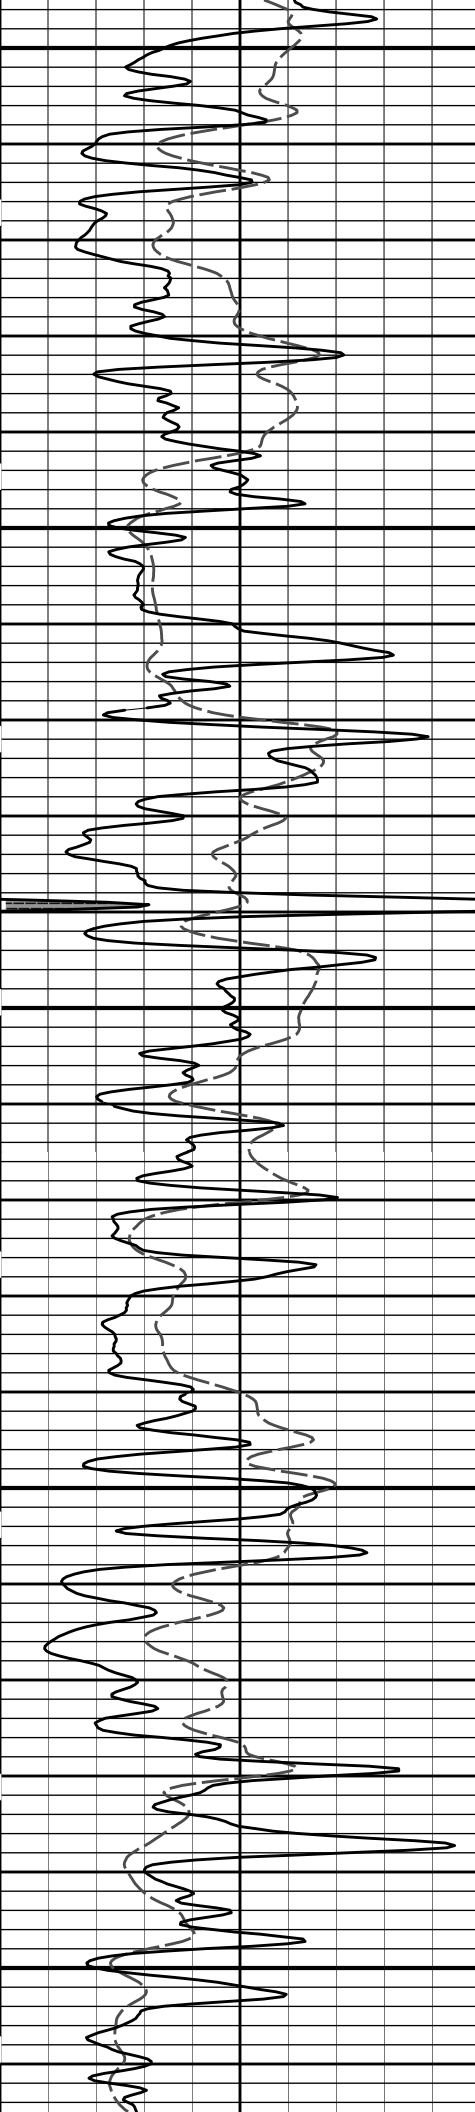



3600

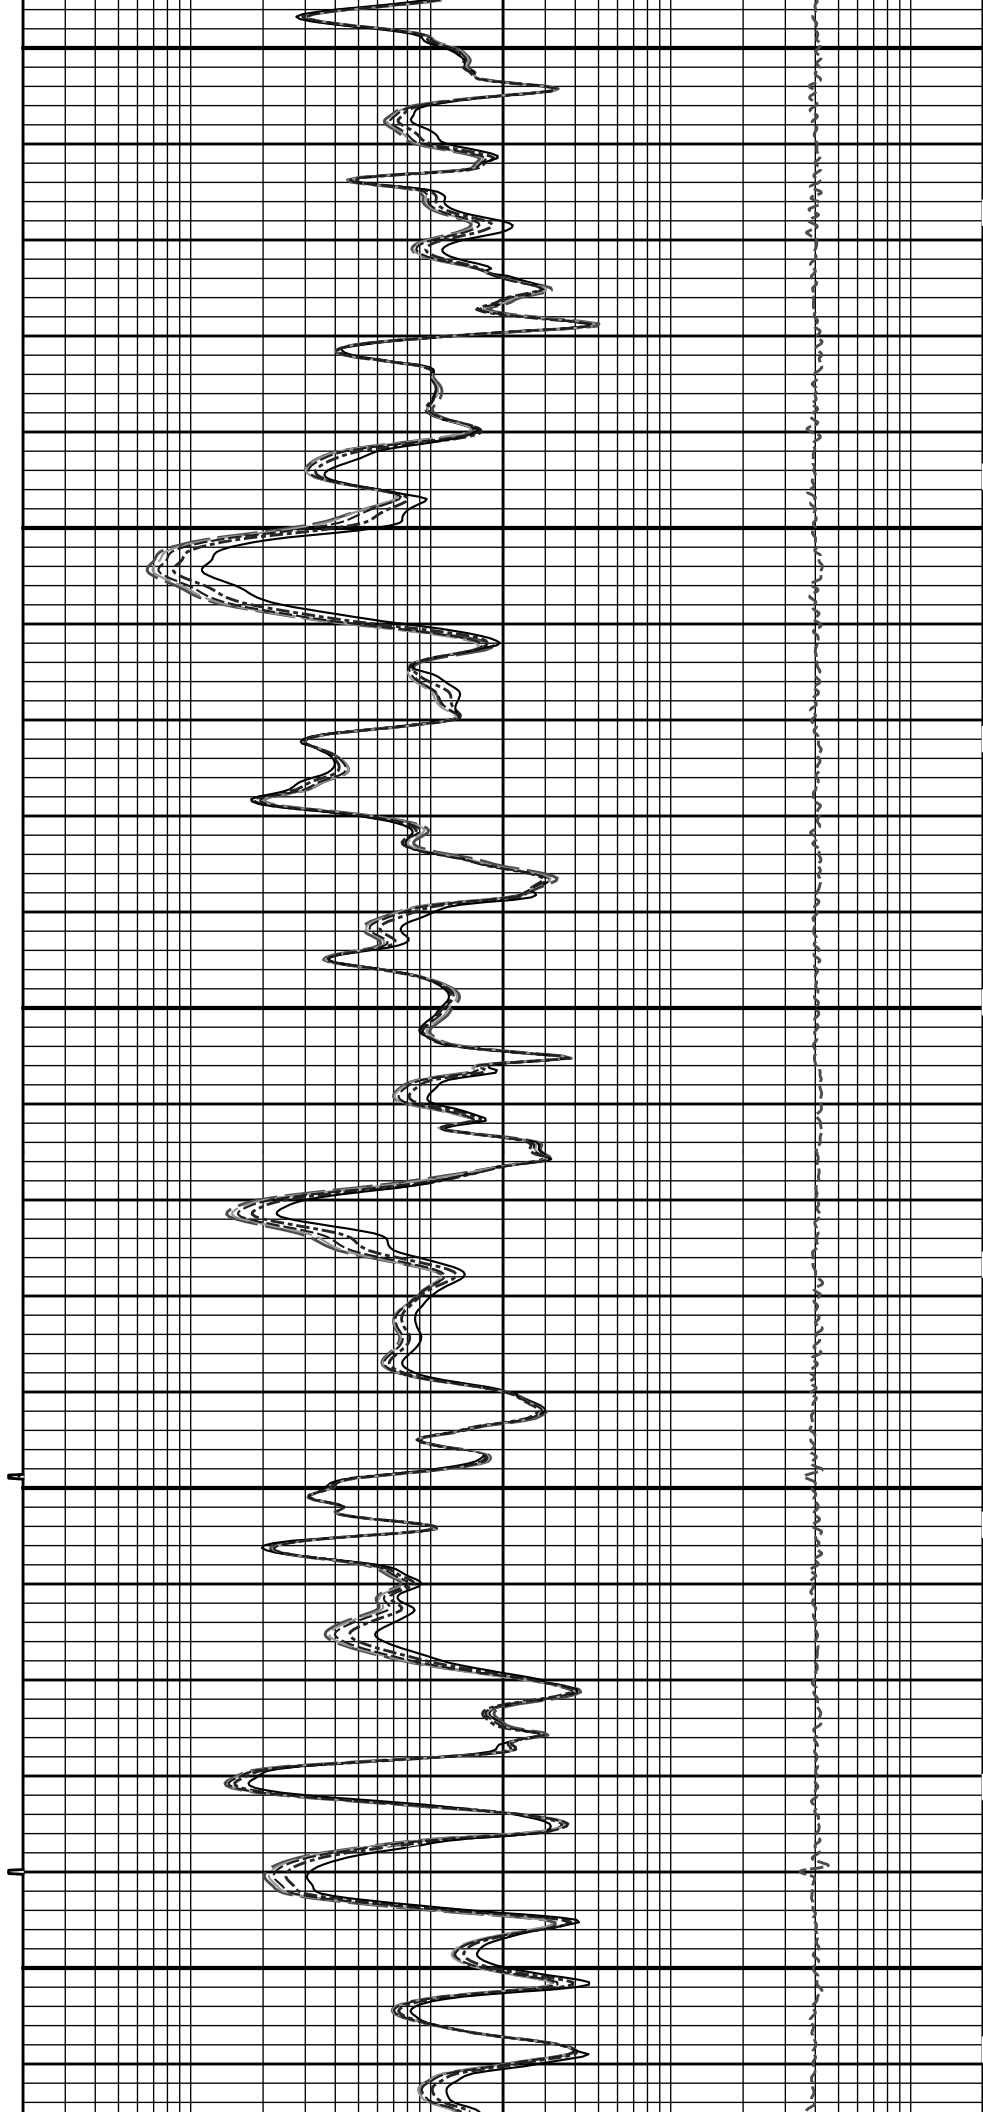


3700

3800

3900

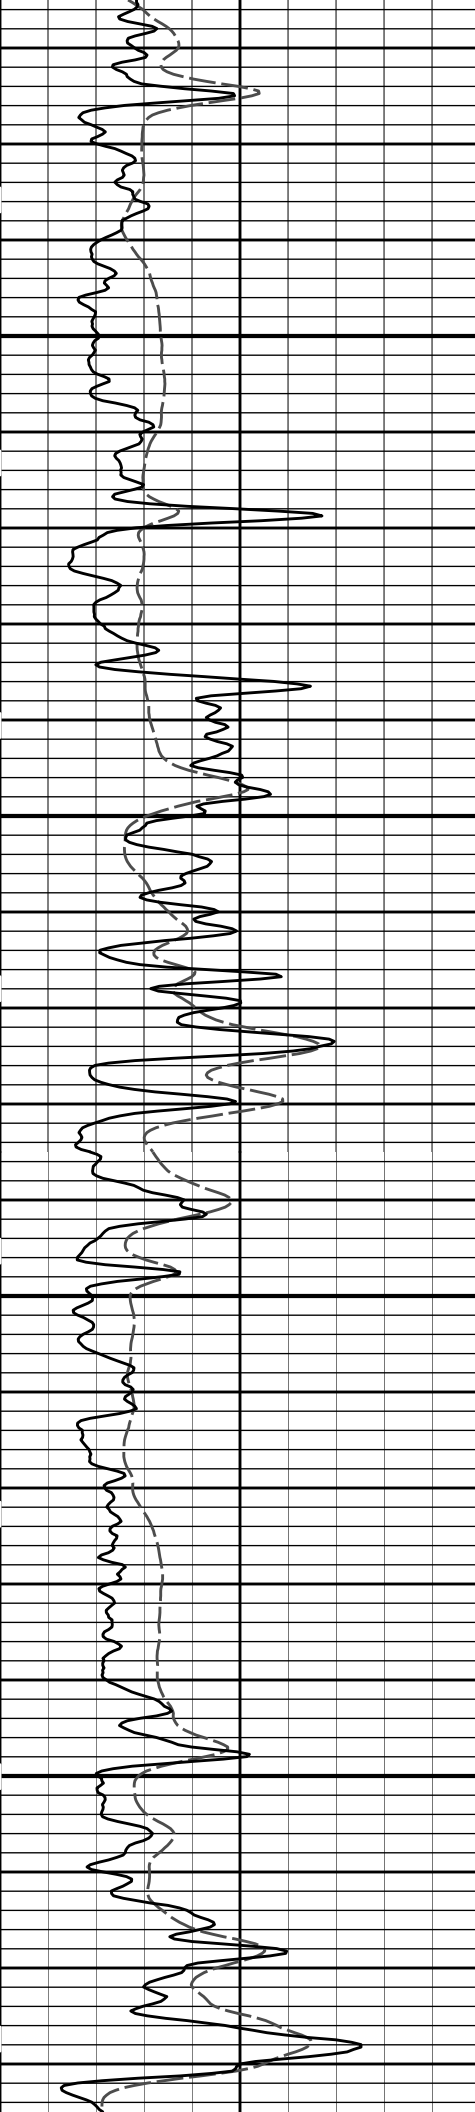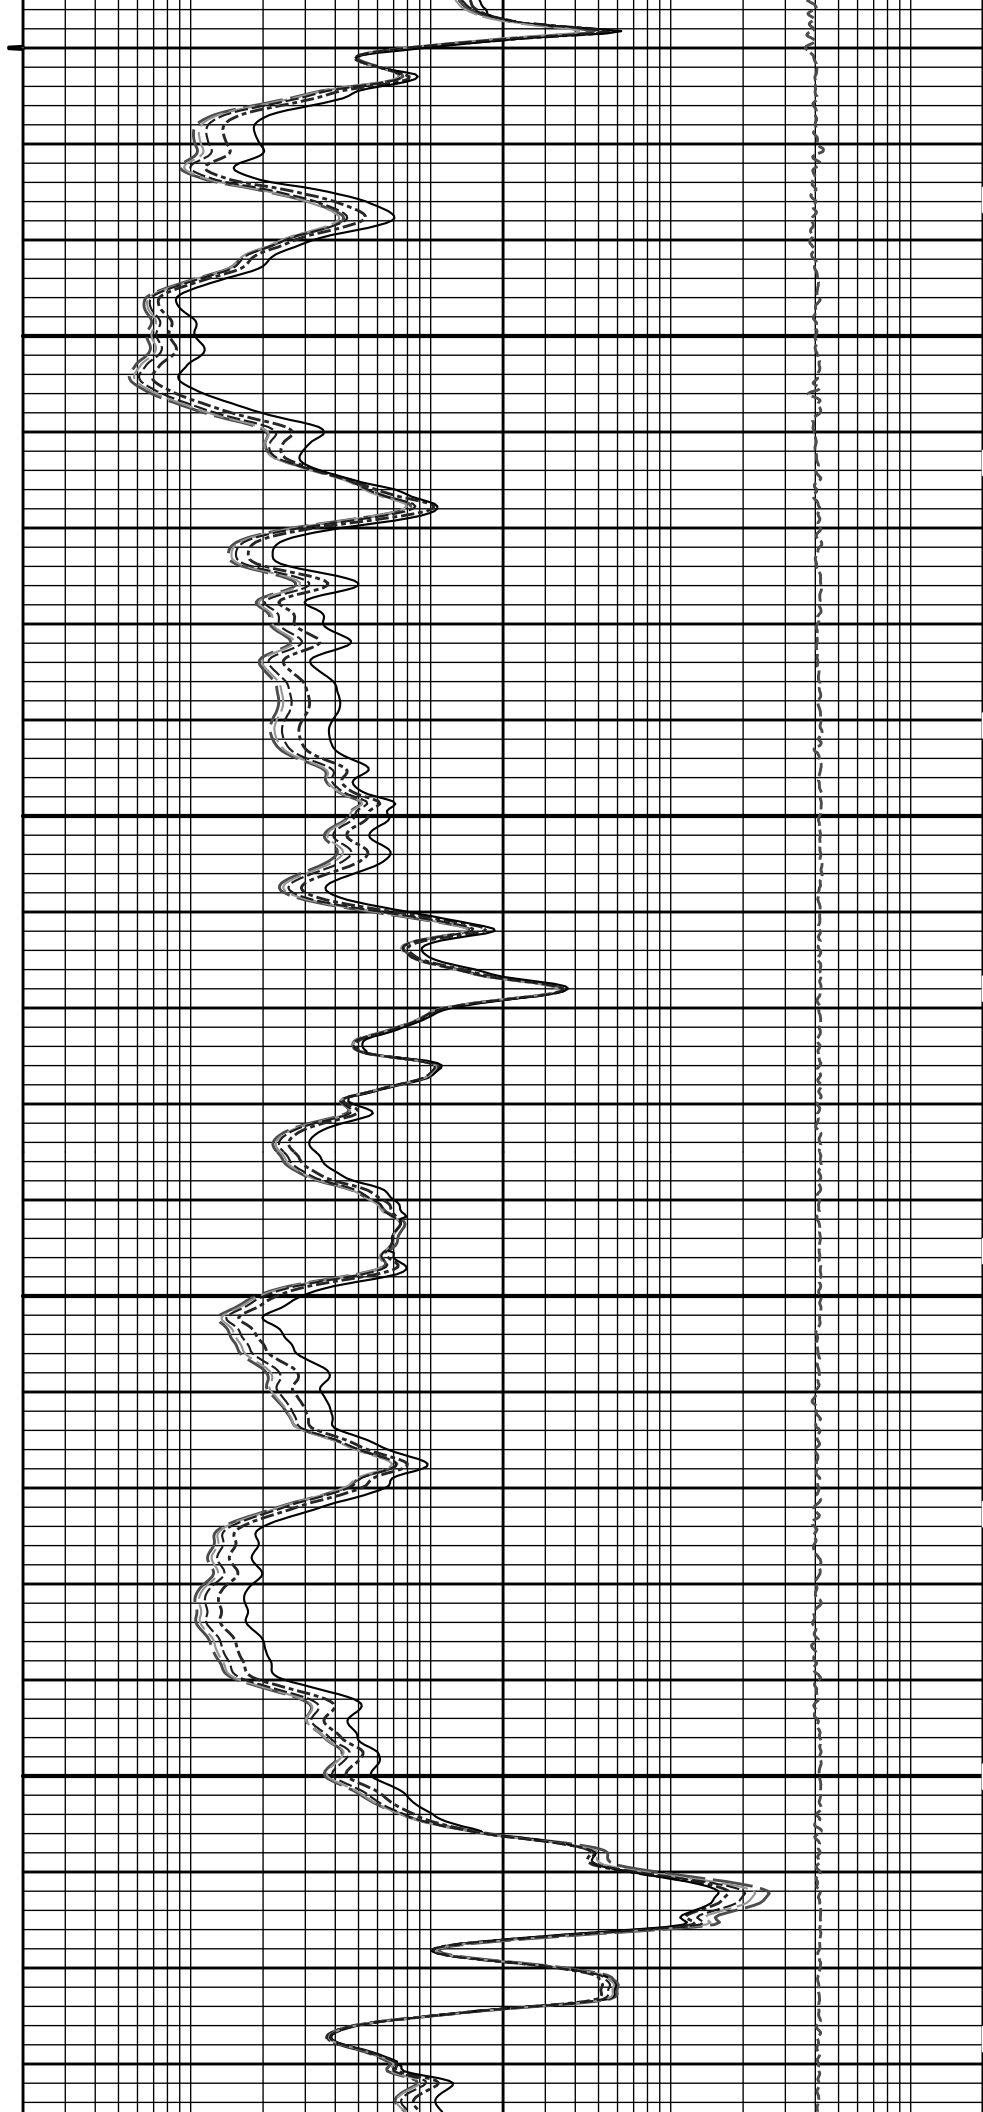


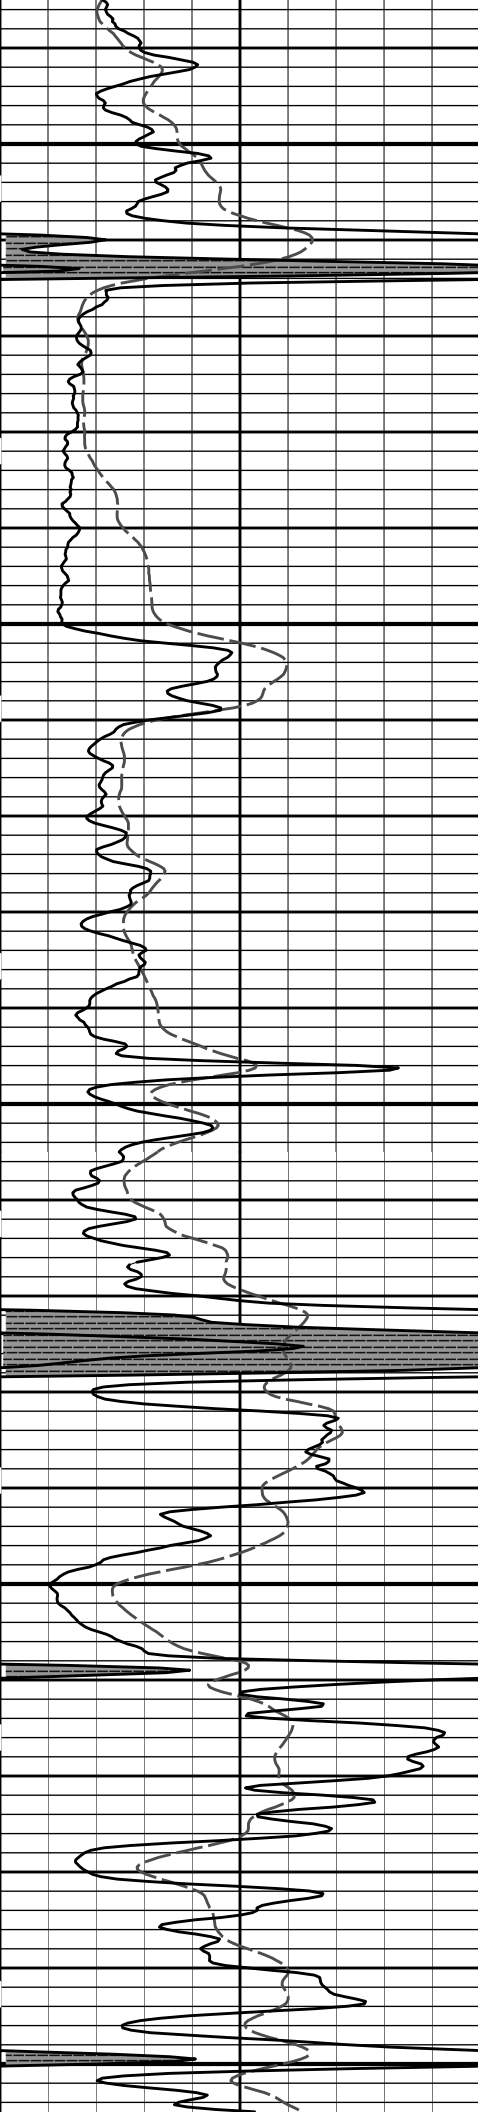


4000

4100


4200

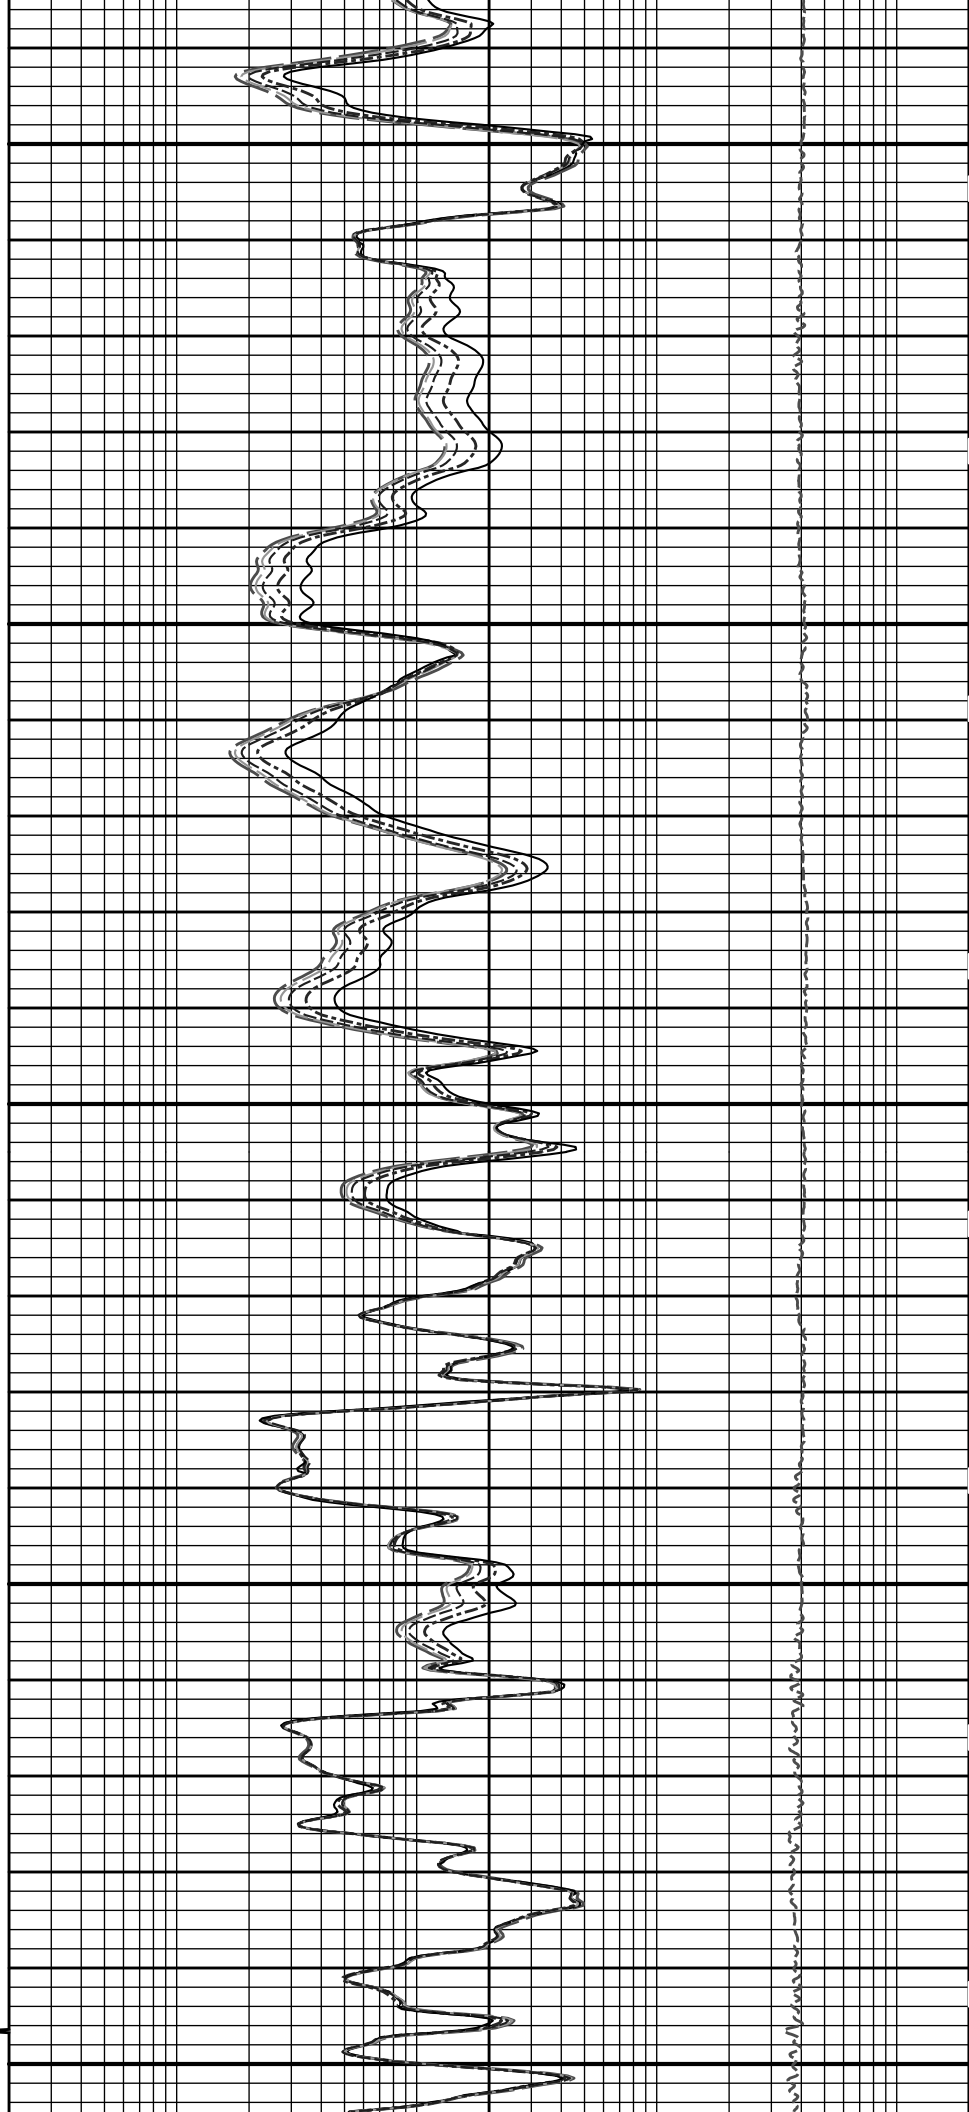


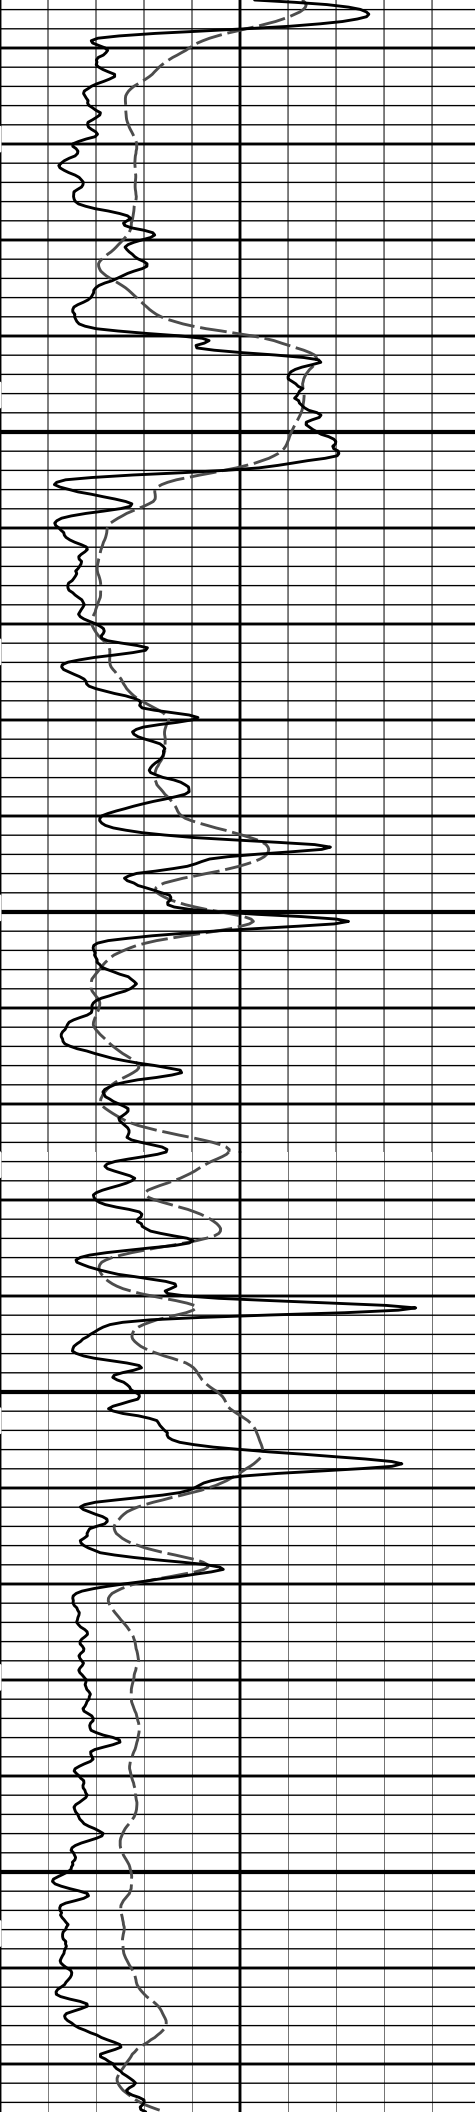

4300


4400

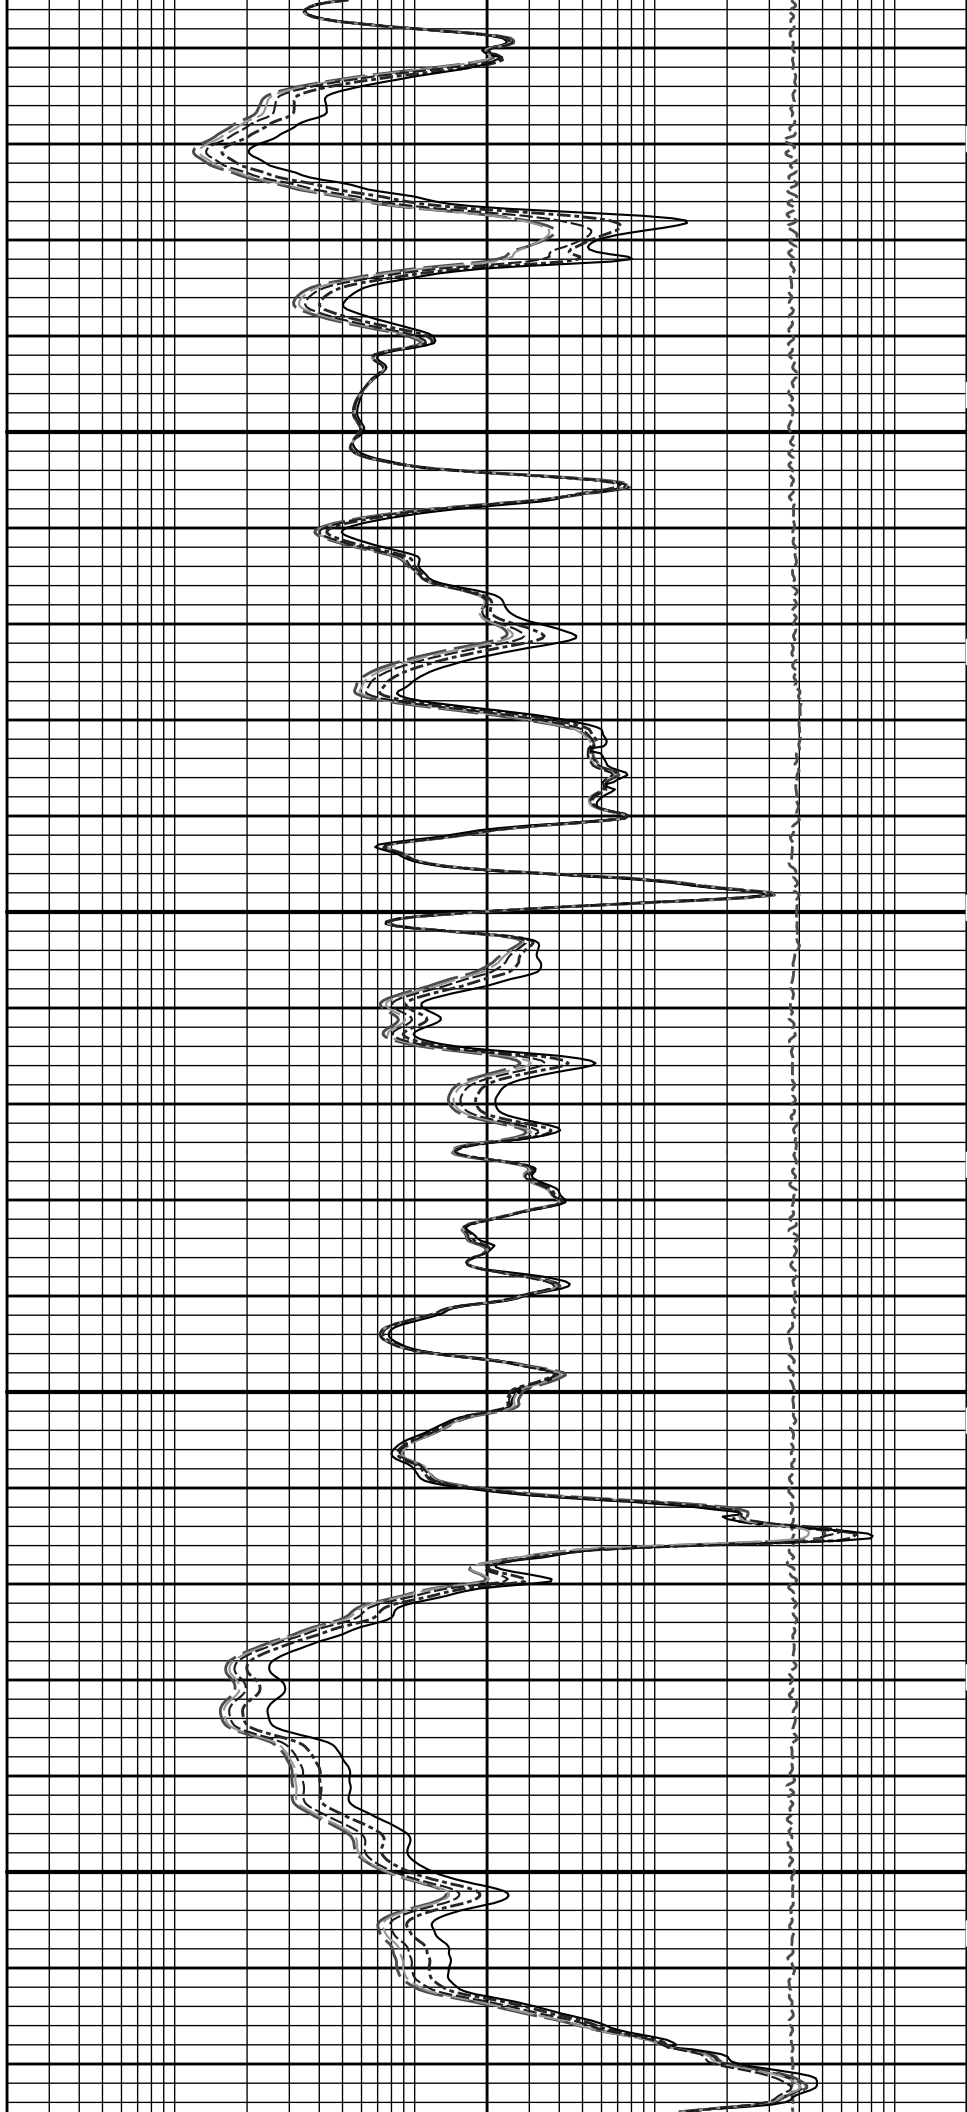


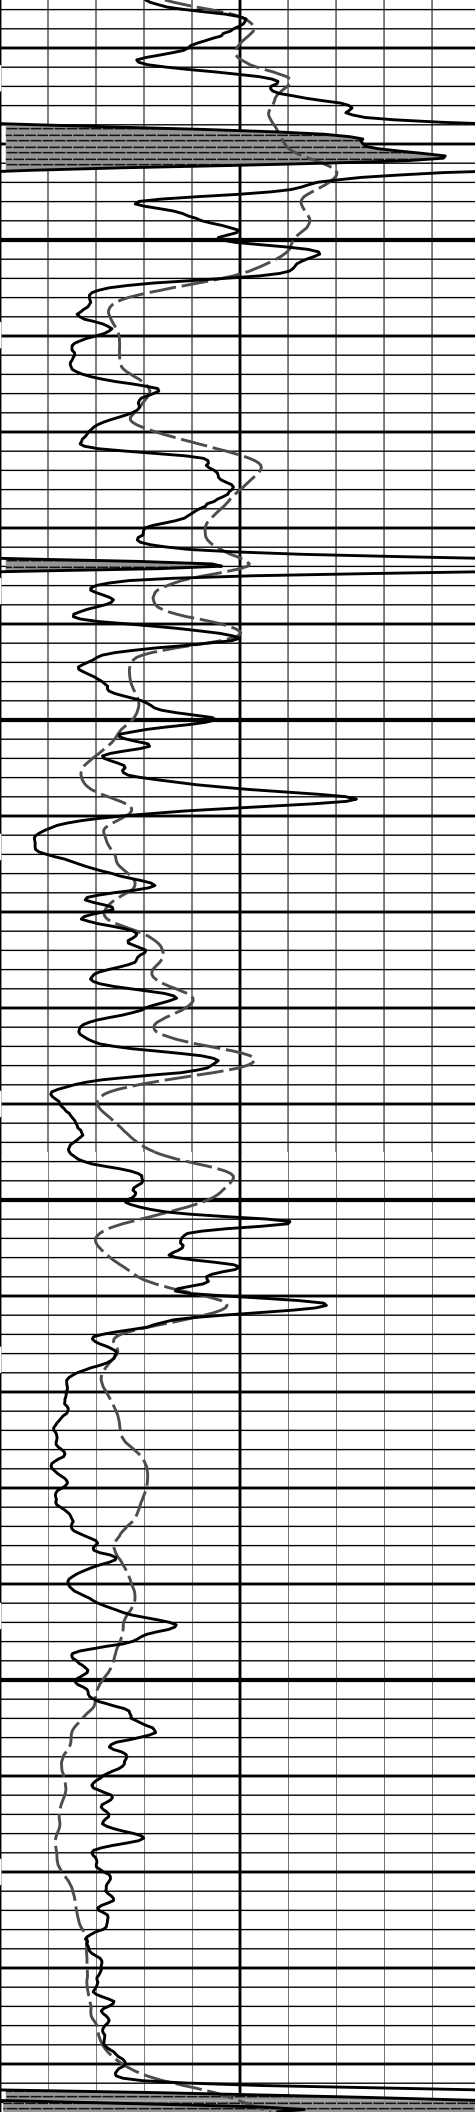

4500


4600

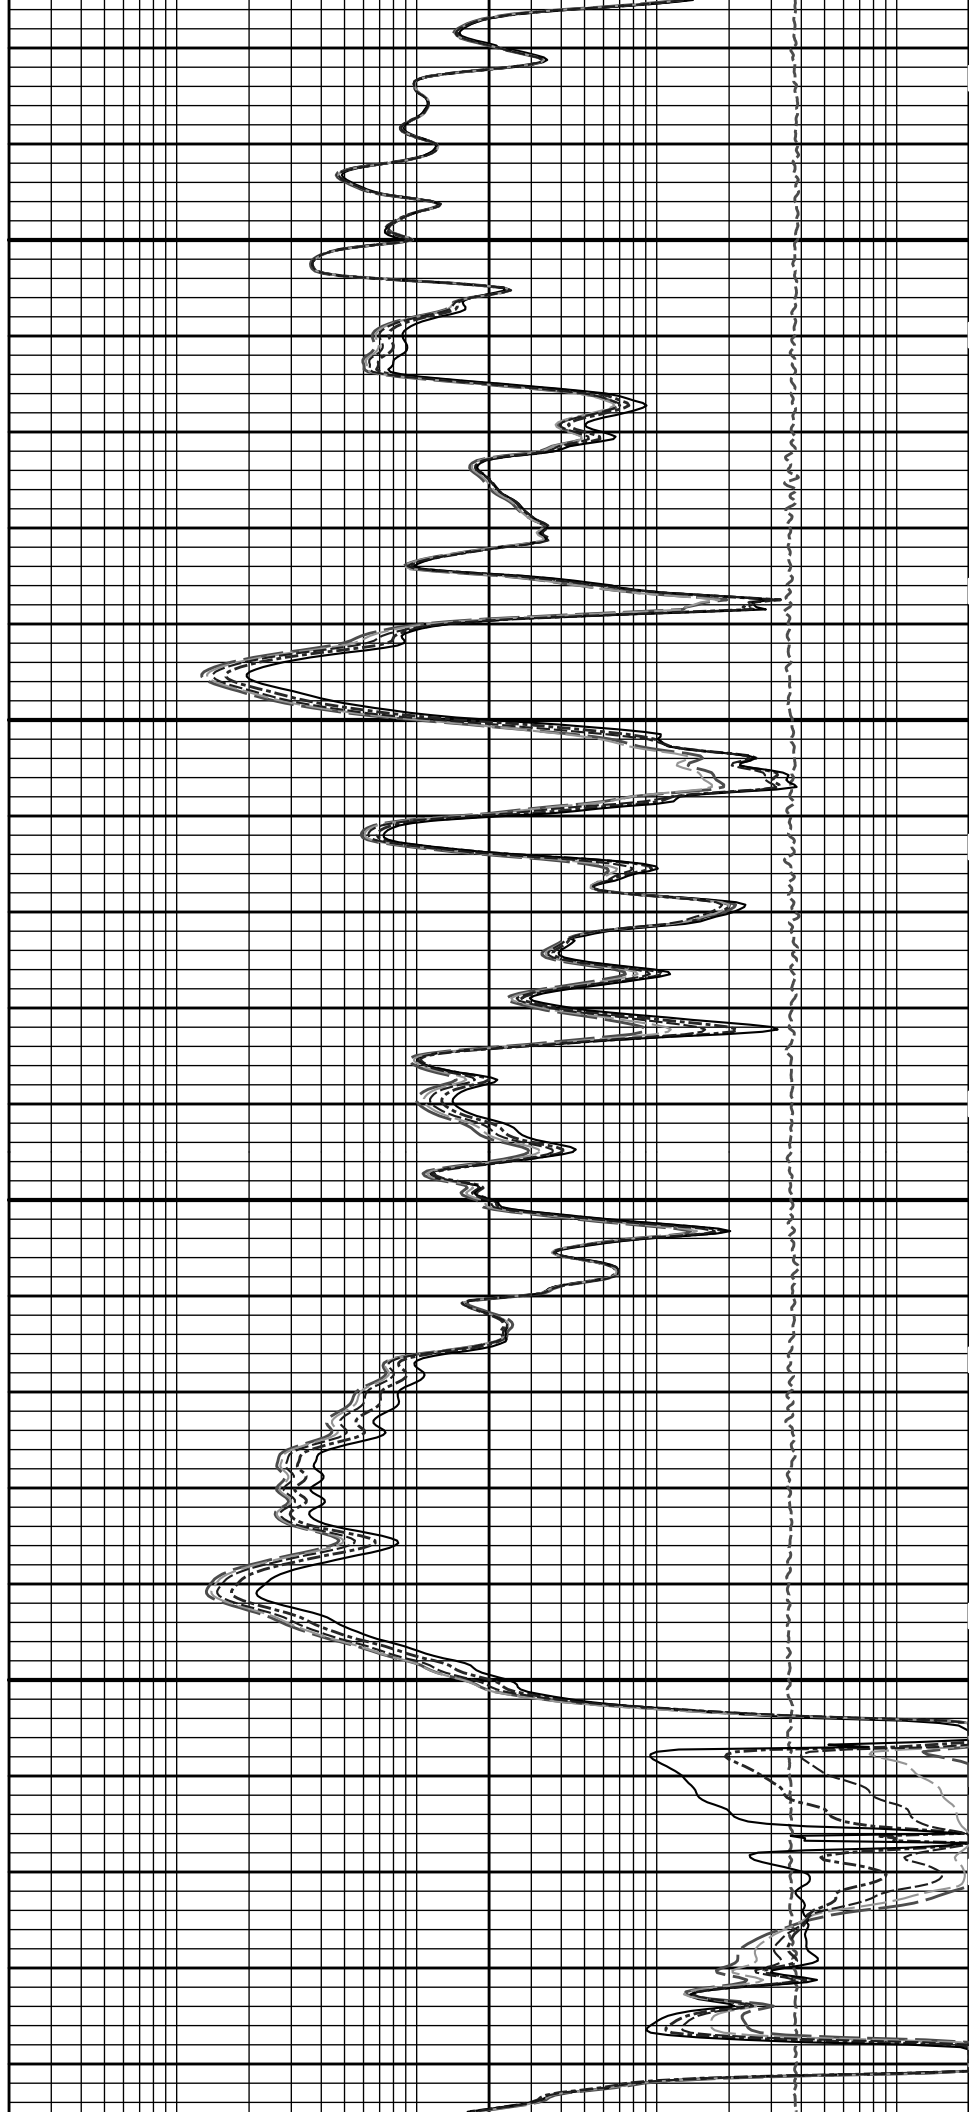


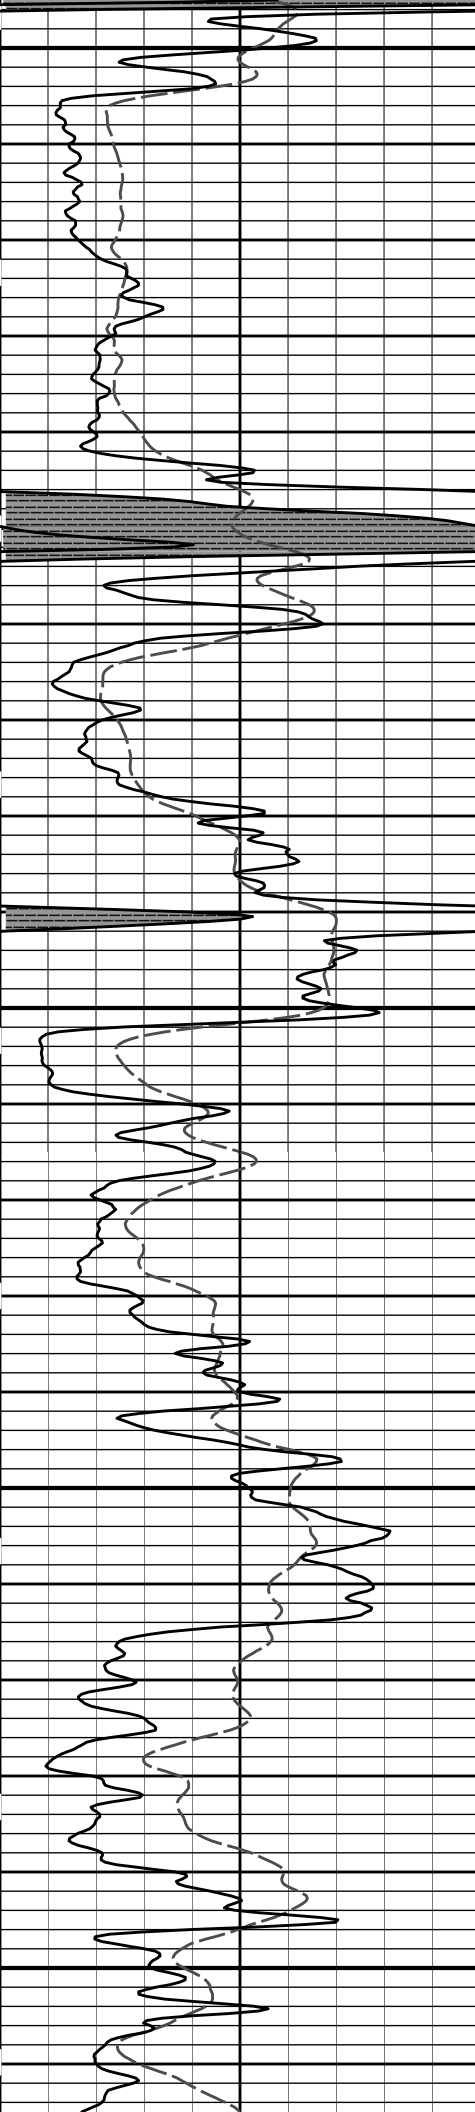

4700


4800

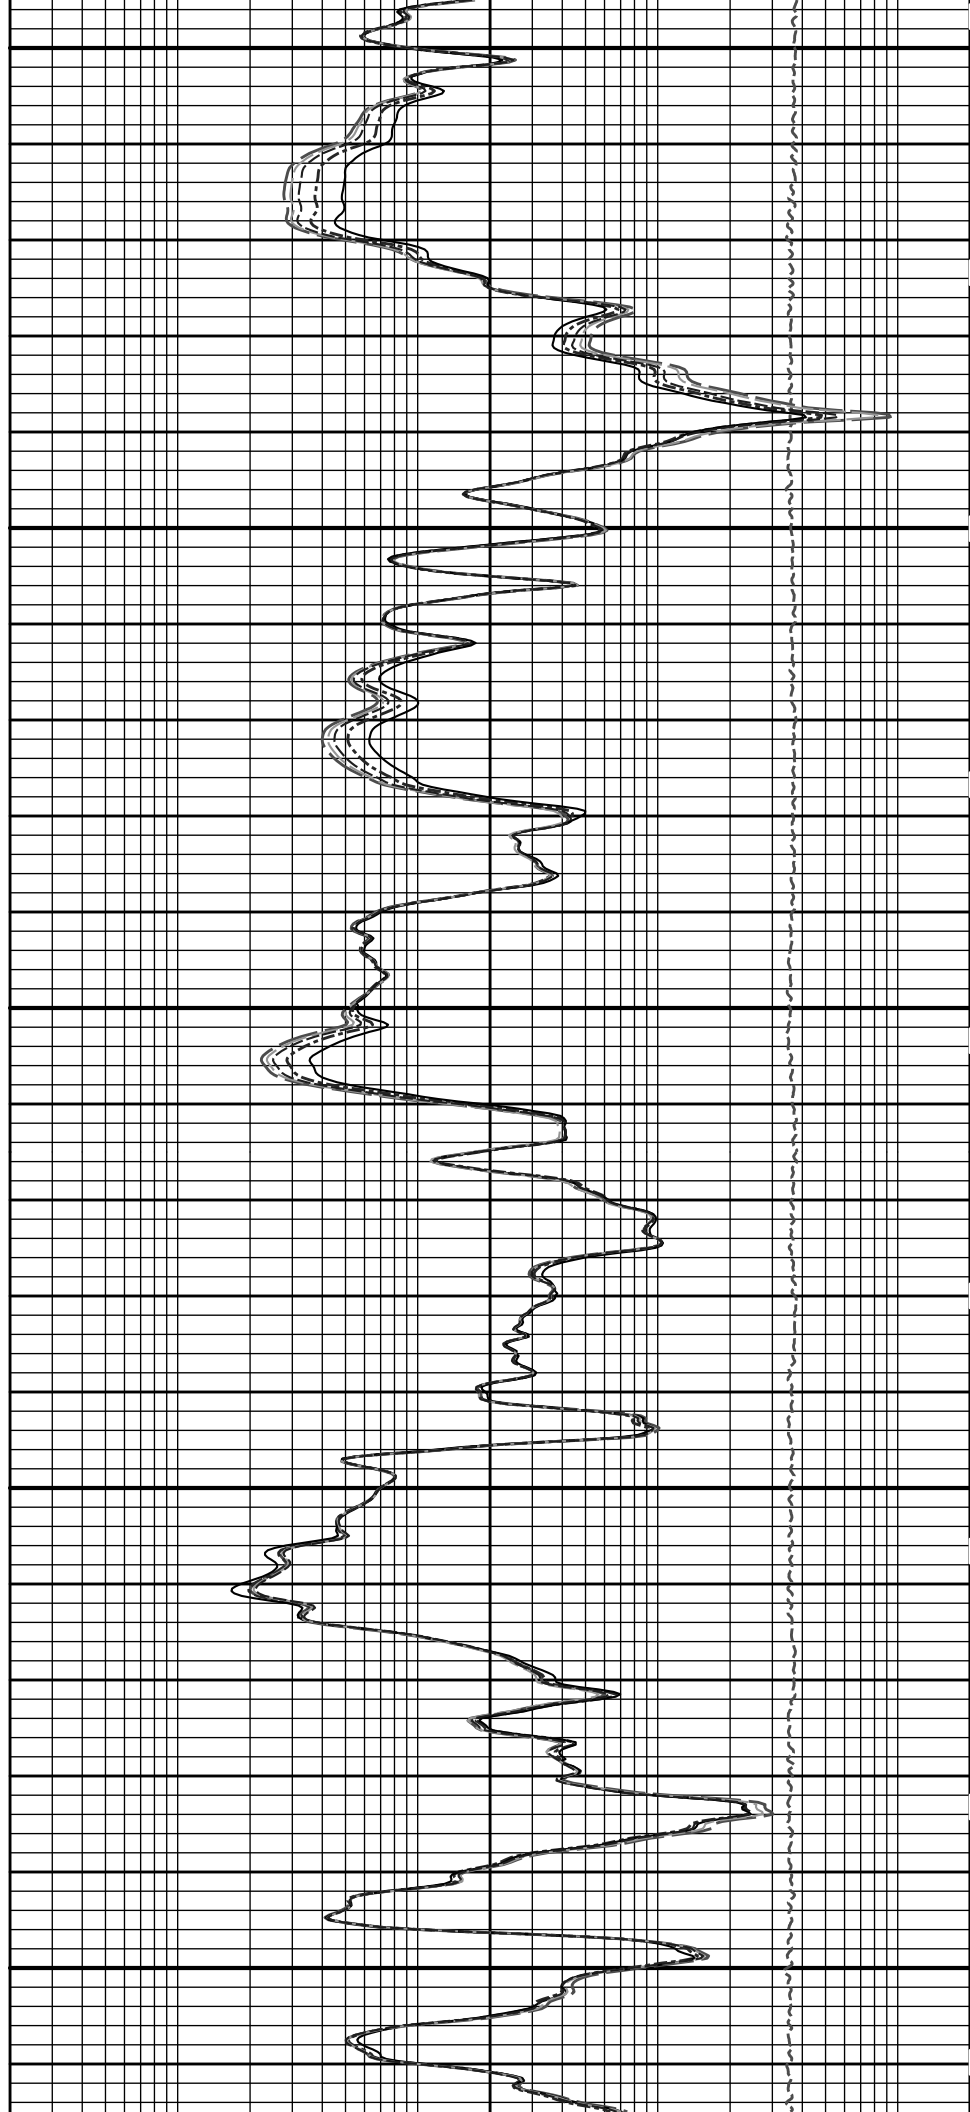


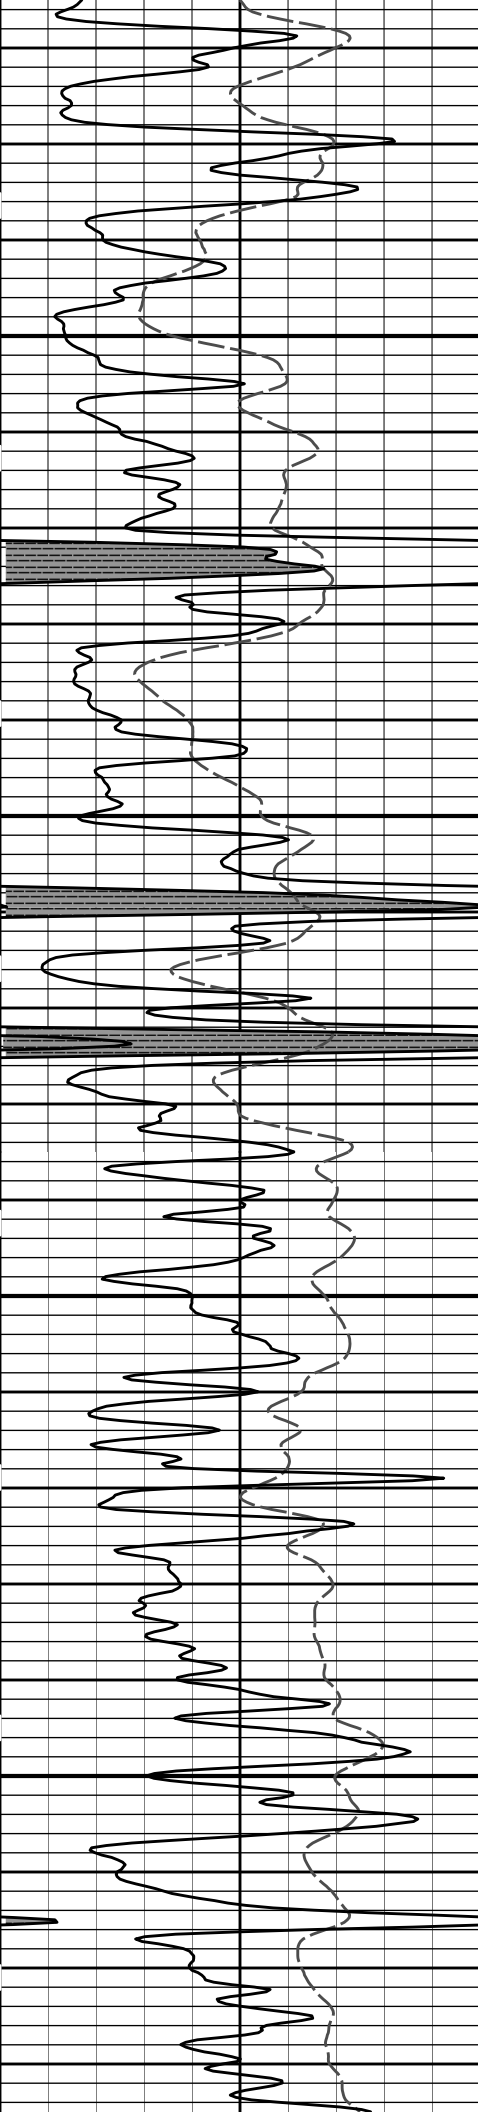

4900

5000

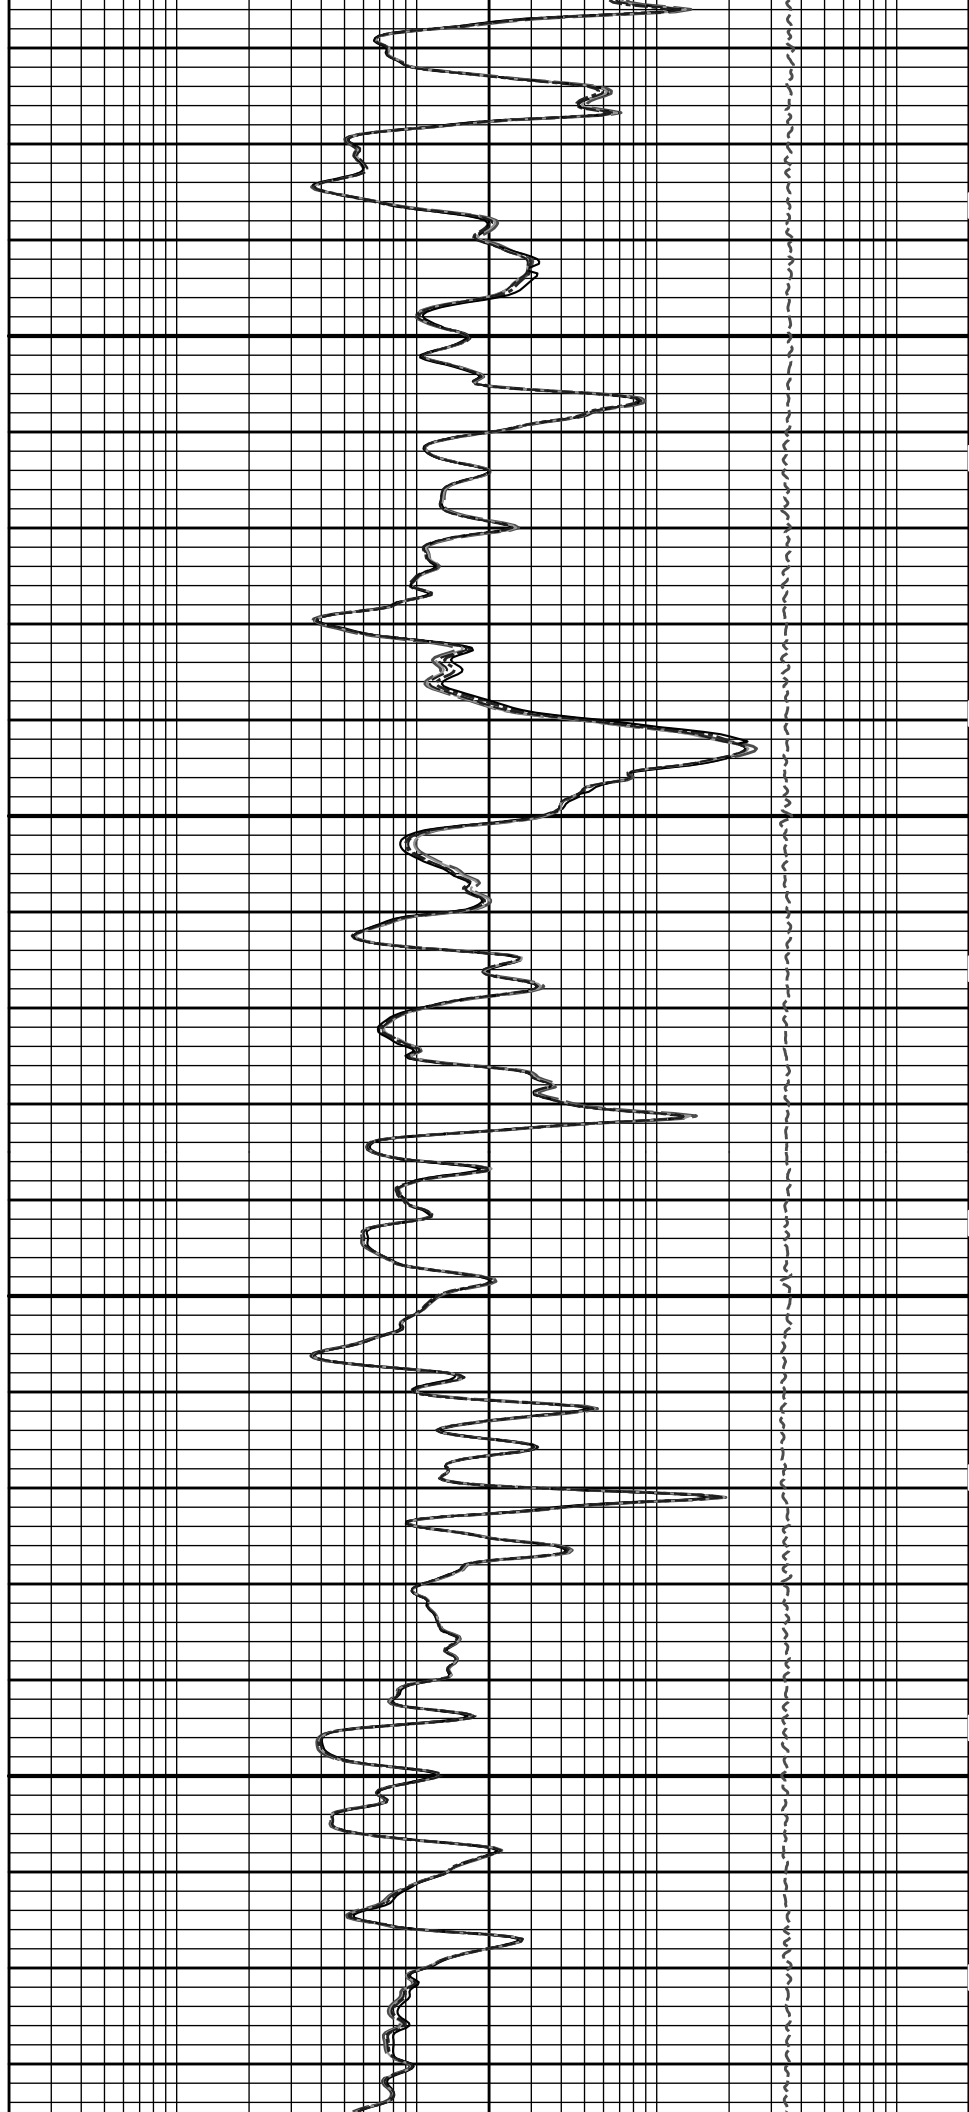


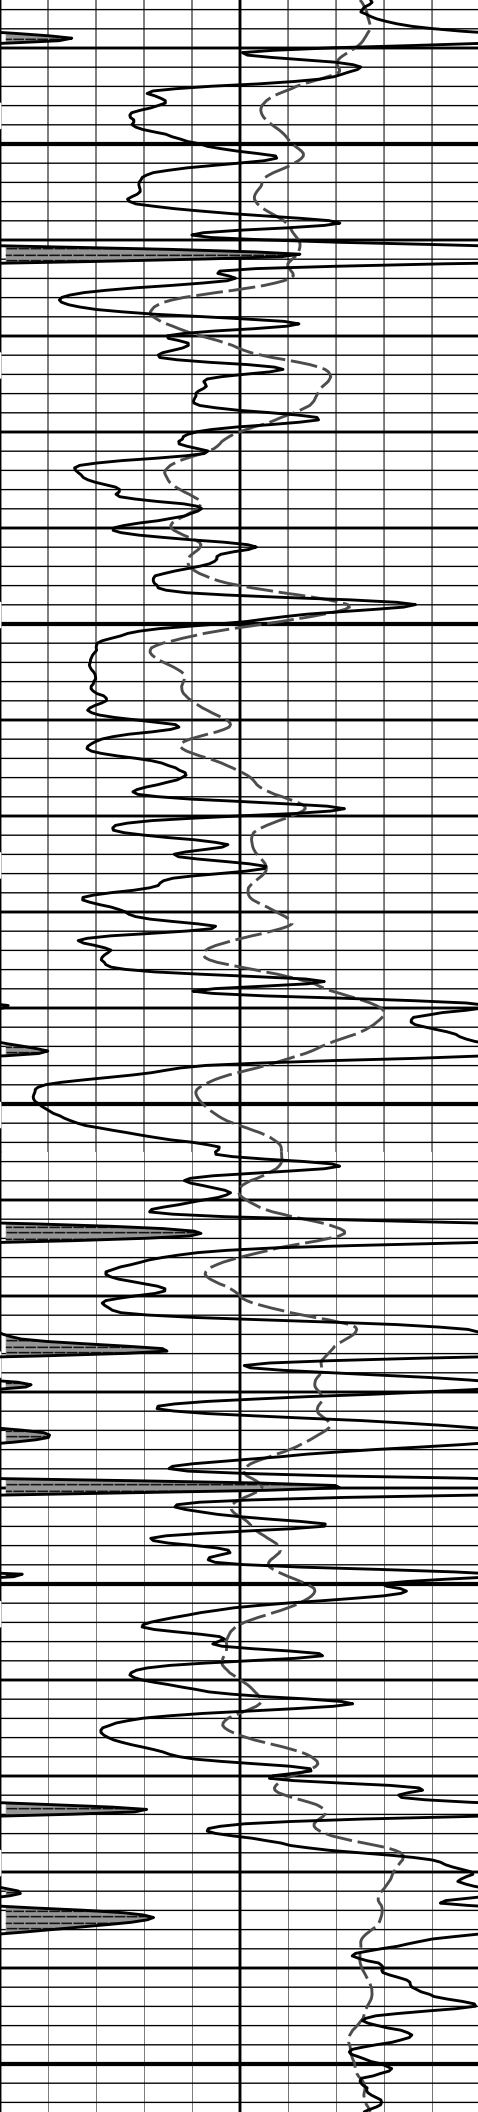


5100

5200


5300

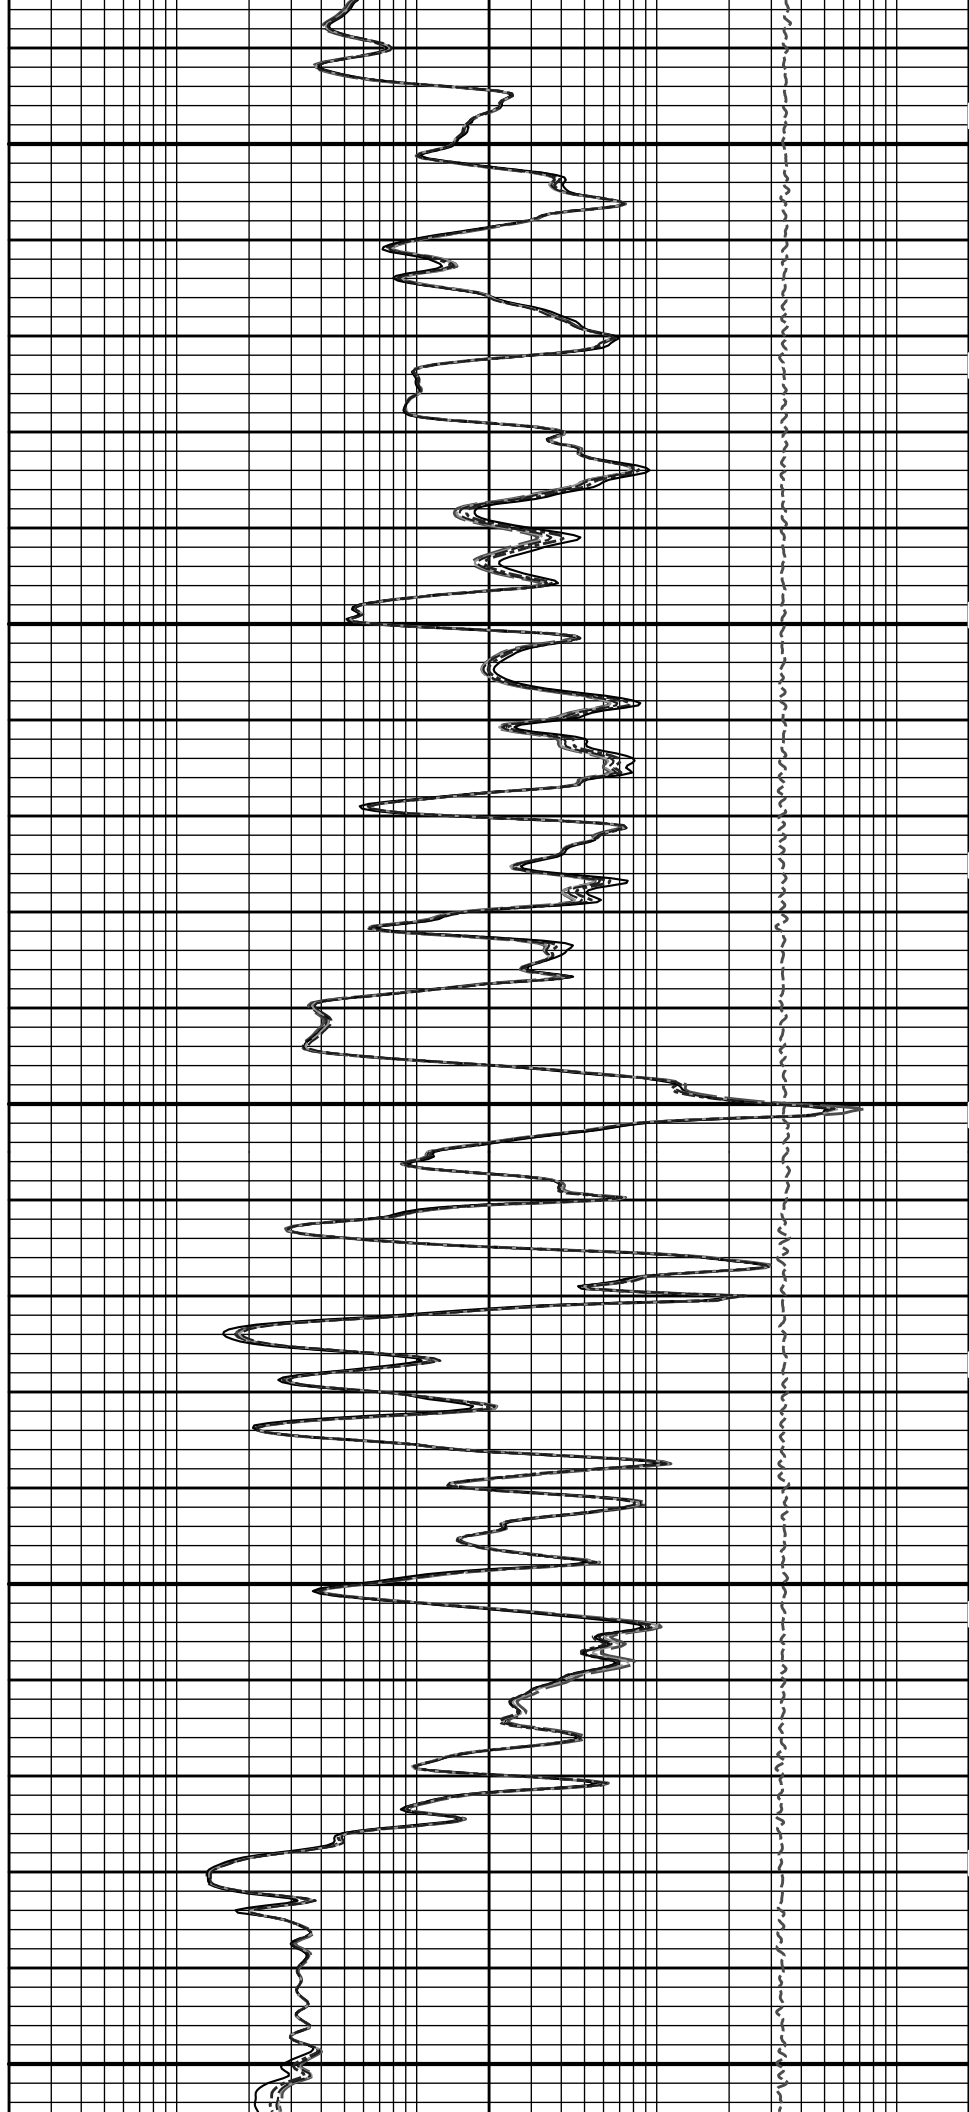

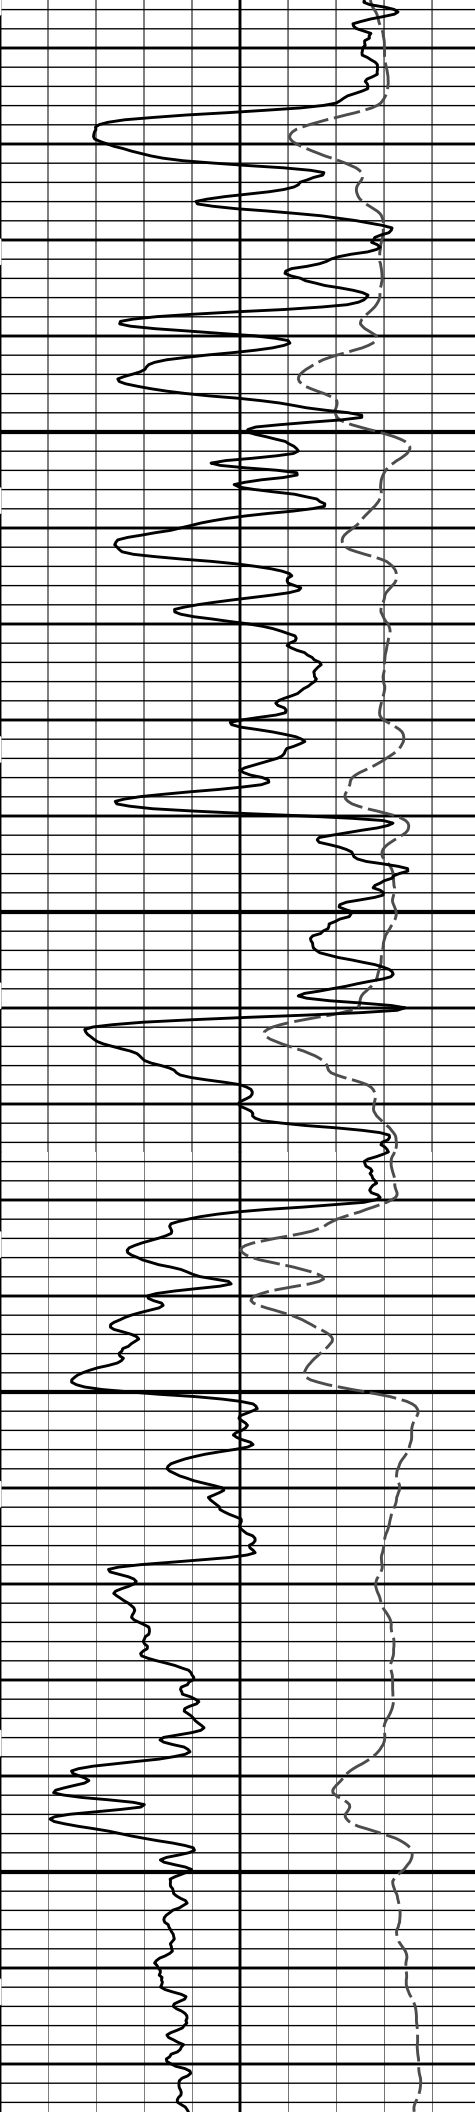

5400


5500

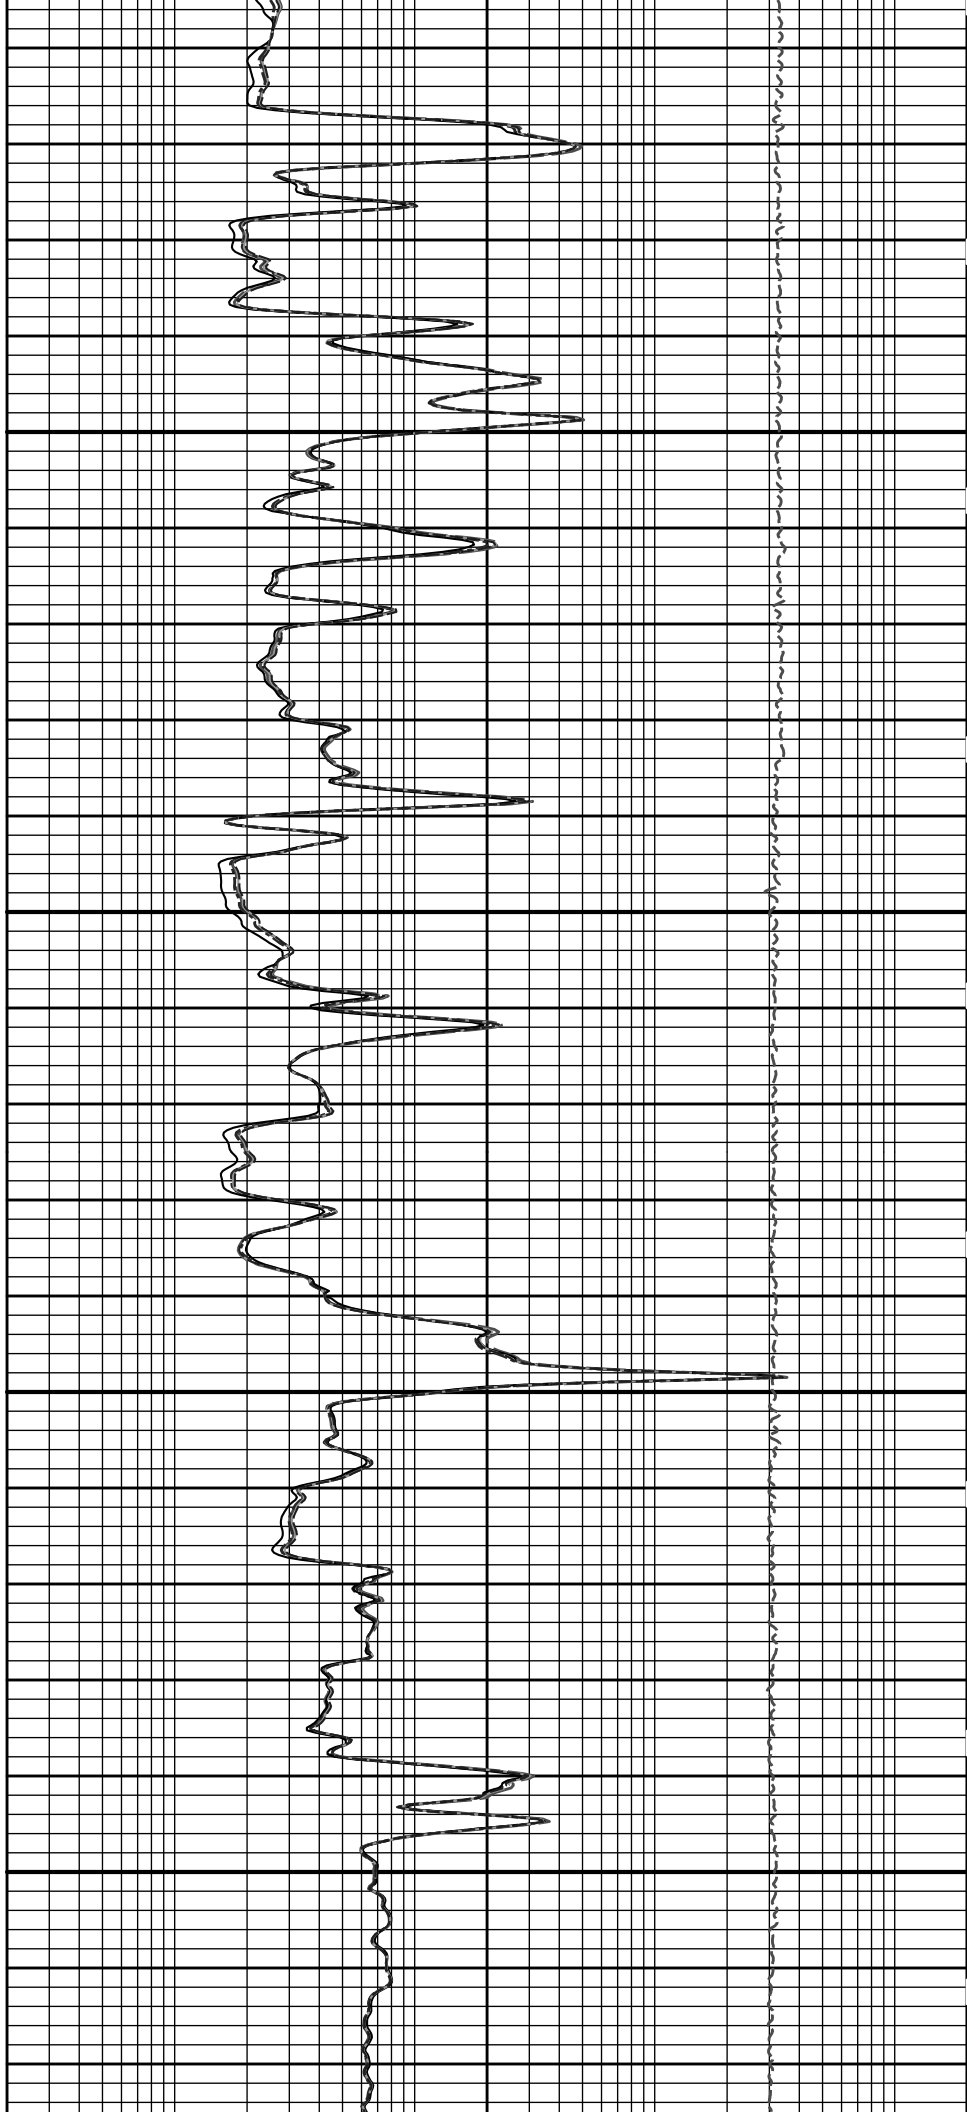




5600

5700

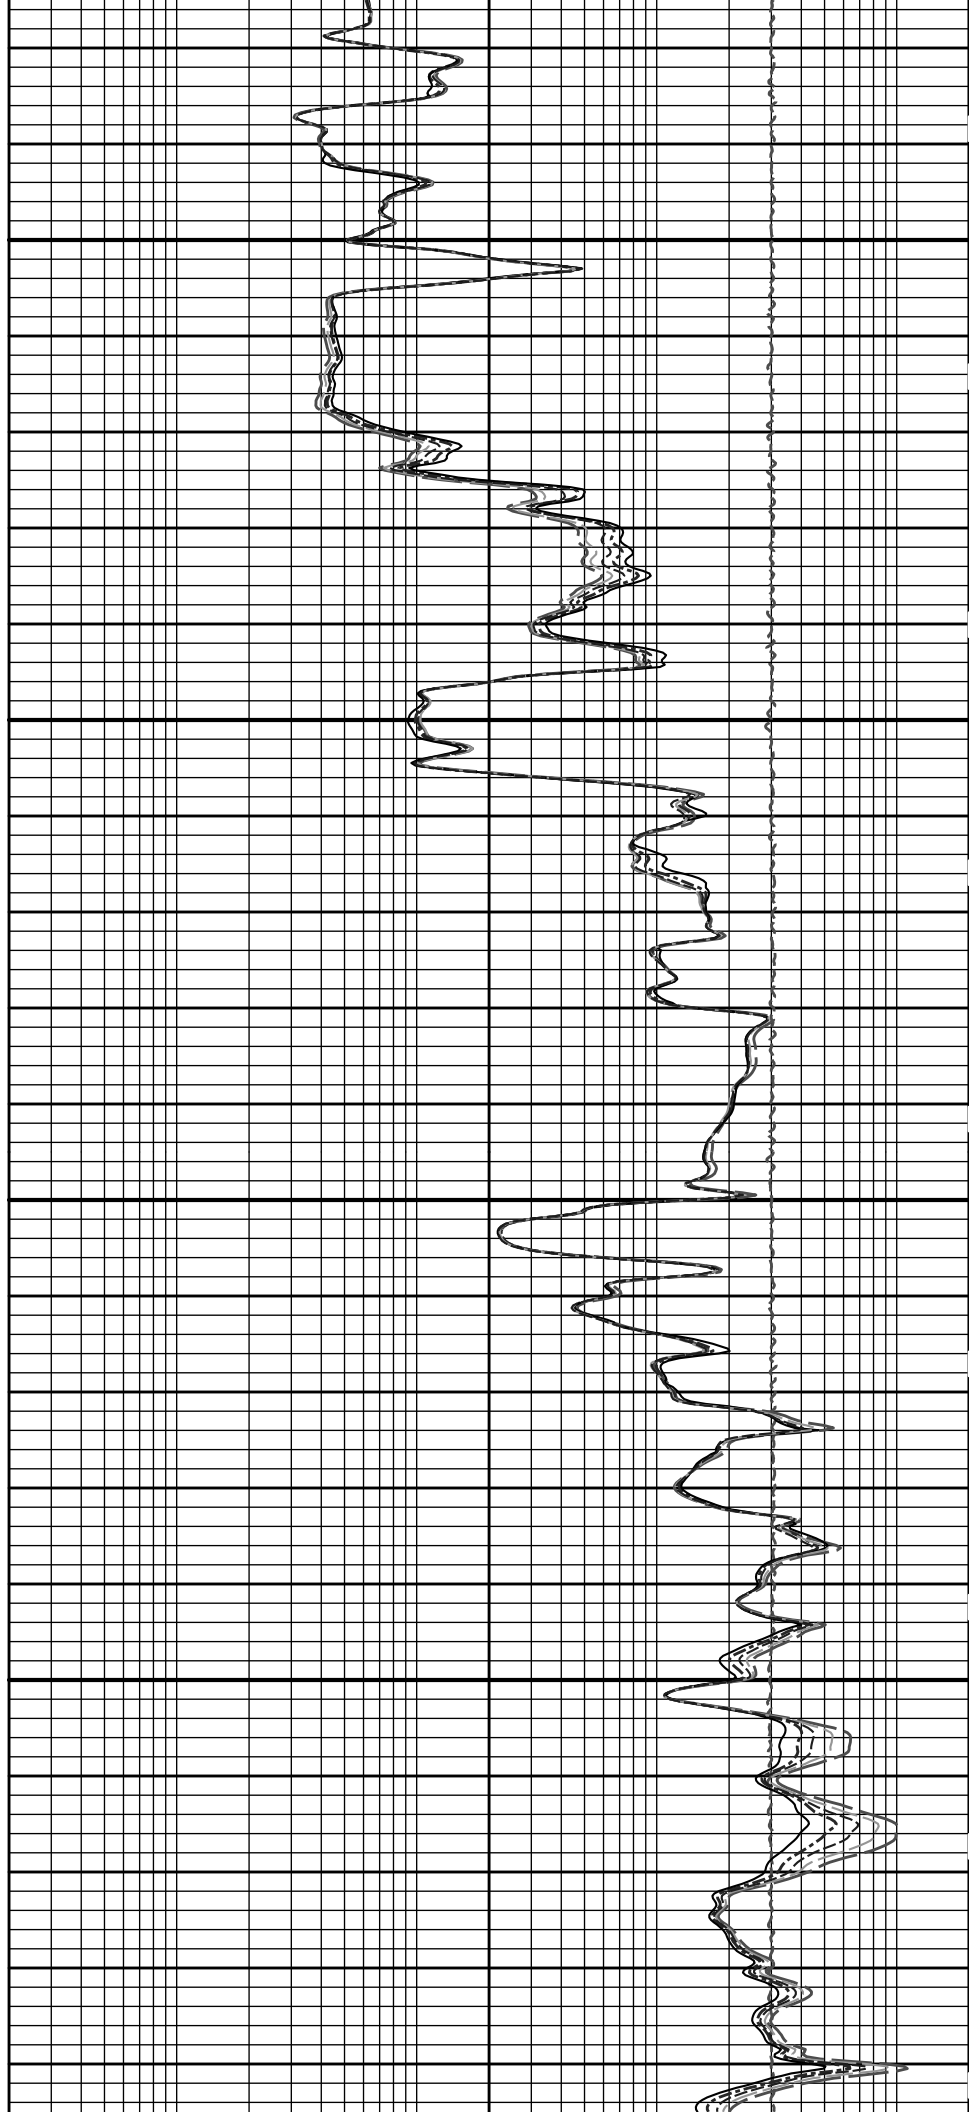

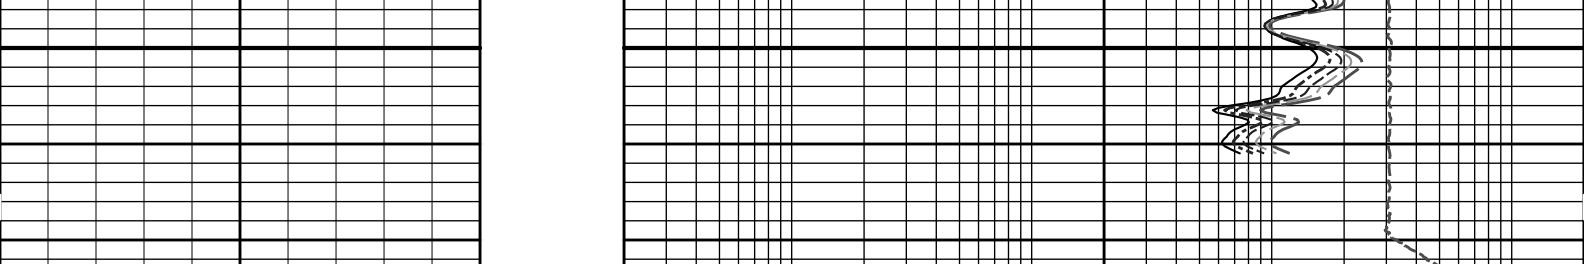

SP		MD 1 : 240 ft			10K	Tension	0	
-]20[+					pounds			
0	Gamma API	150	Tension Pull	10	0	0.2	10in Resistivity 2ft Res	2000
api			ohmm					
SHALE			Tension Pull			0.2	20in Resistivity 2ft Res	2000
			ohmm					
						0.2	30in Resistivity 2ft Res	2000
			ohm-metre					
						0.2	60in Resistivity 2ft Res	2000
			ohmm					
						0.2	90in Resistivity 2ft Res	2000
			ohmm					

HALLIBURTON


Plot Time: 02-Sep-13 05:12:33
Plot Range: 1575 ft to 5773.08 ft
Data: DEWELL B-1\Well Based\IR1 CASING\
Plot File: \\-LOCAL-\\DEWELL B-1\Well Based\ACRT\ACRT_5_main_lib


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 02-Sep-13 05:12:34
Plot Range: 3934.75 ft to 4400.42 ft
Data: DEWELL B-1\Well Based\IR1 REPEAT\
Plot File: \\-LOCAL-\\DEWELL B-1\Well Based\ACRT\ACRT_5_repeat_lib


REPEAT SECTION


		MD 1 : 240 ft	0.2		90in Resistivity 2ft Res		2000			
			ohmm							
			0.2		60in Resistivity 2ft Res		2000			
			ohmm							
			0.2		30in Resistivity 2ft Res		2000			
			ohm-metre							
			0.2		20in Resistivity 2ft Res		2000			
			ohmm							
			0.2		10in Resistivity 2ft Res		2000			
			ohmm							
SHALE		MD 1 : 240 ft			10K		Tension		0	
Gamma API							pounds			
0	150									
api										
SP										
-]20[+										
										

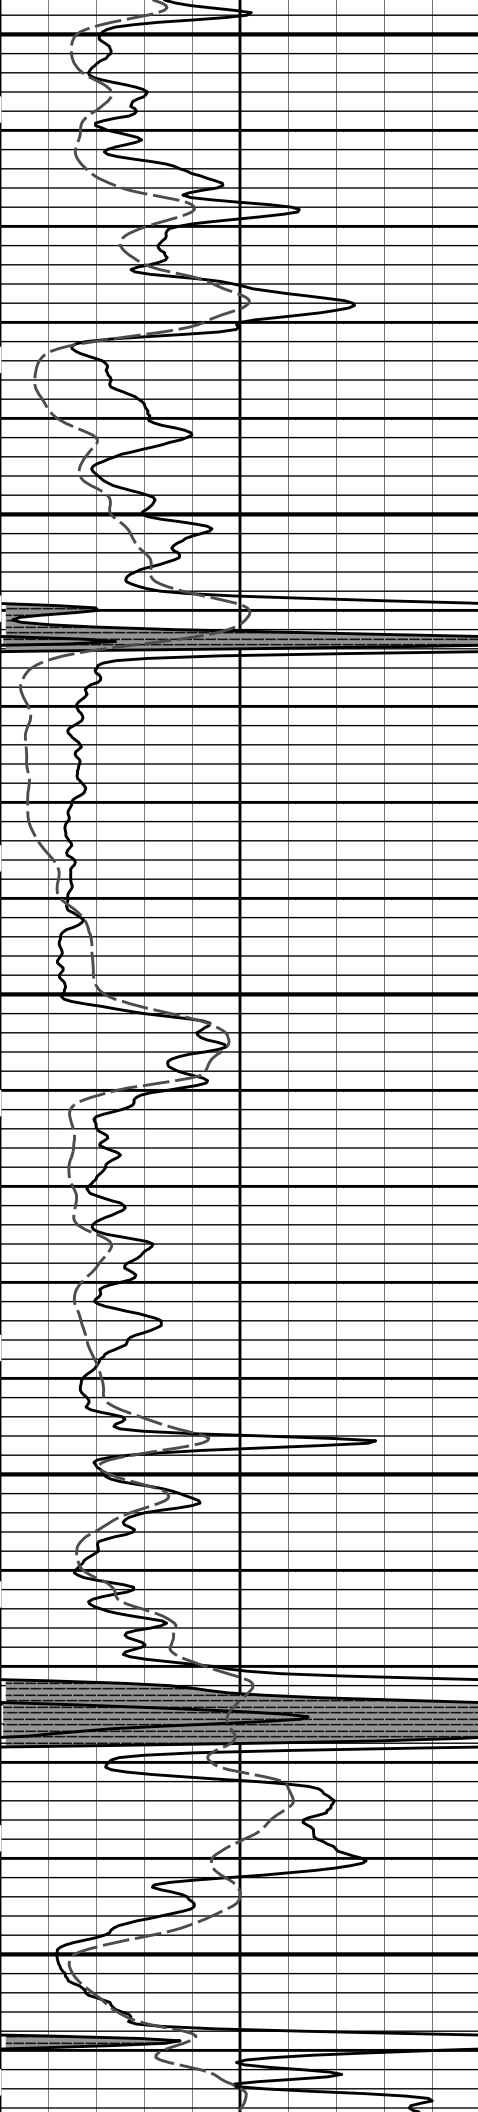


4000

4100

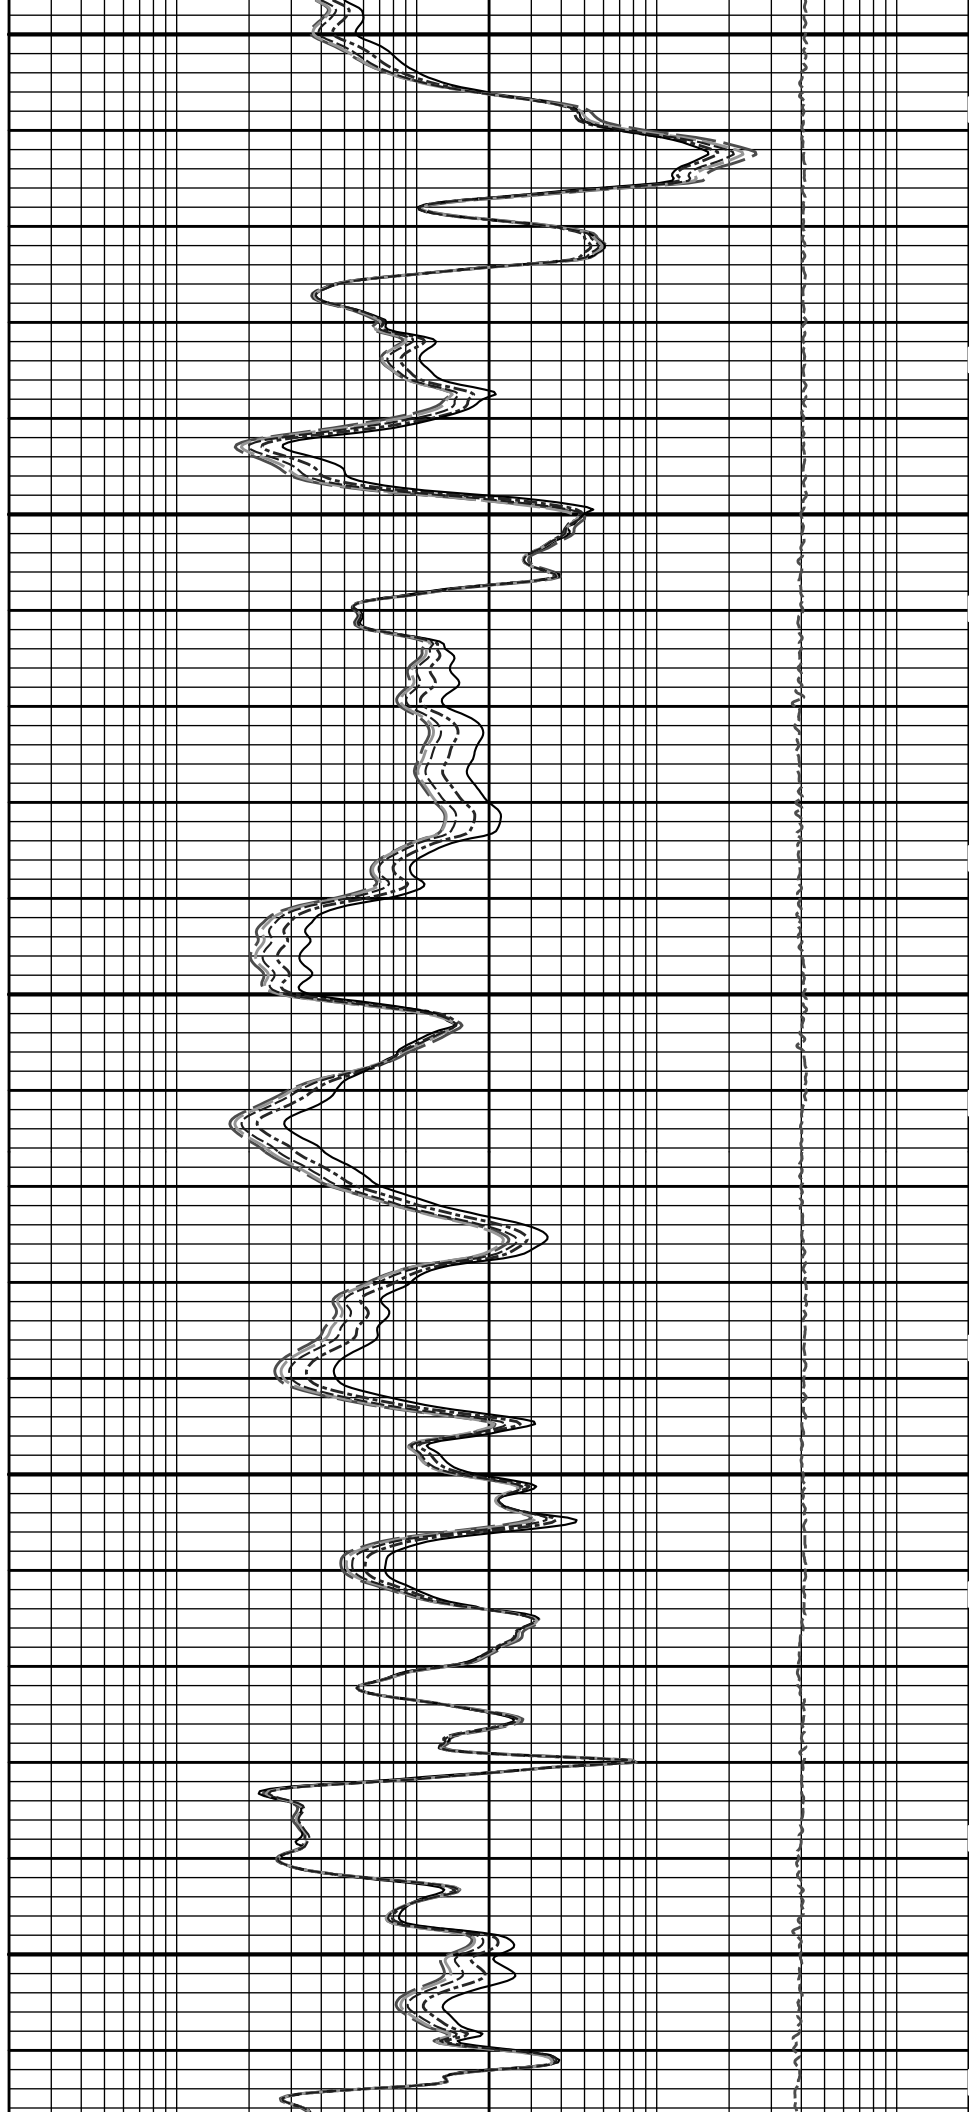

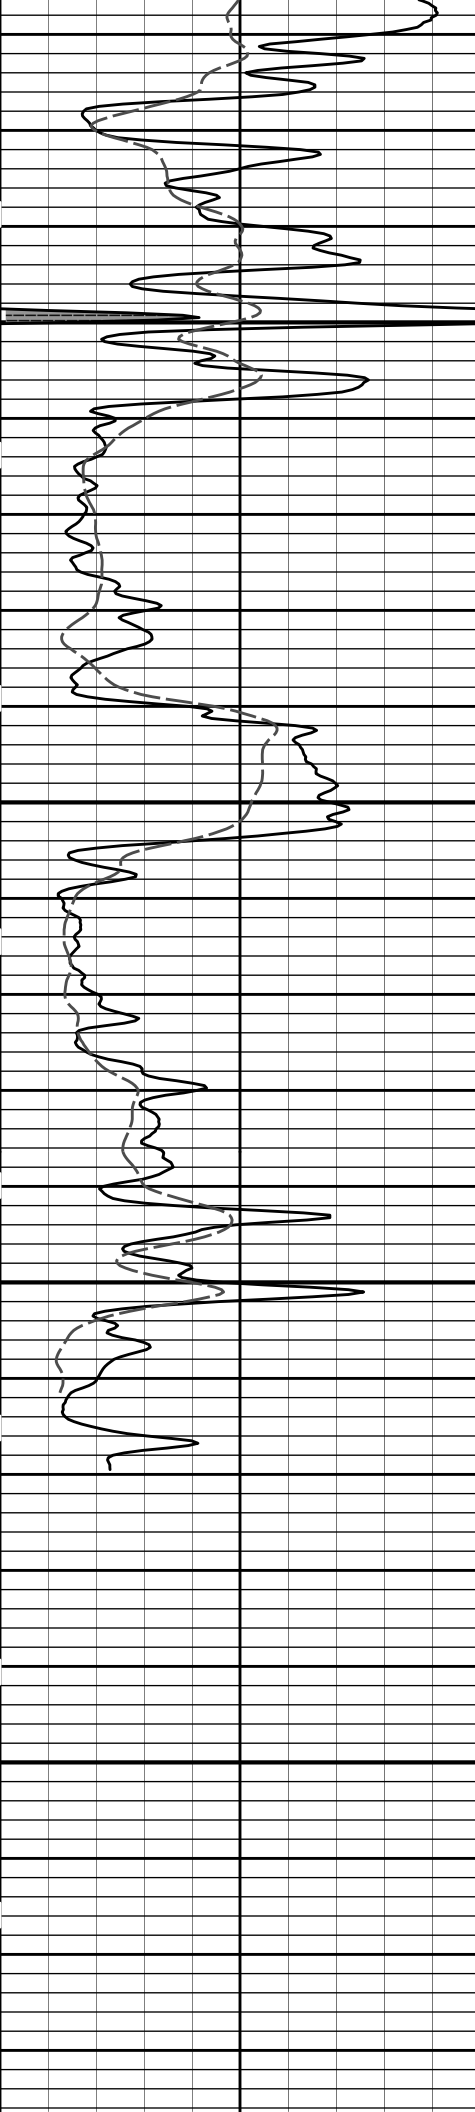

4200

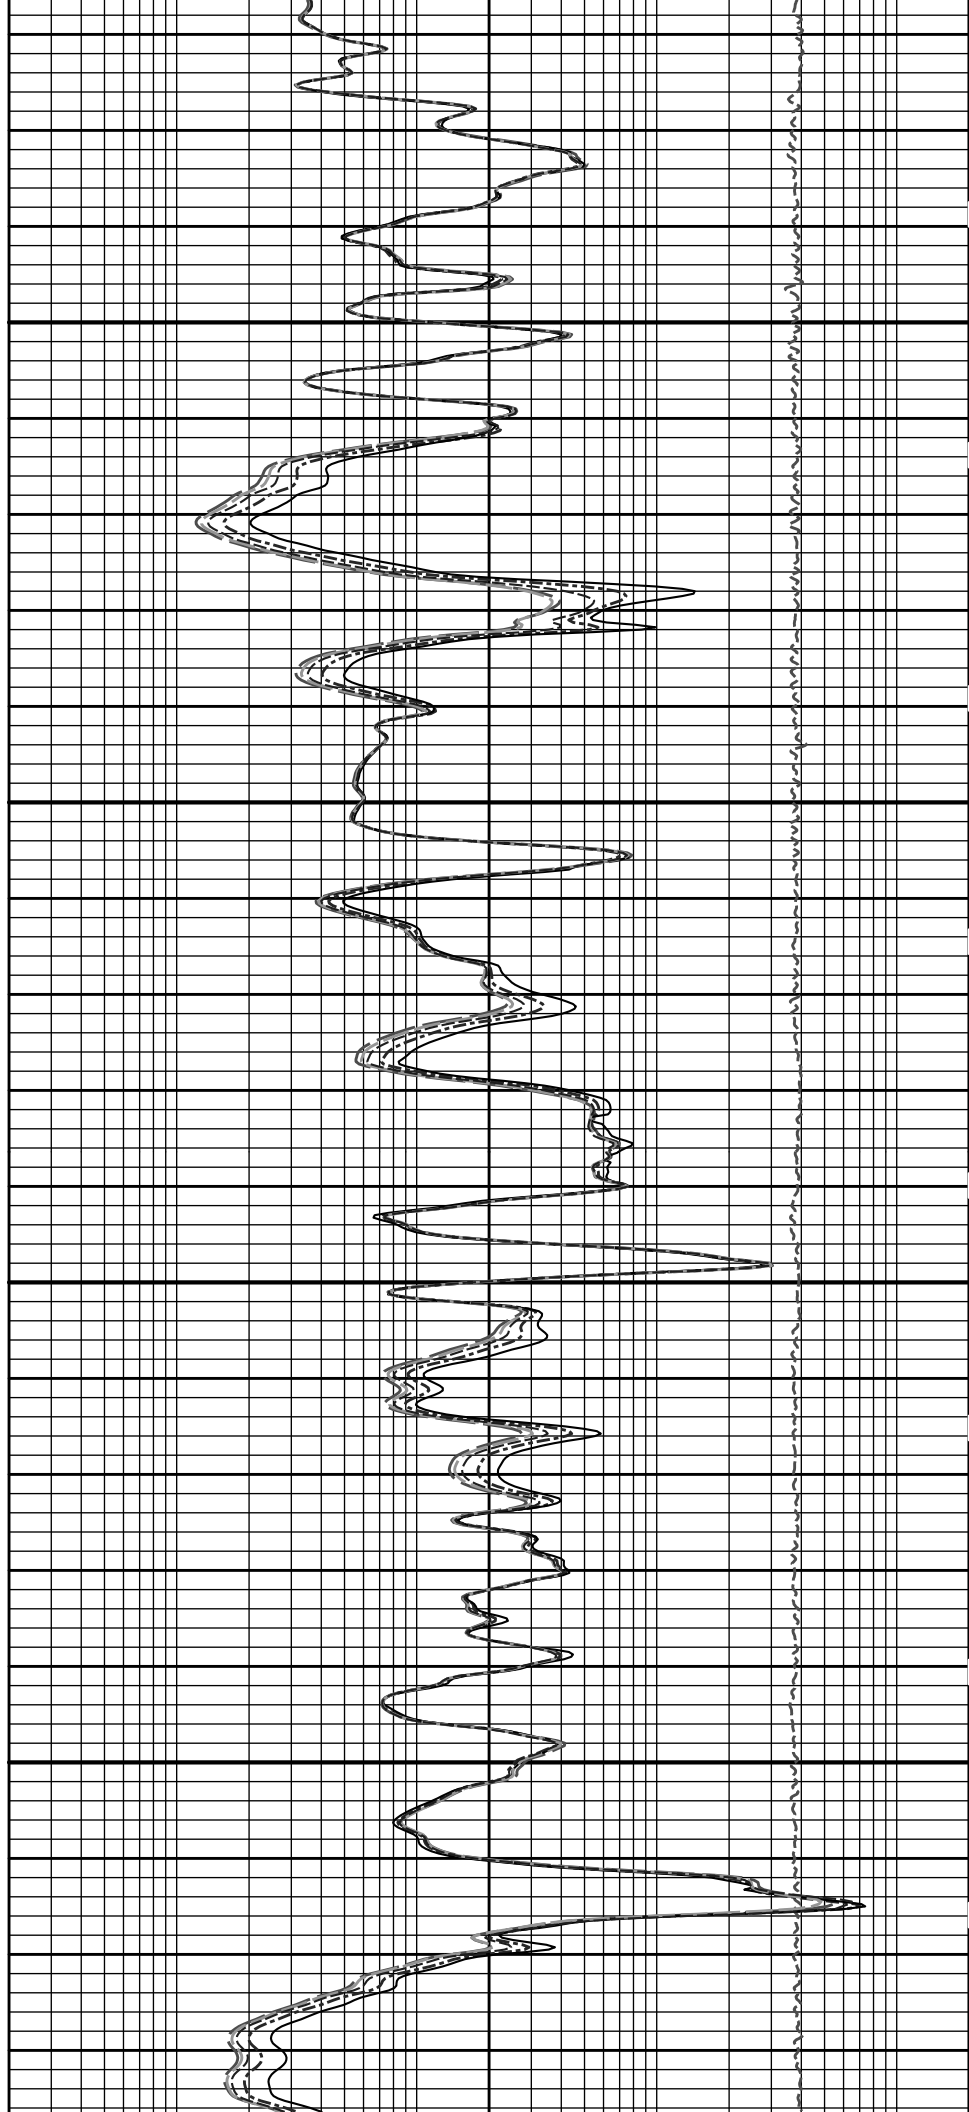

4300

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
						96.17 ft
RWCH-12156658 135.00 lbs		Ø 3.625 in →		← Load Cell @ 92.49 ft ← BH Temperature @ 91.92 ft	6.25 ft	
SP Sub-11441455 60.00 lbs		Ø 3.625 in →		← SP @ 88.14 ft	3.74 ft	89.92 ft
						86.18 ft
GTET-11048627 165.00 lbs		Ø 3.625 in →		← GammaRay @ 80.12 ft	8.52 ft	
						77.66 ft

HFDT-I-11997111
435.00 lbs

Ø 4.500 in →

16.14 ft

Ø 4.750 in →

Receiver Upper @ 64.69 ft
HFDT-I Receiver @ 64.59 ft
Receiver Middle @ 64.59 ft
HFDT Microlog @ 64.53 ft
Receiver Lower @ 64.49 ft
HFDT-I Caliper @ 64.34 ft
HFDT-I Pad @ 63.81 ft

61.53 ft

DSNT-11019643
174.00 lbs

DSN Decentralizer-
10755066
6.60 lbs

Ø 5.000 in* →

Ø 3.625 in →

9.69 ft

← DSN Far @ 54.59 ft
← DSN Near @ 53.84 ft

51.84 ft

SDLT-10950489
360.00 lbs

SDLT Pad-10844781
65.00 lbs
Microlog Pad-10950489
8.00 lbs

Ø 4.500 in →

Ø 4.750 in* →

Ø 4.750 in* →

10.81 ft

Microlog @ 44.03 ft
SDL Caliper @ 43.84 ft
SDL @ 43.83 ft

41.03 ft

IQ Flex-00000696
140.00 lbs

Ø 3.625 in →

5.67 ft

35.36 ft

Centralizer 25-00000027
8.00 lbs

Ø 4.000 in* →


BSAT-10747683
300.00 lbs

Ø 3.625 in →

← Sonic Receivers @ 26.84 ft

15.77 ft

19.58 ft

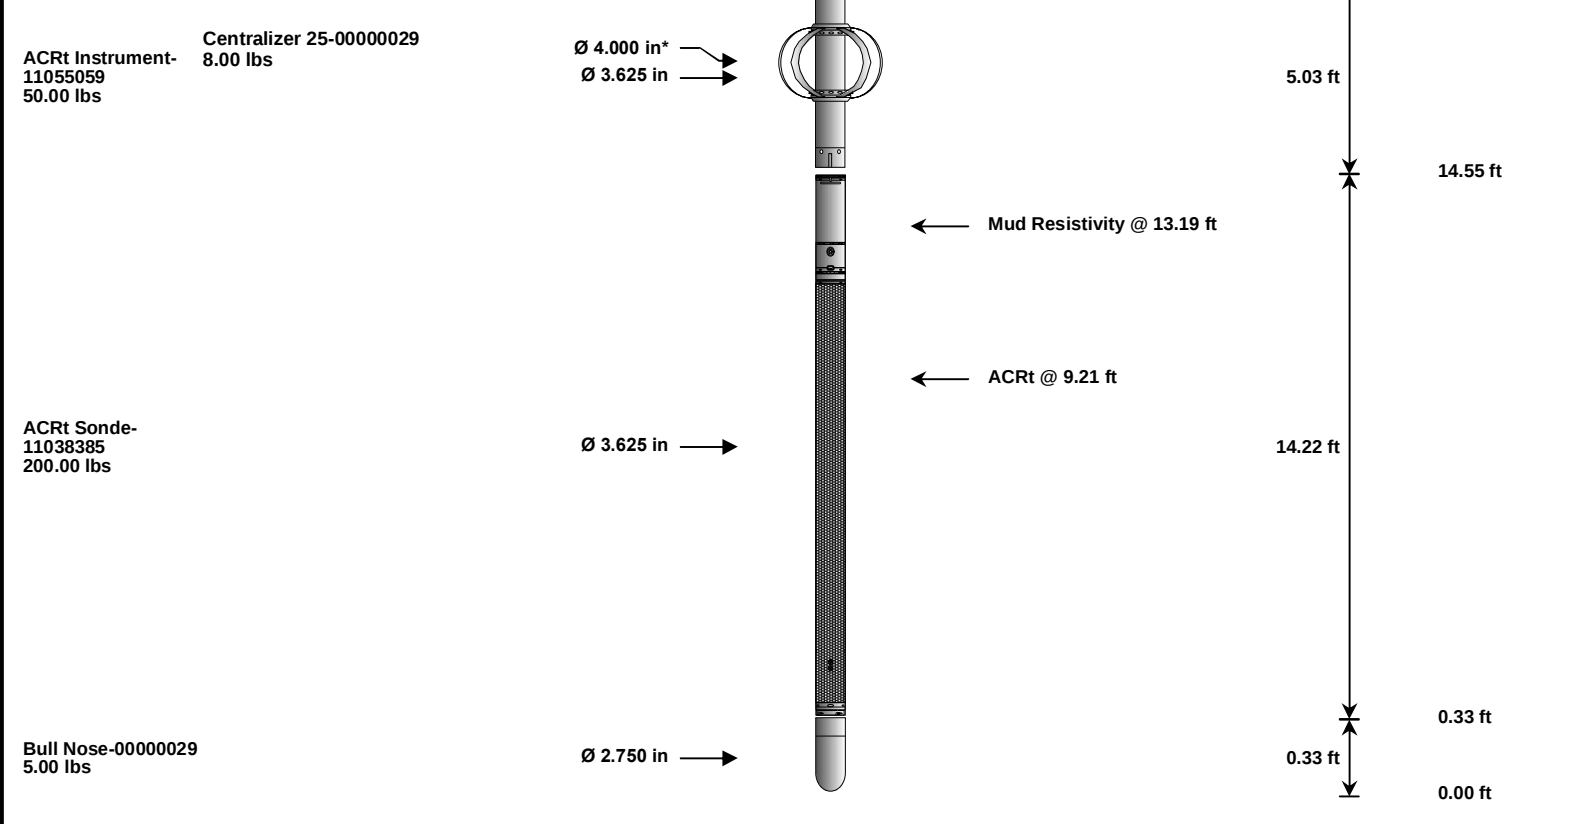

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	12156658	135.00	6.25	89.92	300.00
SP	SP Sub	11441455	60.00	3.74	86.18	300.00
GTET	Gamma Telemetry Tool	11048627	165.00	8.52	77.66	60.00
HFDT	High Frequency Dielectric Tool	11997111	435.00	16.14	61.53	30.00
DSNT	Dual Spaced Neutron	11019643	174.00	9.69	51.84	60.00
DCNT	DSN Decentralizer	10755066	6.60	5.13	55.17	300.00
SDLT	Spectral Density Tool	10950489	360.00	10.81	41.03	60.00
MICP	Microlog Pad	10950489	8.00	1.00	43.53	60.00
SDLP	Density Insite Pad	10844781	65.00	2.55	43.24	60.00
IQF	IQ Flex tool	00000696	140.00	5.67	35.36	300.00
BSAT	Borehole Sonic Array Tool	10747683	300.00	15.77	19.58	60.00
OBCEN	Centralizer - 25 in. Overbody	00000027	8.00	2.08	32.52	300.00
ACRt	Array Compensated True Resistivity Instrument Section	11055059	50.00	5.03	14.55	300.00
OBCEN	Centralizer - 25 in. Overbody	00000029	8.00	2.08	16.39	300.00
ACRt	Array Compensated True Resistivity Sonde Section	11038385	200.00	14.22	0.33	300.00
BLNS	Bull Nose	00000029	5.00	0.33	0.00	300.00
Total			2,119.60	96.17		
* Not included in Total Length and Length Accumulation.						
Data: DEWELL B-1\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\IDLE					Date: 02-Sep-13 00:20:36	

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	

SHARED	BSAL	Borehole salinity	0.00	ppm
SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
SHARED	RMUD	Mud Resistivity	1.090	ohmm
SHARED	TRM	Temperature of Mud	85.0	degF
SHARED	CSD	Logging Interval is Cased?	No	
SHARED	ICOD	AHV Casing OD	5.500	in
SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	5784.00	ft
SHARED	BHT	Bottom Hole Temperature	135.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	Temperature Master Tool	NONE	
SHARED	BHSM	Borehole Size Master Tool	NONE	
Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
HFDT-I	HFOK	Do HFDT Calculations?	Yes	
HFDT-I	RMF	Mud Filtrate Resistivity	0.93	ohmm
HFDT-I	RMFT	Temperature of Mud Filtrate	85.00	degF
HFDT-I	MDIL	Matrix Dielectric Constant	7.700	
HFDT-I	HRTC	HFDT Insite Temperature Correction Source	PADTEMP1	
HFDT-I	CLOK	Process Caliper Outputs?	Yes	
HFDT-I	SAO	SDL Backup Arm Offset	-0.20	in
HFDT-I	PAO	Pad Arm Offset	0.00	in
HFDT-I	MLOK	Process MicroLog Outputs?	No	
HFDT-I	MINO	Microlog Lateral Offset	0.00	ohmm
HFDT-I	MNOO	Microlog Normal Offset	0.00	ohmm
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	SPVT	SDLT Pad Temperature EVR?	No	

SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wyllie	
ACRt Sonde	RTOK	Process ACRT?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
BOTTOM				
Data: DEWELL B-1\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\005 02-Sep-13 02:08 Up @5774.5f				Date: 02-Sep-13 03:17:37

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION			
Tool Name:	GTET - 11048627	Reference Calibration Date:	02-Jul-13 07:19:00
Engineer:	THOMAS HYDE	Calibration Date:	14-Aug-13 07:16:10
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1
Calibrator Source S/N: TB146			
Calibrator API Reference:265.00 api			
Equivalent Calibrator API Reference:269.6 api			
	Measurement	Measured	Calibrated Units
	Background	51.1	50.6 api
	Background + Calibrator	323.4	320.2 api
	Calibrator	272.3	269.6 api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION			
Tool Name:	GTET - 11048627	Reference Calibration Date:	14-Aug-13 07:16:10
Engineer:	SHELDON INGERSOLL	Calibration Date:	01-Sep-13 06:33:52
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1
Calibrator Source S/N: TB146			
Calibrator API Reference:265.00 api			
Equivalent Calibrator API Reference:269.6 api			
	Field Verification	Shop	Field Units
	Background	50.6	32.9 api
	Background + Calibrator	320.2	303.5 api
	Calibrator	269.6	270.6 api

Shop		Field		Difference		Tolerance			
269.6		270.6		-1.0		+/- 9.00			
ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION									
Tool Name:		ACRt Sonde - 11038385			Reference Calibration Date:		20-Apr-13 10:48:22		
Engineer:		J. BOLLLOM			Calibration Date:		21-Jun-13 10:32:46		
Software Version:		WL INSITE R3.8.4 (Build 5)			Calibration Version:		1		
Host Tool Name:		ACRt Instrument - I5059_S8385							
TYPICAL GAIN RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.01	1.05	0.95	1.02	1.05	0.95	1.02	1.05
A2 (50")	0.95	1.02	1.05	0.95	1.02	1.05	0.95	1.03	1.05
A3 (29")	0.95	1.00	1.05	0.95	1.01	1.05	0.95	1.01	1.05
A4 (17")	0.95	1.01	1.05	0.95	1.01	1.05	0.95	1.02	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.00	1.05	0.95	1.01	1.05
A6 (6")	N/A	N/A	N/A	0.95	1.00	1.05	0.95	1.00	1.05
TYPICAL SONDE OFFSET RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	-5	-0.68	2	-6	-4.57	-2	-8	-4.40	-2
A2 (50")	-7	-2.12	0	-7	-3.39	0	-7	-4.62	0
A3 (29")	-27	-15.01	-9	-9	-4.68	-3	-7	-2.35	-1
A4 (17")	-180	-104.94	-60	-45	-33.01	-15	-39	-25.93	-13
A5 (10")	N/A	N/A	N/A	-150	-81.71	-50	-80	-41.18	-10
A6 (6")	N/A	N/A	N/A	175	345.04	525	90	170.75	270
TRANSMITTER CURRENT GAIN				R-MUD VERIFICATION					
Signal	Lower	R	Upper	Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)		
12K	0.6	0.89	1.3	Mud Cell	0.95	1.00	1.05		
36K	1.0	1.35	2.0						
72K	1.0	1.61	2.0						
PASS/FAIL SUMMARY									
GAIN RANGE CHK				PASS					
SONDE OFFSET RANGE CHK				PASS					
Tx CURRENT GAIN				PASS					
Rmud VERIFICATION				PASS					
TOOL OK TO LOG									
CALIBRATION SUMMARY									
Sensor	Shop	Field	Post	Difference	Tolerance	Units			
GTET-11048627									
Gamma Ray Calibrator	269.6	270.6	-----	-1.0	+/- 9.00	api			
ACRt Sonde-11038385									
Mud Cell	1.00	-----	-----	0.00	-----	ohm-m			
Data: DEWELL B-1\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\005 02-Sep-13 02:08 Up @5774.5f					Date: 02-Sep-13 03:19:04				

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
RWCH				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	88.14	NO	
SP	Spontaneous Potential	88.14	BLK	1.250
SPR	Raw Spontaneous Potential	88.14	NO	
SPO	Spontaneous Potential Offset	88.14	NO	
GTET				
TPUL	Tension Pull	80.12	NO	
GR	Natural Gamma Ray API	80.12	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	80.12	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	80.12	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
HFDT-I				
TPUL	Tension Pull	64.59	NO	
IUXU	HFDT Insite In-phase Component of Upper Receiver - TXUon TXLoff	64.59	NO	
QUXU	HFDT Insite Quadrature Component of Upper Receiver - TXUon TXLof	64.59	NO	
IMXU	HFDT Insite In-phase Component of Middle Receiver TXUon TXLoff	64.59	NO	
QMXU	HFDT Insite Quadrature Component of Middle Receiver TXUon TXLof	64.59	NO	
ILXU	HFDT Insite In-phase Component of Lower Receiver TXUon TXLoff	64.59	NO	
QLXU	HFDT Insite Quadrature Component of Lower Receiver TXUon TXLoff	64.59	NO	
IUXL	HFDT Insite In-phase Component of Upper Receiver TXUoff TXLon	64.59	NO	
QUXL	HFDT Insite Quadrature Component of Upper Receiver TXUoff TXLon	64.59	NO	
IMXL	HFDT Insite In-phase Component of Middle Receiver TXUoff TXLon	64.59	NO	
QMXL	HFDT Insite Quadrature Component of Middle Receiver TXUoff TXLo	64.59	NO	
ILXL	HFDT Insite In-phase Component of Lower Receiver TXUoff TXLon	64.59	NO	
QLXL	HFDT Insite Quadrature Component of Lower Receiver TXUoff TXLon	64.59	NO	
TEX1	HFDTInsite External Pad Temperature Measurement 1	63.81	NO	
TEX2	HFDTInsite External Pad Temperature Measurement 2	63.81	NO	
STAT	HFDT Insite Pad Status Word	64.59	NO	
TPUL	Tension Pull	64.34	NO	
PCAL	Pad Caliper	64.34	TRI	0.250
ACAL	Arm Caliper	64.34	TRI	0.250
TPUL	Tension Pull	64.53	NO	
MINV	Microlog Lateral	64.53	BLK	0.750
MNOR	Microlog Normal	64.53	BLK	0.750

DSNT				
TPUL	Tension Pull	53.74	NO	
RNDS	Near Detector Telemetry Counts	53.84	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.59	TRI	0.583
DNTT	DSN Tool Temperature	53.84	NO	
DSNS	DSN Tool Status	53.74	NO	
ERND	Near Detector Telemetry Counts EVR	53.84	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.59	BLK	0.000
ENTM	DSN Tool Temperature EVR	53.84	NO	
SDLT				
TPUL	Tension Pull	43.84	NO	
PCAL	Pad Caliper	43.84	TRI	0.250
ACAL	Arm Caliper	43.84	TRI	0.250
BSAT				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000

F3X3	ACRT 72KHz - 25in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Current Raw 12K X Receiver	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
SDLT Pad				
TPUL	Tension Pull	43.83	NO	
NAB	Near Above	43.66	BLK	0.920
NHI	Near Cesium High	43.66	BLK	0.920
NLO	Near Cesium Low	43.66	BLK	0.920
NVA	Near Valley	43.66	BLK	0.920
NBA	Near Barite	43.66	BLK	0.920
NDE	Near Density	43.66	BLK	0.920
NPK	Near Peak	43.66	BLK	0.920
NLI	Near Lithology	43.66	BLK	0.920
NBAU	Near Barite Unfiltered	43.66	BLK	0.250
NLIU	Near Lithology Unfiltered	43.66	BLK	0.250
FAB	Far Above	44.01	BLK	0.250
FHI	Far Cesium High	44.01	BLK	0.250
FLO	Far Cesium Low	44.01	BLK	0.250
FVA	Far Valley	44.01	BLK	0.250
FBA	Far Barite	44.01	BLK	0.250
FDE	Far Density	44.01	BLK	0.250
FPK	Far Peak	44.01	BLK	0.250
FLI	Far Lithology	44.01	BLK	0.250
PTMP	Pad Temperature	43.84	BLK	0.920
NHV	Near Detector High Voltage	43.24	NO	
FHV	Far Detector High Voltage	43.24	NO	
ITMP	Instrument Temperature	43.24	NO	
DDHV	Detector High Voltage	43.24	NO	
Microlog Pad				
TPUL	Tension Pull	44.03	NO	
MINV	Microlog Lateral	44.03	BLK	0.750
MNOR	Microlog Normal	44.03	BLK	0.750
Data: DEWELL B-1\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\005 02-Sep-13 02:08 Up @5774.5f			Date: 02-Sep-13 03:16:59	

HALLIBURTON

Plot Time: 02-Sep-13 05:12:37
Plot Range: 1575 ft to 5761 ft
Data: DEWELL B-1\Well Based\IR1 CASING\
Plot File: \\-LOCAL-\\DEWELL B-1\Well Based\ACRT\ACRT_1.lib

1 INCH MAIN LOG

