


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

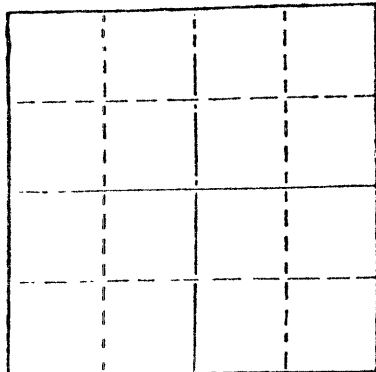

Locate well correctly on above  
Section Plat

Osborne County. Sec. 32 Twp. 7 Rge. 15 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
C SW SW  
Lease Owner Shields Oil Producers, Inc.  
Lease Name Enoch Well No. 3  
Office Address Shields Bldg., Russell, Kansas 67665  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry hole  
Date Well completed 9-6 1982  
Application for plugging filed 9-6 1982  
Application for plugging approved 9-6 1982  
Plugging commenced 9-6 1982  
Plugging completed 9-6 1982  
Reason for abandonment of well or producing formation  
Dry hole

If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck  
Producing formation Depth to top Bottom Total Depth of Well 3,325'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	269'	Cmtd. w/175 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from feet to  
feet for each plug set.

Fill hole w/heavy mud

Push bridge plug to 900'

Spotted 50 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe

Push bridge plug to 275'

Spotted 30 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe

Push bridge plug to 40' w/ $\frac{1}{2}$  sax hulls on plug

Dump 10 sax cement on plug to cellar

Dump 10 sax cement in rat hole, 5 sax cement in mouse hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.

STATE OF KANSAS COUNTY OF RUSSELL, ss.

R.L. SHIELDS

(employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature)

*R.L. Shields*

Shields Bldg., Russell, Kansas 67665


(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of September, 1982

*Ruth Phillips*

Notary Public.

My commission expires



RECEIVED  
STATE CORPORATION COMMISSION

SEP 22 1982

9-22-82  
CONSERVATION DIVISION  
Wichita, Kansas