

15-163-02919-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Rooks County, Sec. 9 Twp. 7 Rge. (E) 17 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines Center of NW/4 - NW/4

Lease Owner The Carter Oil Co.

Lease Name Anna V. Oliva Well No. 1

Office Address Box 786 - Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed April 5, 1942 19.

Application for plugging filed 19.

Application for plugging approved 19.

Plugging commenced April 5, 1942 19.

Plugging completed April 5, 1942 19.

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Topeka	Dry	2803		8-5/8	313'	None
Kansas City	Dry	3054				
Arbuckle	Dry	3369				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Circulated hole from bottom (3470') with 14 pound mud.


Placed wooden plug in bottom of 8-5/8" casing at 313'

Placed cement on top of wooden plug from 281' to 311'

Filled casing with 14 pound mud.

Placed cement in top of casing from 0' to 32'

9 7 17W  
30 15

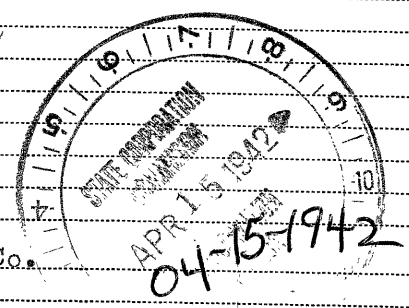

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Carter Oil Co.

Address P. O. Box 786 -

Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

E. A. Rose

(employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. A. Rose

Box 786, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of April, 1942

My commission expires April 16, 1944

Samuel H. Yeo  
Notary Public.