



MICROLOG

Fold here

LOGGING DATA

GENERAL				GAMMA		ACOUSTIC			DENSITY			NEUTRON			
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix	
No.	From	To	ft/min	L	R	L	R		L	R		L	R		
ONE	5706	4000	REC	0	150										
DIRECTIONAL INFORMATION															
Maximum Deviation								@	KOP @						
Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5-INCH CASING															
CHLORIDES REPORTED AT 3,200 MG/L															
LCM REPORTED AT 6 LB/BSL															
GTET-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION															
TODAY'S CREW: R. DODD & D. MILLER															
THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KS. 620-624-8123															
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.															
HALLIBURTON															

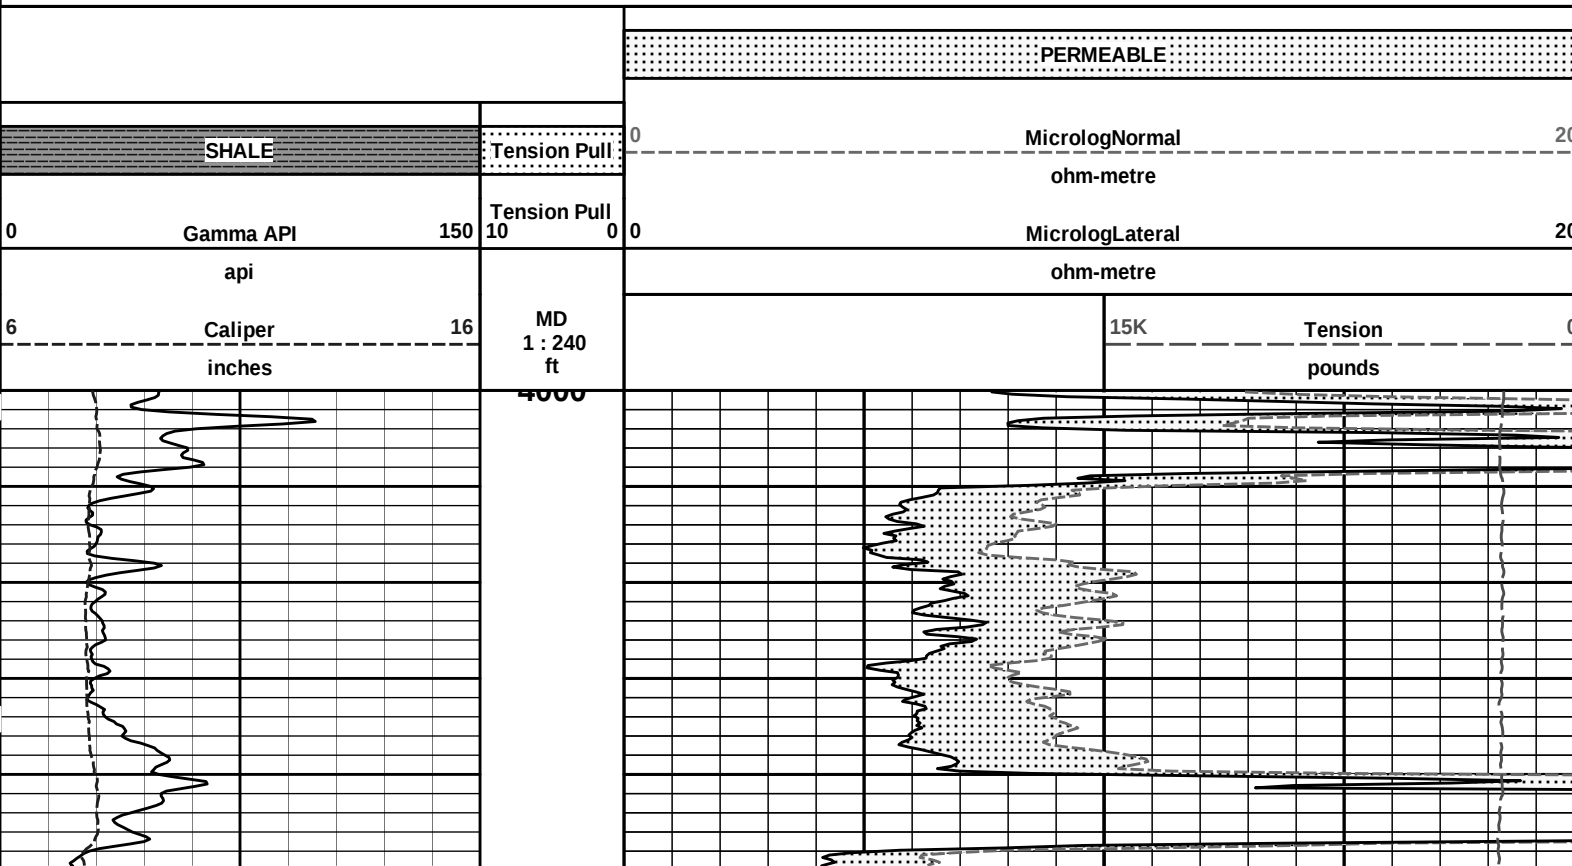

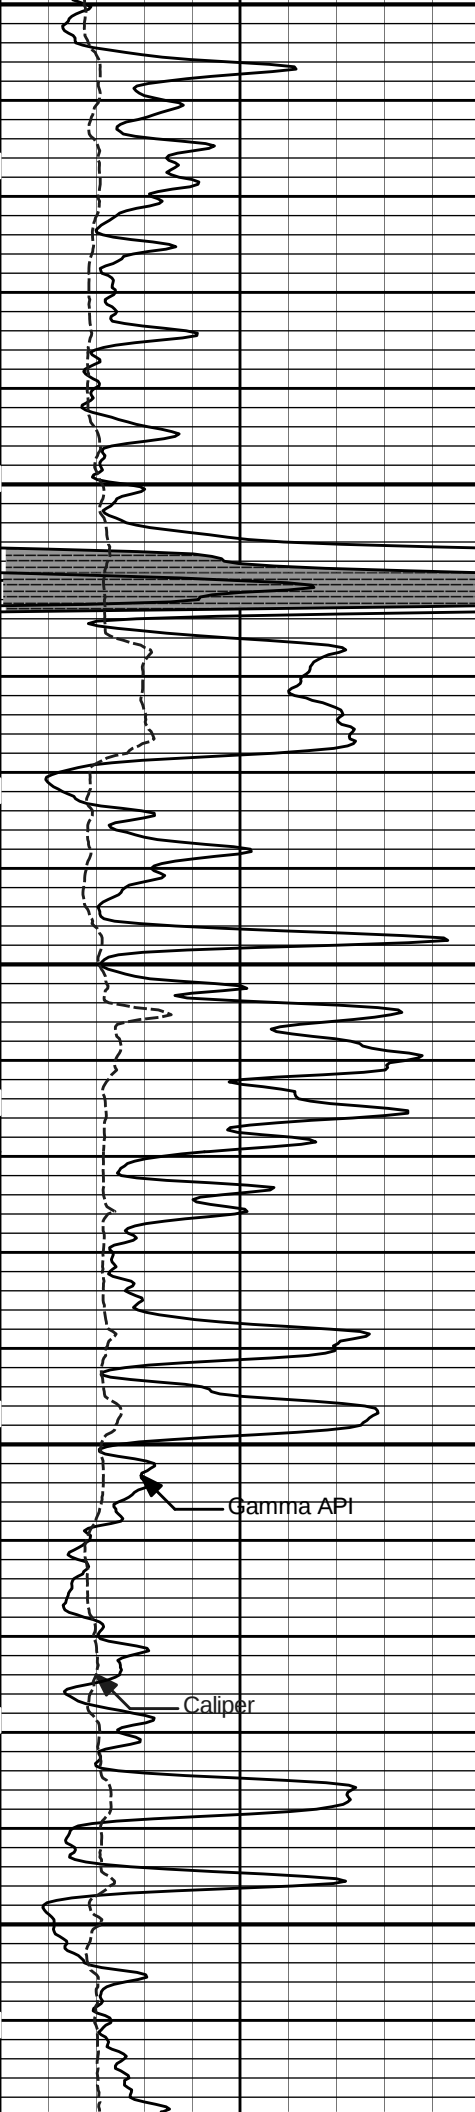


4100

4200


Gamma API

Caliper

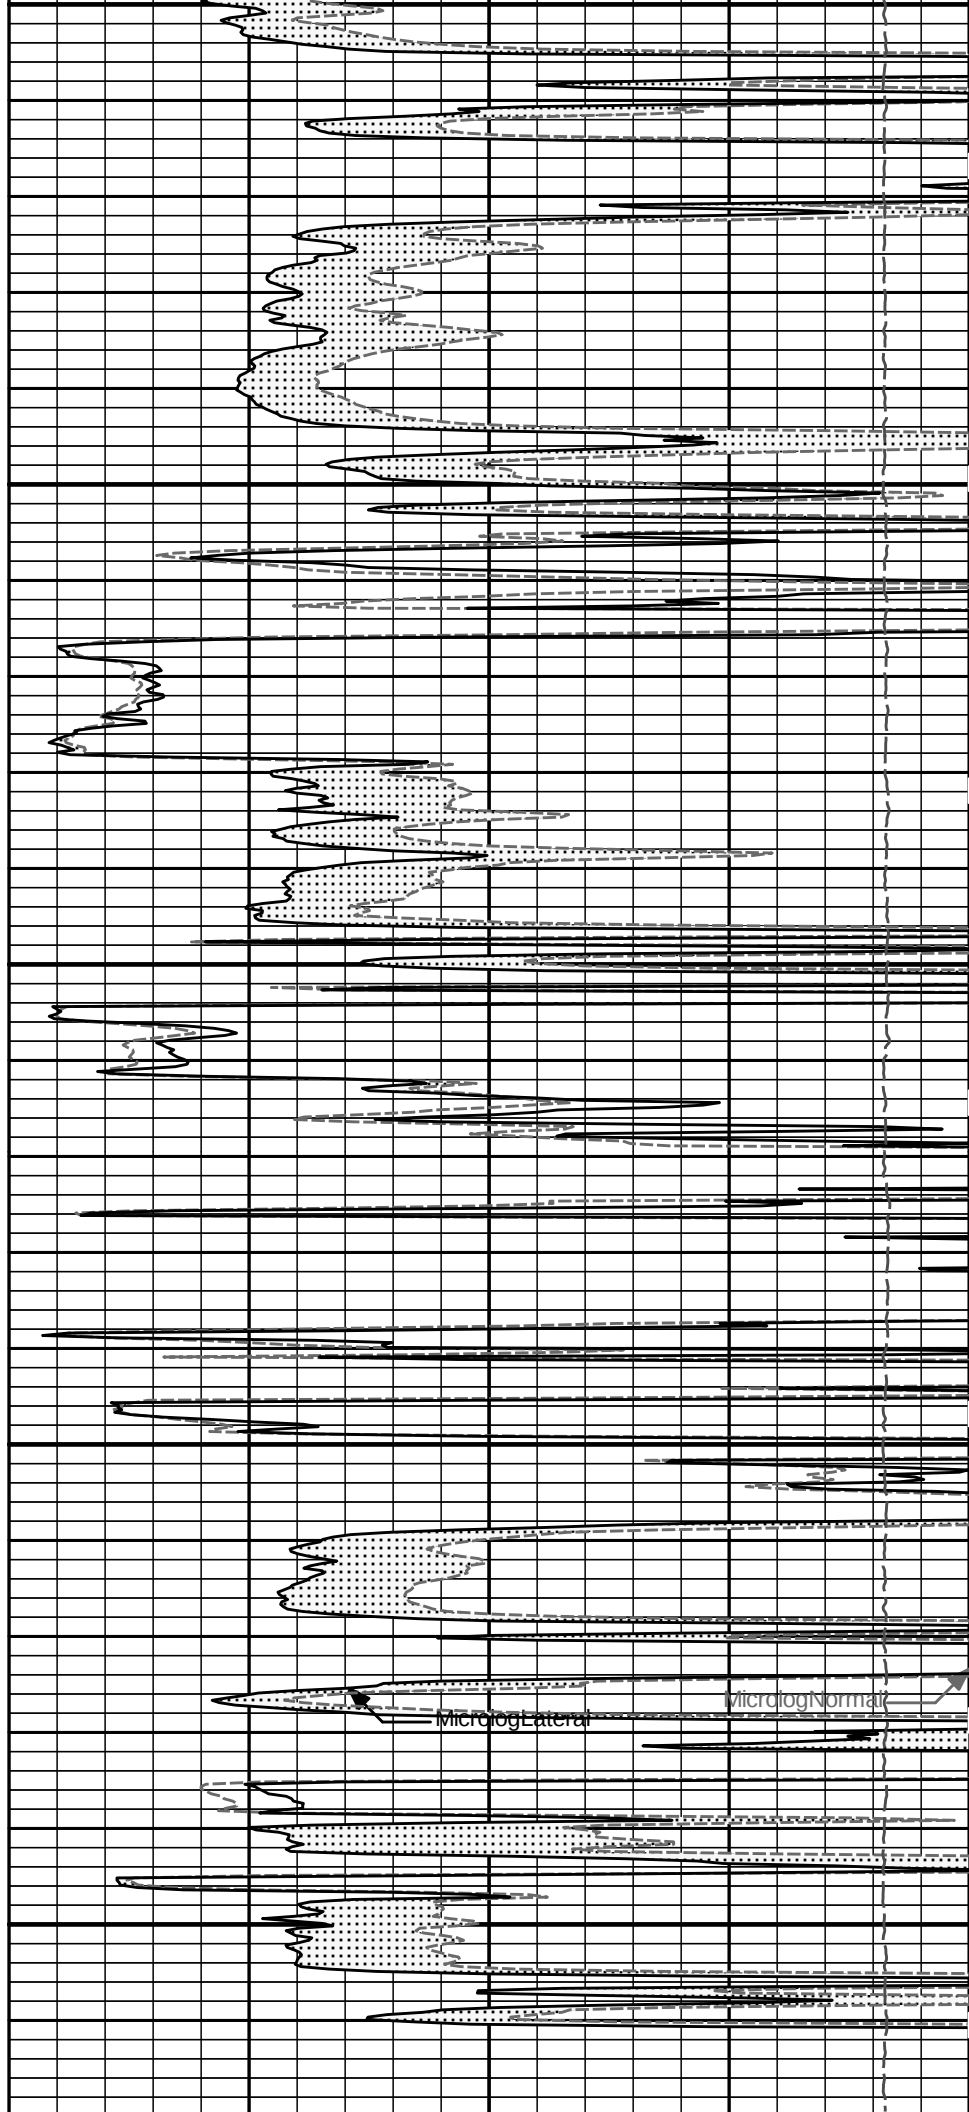


Microlog Lateral

Microlog Normal

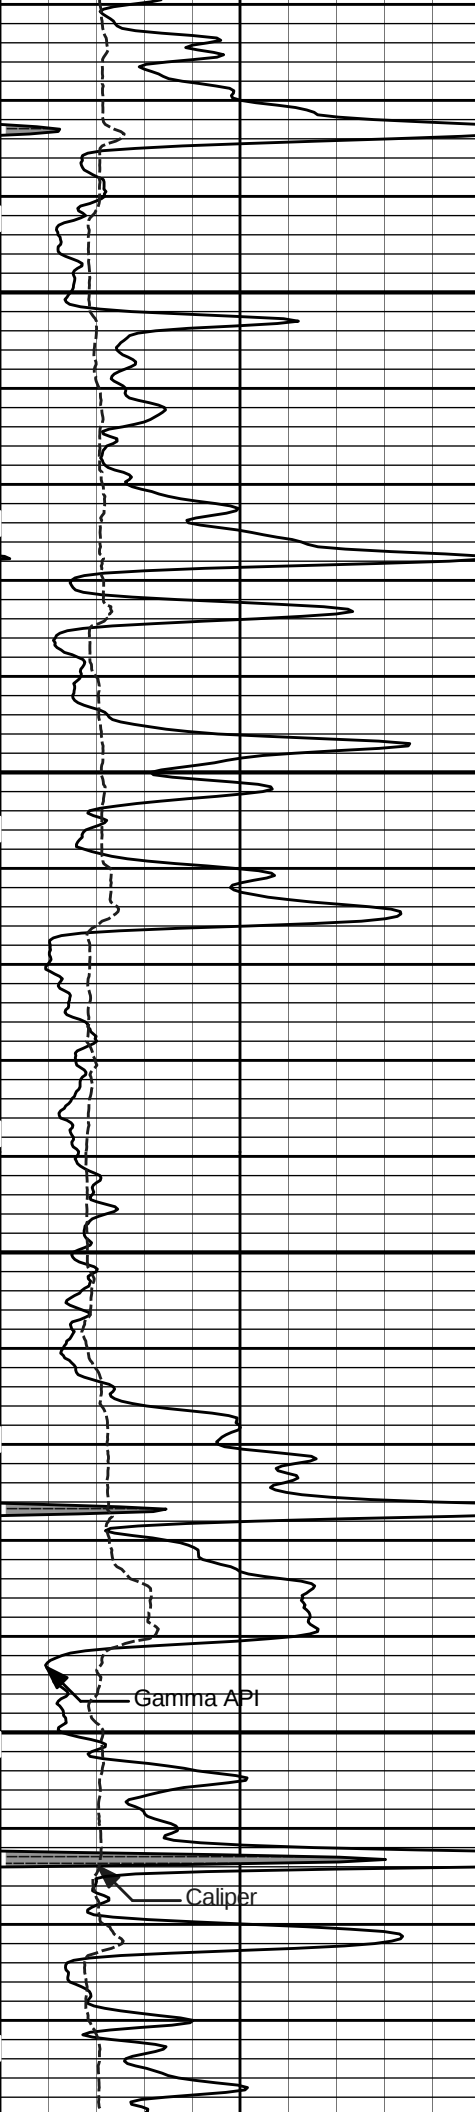

4300

4400

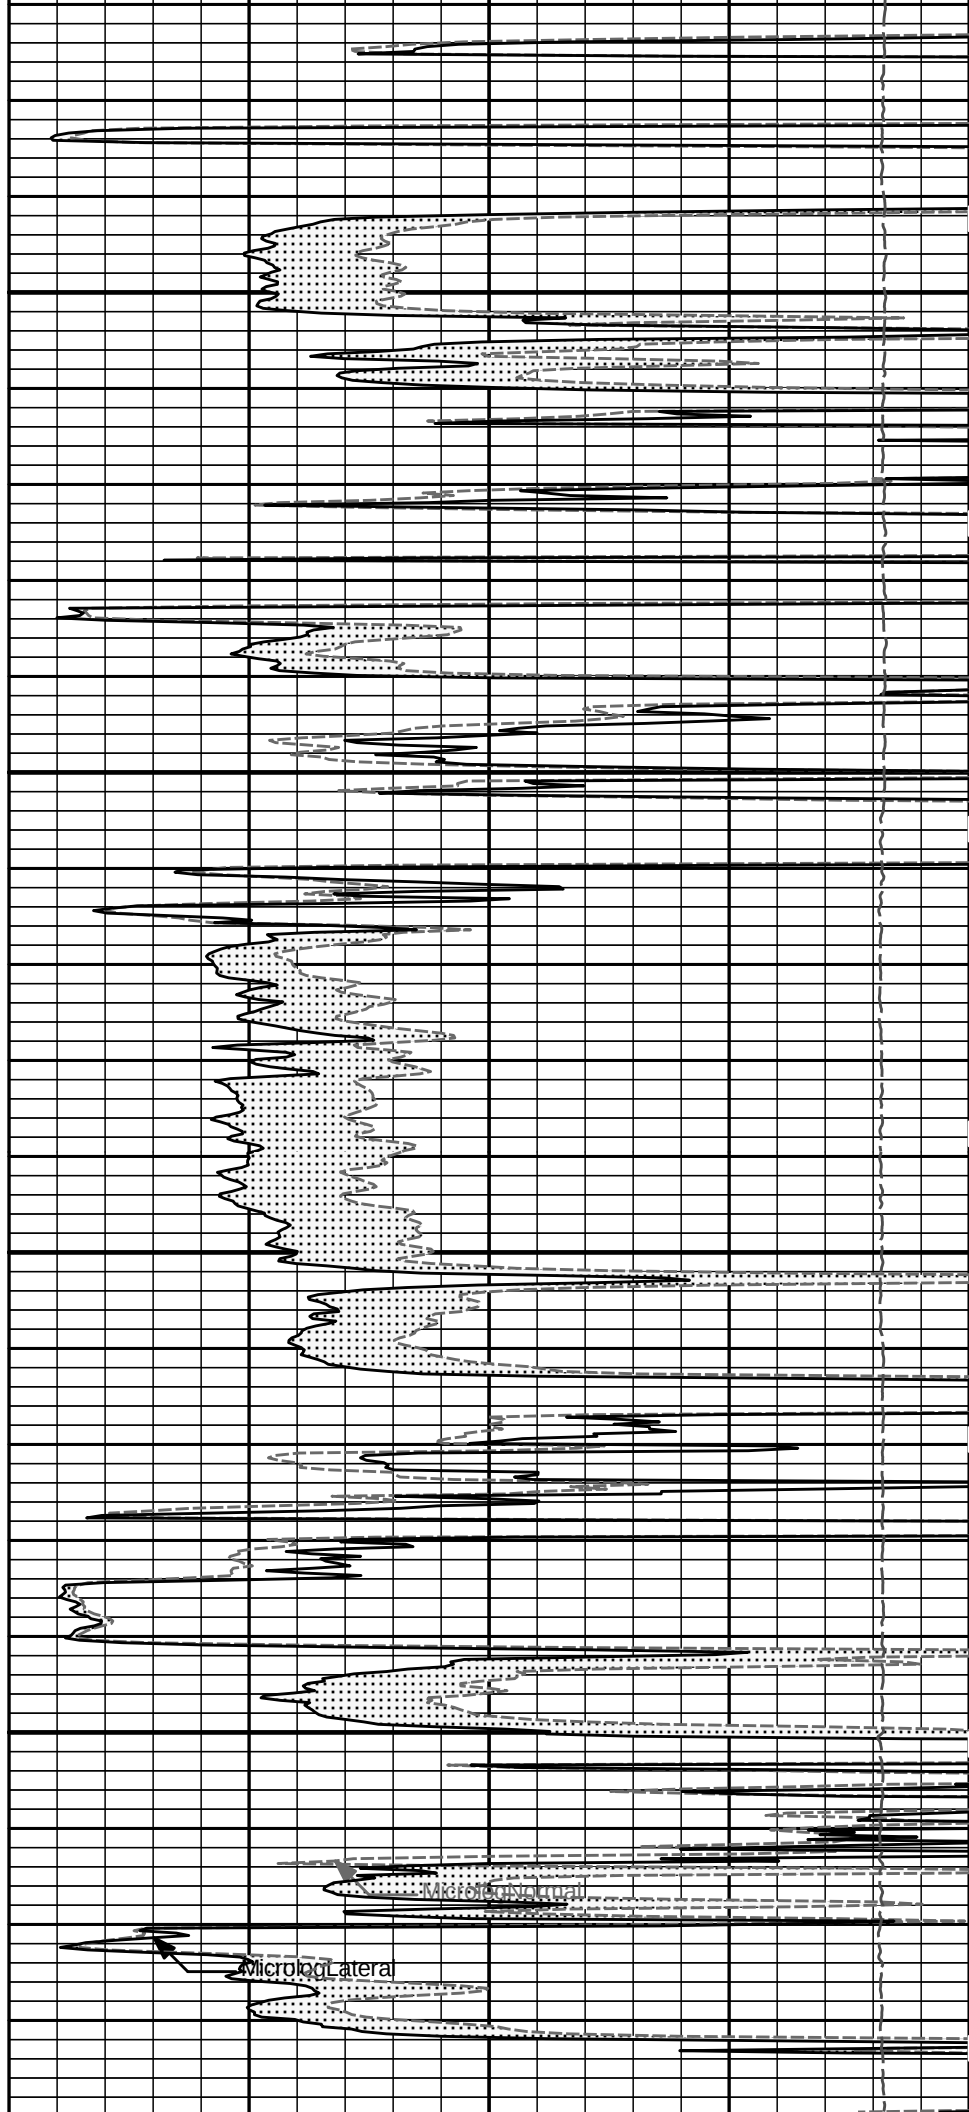




4500

4600

4700

Gamma API

Caliper

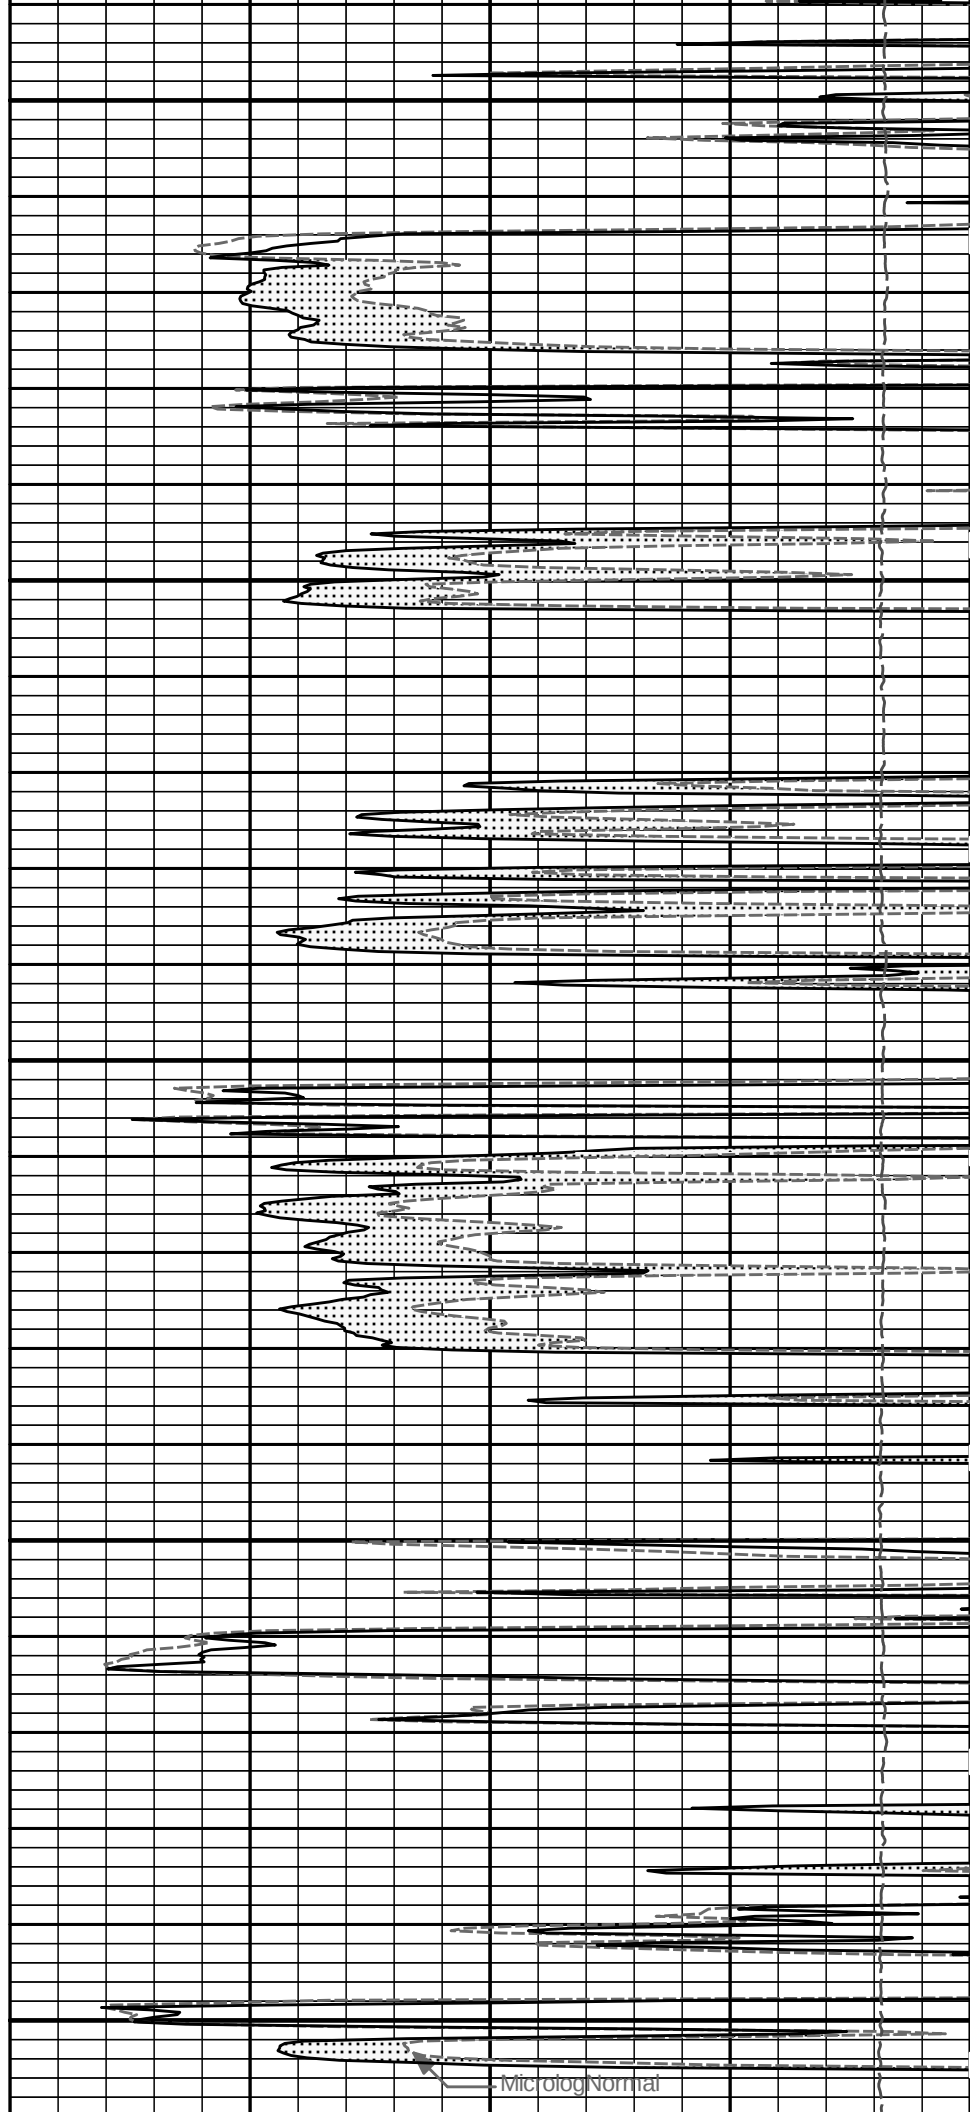



Microlog Normal



4800


4900

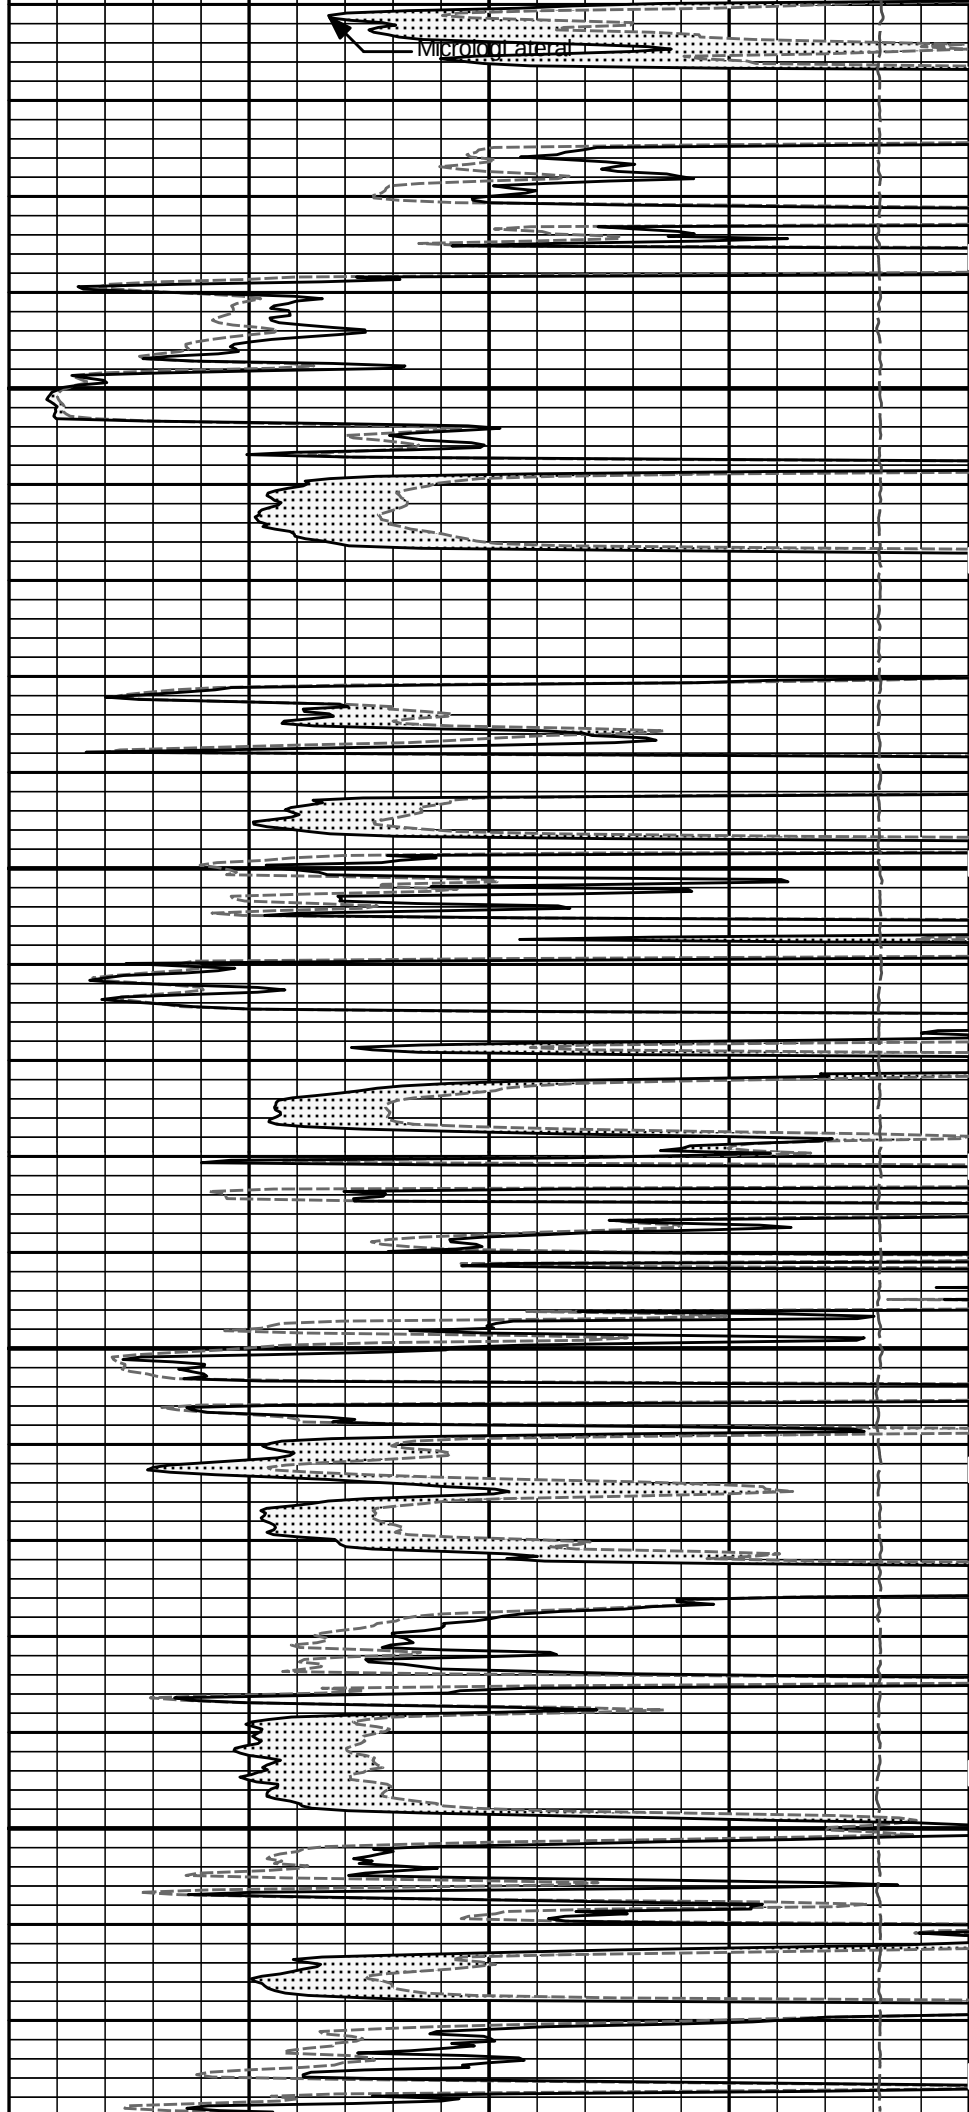


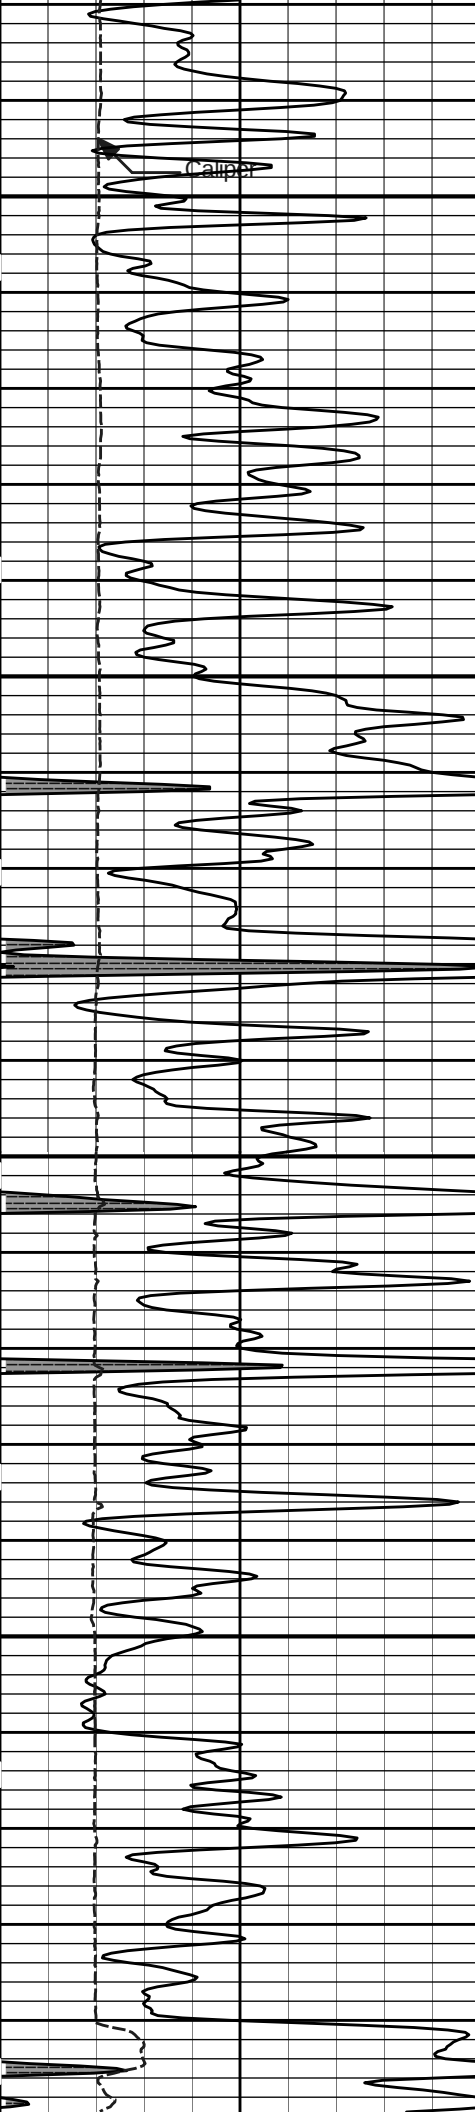

5000


5100

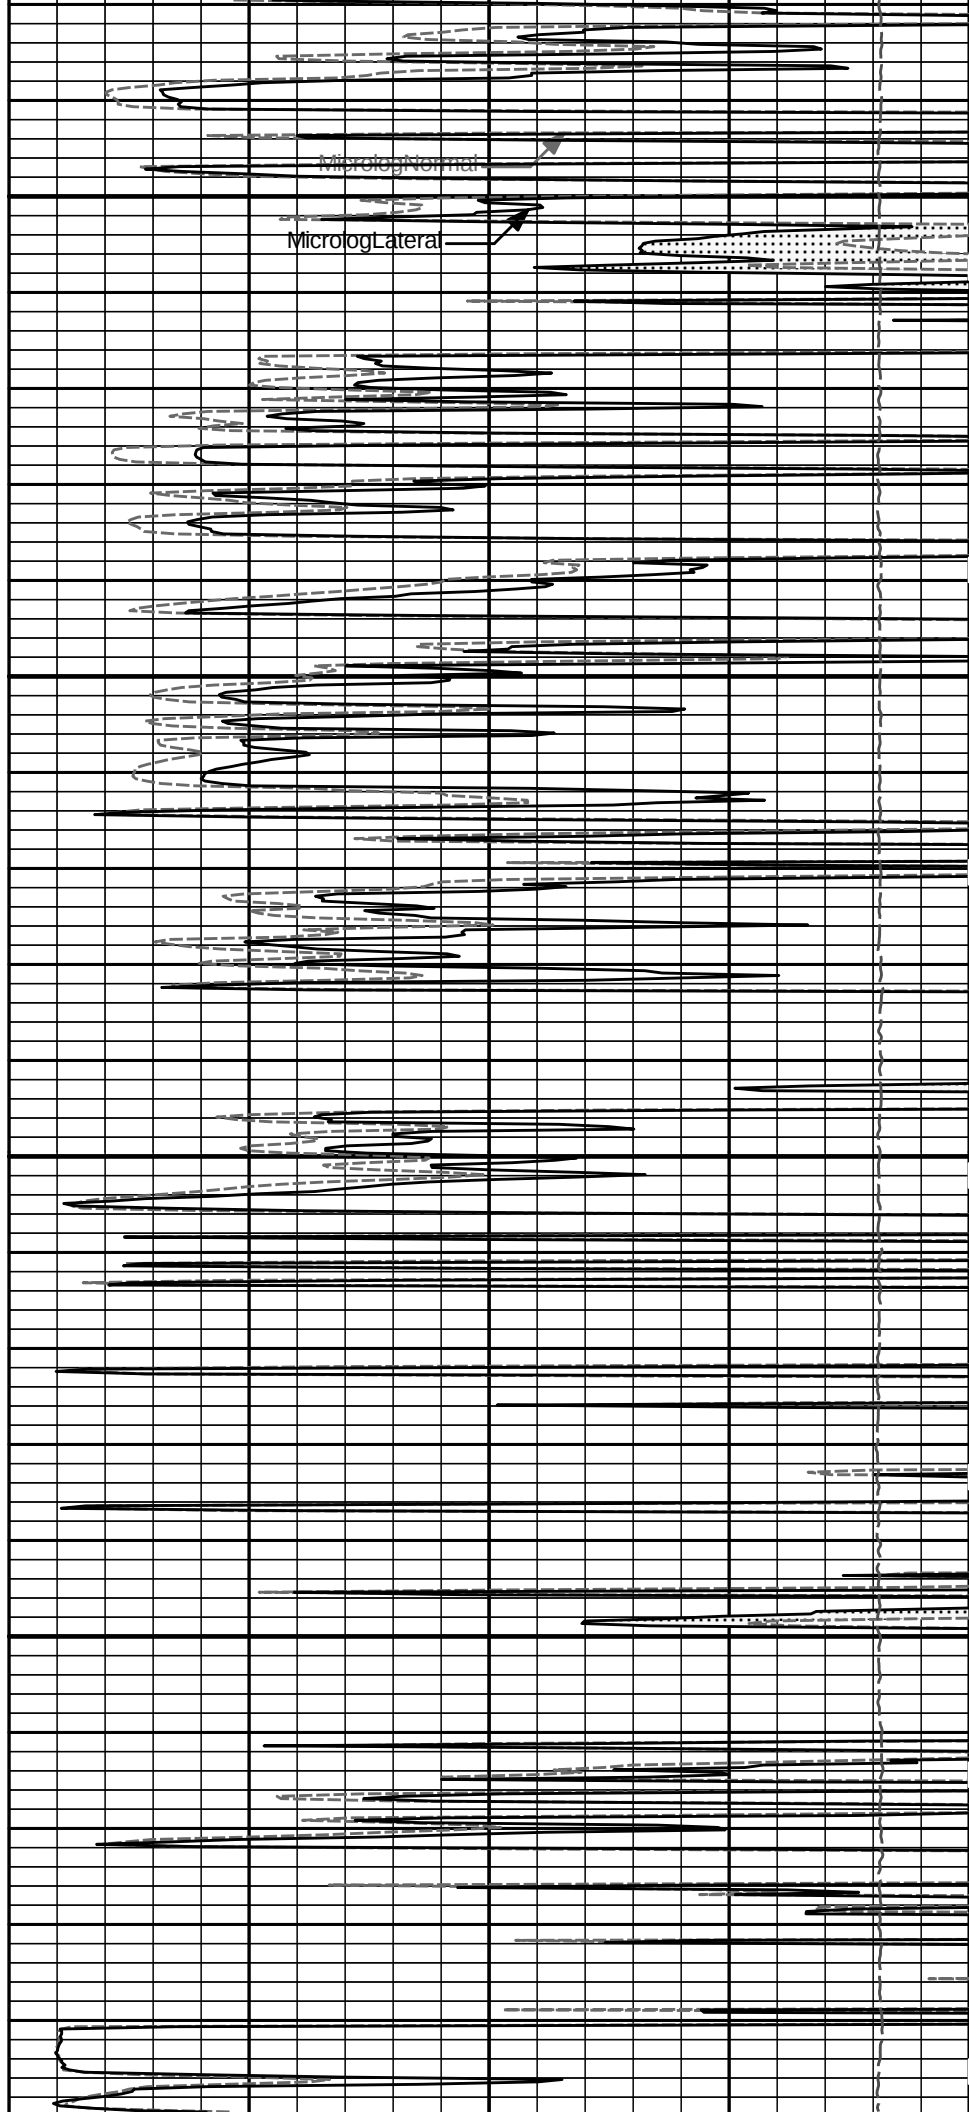

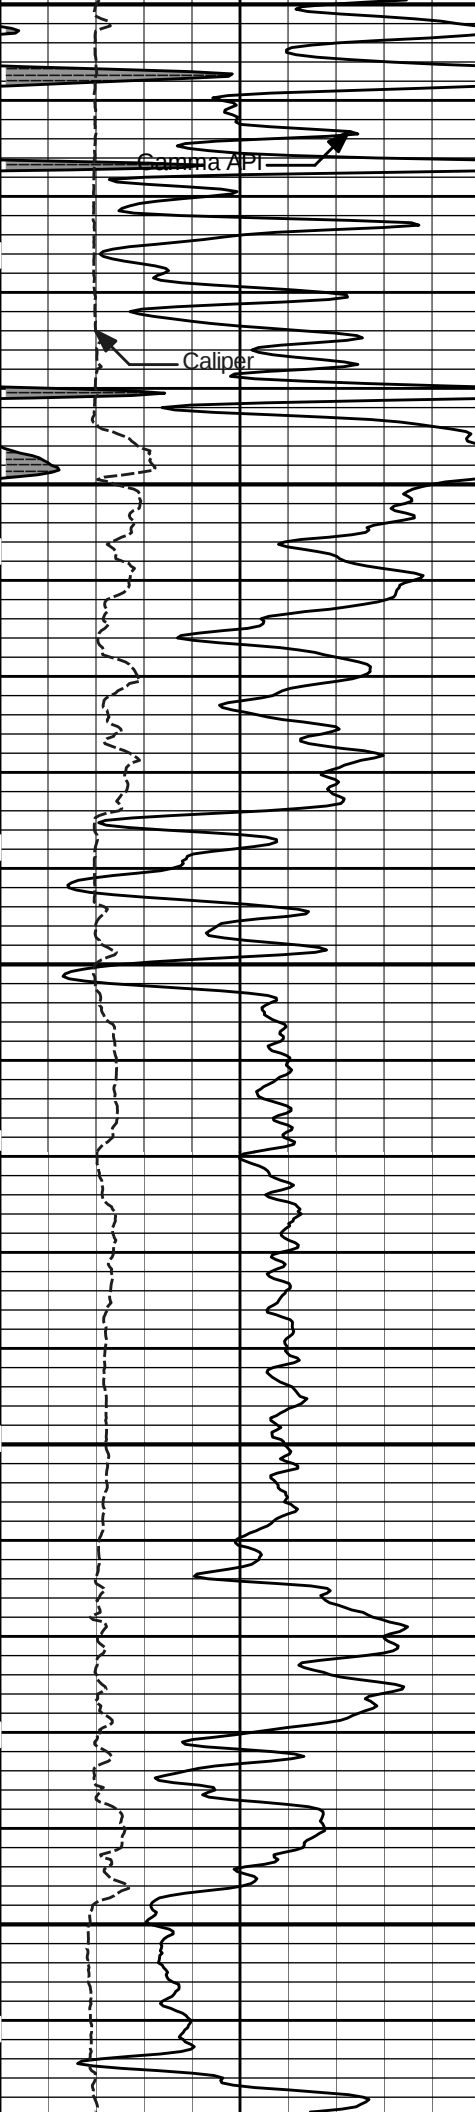

5200


5300

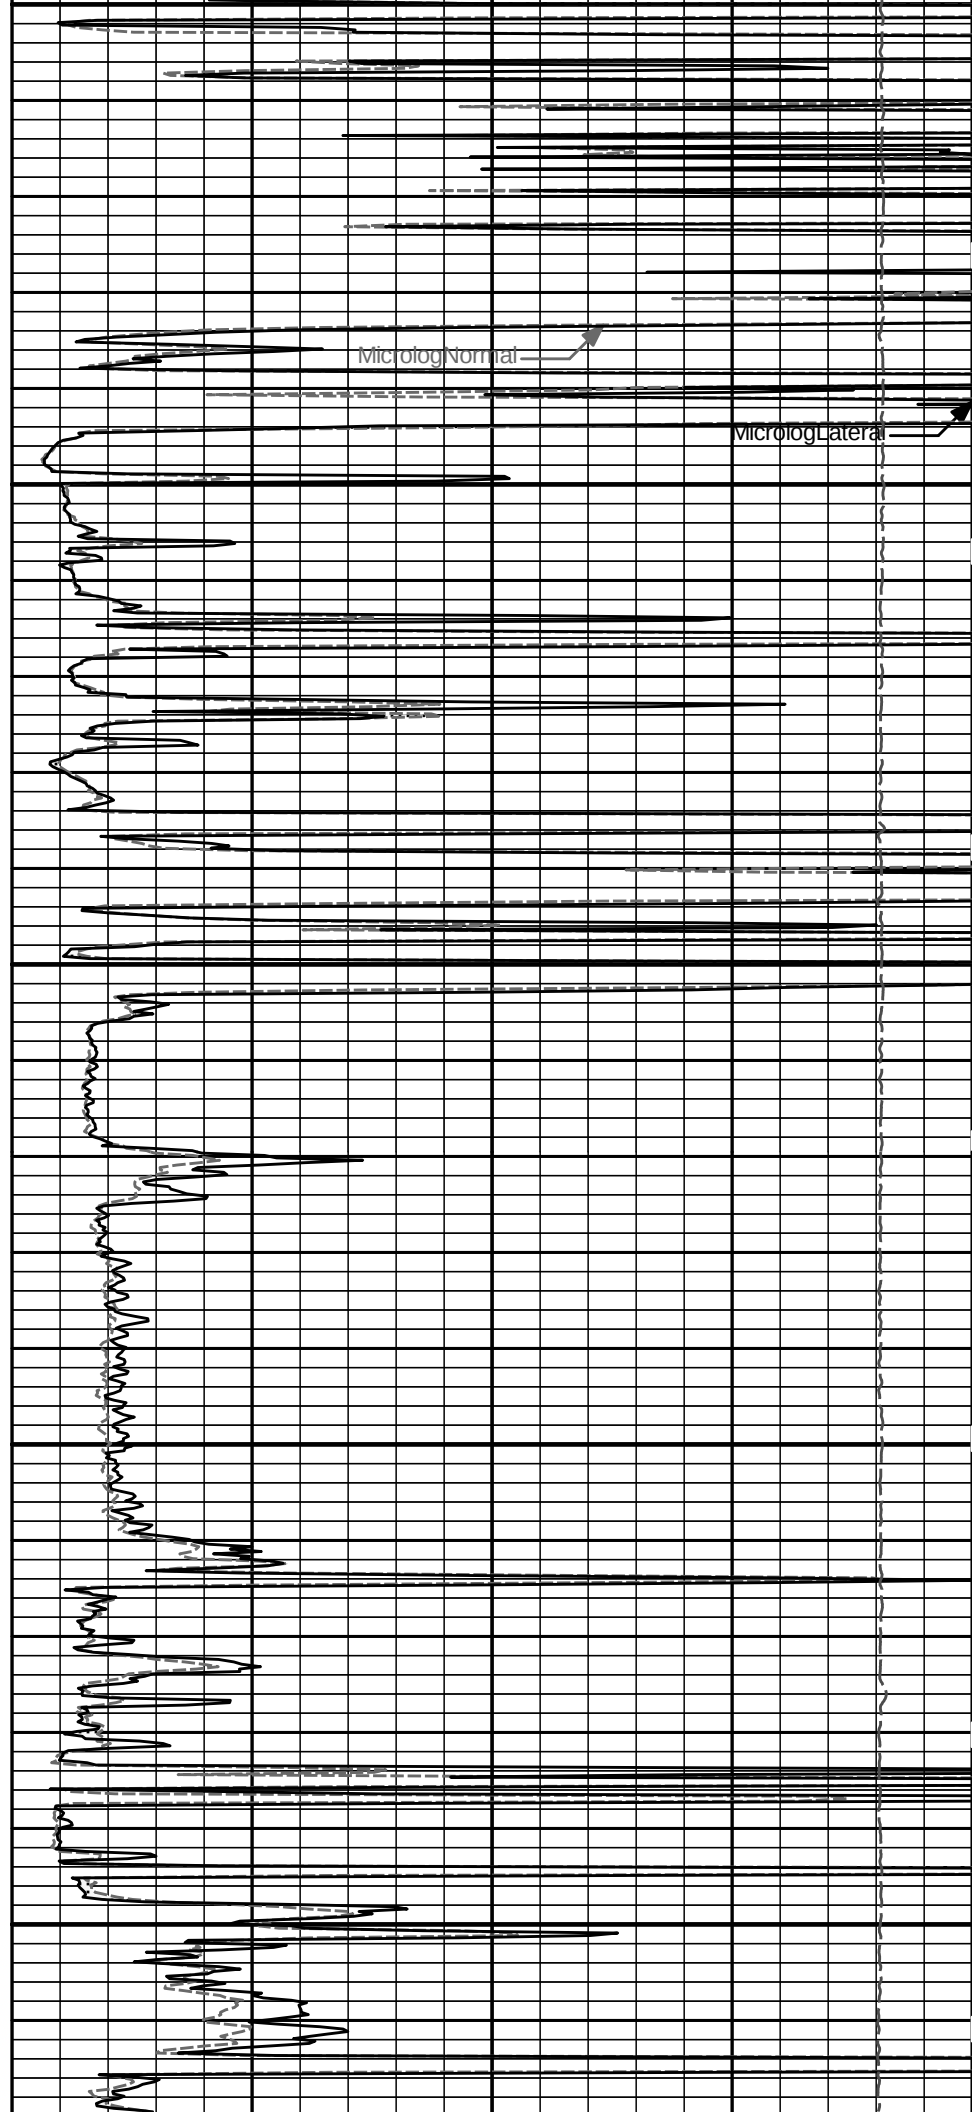




5400

5500

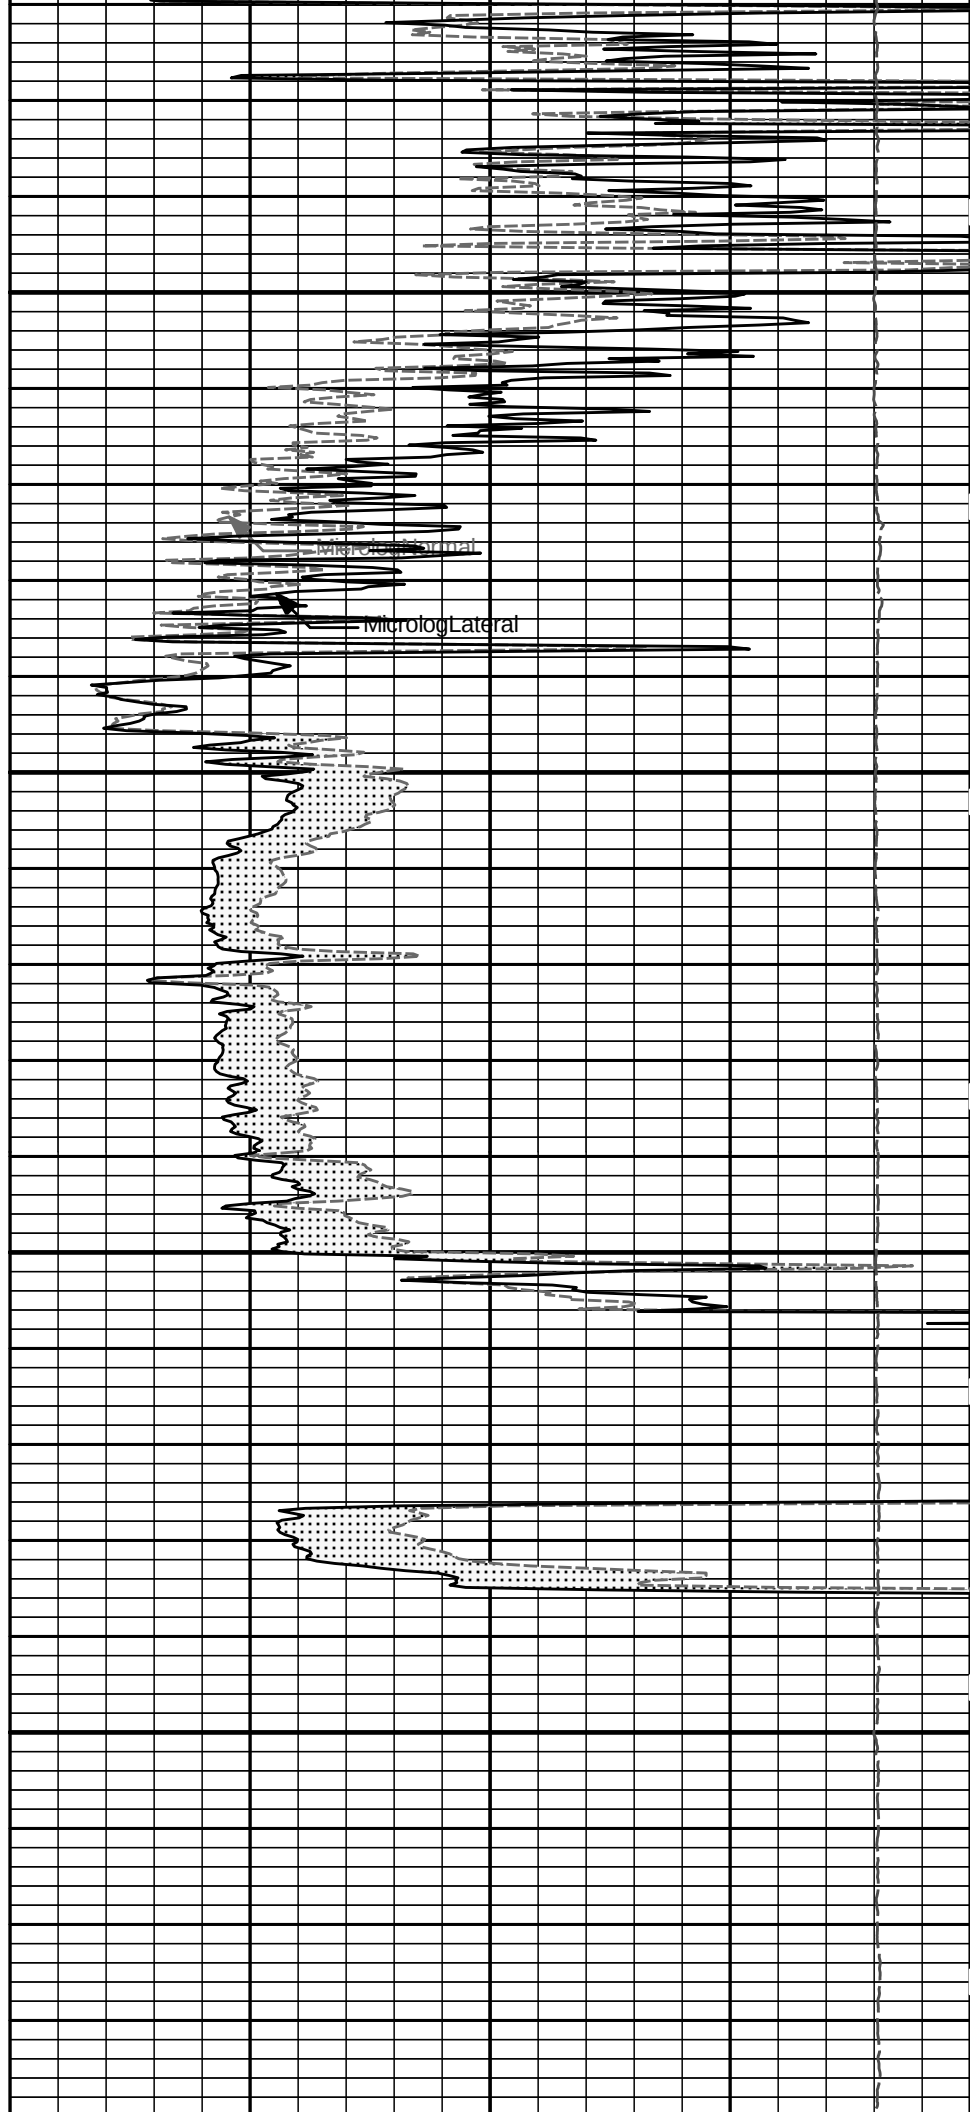

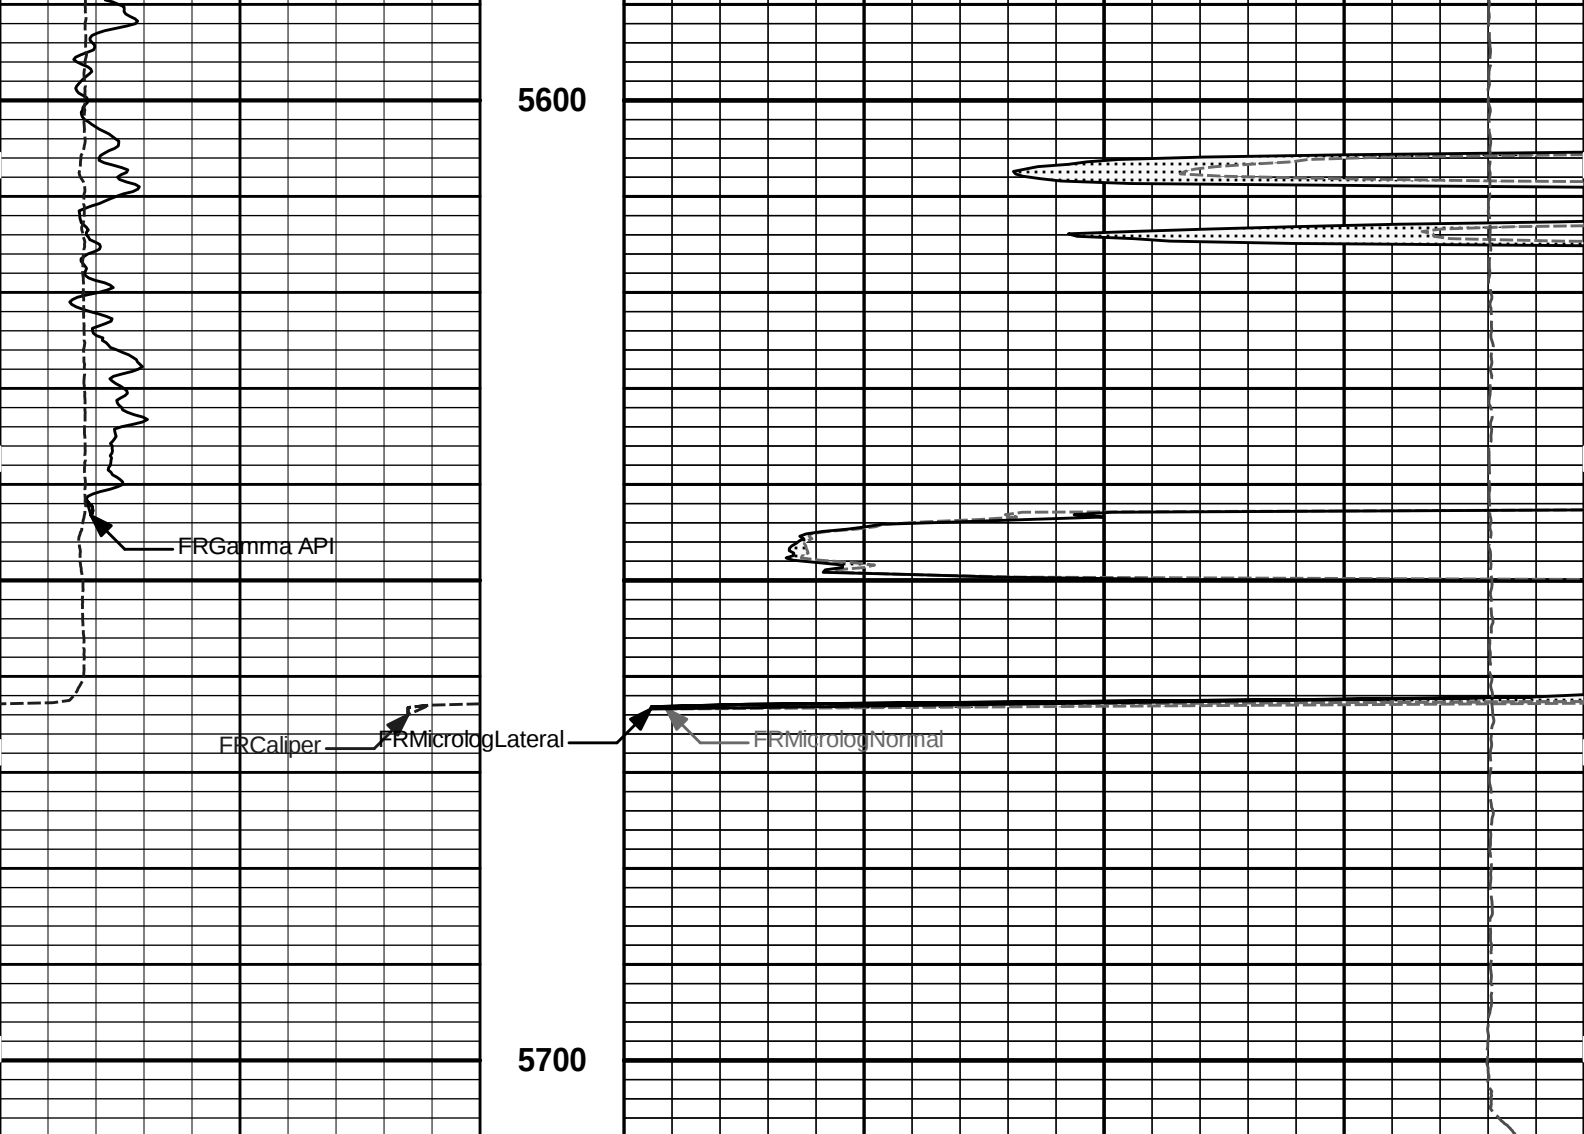

6	Caliper	16	MD	1 : 240	ft	15K	Tension	0
	inches						pounds	
0	Gamma API	150	Tension Pull	10	0	MicrologLateral		20
	api					ohm-metre		
	SHALE		Tension Pull	0	0	MicrologNormal		20
						ohm-metre		
						PERMEABLE		

HALLIBURTON

Plot Time: 10-Sep-13 07:12:23
Plot Range: 4000 ft to 5708.25 ft
Data: MOSBARGER_B-2\Well Based\DETAIL\
Plot File: \\LOCAL-MOSBARGER_B-2\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIMICRO\Microlog_IQ_5_main_lib


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 10-Sep-13 07:12:23
Plot Range: 5000 ft to 5708.42 ft
Data: MOSBARGER_B-2\Well Based\REPEAT\
Plot File: \\LOCAL-MOSBARGER_B-2\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIMICRO\Microlog_IQ_5_rep_lib

REPEAT SECTION


[illegible]

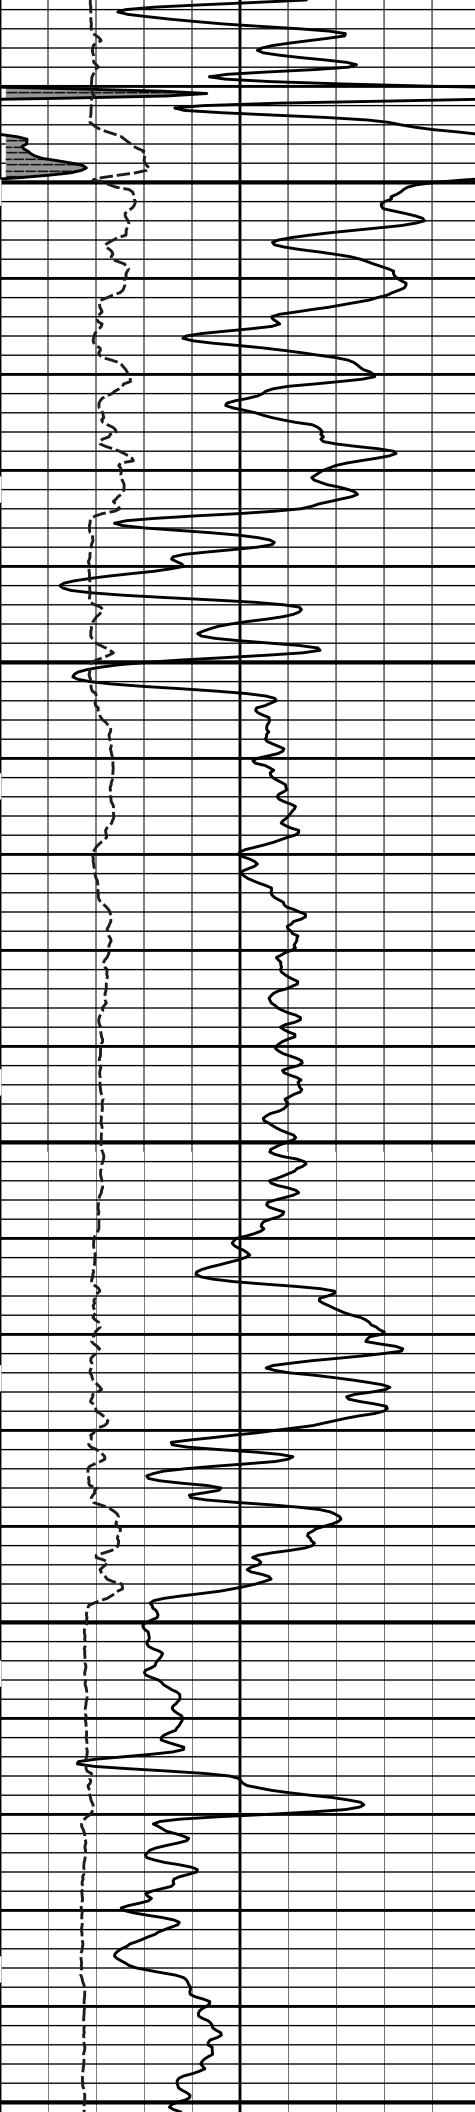


5200

5300


5400

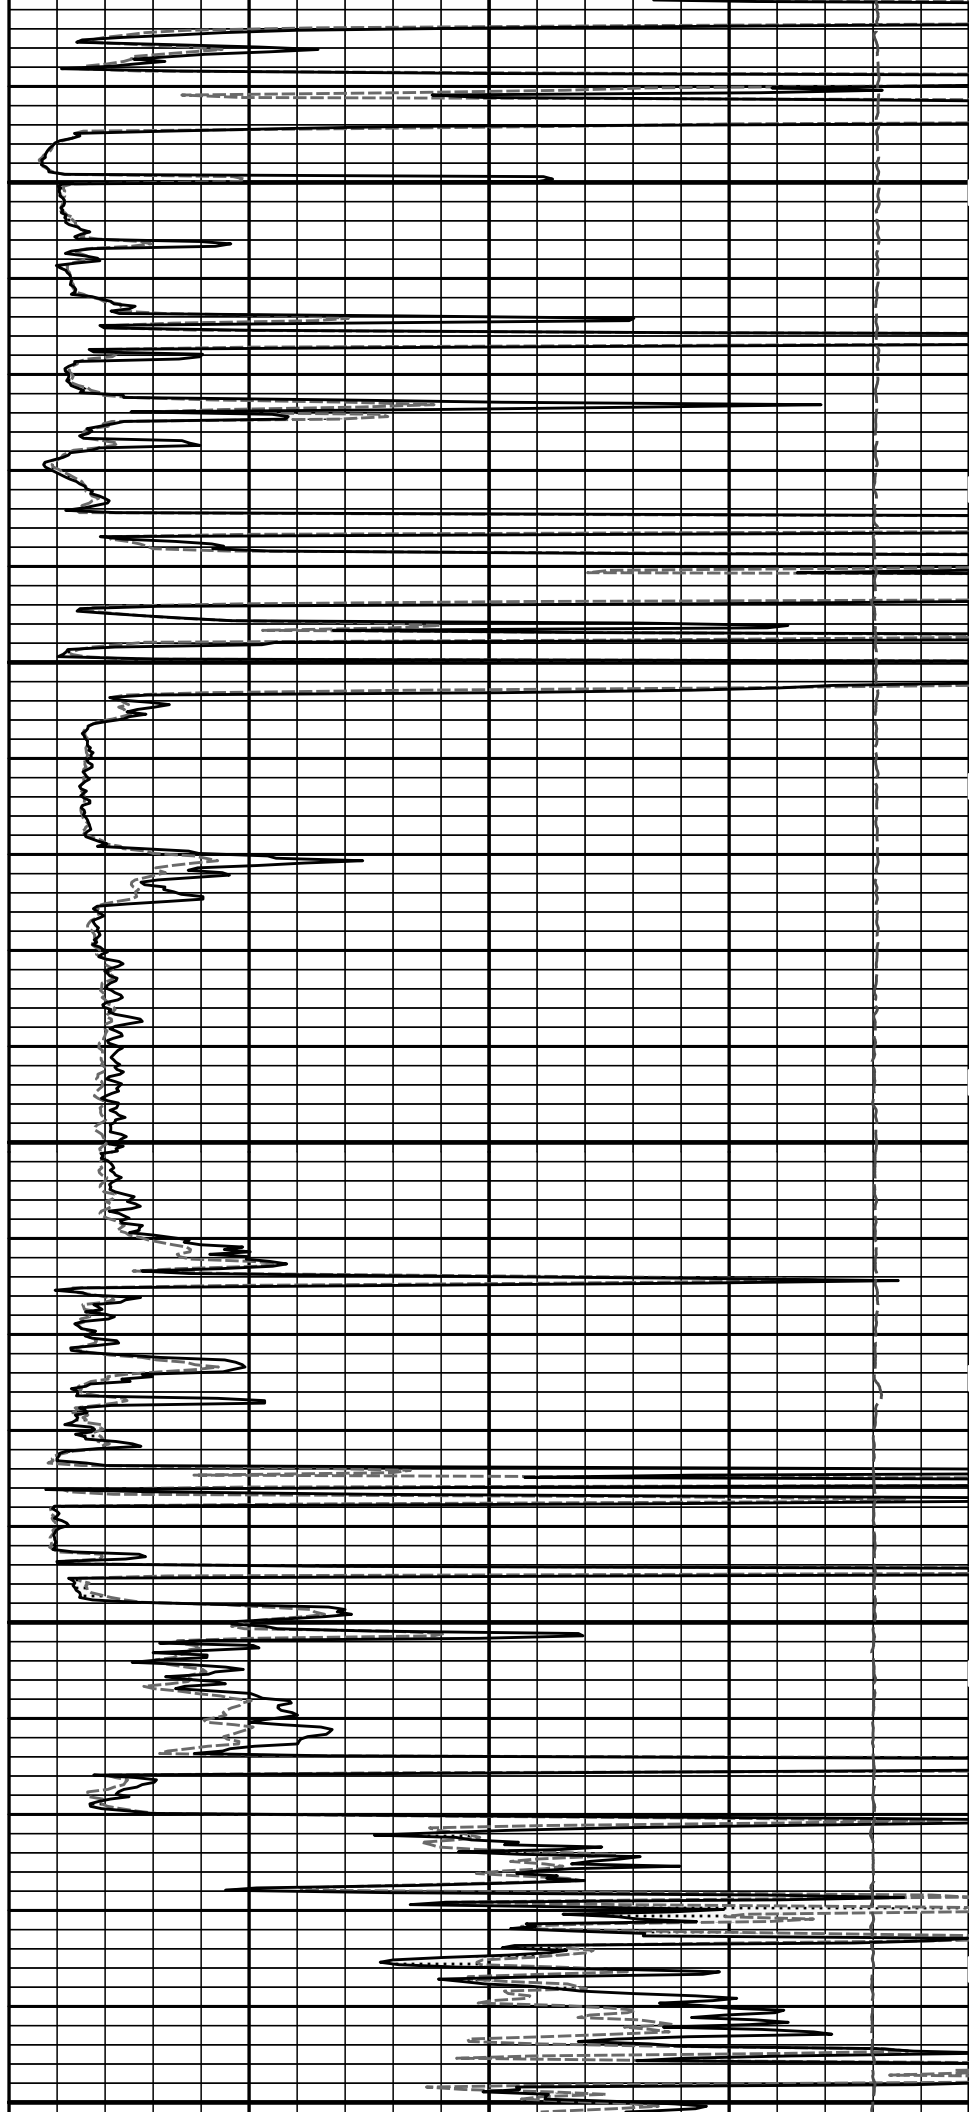


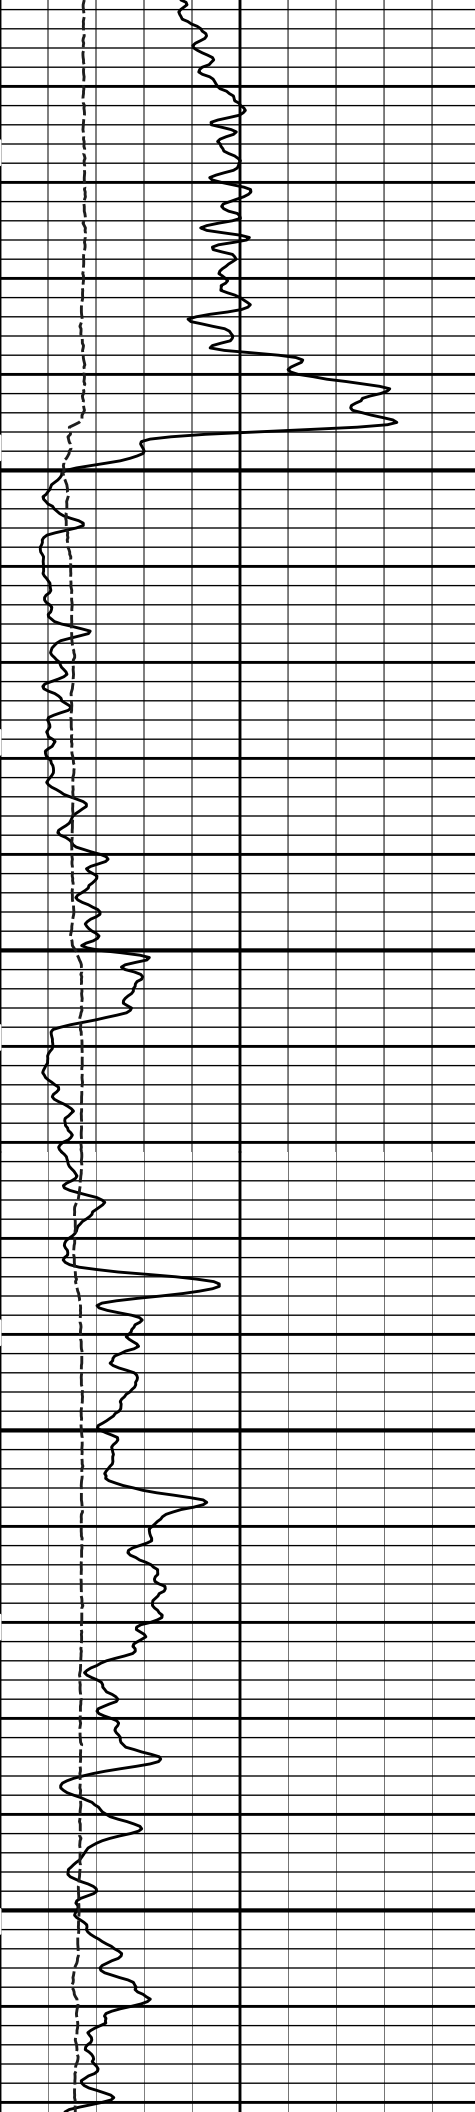

5500

5600

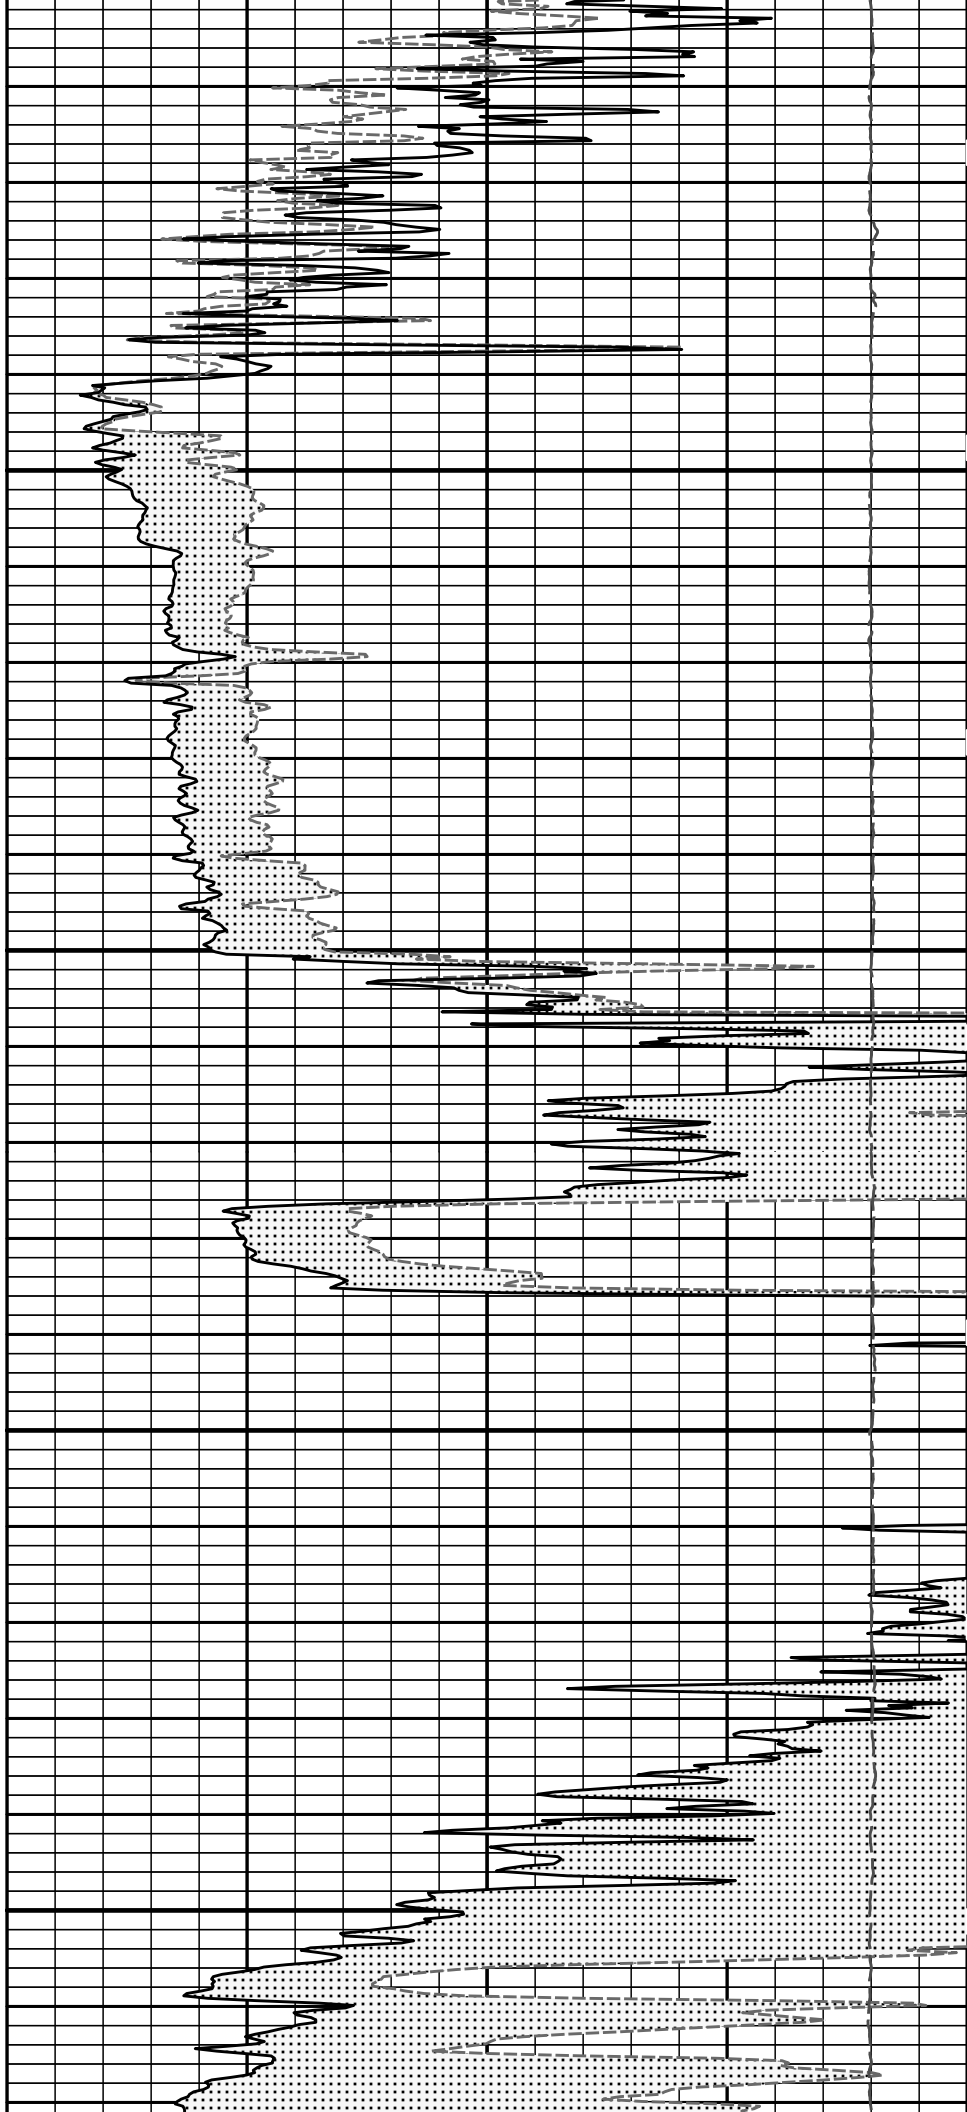

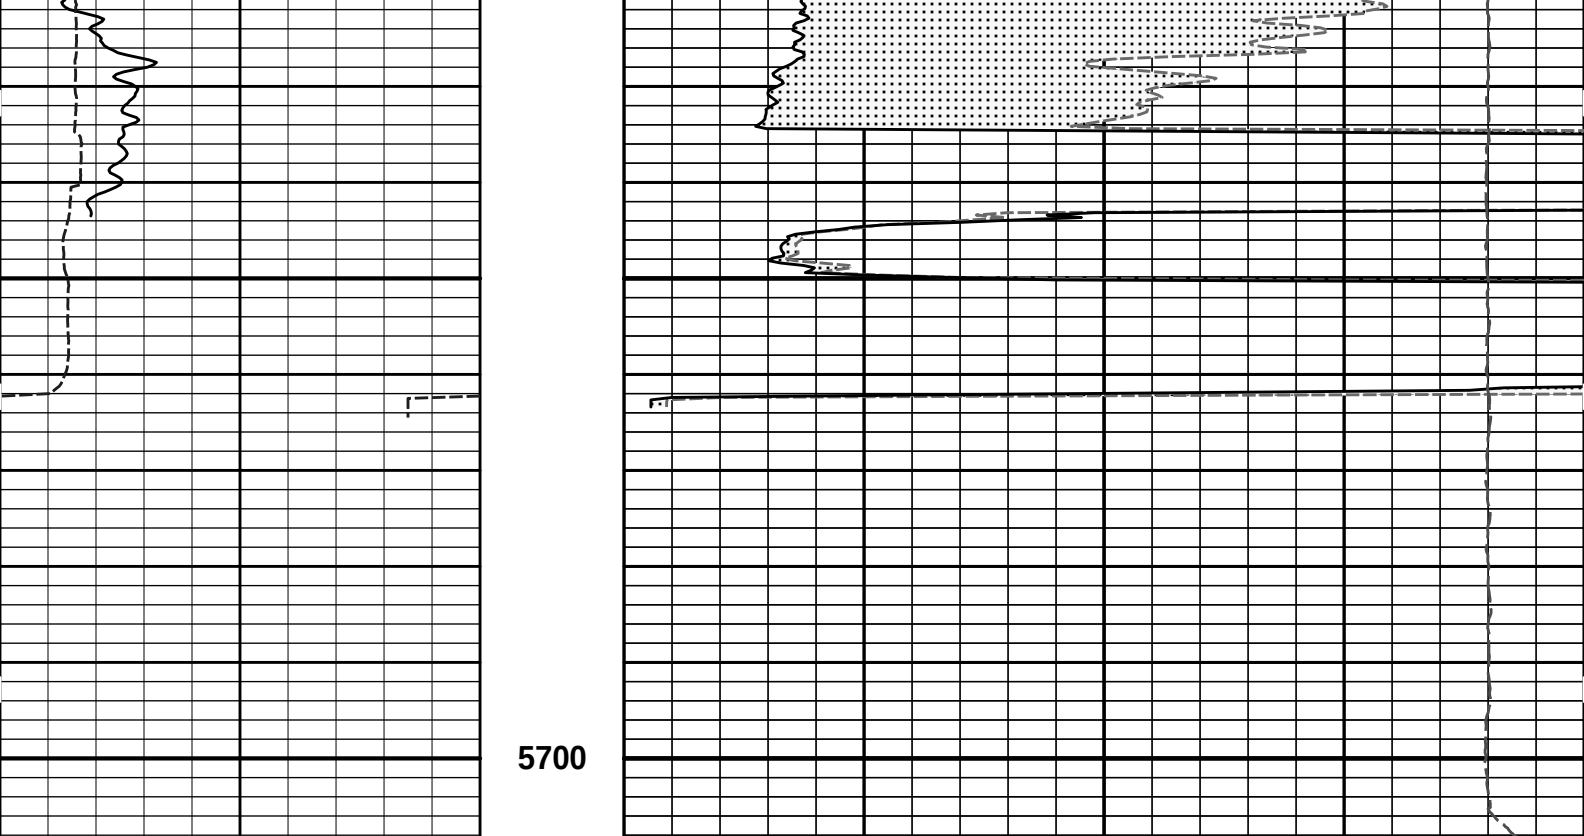



6	Caliper	16	MD		15K	Tension	0
	inches		1 : 240			pounds	
0	Gamma API	150		0	MicrologLateral		20
	api				ohm-metre		
	SHALE			0	MicrologNormal		20
					ohm-metre		
					PERMEABLE		

HALLIBURTON	Plot Time: 10-Sep-13 07:12:24
	Plot Range: 5000 ft to 5708.42 ft
	Data: MOSBARGER_B-2\Well Based\REPEAT\
	Plot File: \\LOCAL-IMOSBARGER_B-2\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\MICRO\Microlog_IQ_5_rep_lib
REPEAT SECTION	

HALLIBURTON
TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
RWCH-12156658 135.00 lbs		Ø 3.625 in →		← Load Cell @ 76.35 ft	6.25 ft	80.04 ft
				← BH Temperature @ 75.79 ft		
SP Sub-11441455 60.00 lbs		Ø 3.625 in →		← SP @ 72.01 ft	3.74 ft	73.79 ft

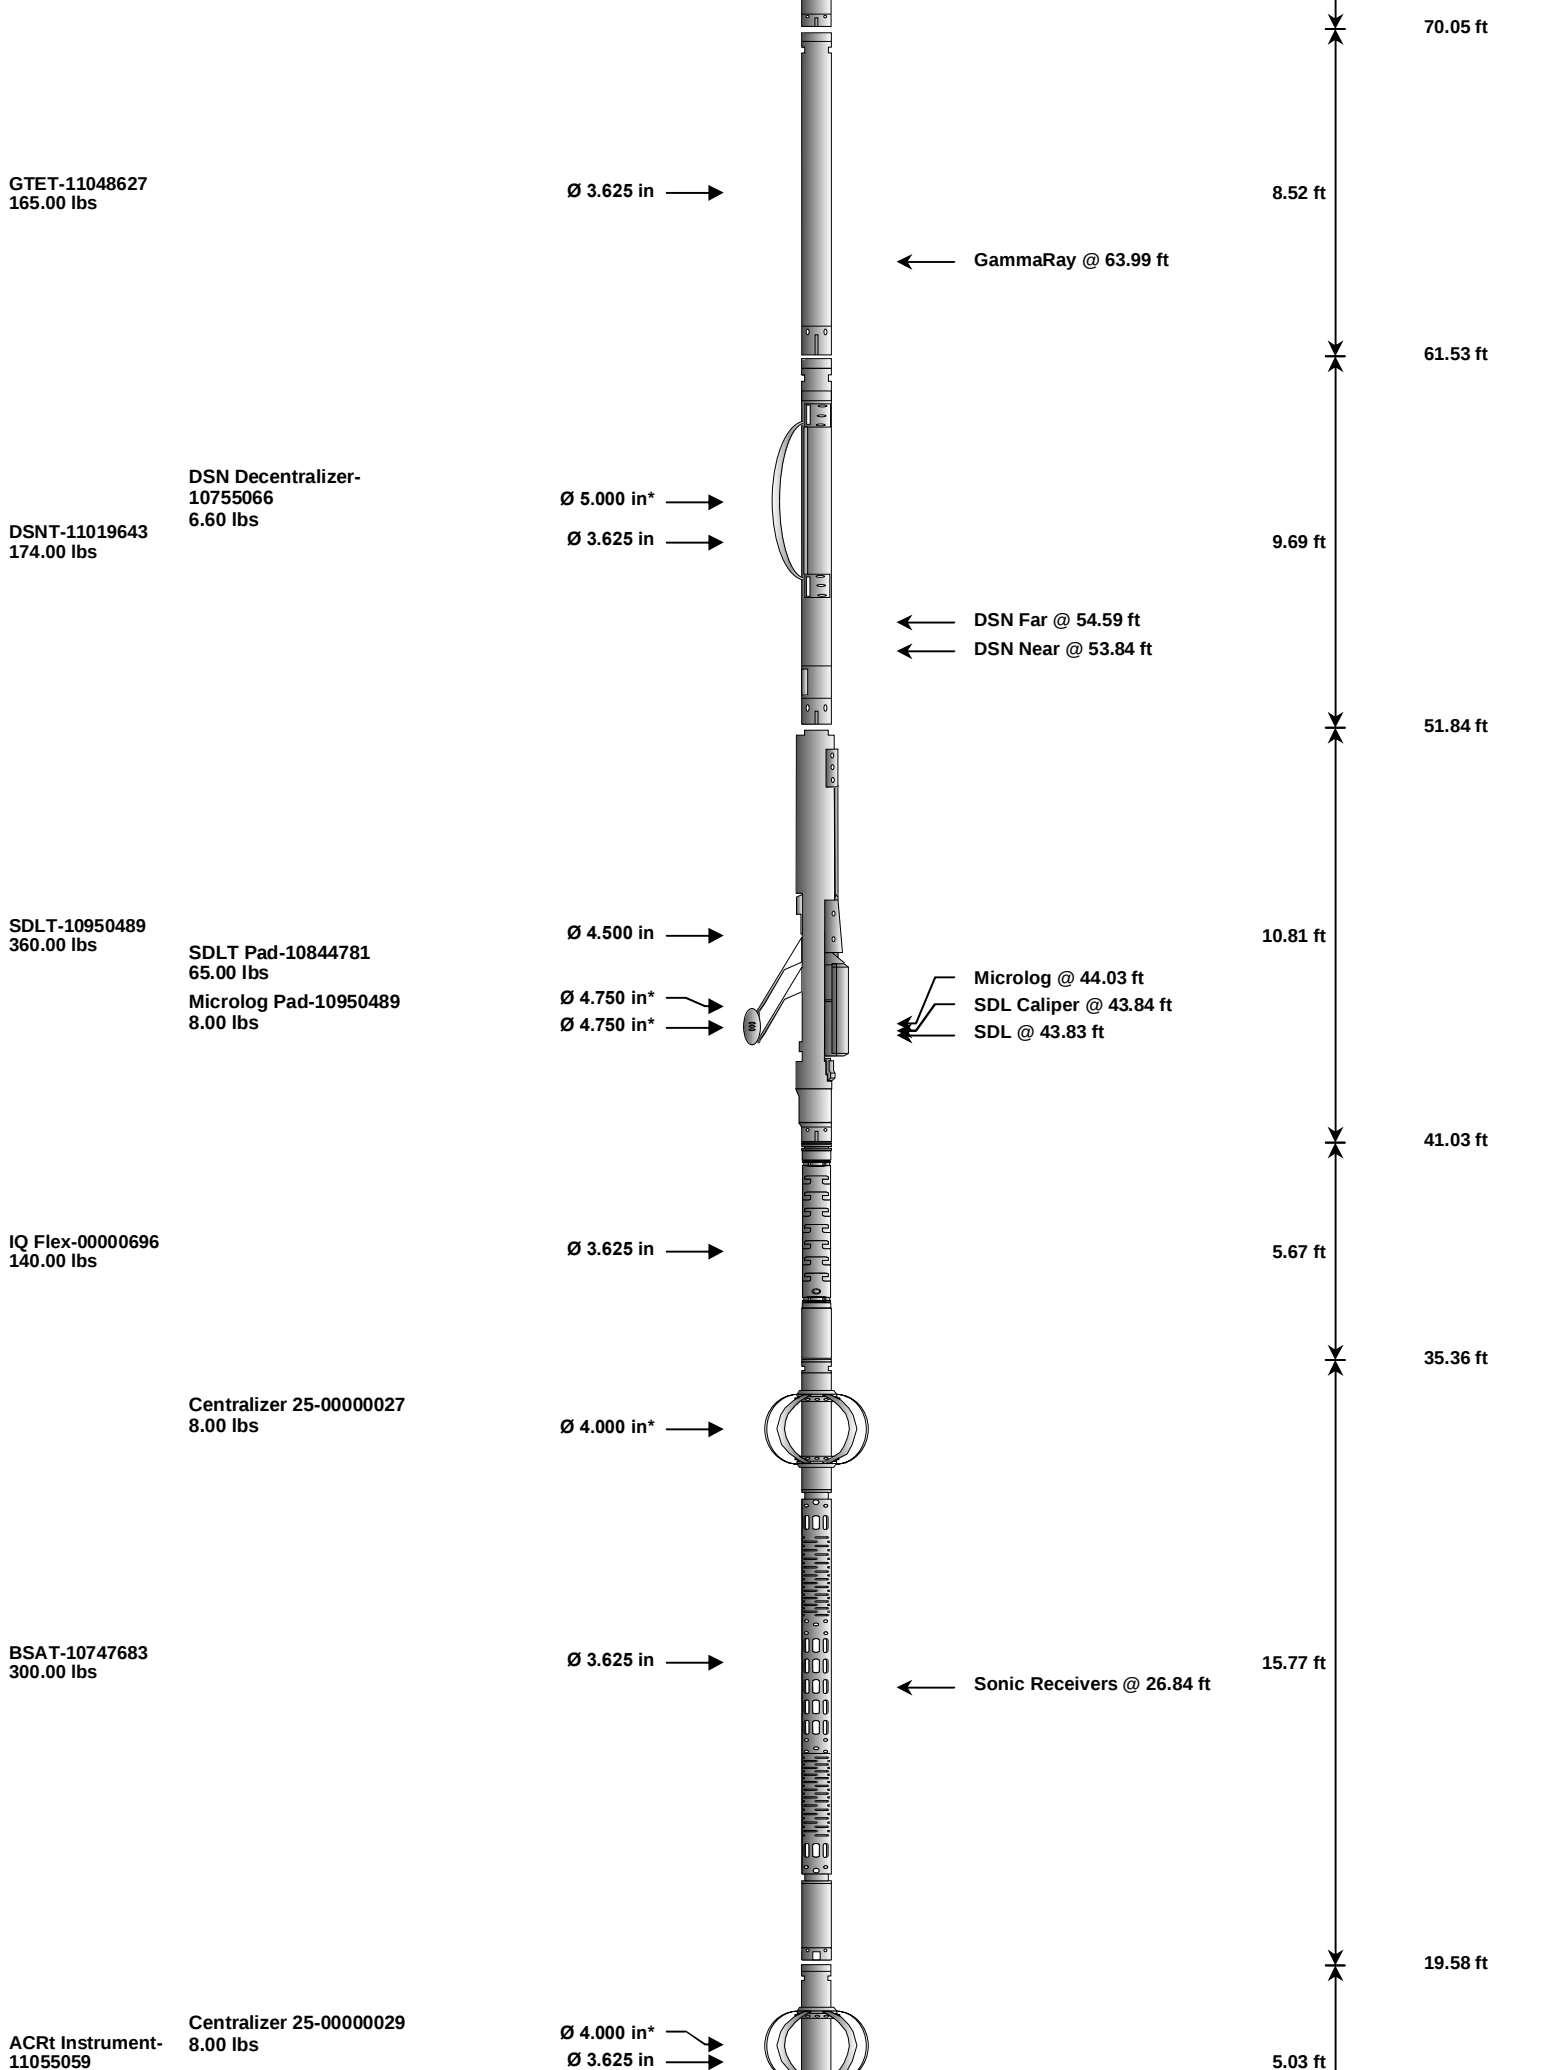

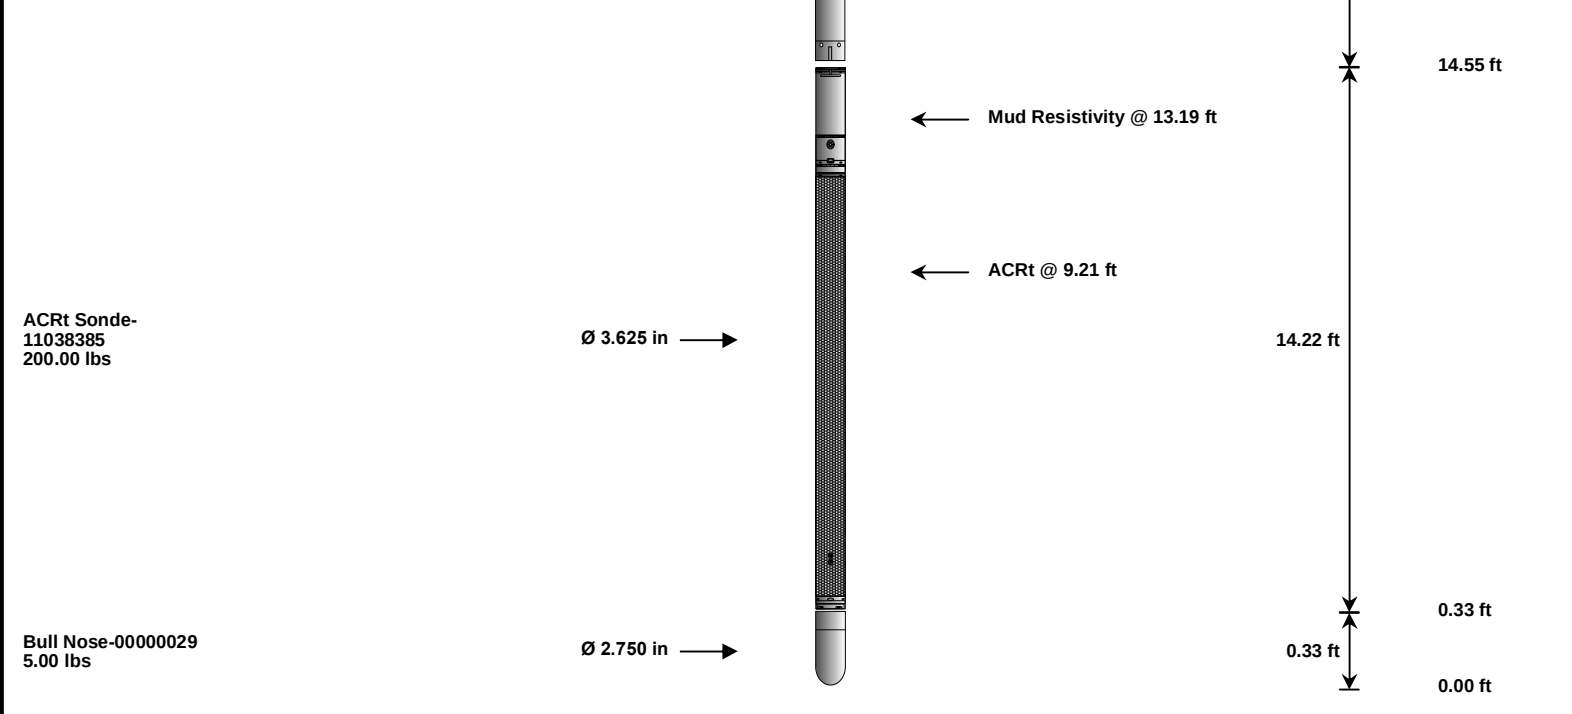

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)	
RWCH	Releasable Wireline Cable Head		12156658	135.00	6.25	73.79	300.00	
SP	SP Sub		11441455	60.00	3.74	70.05	300.00	
GTET	Gamma Telemetry Tool		11048627	165.00	8.52	61.53	60.00	
DSNT	Dual Spaced Neutron		11019643	174.00	9.69	51.84	60.00	
DCNT	DSN Decentralizer		10755066	6.60	5.13	*	55.17	300.00
SDLT	Spectral Density Tool		10950489	360.00	10.81		41.03	60.00
MICP	Microlog Pad		10950489	8.00	1.00	*	43.53	60.00
SDLP	Density Insite Pad		10844781	65.00	2.55	*	43.24	60.00
IQF	IQ Flex tool		00000696	140.00	5.67		35.36	300.00
BSAT	Borehole Sonic Array Tool		10747683	300.00	15.77		19.58	60.00
OBCEN	Centralizer - 25 in. Overbody		00000027	8.00	2.08	*	32.52	300.00
ACRt	Array Compensated True Resistivity Instrument Section		11055059	50.00	5.03		14.55	300.00
OBCEN	Centralizer - 25 in. Overbody		00000029	8.00	2.08	*	16.39	300.00
ACRt	Array Compensated True Resistivity Sonde Section		11038385	200.00	14.22		0.33	300.00
BLNS	Bull Nose		00000029	5.00	0.33		0.00	300.00
Total				1,684.60	80.04			
* Not included in Total Length and Length Accumulation.								
Data: MOSBARGER_B-2i0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE								
Date: 10-Sep-13 04:05:20								

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION			
Tool Name:	GTET - 11048627	Reference Calibration Date:	02-Jul-13 07:19:00
Engineer:	THOMAS HYDE	Calibration Date:	14-Aug-13 07:16:10
Software Version:	WL INSITE R3.8.4 (Build 5)	Calibration Version:	1

Calibrator Source S/N: TB146
Calibrator API Reference:265.00 api
Equivalent Calibrator API Reference:269.6 api

Measurement	Measured	Calibrated	Units
Background	51.1	50.6	api
Background + Calibrator	323.4	320.2	api
Calibrator	272.3	269.6	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION					
Tool Name:	GTET - 11048627			Reference Calibration Date:	14-Aug-13 07:16:10
Engineer:	SHELDON INGERSOLL			Calibration Date:	10-Sep-13 01:11:07
Software Version:	WL INSITE R3.8.4 (Build 5)			Calibration Version:	1
Calibrator Source S/N: TB146					
Calibrator API Reference:265.00 api					
Equivalent Calibrator API Reference:269.6 api					
	Field Verification	Shop	Field	Units	
	Background	50.6	57.0	api	
	Background + Calibrator	320.2	318.0	api	
	Calibrator	269.6	261.0	api	
	Shop	Field	Difference	Tolerance	
	269.6	261.0	8.6	+/- 9.00	

MICRO LOG SHOP CALIBRATION					
Tool Name:	Microlog Pad - 10950489			Reference Calibration Date:	03-Jul-13 09:23:03
Engineer:	THOMAS HYDE			Calibration Date:	14-Aug-13 08:42:20
Software Version:	WL INSITE R3.8.4 (Build 5)			Calibration Version:	1
Host Tool Name:	DSNT - 11019643				

	CALIBRATION COEFFICIENT SUMMARY				
	Measurement	Micro Log Normal		Micro Log Lateral	
		Measured	Calibrated	Measured	Calibrated
					Units
	Tool Zero	-0.06	0.01	0.01	0.01
	Calibration Point #1	-0.08	0.00	-0.00	0.00
	Calibration Point #2	19.99	20.00	19.98	20.00
	Internal Reference	19.94	19.95	19.97	19.99
	Measurement	Micro Log Normal Tool Value		Micro Log Lateral Tool Value	
					Units
	Tool Zero	5.81		3.87	
	Calibration Point #1	2.34		-1.11	
	Calibration Point #2	5362.40		7023.38	
	Internal Reference	5348.82		7020.58	

MICRO LOG FIELD CHECK					
Tool Name:	Microlog Pad - 10950489			Reference Calibration Date:	14-Aug-13 08:42:20
Engineer:	SHELDON INGERSOLL			Calibration Date:	01-Sep-13 06:30:37
Software Version:	WL INSITE R3.8.4 (Build 5)			Calibration Version:	1

	Measurement	Micro Log Normal		Micro Log Lateral	
		Shop	Field	Shop	Field
					Units
	Tool Zero	0.01	-0.01	0.01	0.00
	Internal Reference	19.95	19.93	19.99	19.97
	Summary				
	Signal	Shop	Field	Difference	Tolerance
	Microlog Normal	19.95	19.93	0.02	+/- 0.80
	Microlog Lateral	19.99	19.97	0.02	+/- 0.80

CALIBRATION SUMMARY					
---------------------	--	--	--	--	--

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11048627						
Gamma Ray Calibrator	269.6	261.0	-----	8.6	+/- 9.00	api
Microlog Pad-10950489						
MicroLog Normal	19.95	19.93	-----	0.02	+/-0.80	ohmm
MicroLog Lateral	19.99	19.97	-----	0.02	+/-0.80	ohmm
Data: MOSBARGER_B-2I0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE					Date: 10-Sep-13 04:08:24	

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP-----					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.400	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	5706.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in

DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
BOTTOM_____				
Data: MOSBARGER_B-210001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE			Date: 10-Sep-13 04:07:05	

HALLIBURTON				
INPUTS, DELAYS AND FILTERS TABLE				
Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
RWCH				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	72.01	NO	
SP	Spontaneous Potential	72.01	BLK	1.250
SPR	Raw Spontaneous Potential	72.01	NO	
SPO	Spontaneous Potential Offset	72.01	NO	
GTET				
TPUL	Tension Pull	63.99	NO	
GR	Natural Gamma Ray API	63.99	TRI	1.750

GRU	Unfiltered Natural Gamma Ray API	63.99	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	63.99	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	53.74	NO	
RNDS	Near Detector Telemetry Counts	53.84	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.59	TRI	0.583
DNTT	DSN Tool Temperature	53.84	NO	
DSNS	DSN Tool Status	53.74	NO	
ERND	Near Detector Telemetry Counts EVR	53.84	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.59	BLK	0.000
ENTM	DSN Tool Temperature EVR	53.84	NO	
SDLT				
TPUL	Tension Pull	43.84	NO	
PCAL	Pad Caliper	43.84	TRI	0.250
ACAL	Arm Caliper	43.84	TRI	0.250
BSAT				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3				

F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Current Raw 12K X Receiver	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
SDLT Pad				
TPUL	Tension Pull	43.83	NO	
NAB	Near Above	43.66	BLK	0.920
NHI	Near Cesium High	43.66	BLK	0.920
NLO	Near Cesium Low	43.66	BLK	0.920
NVA	Near Valley	43.66	BLK	0.920
NBA	Near Barite	43.66	BLK	0.920
NDE	Near Density	43.66	BLK	0.920
NPK	Near Peak	43.66	BLK	0.920
NLI	Near Lithology	43.66	BLK	0.920
NBAU	Near Barite Unfiltered	43.66	BLK	0.250
NLIU	Near Lithology Unfiltered	43.66	BLK	0.250
FAB	Far Above	44.01	BLK	0.250
FHI	Far Cesium High	44.01	BLK	0.250
FLO	Far Cesium Low	44.01	BLK	0.250
FVA	Far Valley	44.01	BLK	0.250
FBA	Far Barite	44.01	BLK	0.250
FDE	Far Density	44.01	BLK	0.250
FPK	Far Peak	44.01	BLK	0.250
FLI	Far Lithology	44.01	BLK	0.250
PTMP	Pad Temperature	43.84	BLK	0.920
NHV	Near Detector High Voltage	43.24	NO	
FHV	Far Detector High Voltage	43.24	NO	
ITMP	Instrument Temperature	43.24	NO	
DDHV	Detector High Voltage	43.24	NO	
Microlog Pad				
TPUL	Tension Pull	44.03	NO	

MINV	Microlog Lateral	44.03	BLK	0.750
MNOR	Microlog Normal	44.03	BLK	0.750
Data: MOSBARGER_B-2\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BN\IDLE			Date: 10-Sep-13 04:06:02	
COMPANY	OXY USA INC.			
WELL	MOSBARGER B-2			
FIELD	HUGOTON GAS AREA			
COUNTY	HASKELL	STATE	KANSAS	
HALLIBURTON		MICROLOG		