

DISTRICT CONSERVATION AGENT'S REPORT

15-029-00006-0000

Handwritten signature/initials

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NW-NW-SW

SEC. 18 TWP. 7 RGE. 3W

Dry Hole *** Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Hall

Operator Shawver - Armour, Inc. Address 817 Central Bldg. Wichita, Kansas.

Field _____ County Cloud

Total Depth 3898' Feet.

(Describe briefly the manner in which the well was plugged)

Plugging Contractor.- Shawver - Armour, Inc.

Plugging Contractor's License No.- _____


Address.- 817 Central Bldg. Wichita, Kansas.

Surface pipe - 8 5/8" @ 318' c.w.c. 250 sx.

Filled hole with heavy mud to 310' from top, 1/2 sx. hulls, H.O.W.C.O.

plug and 20 sx. cem. through drill pipe. Mud to 40' from top, 1/2 sx.

hulls H.O.W.C.O. plug and 10 sx. cem. to base of cellar.

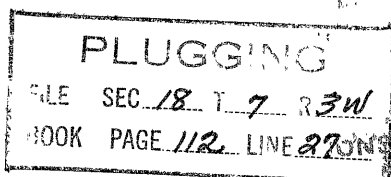

Handwritten signature: Milton Galyard
District Conservation Agent

CONSERVATION DIVISION Date 10-30-56

Wichita, Kansas
11-2-56