

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy

RECEIVED
KANSAS CORPORATION COMMISSION

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

OCT 05 2005

CONSERVATION DIVISION
WICHITA, KS

API # 15 - 033-21251 - 00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date _____

Well Operator: Pickrell Drilling Company, Inc. KCC License #: 5123 6/04

Address: 100 S. Main, Suite 505 (Owner / Company Name) City: Wichita (Operator's)

State: Kansas Zip Code: 67202 Contact Phone: (316) 262 - 8427

Lease: Hoffman Trust Well #: 2 Sec. 7 Twp. 34 S. R. 18 East West

120' - W of - C^{E1} E2 W2 SW Spot Location / QQQQ County: Comanche

1320 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

1200 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: 20" Set at: 80 Cemented with: ??? Sacks _____

Surface Casing Size: None Set at: _____ Cemented with: _____ Sacks _____

Production Casing Size: None Set at: _____ Cemented with: _____ Sacks _____

List (ALL) Perforations and Bridgeplug Sets: None

Elevation: 1910 (G.L. / K.B.) T.D.: 400 (?) P.B.T.D.: _____ Anhydrite Depth: _____
Abandoned at shallow depth (Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): See attached "Procedure" page

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? See cover letter

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Russell Myers

Phone: (620) 793 - 2316

Address: 2485 S. State Rd. 14 City / State: Kingman, Kansas

Plugging Contractor: Acid Service, LLC KCC License #: 32453 4/04

Address: P.O. Box 8613, Pratt, KS 67124-8613 Phone: (620) 672 - 1201 (Contractor's)

Proposed Date and Hour of Plugging (if known?): October 10, 2005

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 10-05-05 Authorized Operator / Agent: Jack Gurely (Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

OCT 05 2005

CONSERVATION DIVISION
WICHITA, KS

Procedure to P&A Hoffman Trust 2

- 1) Cut hole in top of current plate welded on 20" conductor. Weld 5 1/2" collar to plate looking up and install 5 1/2" x 2 3/8" head.
- 2) Rig up pulling unit. Run 4 1/2" or 4 3/4" bit on 2' EUE tubing. Attempt to run tubing to 200 ft. or just below.

If run into solid material in hole and cannot get tubing to go, rig up power swivel and wash on down to 200 ft. plus.

- 3) **Using 60/40 poz, 6% gel and 3% cc, spot 35 sx. cement plug.** Pull up above top of plug (theoretical 65 ft) and wait for cement to set up.
- 4) Lower tubing to check for top of plug. If find top of plug in hole, pull up and spot additional plugs as directed by K.C.C. representative. If do not find top of plug, repeat Step (3), possibly with smaller amount of cement and/or other additives.
- 5) Continue with process ("playing by ear") until get well plugged to surface with plugs spotted as directed by K.C.C. representative.

NOTE: There is, of course, no assurance that this will work as hoped for in the above scenario. If not, it will just have to be "played by ear" and changes made as we go along.

BAKER SERVICE TOOLS - TALLY PAD

New Completion Workover


Oil Company _____ Well No. 2 Field Buttermilk NE Lease Hoffman Trust
Company Man _____ Date Drilled Aug. / 2001 County Comanche State Kansas

Loc.: 1320' FSL & 1200' FWL

Sec 7-345-18W

Elev.: 1910GL

API 15-033-21251

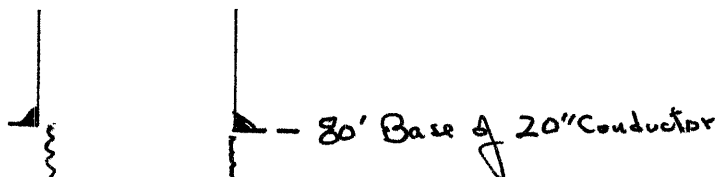

← Presumed to be 12 1/8" hole

NOTE -
 Operator dumped 9 1/2 cubic yards of ready-mix cement down conductor pipe, then welded a cover over it. It is not known if the cement is still in the hole or was lost to the LC zone.

— Apprx 400'. Lost circulation, skidded rig 50ft. Sand 50ft. W.
Drilled Hoffman Trust 2-A Twin (API 15-033-21259)

REMARKS: _____

RECEIVED
 KANSAS CORPORATION COMMISSION
 OCT 05 2005
 CONSERVATION DIVISION
 WICHITA, KS


RECEIVED
KANSAS CORPORATION COMMISSION

OCT 05 2005

CONSERVATION DIVISION
WICHITA, KS

THEORETICAL FILLUP

60/40 Poz, 6%Gel, in 12 1/4" Hole

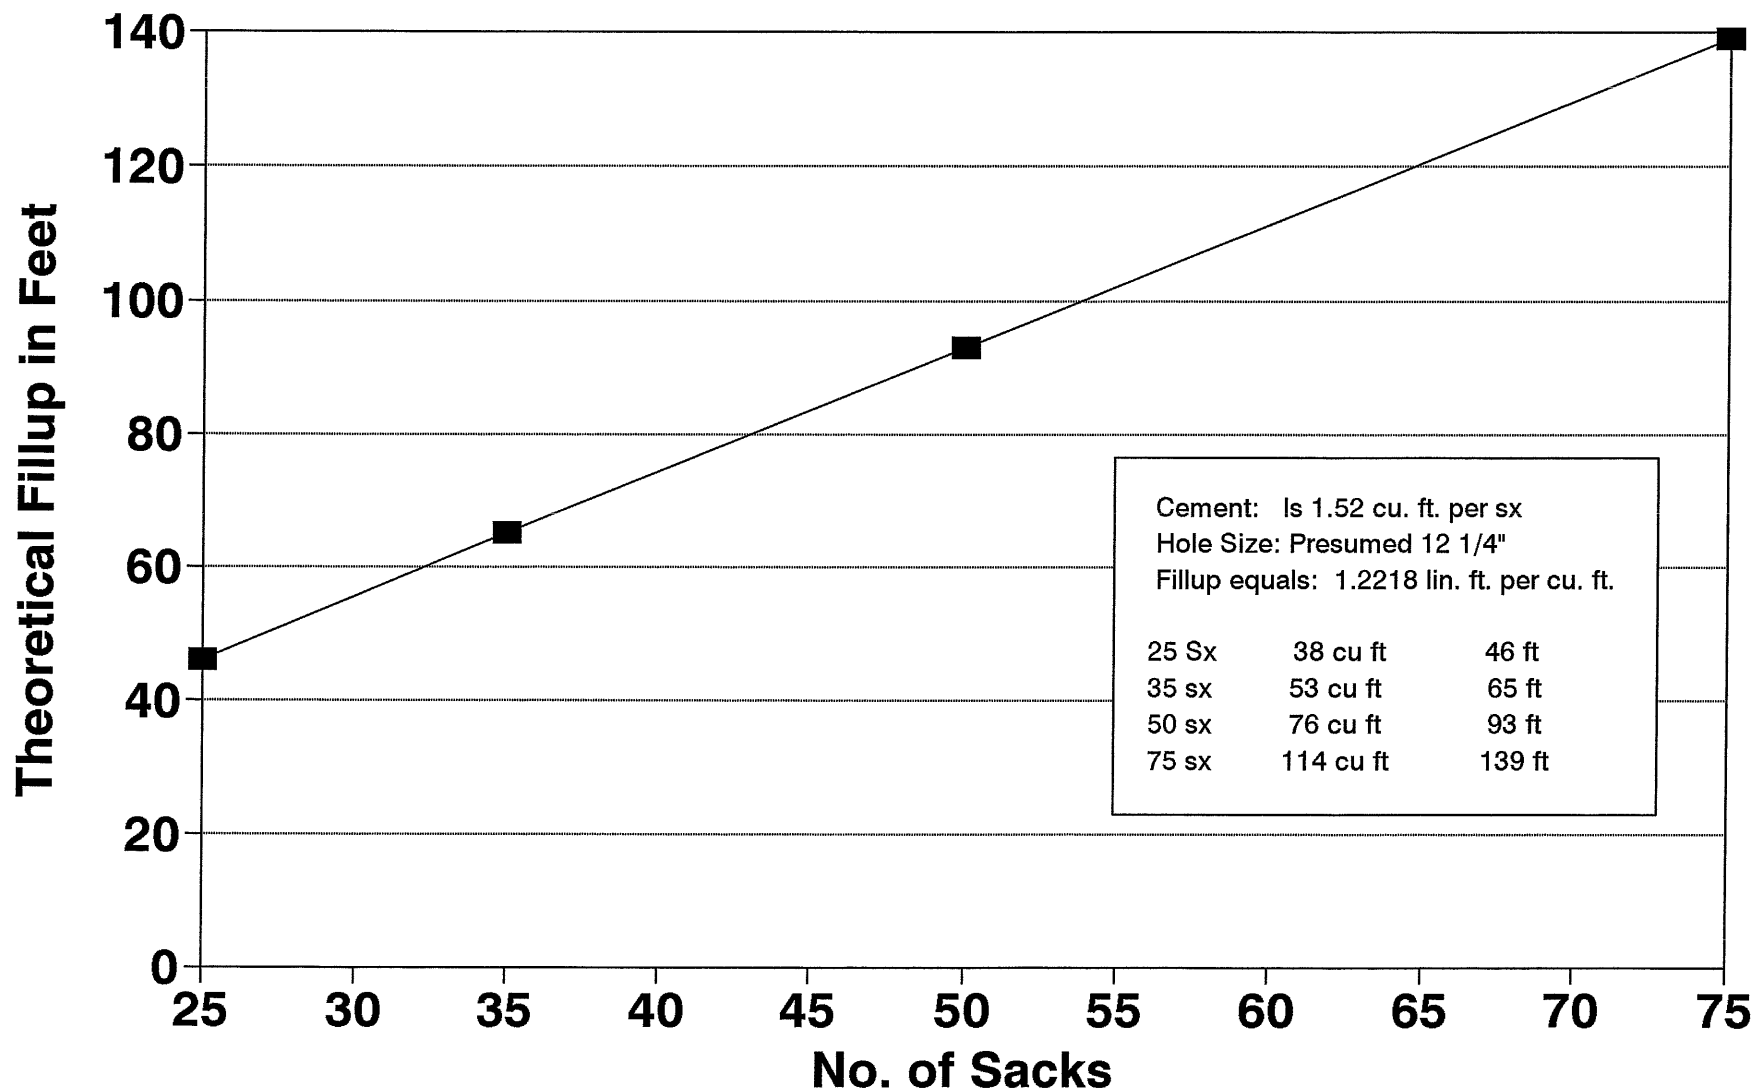

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Pickrell Drilling Company, Inc.
100 South Main - Suite 505
Wichita, KS 67202-3738

October 06, 2005

Re: HOFFMAN TRUST #2
API 15-033-21251-00-00
E2E2W2SW 7-34S-18W, 1320 FSL 1200 FWL
COMANCHE COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.


Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely



David P. Williams
Production Supervisor