## RECEIVED 0CT 1 2 2005 KCC WICHITA


## Kansas Corporation Commission Oil & Gas Conservation Division

## **WELL PLUGGING APPLICATION**

Please TYPE Form and File ONE Copy

Form CP-1 September 2003 This Form must be Typed Form must be Signed All blanks must be Filled

API # 15 - 179-20,763 -00-55	(Identifier Number of this well,	. This must be listed for wells drilled since 1967; if no API # was	s issued,
indicate original spud or completion date			l,
Well Operator: PETROLEUM PROPERTY SERVICES, INC.		KCC License #: 31142	
Address: 155 N. MARKET, SUITE 1010		City:_WICHITA	
State: KANSAS		Contact Phone: (316 ) 262 - 1378	
Lease: TILTON	Well #:_16-06	Sec. 16 Twp. 10 S. R. 26 East	✓ West
APPR - SE - SE - NW s	pot Location / QQQQ Cou	nty:_SHERIDAN	
2290 Feet (in exact footage) From		rest outside section corner) Line of Section (Not Lease Line)	
2280 Feet (in exact footage) From [		rest outside section corner) Line of Section (Not Lease Line)	
Check One: ✓ Oil Well Gas Well	D&A Cathodic	Water Supply Well	
SWD Docket #	ENHR Docket #	Other:	
Conductor Casing Size:	Set at:	Cemented with:	Sacks
Surface Casing Size: 8-5/8"	Set at: 303	Cemented with: 200	Sacks
Production Casing Size: 4-1/2	Set at: <u>4450</u>	Cemented with: 265	Sacks
List (ALL) Perforations and Bridgeplug Sets:	GE COLLAR @ 2232', CEN	MENTED TO SURFACE WITH 475 SACKS.	
PERFS (LANSING): 3856-59', 3843-46',	3896-98', & 4017-20'. PBT	Э.	•
Elevation: 2570 ( G.L. / V.K.B.) T.D.: 4450	)' PBTD: 4336' A	nhydrite Depth: 2195-2230'	
Condition of Well: Good Poor	Casing Leak	(Stone Corral Formation) unk in Hole	
Proposed Method of Plugging (attach a separate page	if additional space is needed): PU	MP 210 SACKS 60/40 POZMIX WITH 500# HULLS	s
DOWN THE CASING. PUMP 25 SACKS	60/40 POZMIX DOWN TH	E BRADENHEAD (NO HULLS). ALL CEMENT W	ITH
10% GEL.			
Is Well Log attached to this application as required?	✓ Yes No Is ACO-1 file	ed? ✓ Yes No	
If not explain why?	L		
Plugging of this Well will be done in accordance w	vith K.S.A. 55-101 <u>et. seg</u> . and th	e Rules and Regulations of the State Corporation Commission	on.
List Name of Company Representative authorized to			
RONALD S. SCHRAEDER		Phone: (316 ) 262 - 1378	
Address: 155 N. MARKET, SUITE 1010		City / State: WICHITA, KS 67202	
Plugging Contractor: ALLIED CEMENTING		KCC License #: 99994	
(Cor.	npany Name)	Phone: (Contractor's)	
	WHEN APPROVED		
Payment of the Plugging Fee (K.A.R. 82-3-118) will	be quaranteed by Operator or /	agent /	
Date: 10/10/05 Authorized Operator /	1 )0110	cel / Charle	
	<i>V</i>	(Signature) et - Room 2078, Wichita, Kansas 67202	
Mail to. NCC - Colls	ervanun pivisiuli, 130 3. Marke	noom 2070, Wichita, Nansas - b/202	

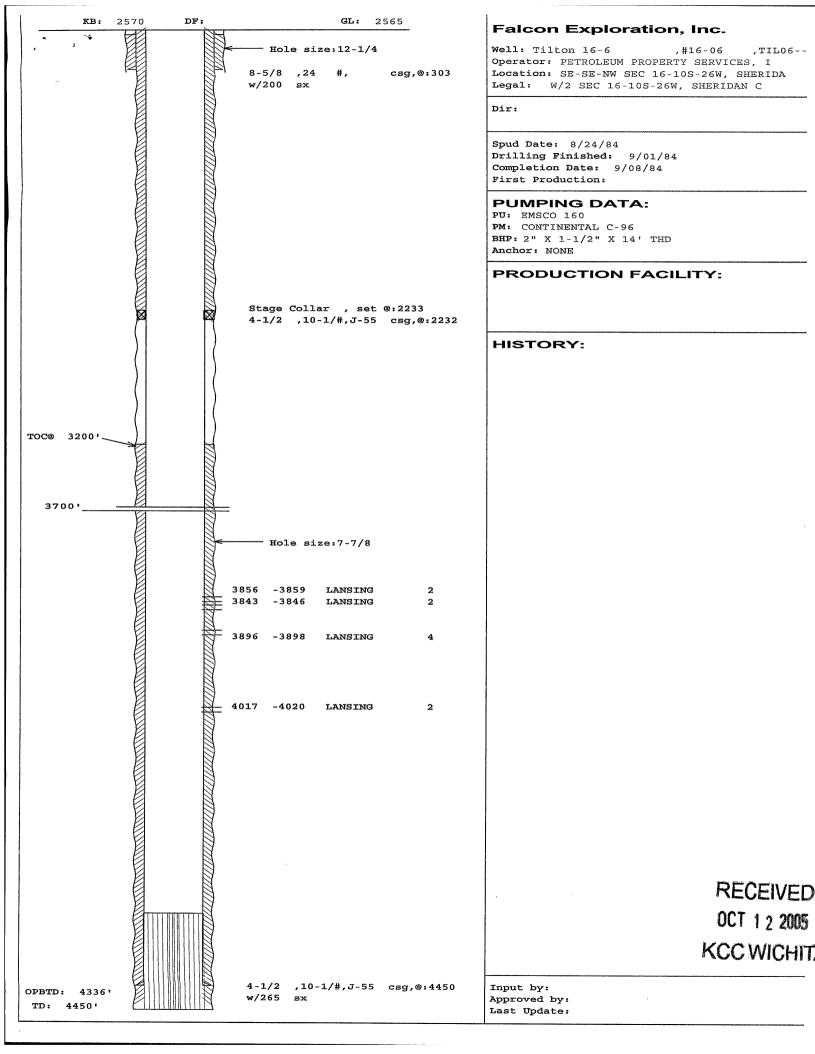



CORPORATION COMMISSION

Kathleen Sebelius, Governor

Brian J. Moline, Chair

Robert E. Krehbiel, Commissioner

Michael C. Moffet, Commissioner

## NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Petroleum Property Services, Inc. 155 N. Market, Ste 1010 Wichita, KS 67202-1824

October 17, 2005

Re: TILTON #16-6

API 15-179-20763-00-00

NWSESENW 16-10S-26W, 2290 FNL 2280 FWL

SHERIDAN COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #4 2301 E. 13th

Hays, KS 67601 (785) 625-0550

David P. Williams

Production Supervisor