

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-21222-00-00
Spot: NWSWNE Sec/Twnshp/Rge: 31-32S-37W
3906 feet from S Section Line, 2121 feet from E Section Line
Lease Name: POTTORF Well #: 1-31
County: STEVENS Total Vertical Depth: 6400 feet

Operator License No.: 30481
Op Name: APOLLO ENERGIES, INC.
Address: 10378 N 281 HWY
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5600		WITH 2 SX CMT
MSCC		3152		TOC @ 2100'
PROD	5.5	6400	1700	WITH 825 SX CMT
SURF	8.625	1753		WITH 778 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/05/2005 10:30 AM

Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.

Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: CIBP @ 5600' WITH 2 SX CMT ON TOP. PLUG AT 1700' WITH 50 SX CMT. PLUG AT 650' WITH 30 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 10/05/2005 5:00 PM

KCC Agent: JIM HOLLAND

Actual Plugging Report:

1ST PLUG SET CIBP @ 5600' WITH 2 SX CMT ON TOP WITH BAILER. SHOOT CASING OFF AT 1711', PULL TO 1700'. 2ND PLUG LOAD HOLE & PUMP 50 SX CMT AT 1700'. 3RD PLUG PUMP 30 SX CMT AT 650'. 4TH PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
6038	6050		
6024	6033		
5667	5678		

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

INVOICED
DATE 10-20-05
INV. NO. 200060649

District: 01

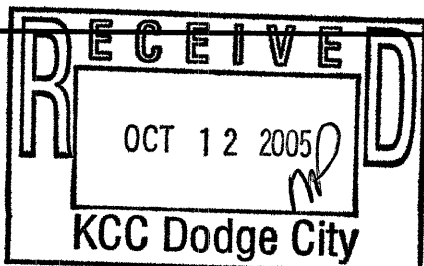

Signed

Jim Holland PART II
(TECHNICIAN)

RECEIVED
OCT 20 2005
KCC WICHITA

Form CP-4/3