

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-20898-00-00
Spot: NWNE Sec/Twnshp/Rge: 34-29S-34W
4620 feet from S Section Line, 1980 feet from E Section Line
Lease Name: MLP BRUNO Well #: 1-34
County: HASKELL Total Vertical Depth: 5588 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, INC.
Address: PO BOX 18496 6200 N WESTERN AVE.
OKLAHOMA CITY, OK 73154

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4490		
PC		2930		WITH 700 SX CMT
PROD	4.5	5587	0	WITH 325 SX CMT
SURF	8.625	1810		WITH 700 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/06/2005 9:00 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: PUMP 300# HULLS WITH 20 SX CMT. PUMP MUD SPACER TO 1830'. PUMP CMT TO SURFACE INSIDE 4 1/2". PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/06/2005 11:00 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 300# HULLS WITH 20 SX CMT DOWN 4 1/2" CASING. PUMP 30 BBL MUD SPACER TO 1830'. PUMP 105 SX CMT INSIDE 4 1/2" TO SURFACE. PRESSURED TO 500# & SHUT IN. RIG UP TO BACKSIDE. PRESSURED IMMEDIATELY. BACKSIDE FULL.

Perfs:

Top	Bot	Thru	Comments
5391	5396		
5372	5378		
5233	5236		
4606	4610		
4540	4544		
4104	4108		


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED

DATE 10-20-05
WV. NO 2006060650

District: 01

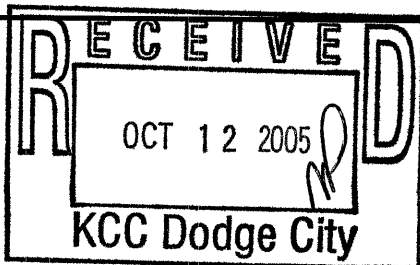

Signed

Jim Holland PART II
(TECHNICIAN)

RECEIVED
OCT 20 2005
KCC WICHITA

Form CP-2/3