



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Prolific Resources, LLC.			
15-009-25,403-00-00		Well Panning "B" No. 2			
		Field Chase-Silica			
		County Barton		State Kansas	
		Location 520' FSL & 439' FEL			
Sec: 35		Twp: 19 S		Rge: 11 W	
Permanent Datum		Ground Level		Elevation 1766	
Log Measured From		Kelly Bushing		5 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 1771 D.F. 1766 G.L. 1766	
Date		4/19/2010			
Run Number		Two			
Depth Driller		3400			
Depth Logger		3401			
Bottom Logged Interval		3400			
Top Log Interval		2600			
Casing Driller		8.625 @ 307			
Casing Logger		303			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		8.000			
Density / Viscosity		9.4 46			
pH / Fluid Loss		9.0 9.6			
Source of Sample		Flowline			
Rm @ Meas. Temp		.25 @ 65			
Rmf @ Meas. Temp		.19 @ 65			
Rmc @ Meas. Temp		.34 @ 65			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.15 @ 112			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		112			
Equipment Number		007			
Location		Hays			
Recorded By		K. Bange			
Witnessed By		Jeff Burk			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858

Ellinwood, 3 E to SW 150th, 1/4 N, W into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

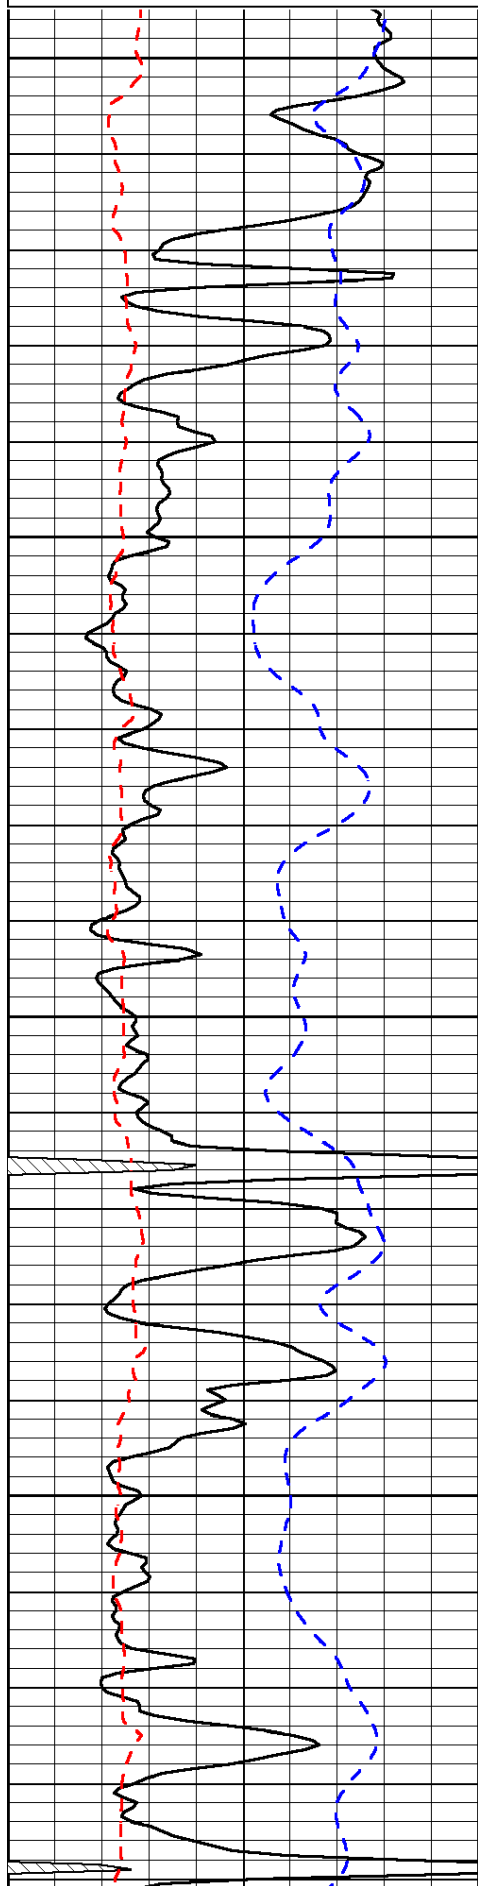


2600
2650
2700
2750

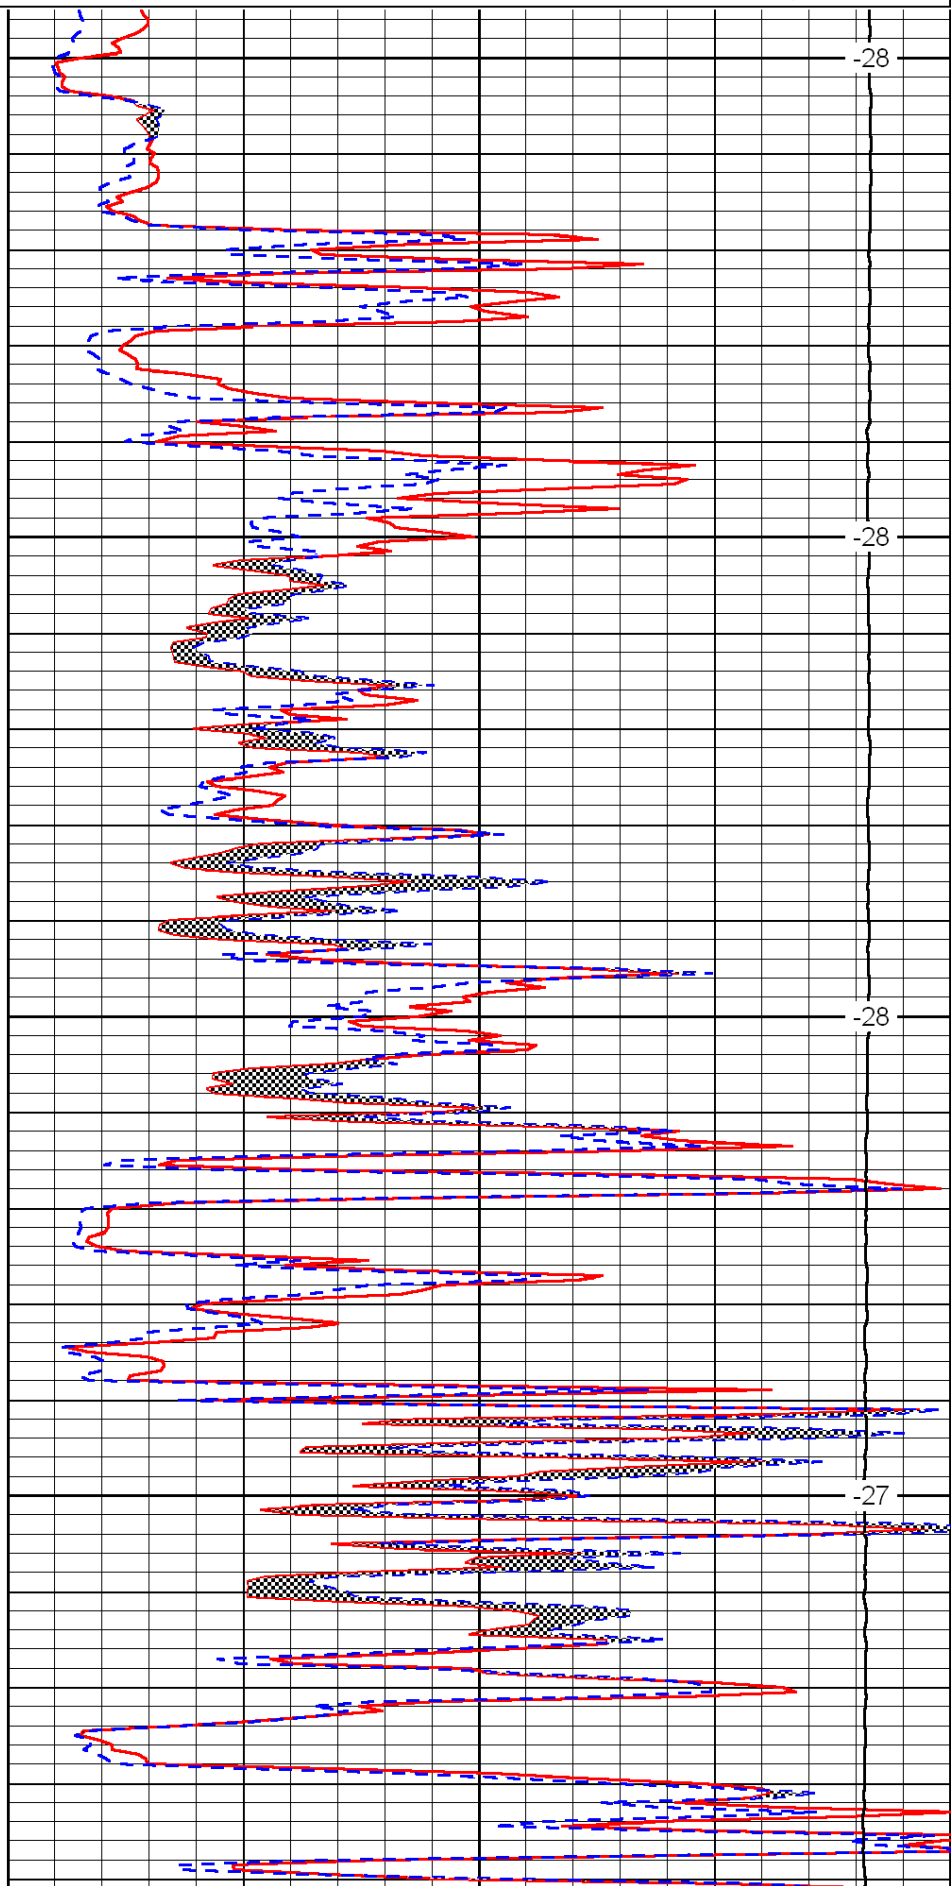

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD

-28
-28
-28
-27

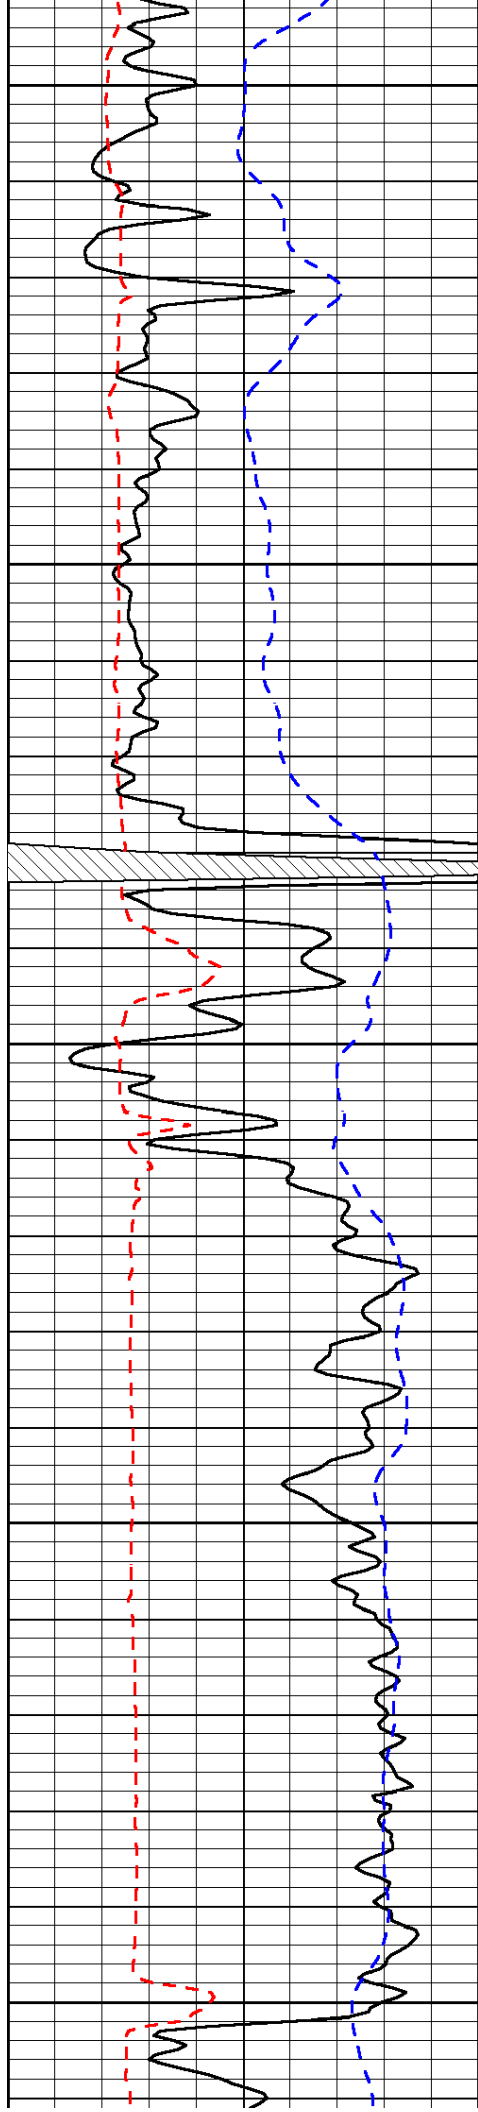


2800

2850

2900

2950

3000

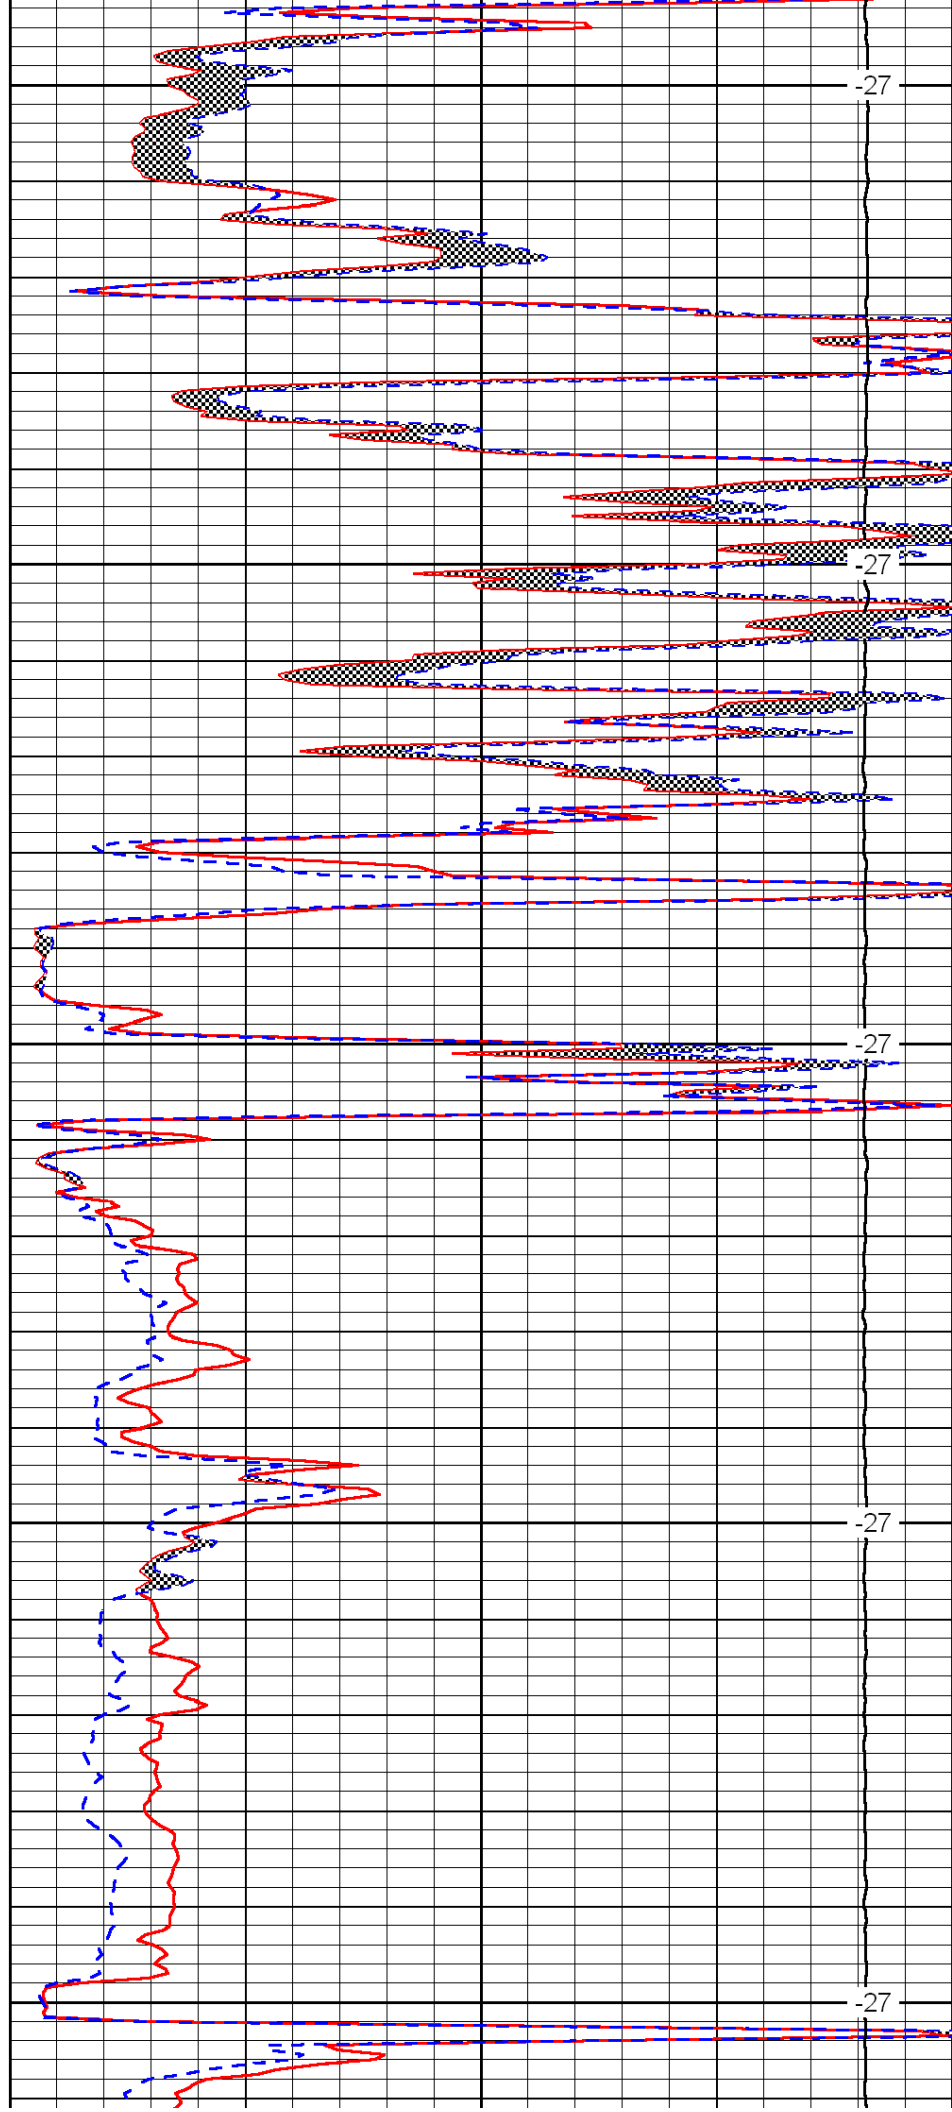


-27

-27

-27

-27

-27

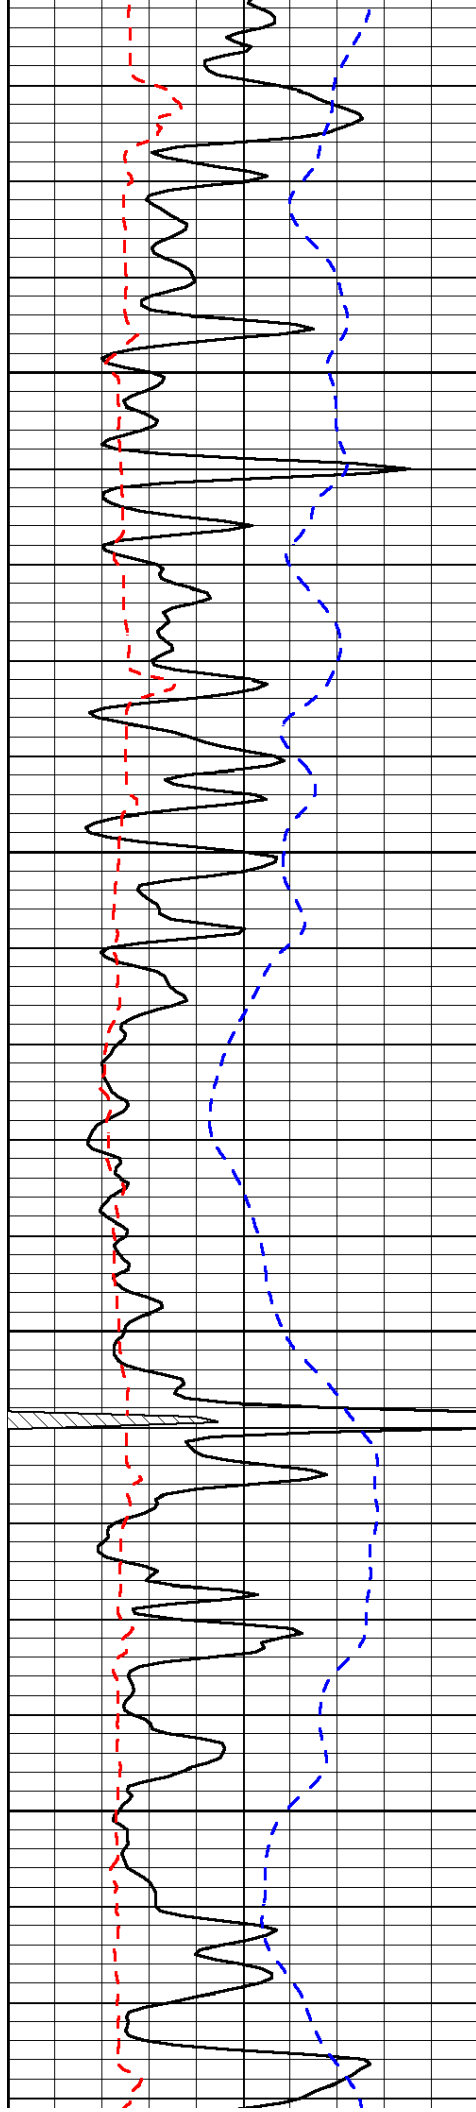

3050

3100

3150

3200

