

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-21596-00-00
Spot: NENWNW Sec/Twnshp/Rge: 35-15S-29W
330 feet from N Section Line, 990 feet from W Section Line
Lease Name: KS5B ROBERT DOWELL Well #: 35-1
County: GOVE Total Vertical Depth: 4378 feet

Operator License No.: 33396

Op Name: FAIR OIL, LTD.

Address: 225 S. COLLEGE P. O. BOX 689
TYLER, TX 75710

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	333		

142²⁹

Well Type: DH

UIC Docket No:

Date/Time to Plug: 10/22/2005 1:00 PM

Plug Co. License No.: 5822

Plug Co. Name: VAL ENERGY, INC.

Proposal Rcvd. from: DALE SMITH

Company: VAL ENERGY, INC.

Phone: (620) 271-2307

Proposed
Plugging
Method:

Ordered out 200 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: JAY PFEIFER

WitnessType: NONE

Date/Time Plugging Completed: 10/22/2005 6:00 PM

KCC Agent: JAY PFEIFER

Actual Plugging Report:

Perfs:


1st. Plug at 2015' w/25 sxs.
2nd. Plug at 1000' w/100 sxs.
3rd. Plug at 350' w/40 sxs.
4th. Plug at 40' w/10 sxs. 8 5/8" wiper plug.
Rathole with 15 sxs.
Mousehole with 10 sxs.

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

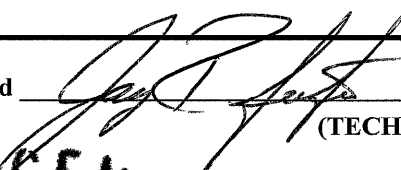

(TECHNICIAN)

INVOICED

DATE 10-27-05

INV. NO. 2006060678

RECEIVED

OCT 27 2005

KCC WICHITA

Form CP-2/3

OCT 25 2005