

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-047-21456-00-00
Spot: SESWSE Sec/Twnshp/Rge: 28-25S-20W
330 feet from S Section Line, 1650 feet from E Section Line
Lease Name: BIAGGIA Well #: 1-28
County: EDWARDS Total Vertical Depth: 4810 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 8080 E. CENTRAL, SUITE 300
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4805	2840	WITH 150 SX CMT
SURF	8.625	323		WITH 200 SX CMT

33
\$156

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/19/2005 11:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MAES Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND OFF TO 4660' & 4 SX CMT. PLUG AT 1300' WITH 50 SX CMT. PLUG AT 650' WITH 80 SX CMT. PLUG AT 340' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/19/2005 12:45 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SAND TO 4660' & 4 SX CMT WITH DUMP BAILER. 1ST PLUG AT 1300' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 650' WITH 80 SX CMT. 3RD PLUG AT 320' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4710	4715		

INVOICED
DATE 10-28-05
TEL NO. 2006060684

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

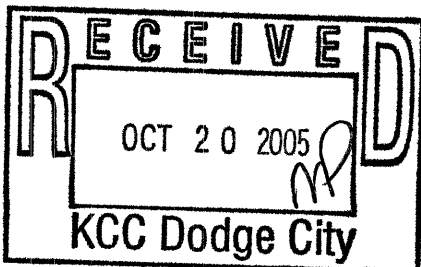

Signed

Jerry W. Stapleton PIR-II
(TECHNICIAN)

RECEIVED
OCT 28 2005
KCC WICHITA

Form CP 23