

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21803-00-00
Spot: SENE Sec/Twnshp/Rge: 25-28S-15W
3300 feet from S Section Line, 660 feet from E Section Line
Lease Name: GUTTRIDGE Well #: 1A
County: PRATT Total Vertical Depth: 4850 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4849	2210	
SURF	8.625	326		#157 ⁶³

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/27/2005 11:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 4490' & 5 SX CMT. PLUG AT 950' WITH 15 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/27/2005 12:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4490' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 950' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 360' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4539	4591		

INVOICED
DATE 11-4-05
INV NO 2006060709

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

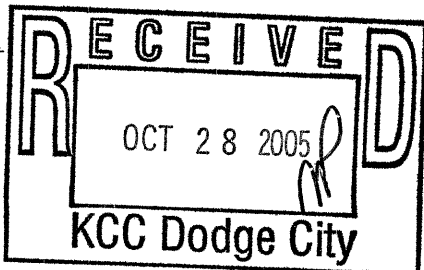

Signed

Stephen J. Rupp
(TECHNICIAN)

RECEIVED
NOV 04 2005
KCC WICHITA

Form C-2/3