



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**DUAL
INDUCTION
LOG**

Company		WOOLSEY OPERATING CO. LLC.		Company		WOOLSEY OPERATING COMPANY, LLC.	
Well		PLATT GU #6		Well		PLATT GU #6	
Field		HARDTNER		Field		HARDTNER	
County		BARBER		County		BARBER	
State		KANSAS		State		KANSAS	
Location:		API # : 15-007-24070-0000		Other Services CDL/CNL PE			
SEC 10 TWP 35S RGE 12W		2044' FSL & 2220' FWL					
Permanent Datum		GROUND LEVEL		Elevation		1392	
Log Measured From		KELLY BUSHING 13' A.G.L.		K.B. 1405		D.F. 1403	
Drilling Measured From		KELLY BUSHING		G.L. 1392			
Date	9/27/13						
Run Number	ONE						
Depth Driller	5505						
Depth Logger	5498						
Bottom Logged Interval	5496						
Top Log Interval	00						
Casing Driller	8 5/8" @ 956		13 3/8" @ 226				
Casing Logger	954						
Bit Size	7 7/8"						
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 4,000 PPM				
Density / Viscosity	9.2/56						
pH / Fluid Loss	10.5/9.6						
Source of Sample	FLOWLINE						
Rin @ Meas. Temp	.70 @ 98F						
Rinf @ Meas. Temp	.52 @ 98F						
Rinc @ Meas. Temp	.84 @ 98F						
Source of Rinf / Rinc	MEASUREMENT						
Rin @ BHT	.53 @ 129F						
Time Circulation Stopped	3 HOURS						
Time Logger on Bottom							
Maximum Recorded Temperature	129F						
Equipment Number	4854						
Location	HAYS, KANSAS						
Recorded By	JASON CAPPELLUCCI						
Witnessed By	BILL KLAVER						

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments



THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
HARDTNER, KS - 1 1/2 MILES EAST - SOUTH INTO



Database File: 011677pe.db
 Dataset Pathname: pass3.2
 Presentation Format: _dil2
 Dataset Creation: Fri Sep 27 21:38:12 2013 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
-100	SP (mV)	100	0	RILD (Ohm-m)	50	
			1000	CILD (mmho/m)		0
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

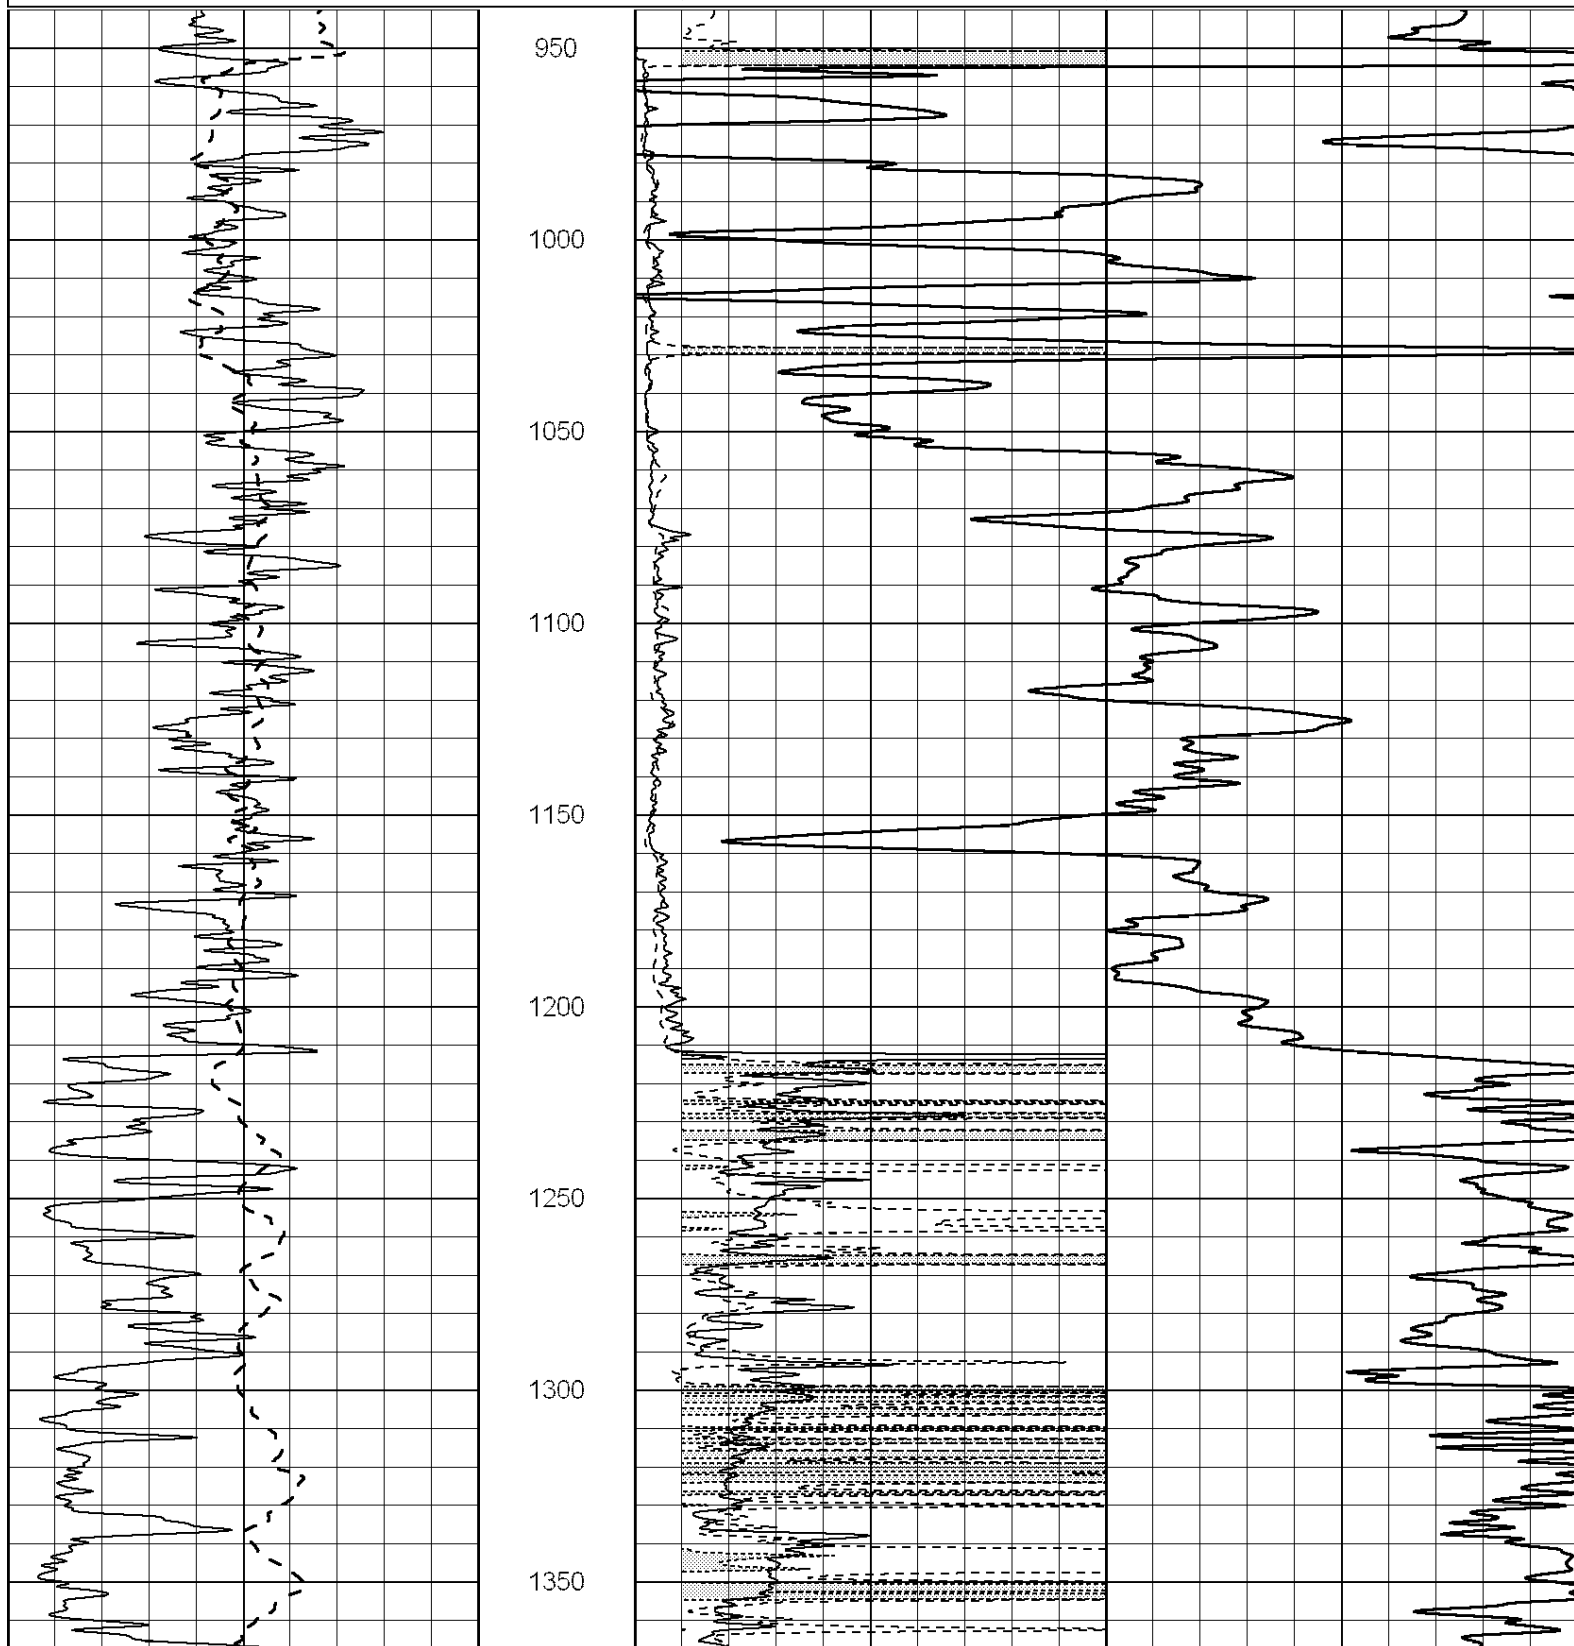

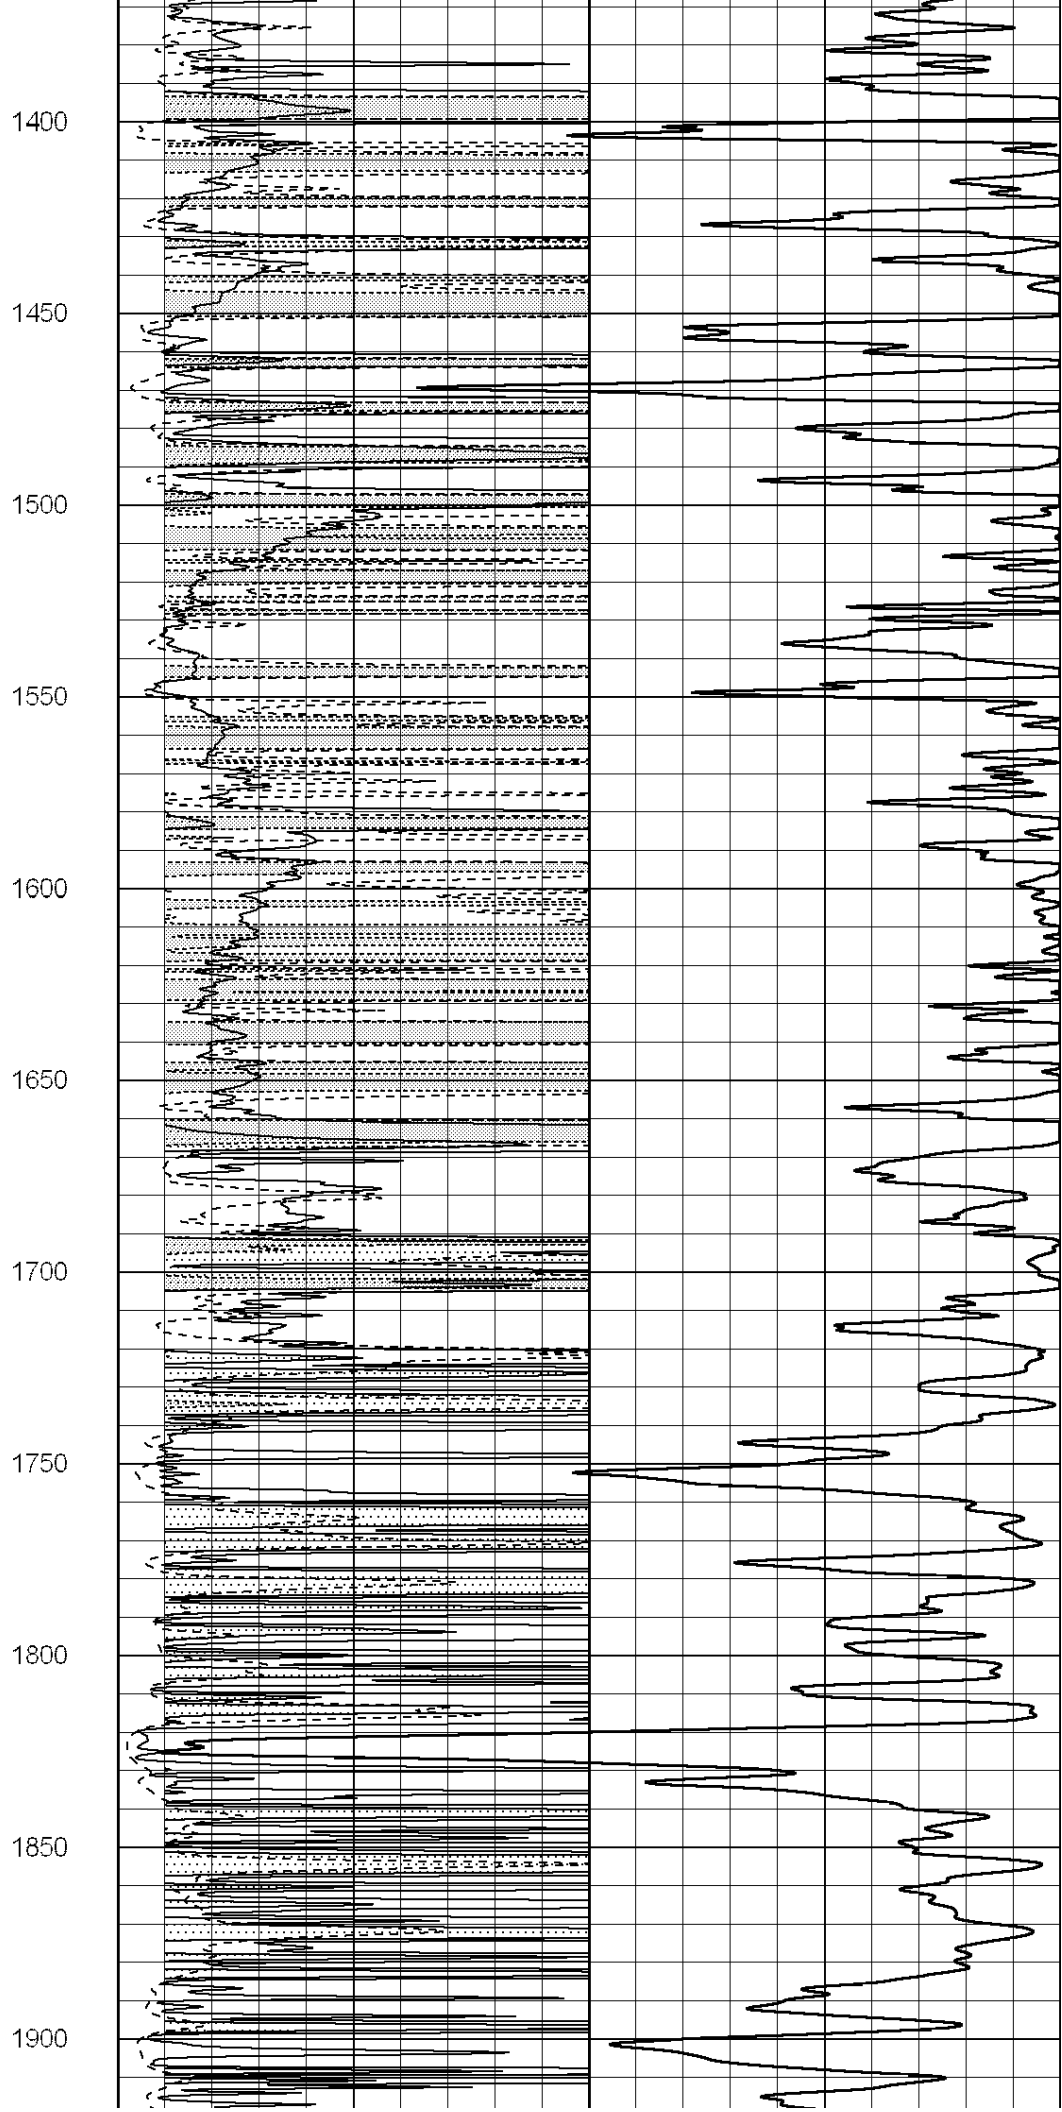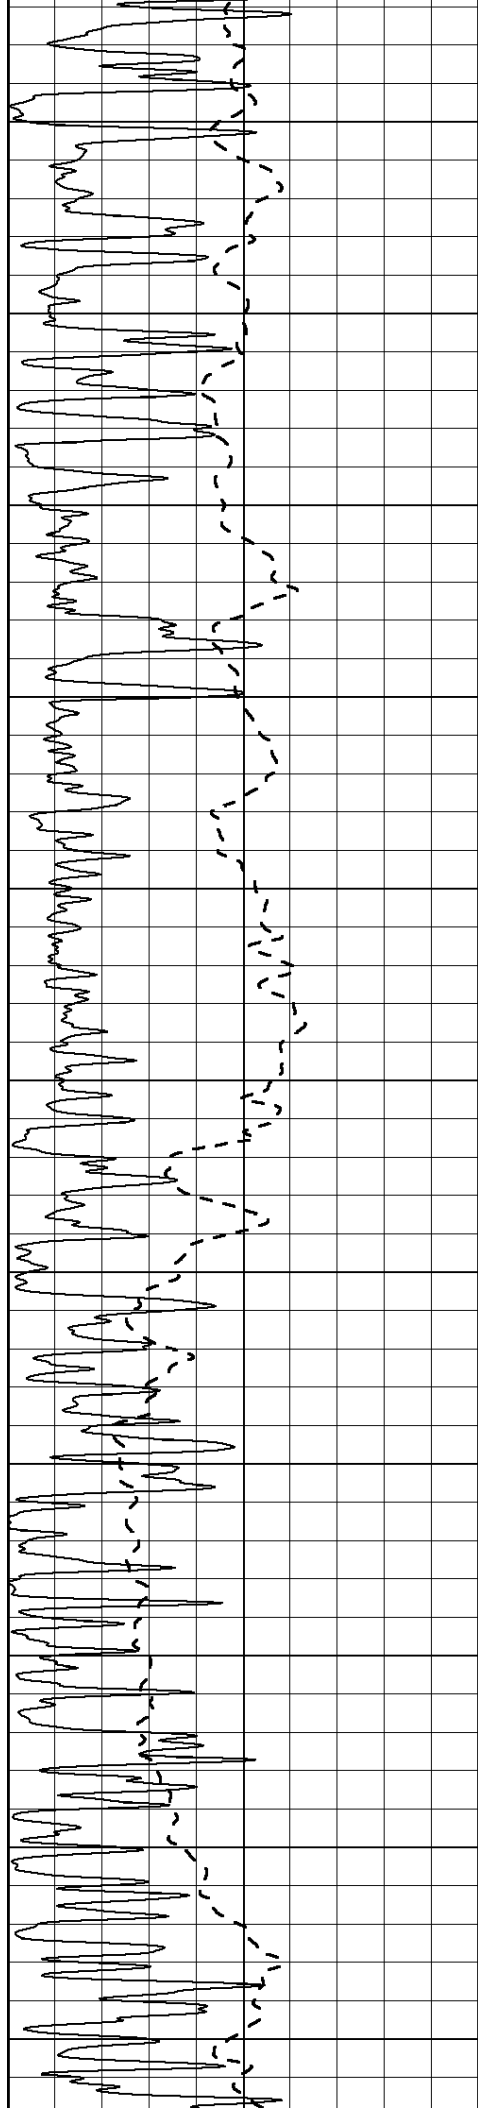

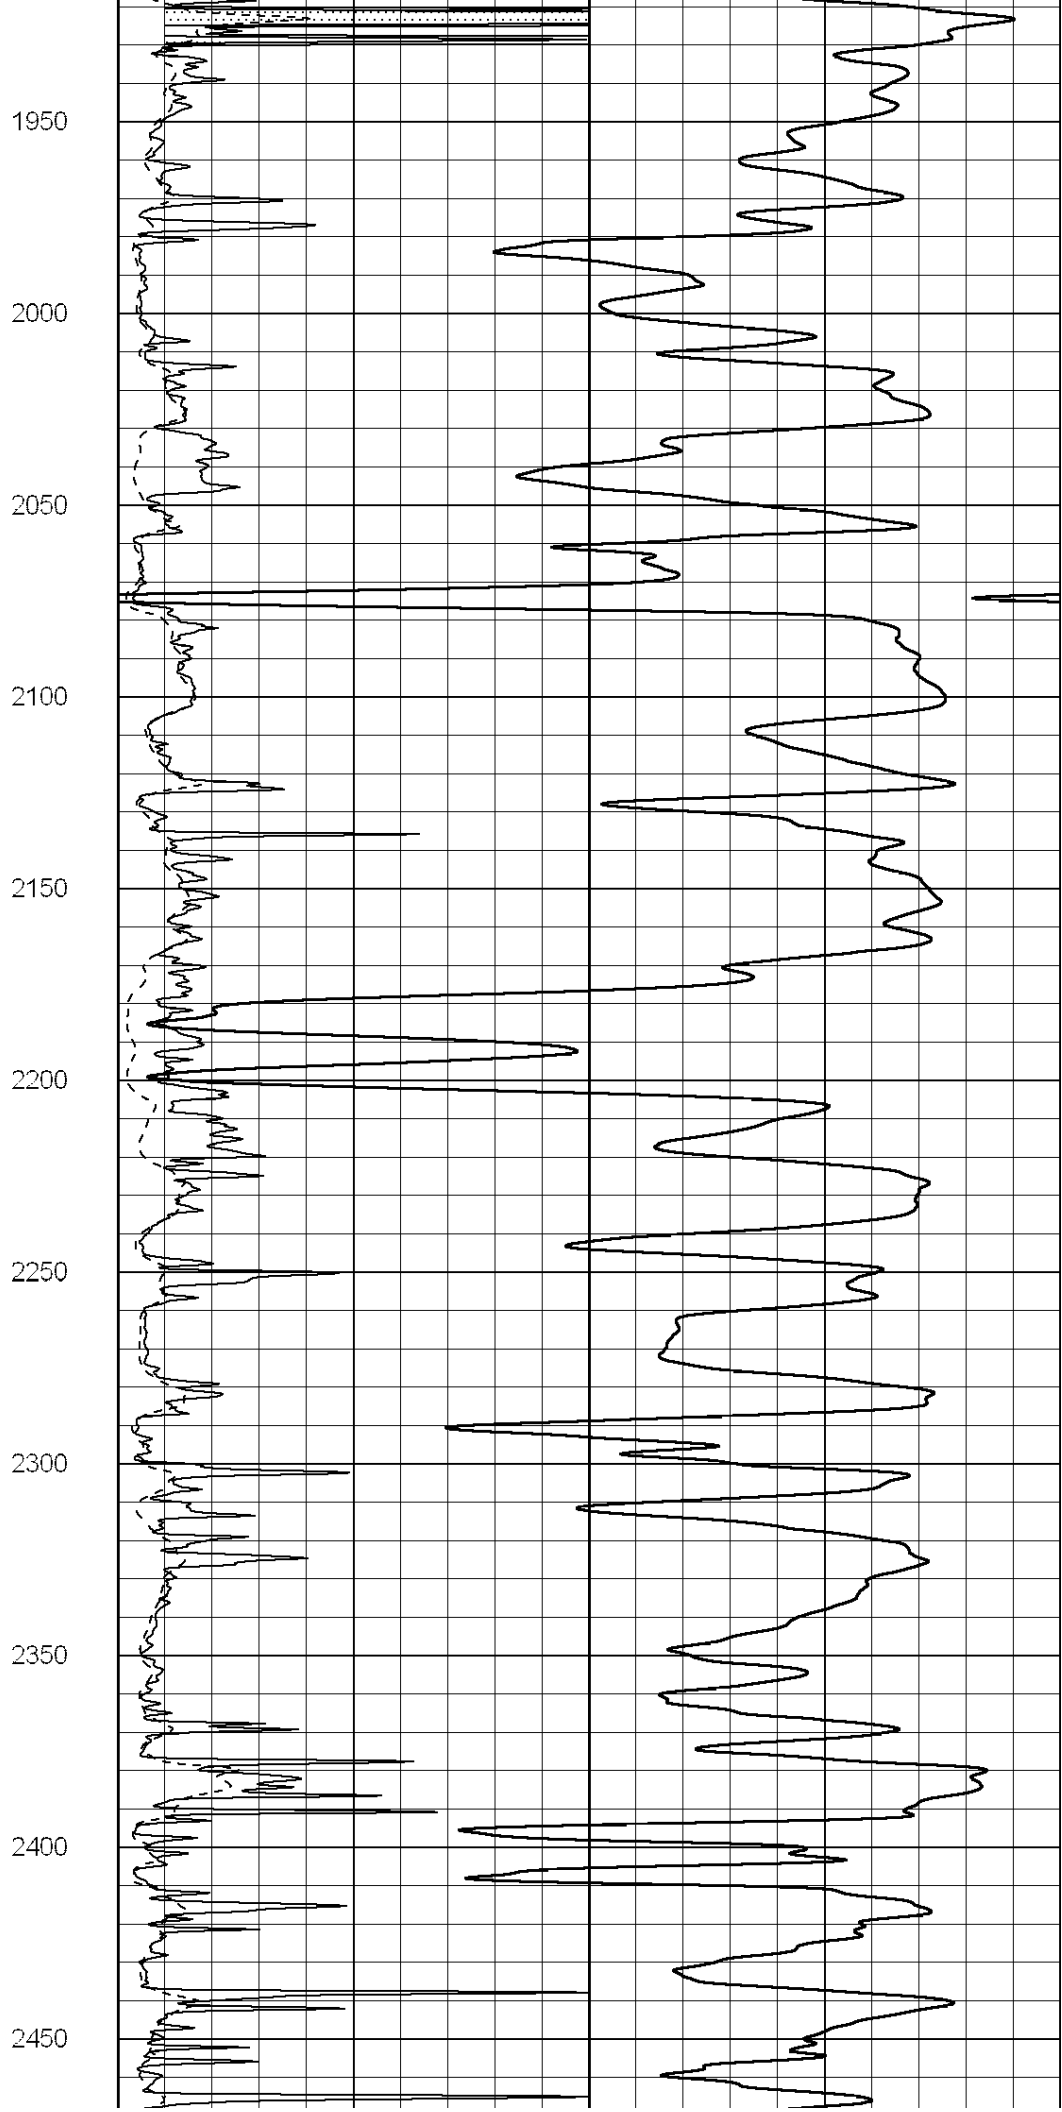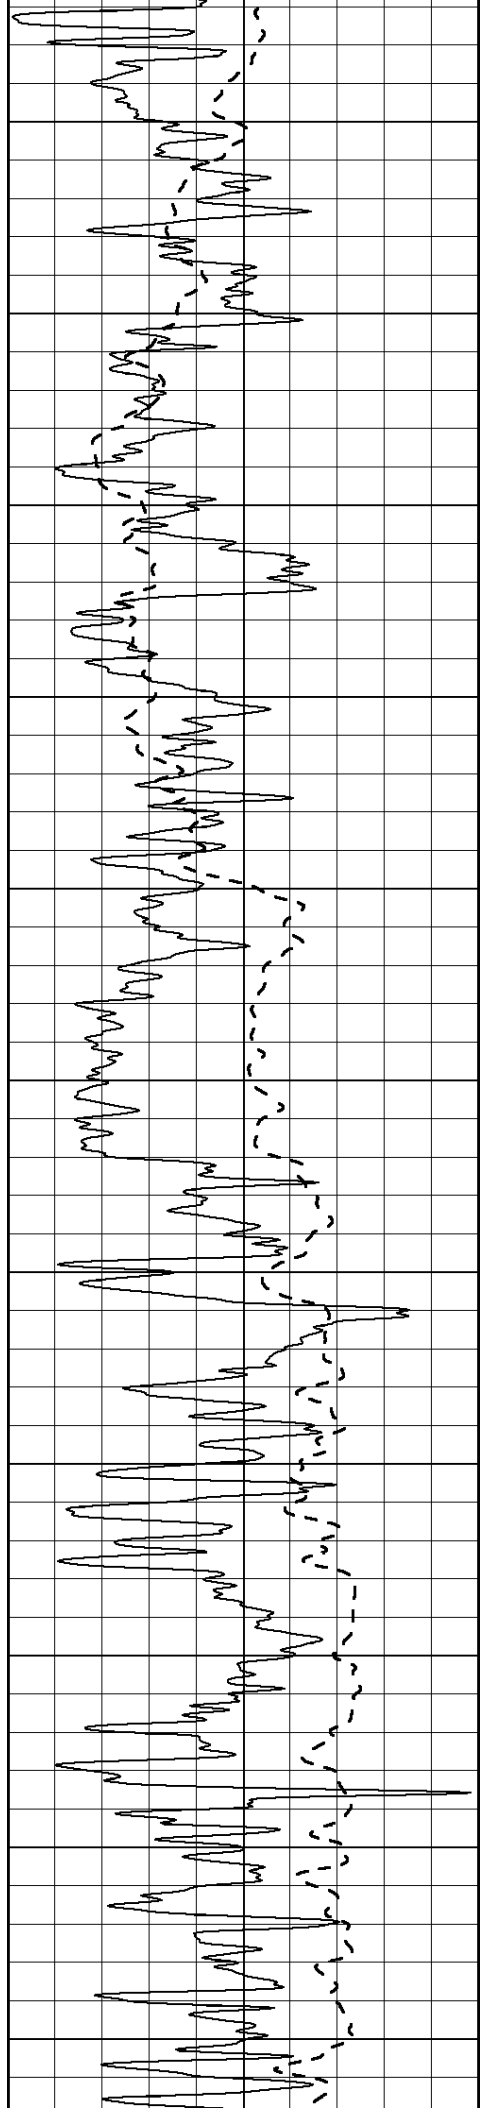

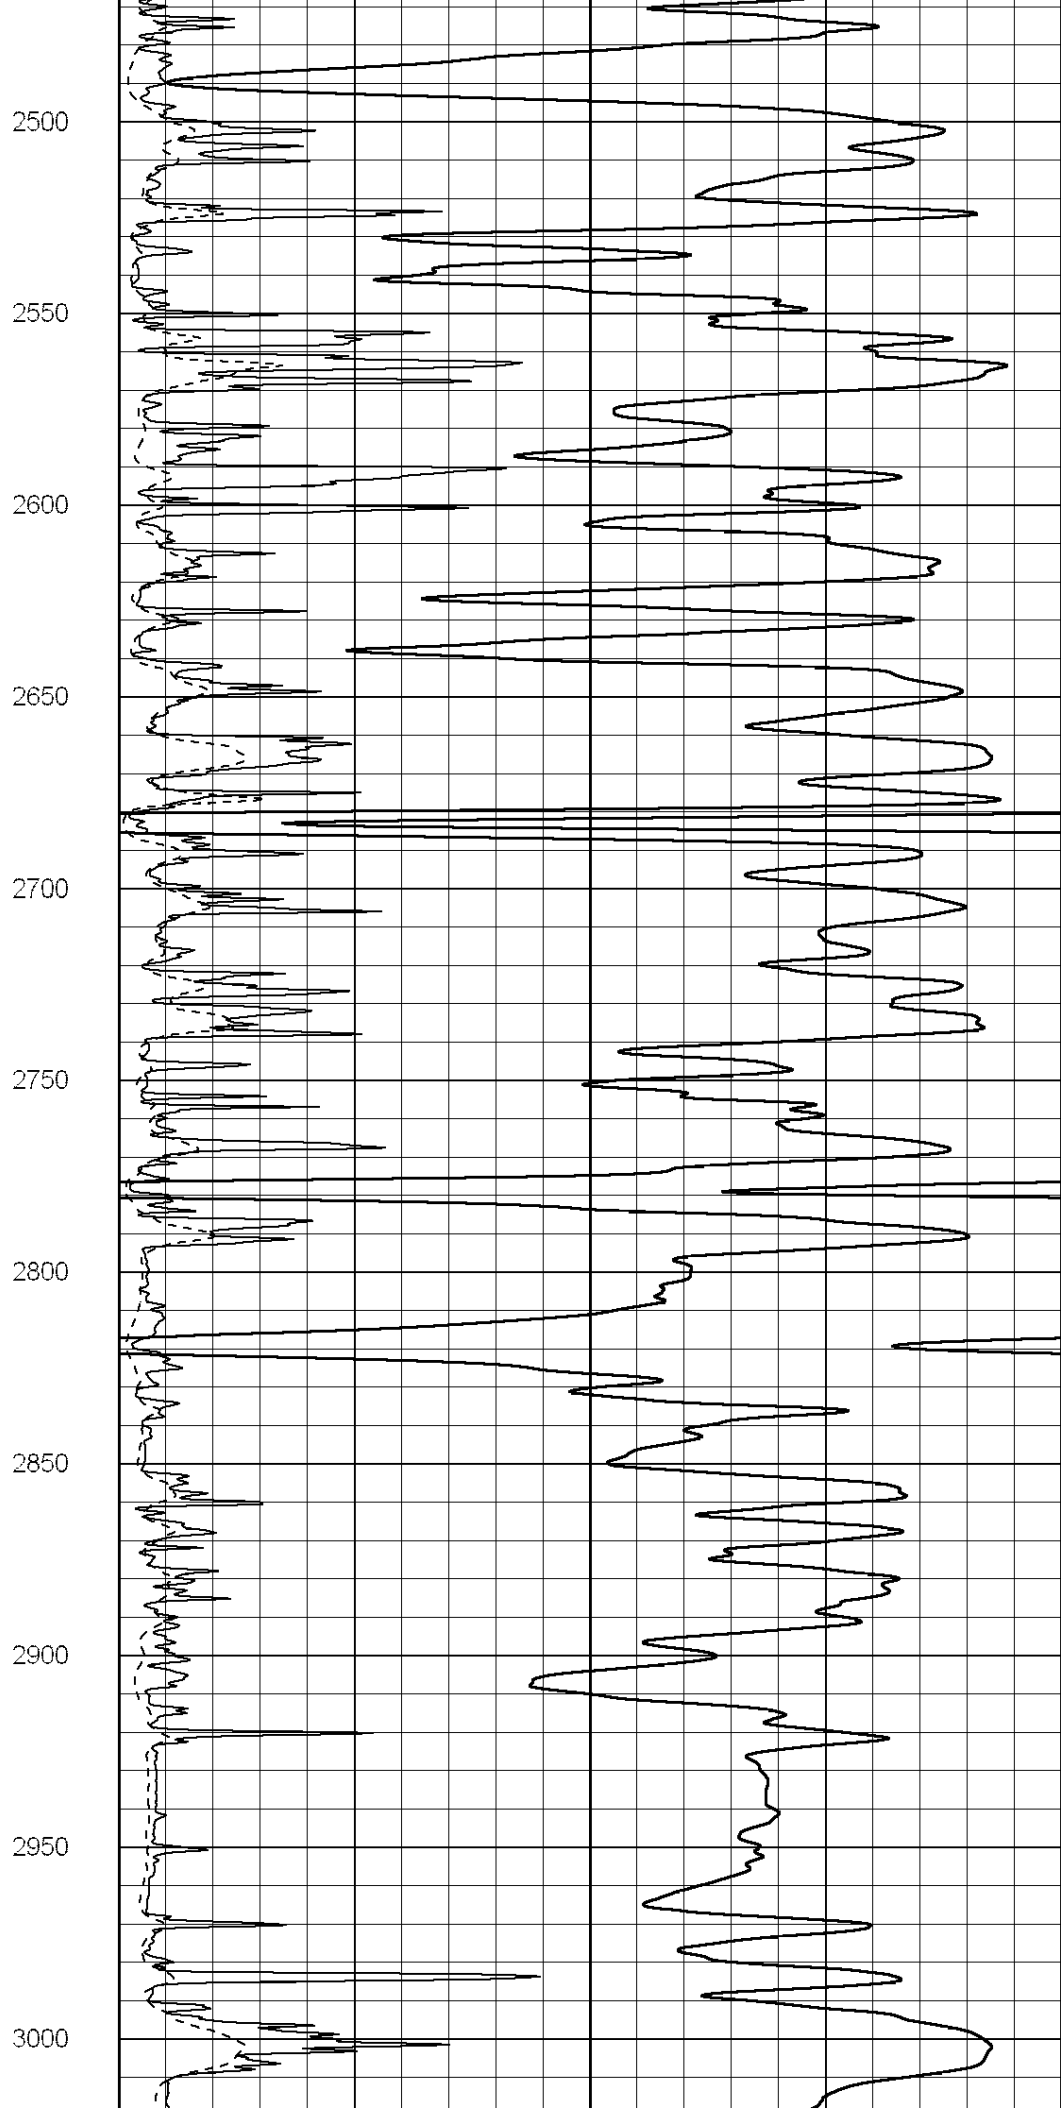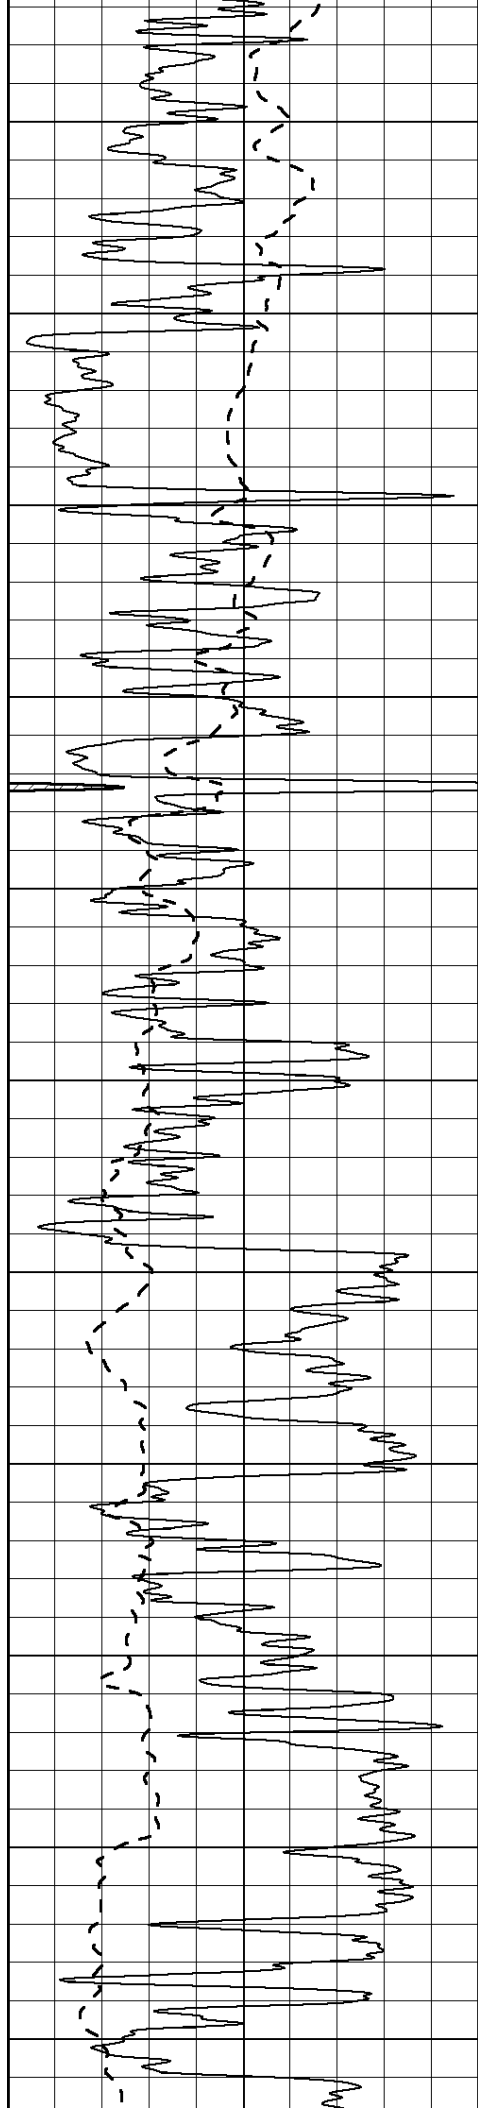

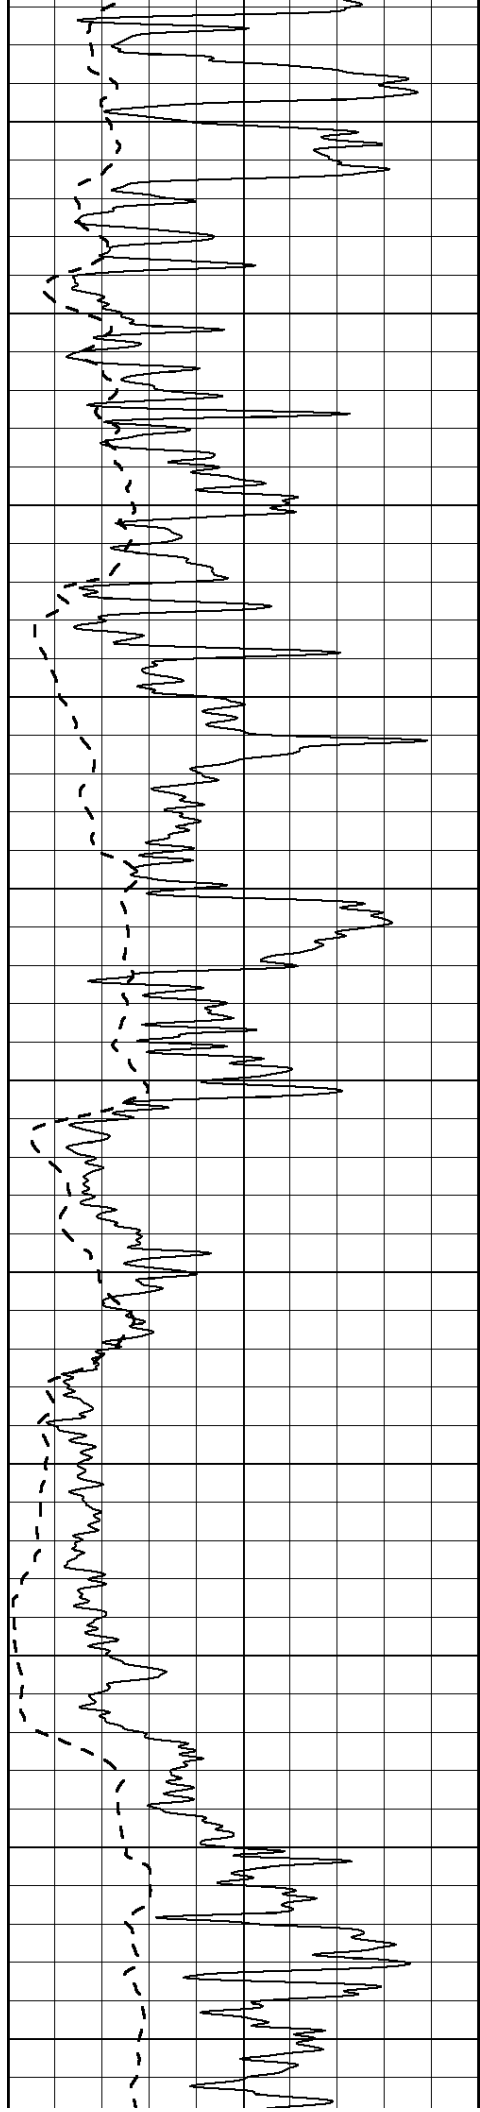

3050

3100

3150

3200

3250

3300



3350


3400

3450

3500

3550

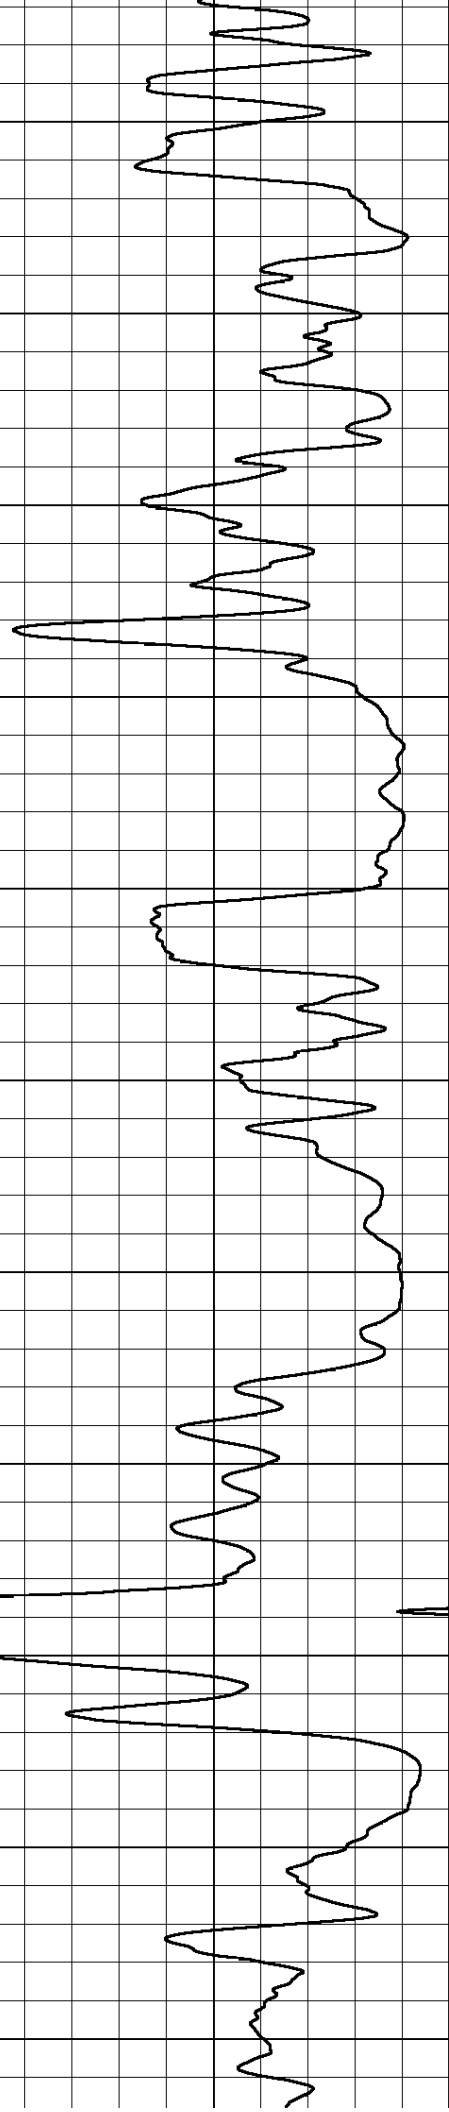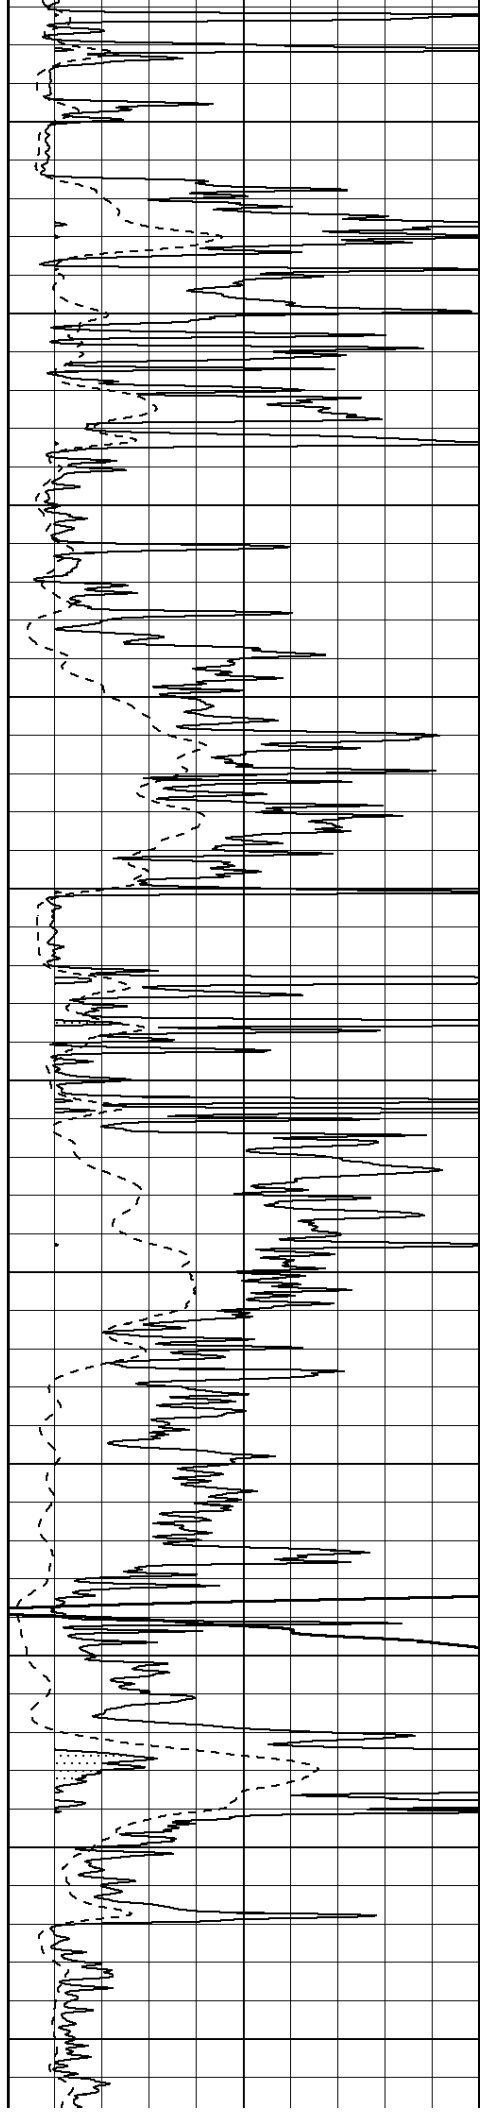

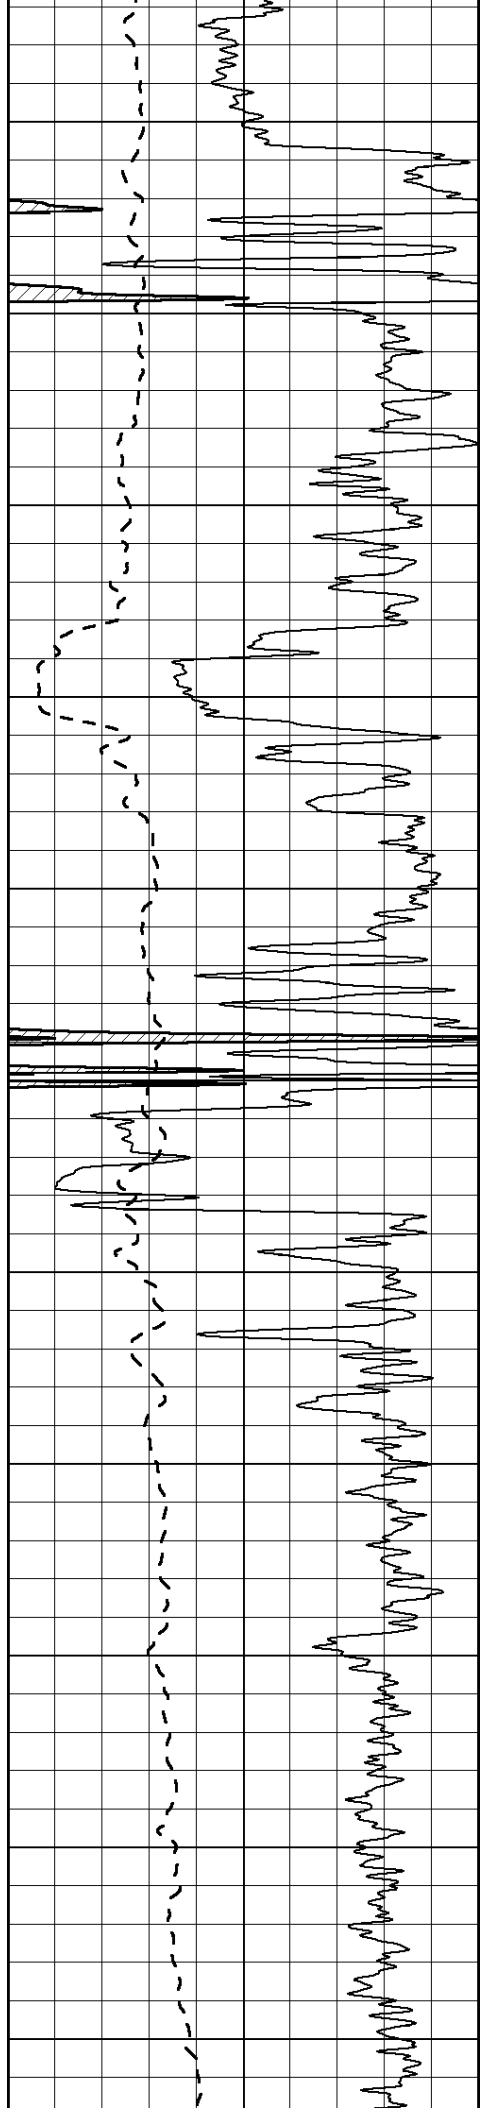

3600

3650

3700

3750

3800

3850


3900


3950

4000

4050

4100

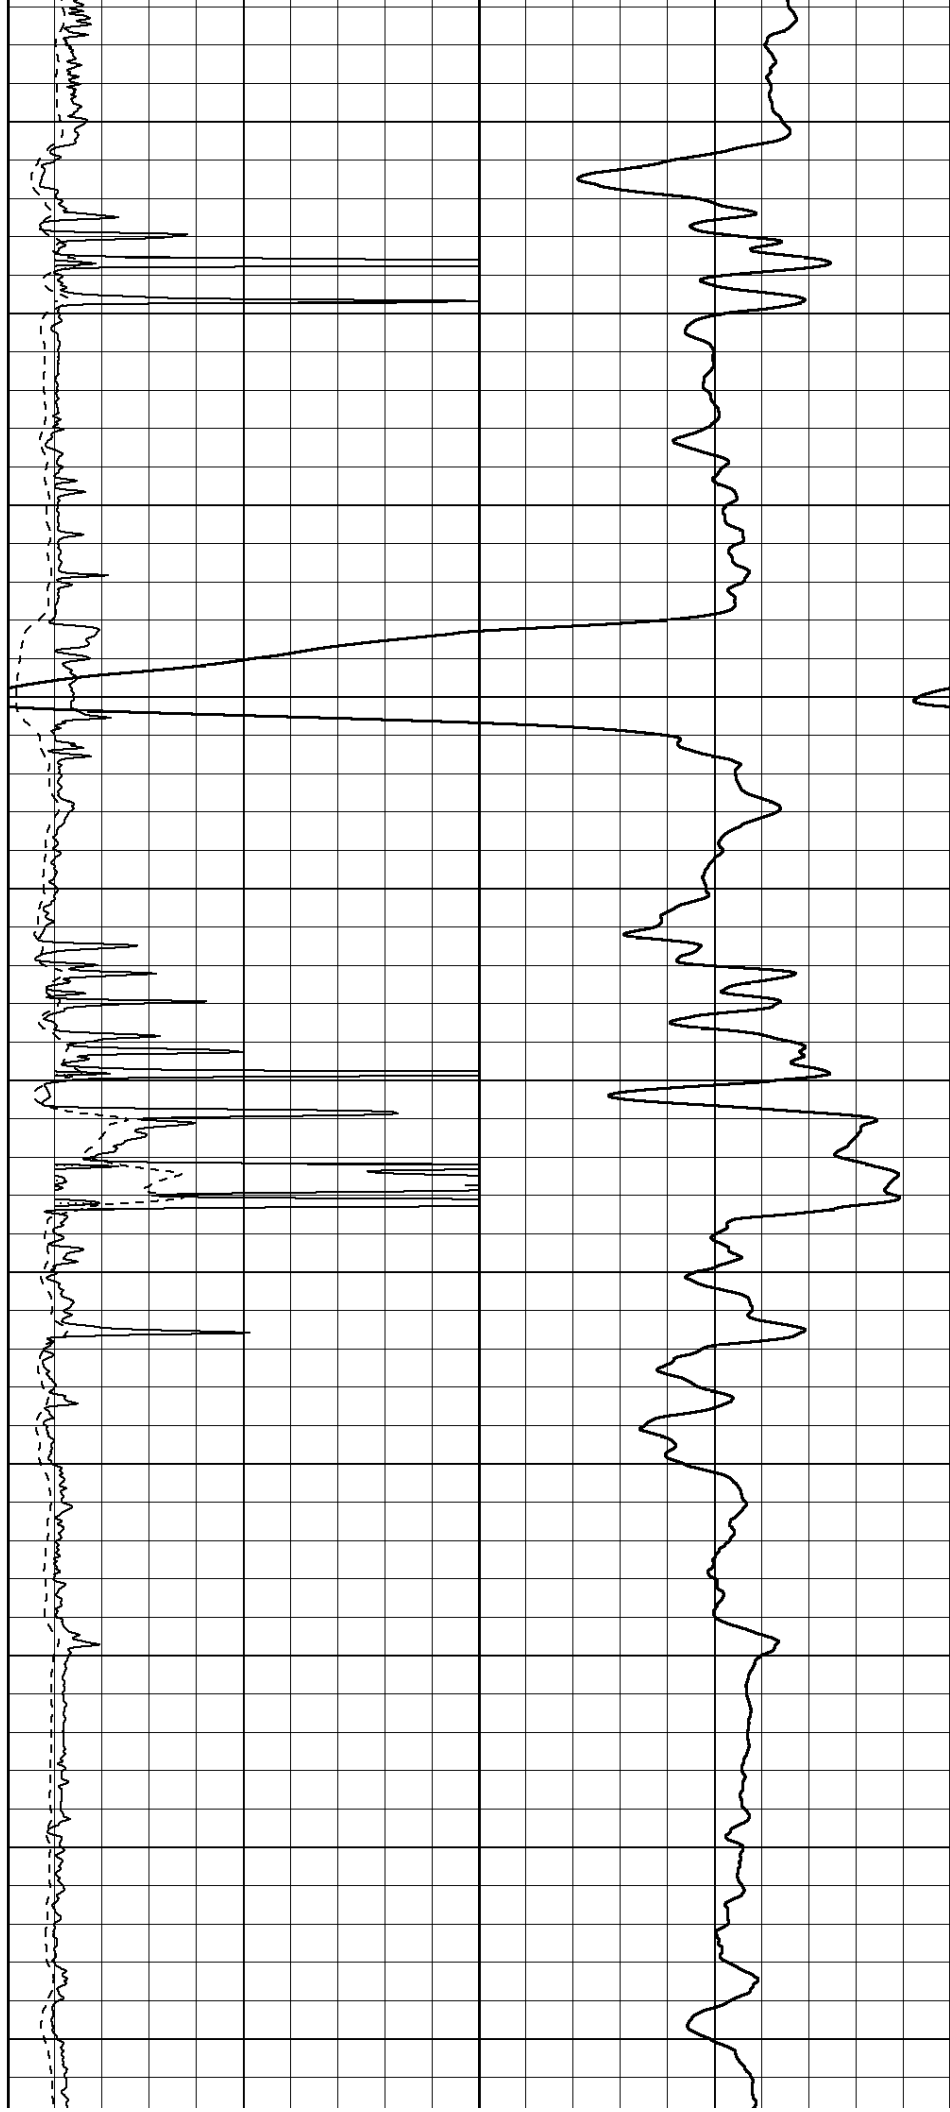

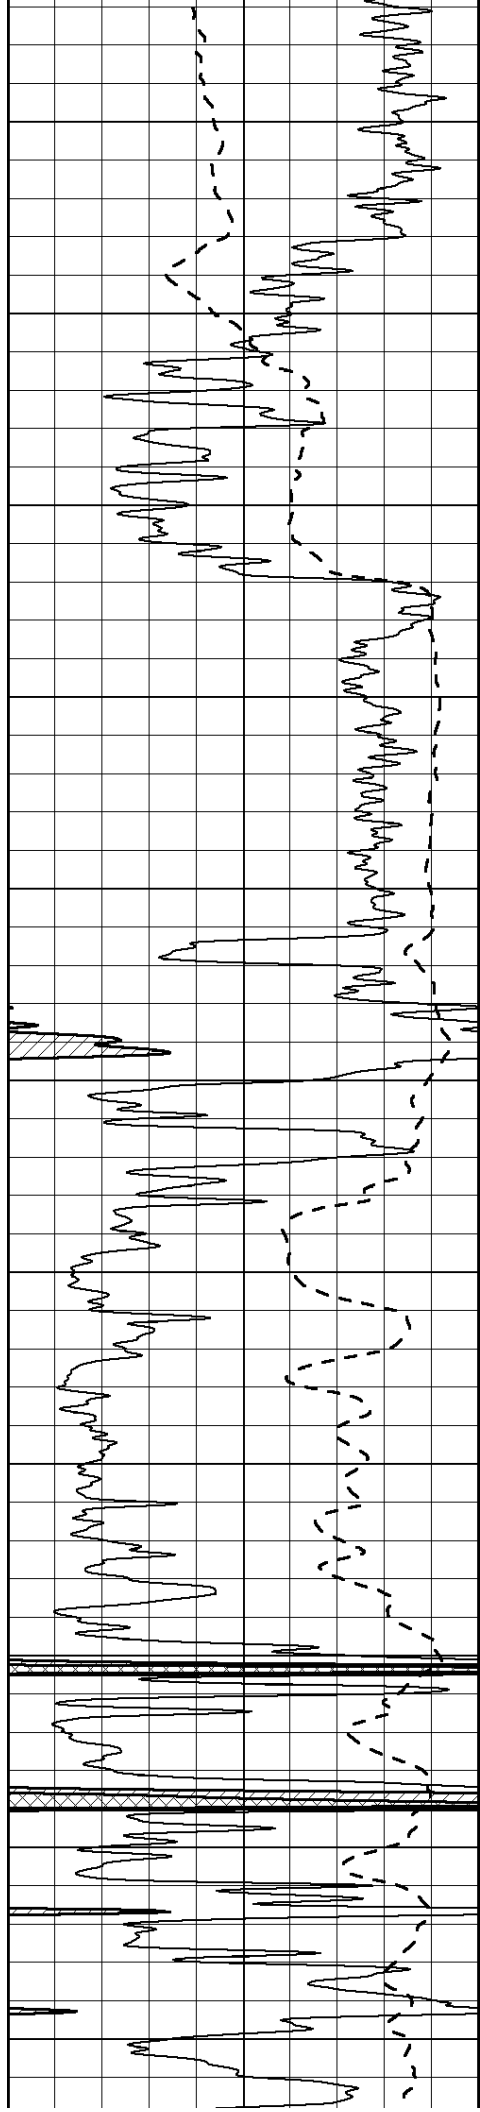

4150

4200

4250

4300

4350

4400


4450




4500


4550

4600

4650

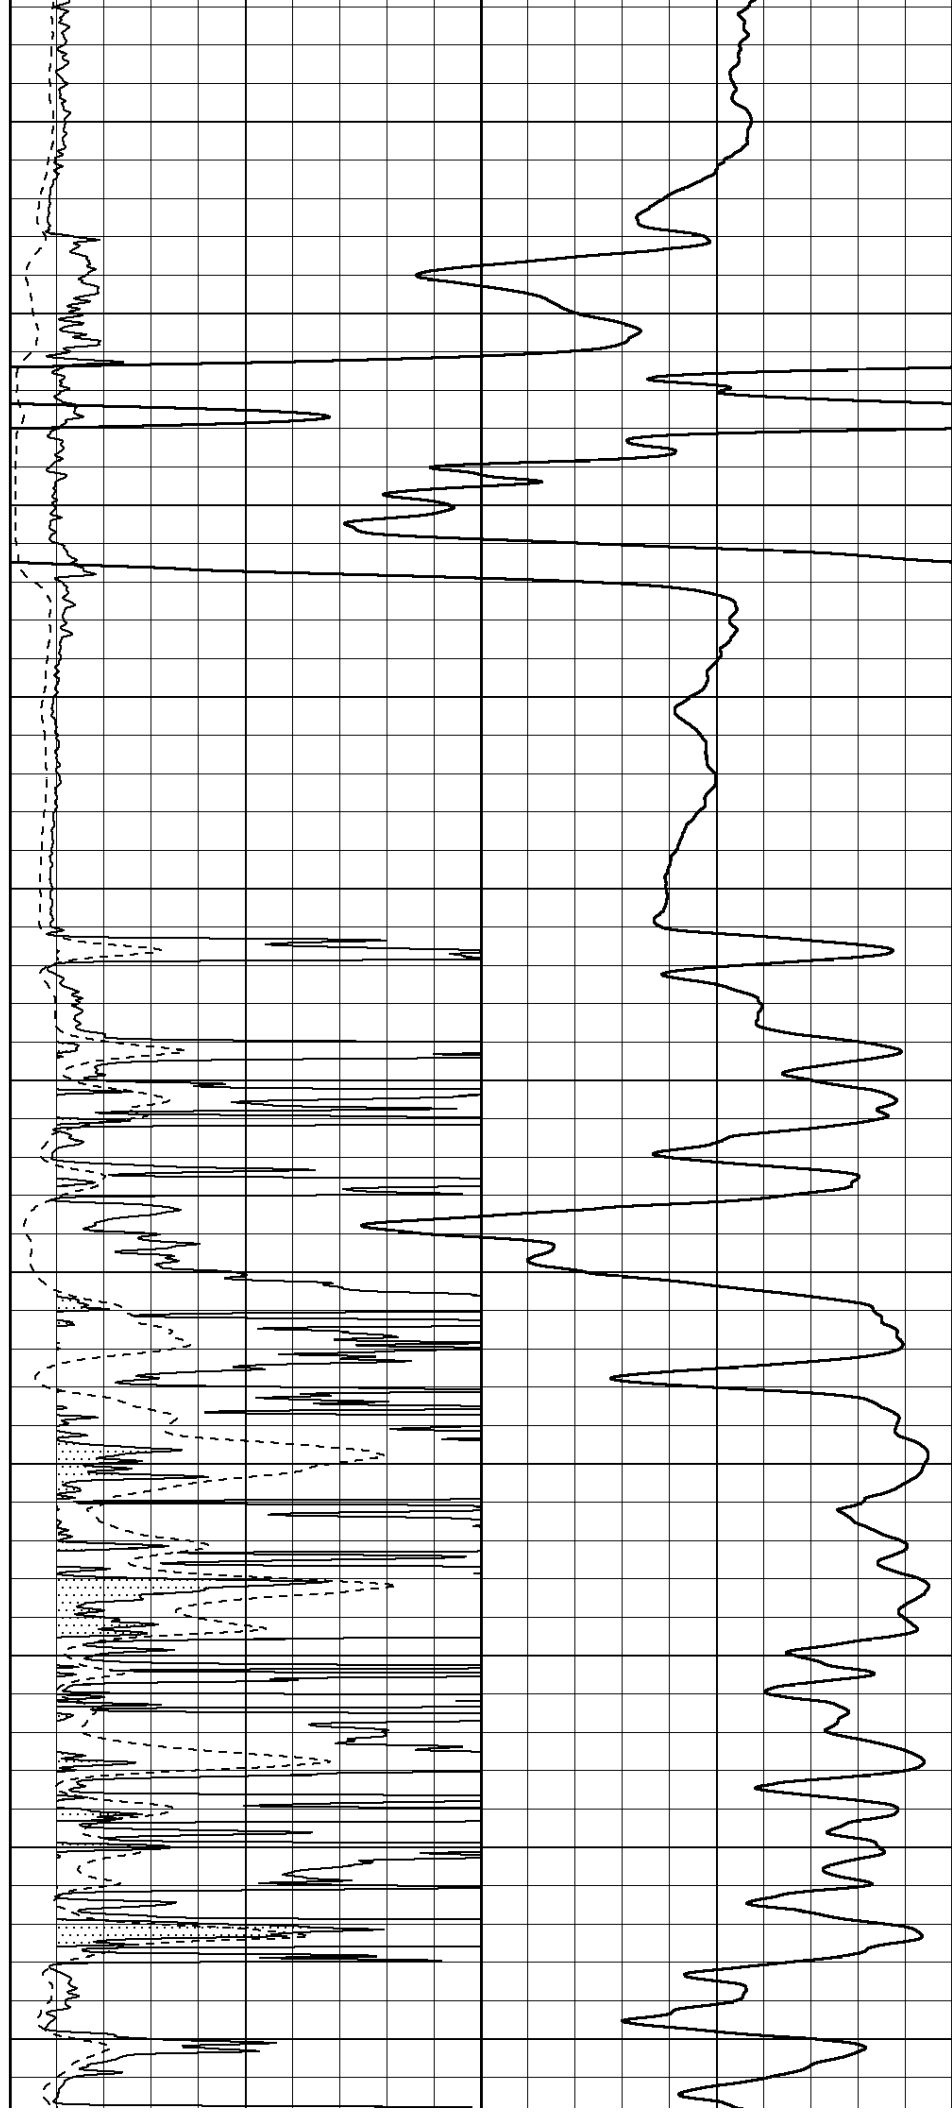

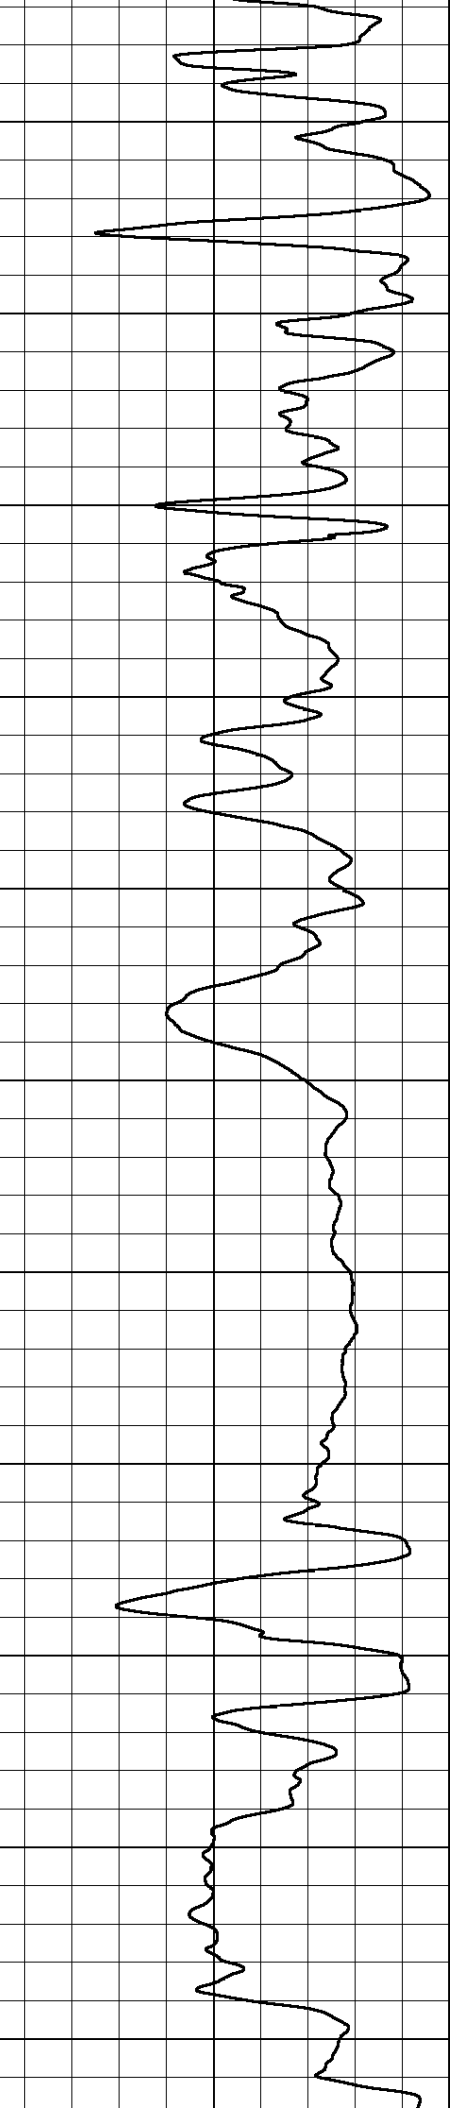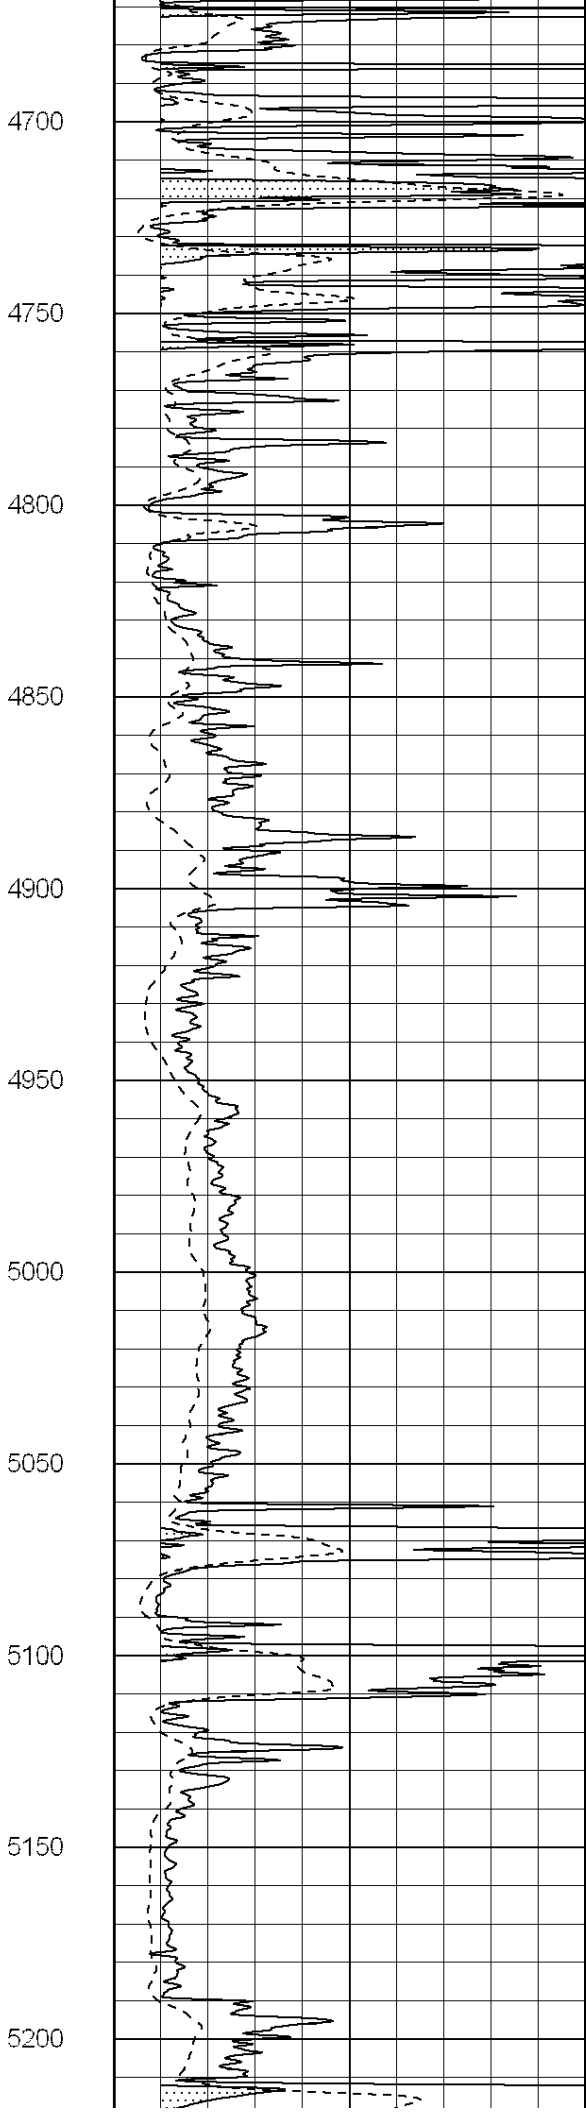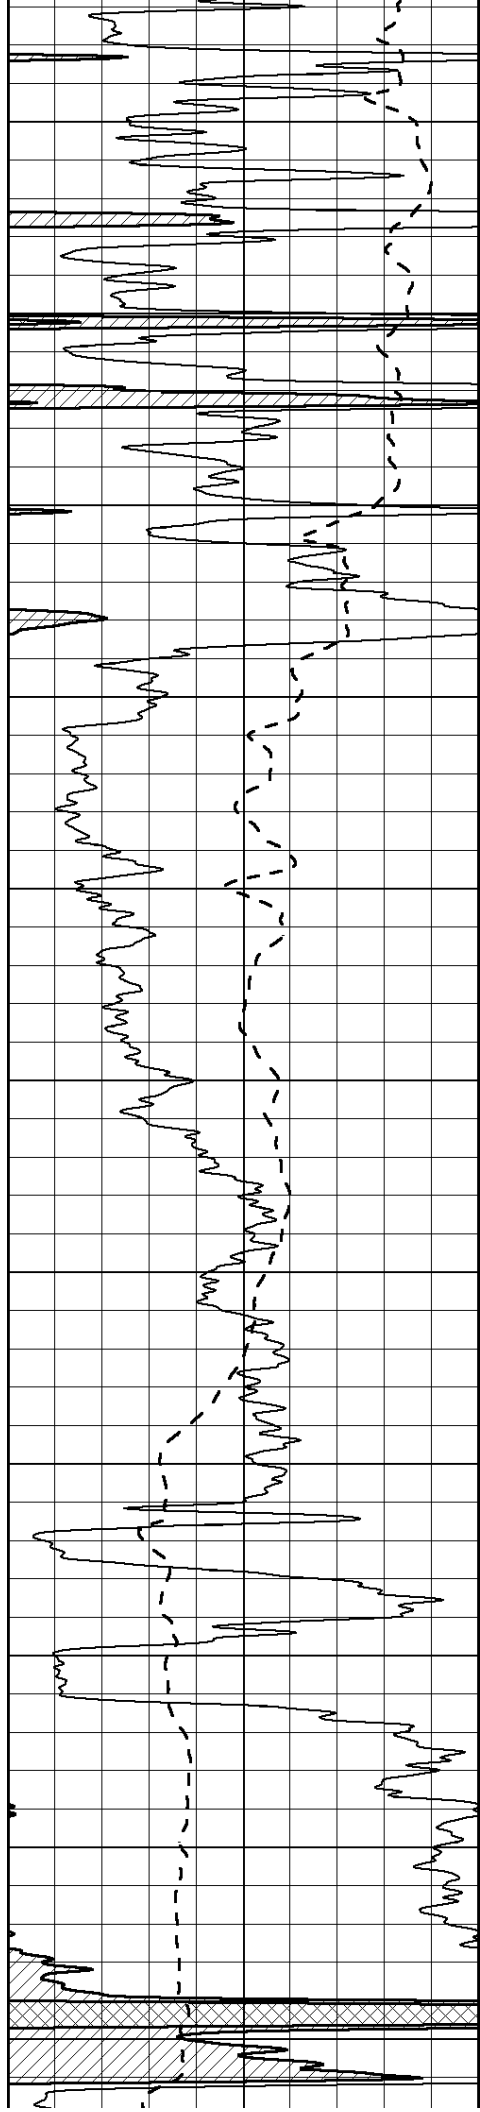

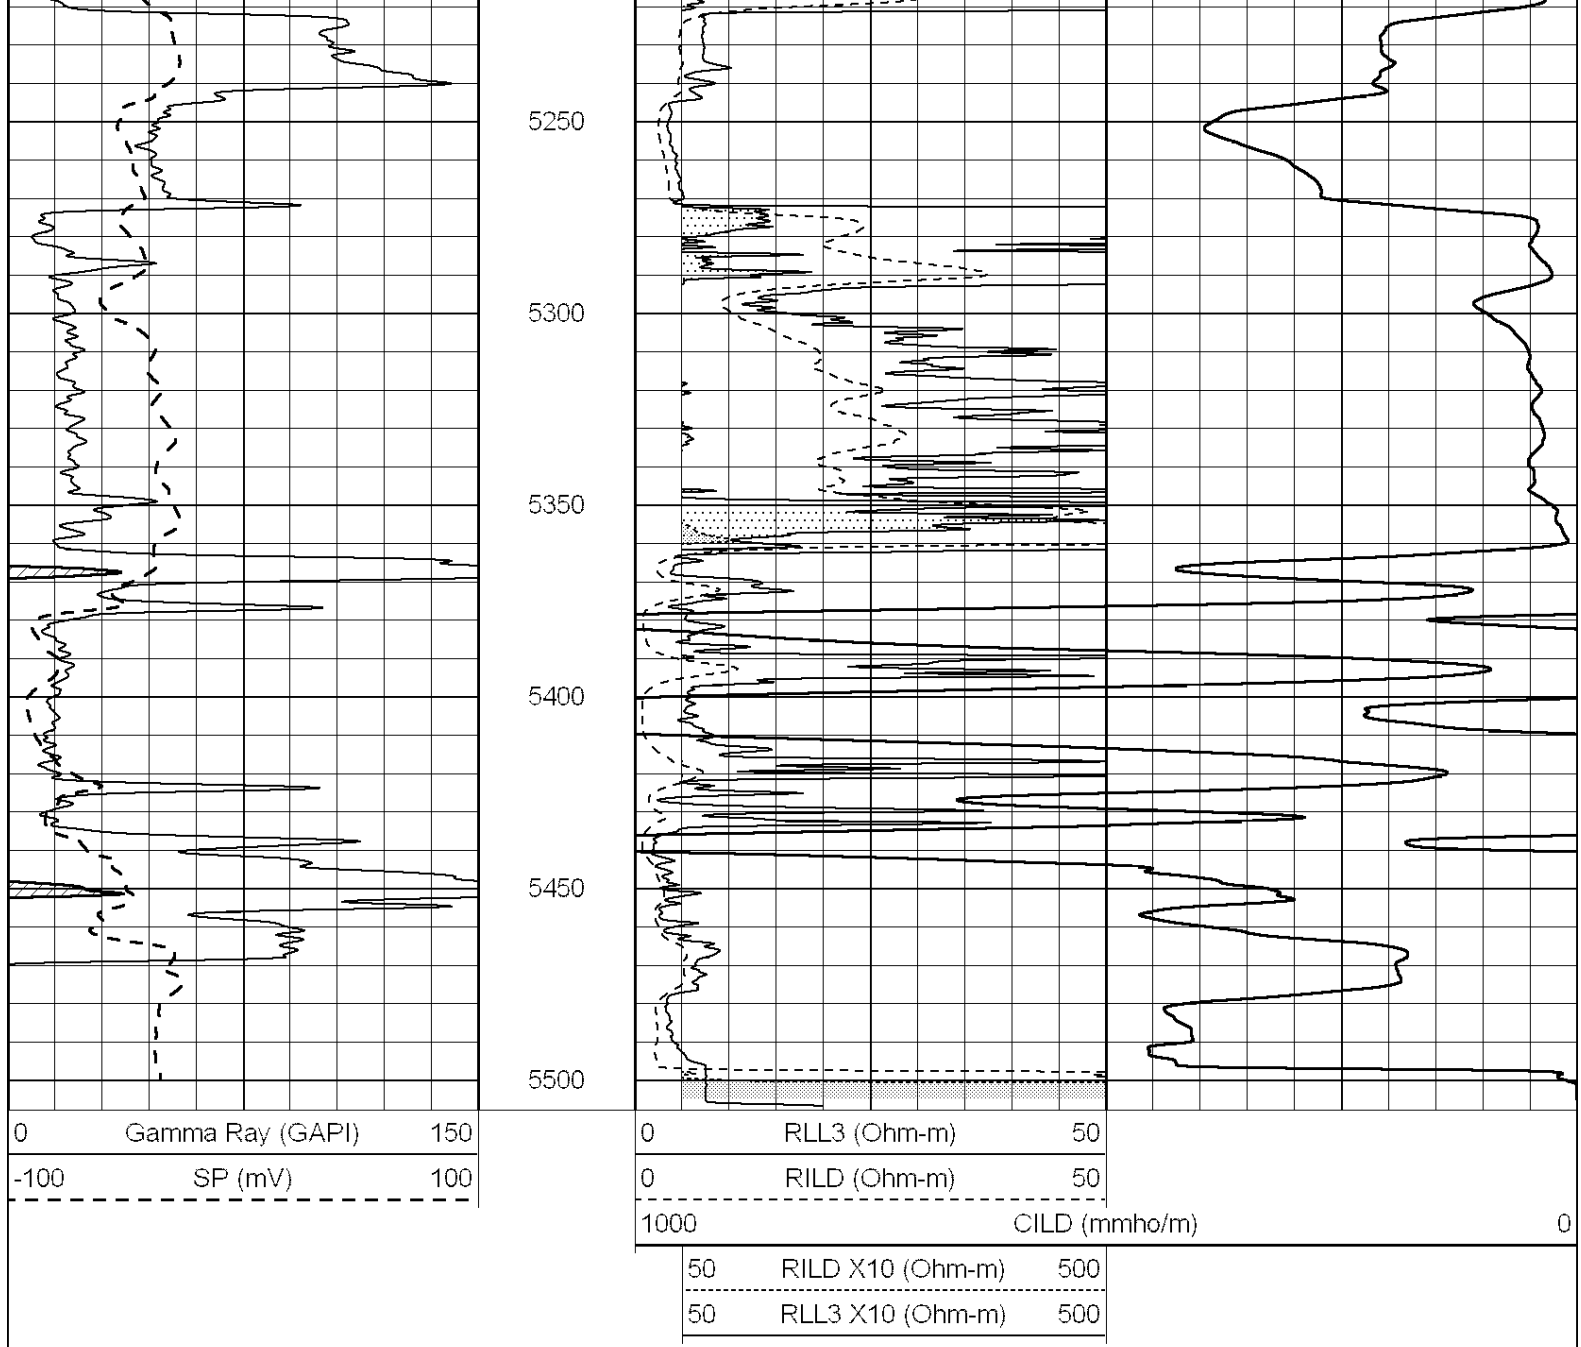

NABORS


**COMPLETION
& PRODUCTION
SERVICES CO.**

MAIN SECTION

Database File: 011677pe.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Fri Sep 27 21:27:11 2013
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



1900



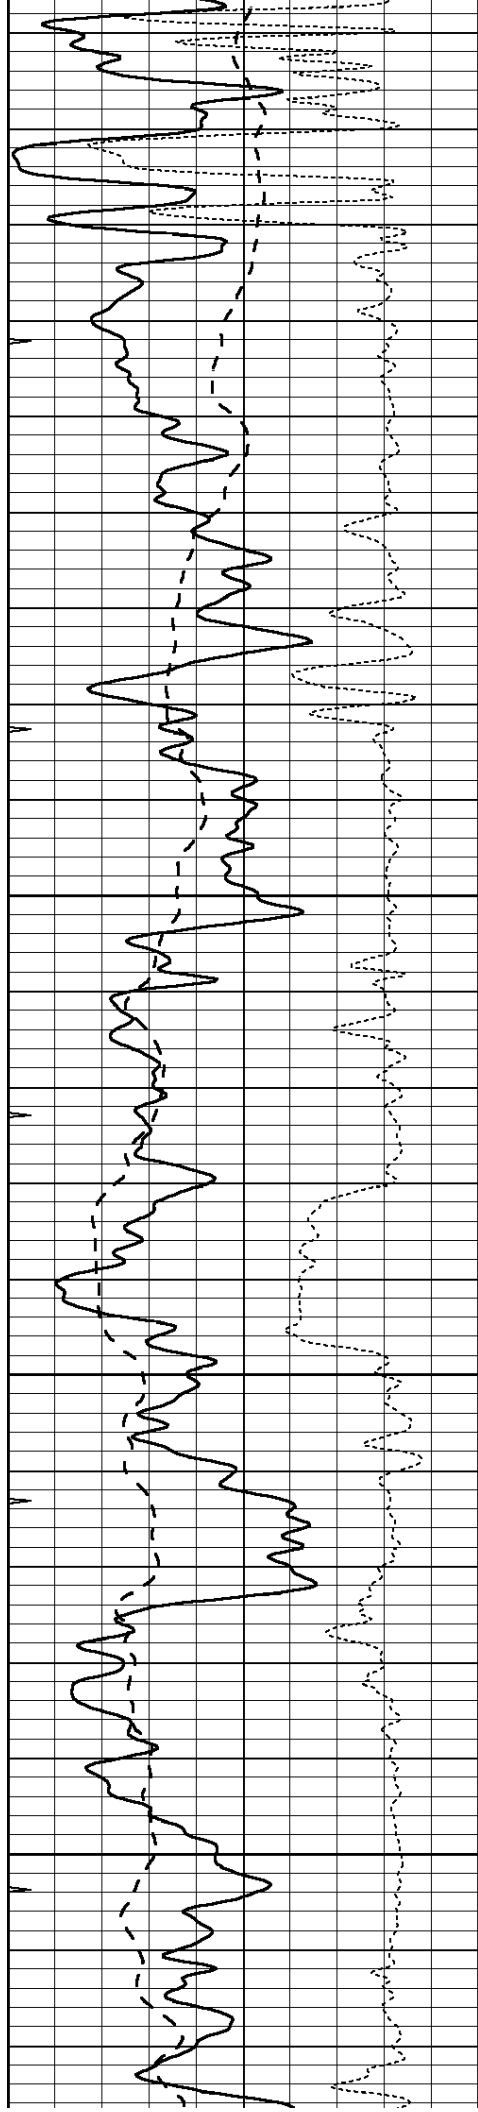



1950

2000

2050

2100

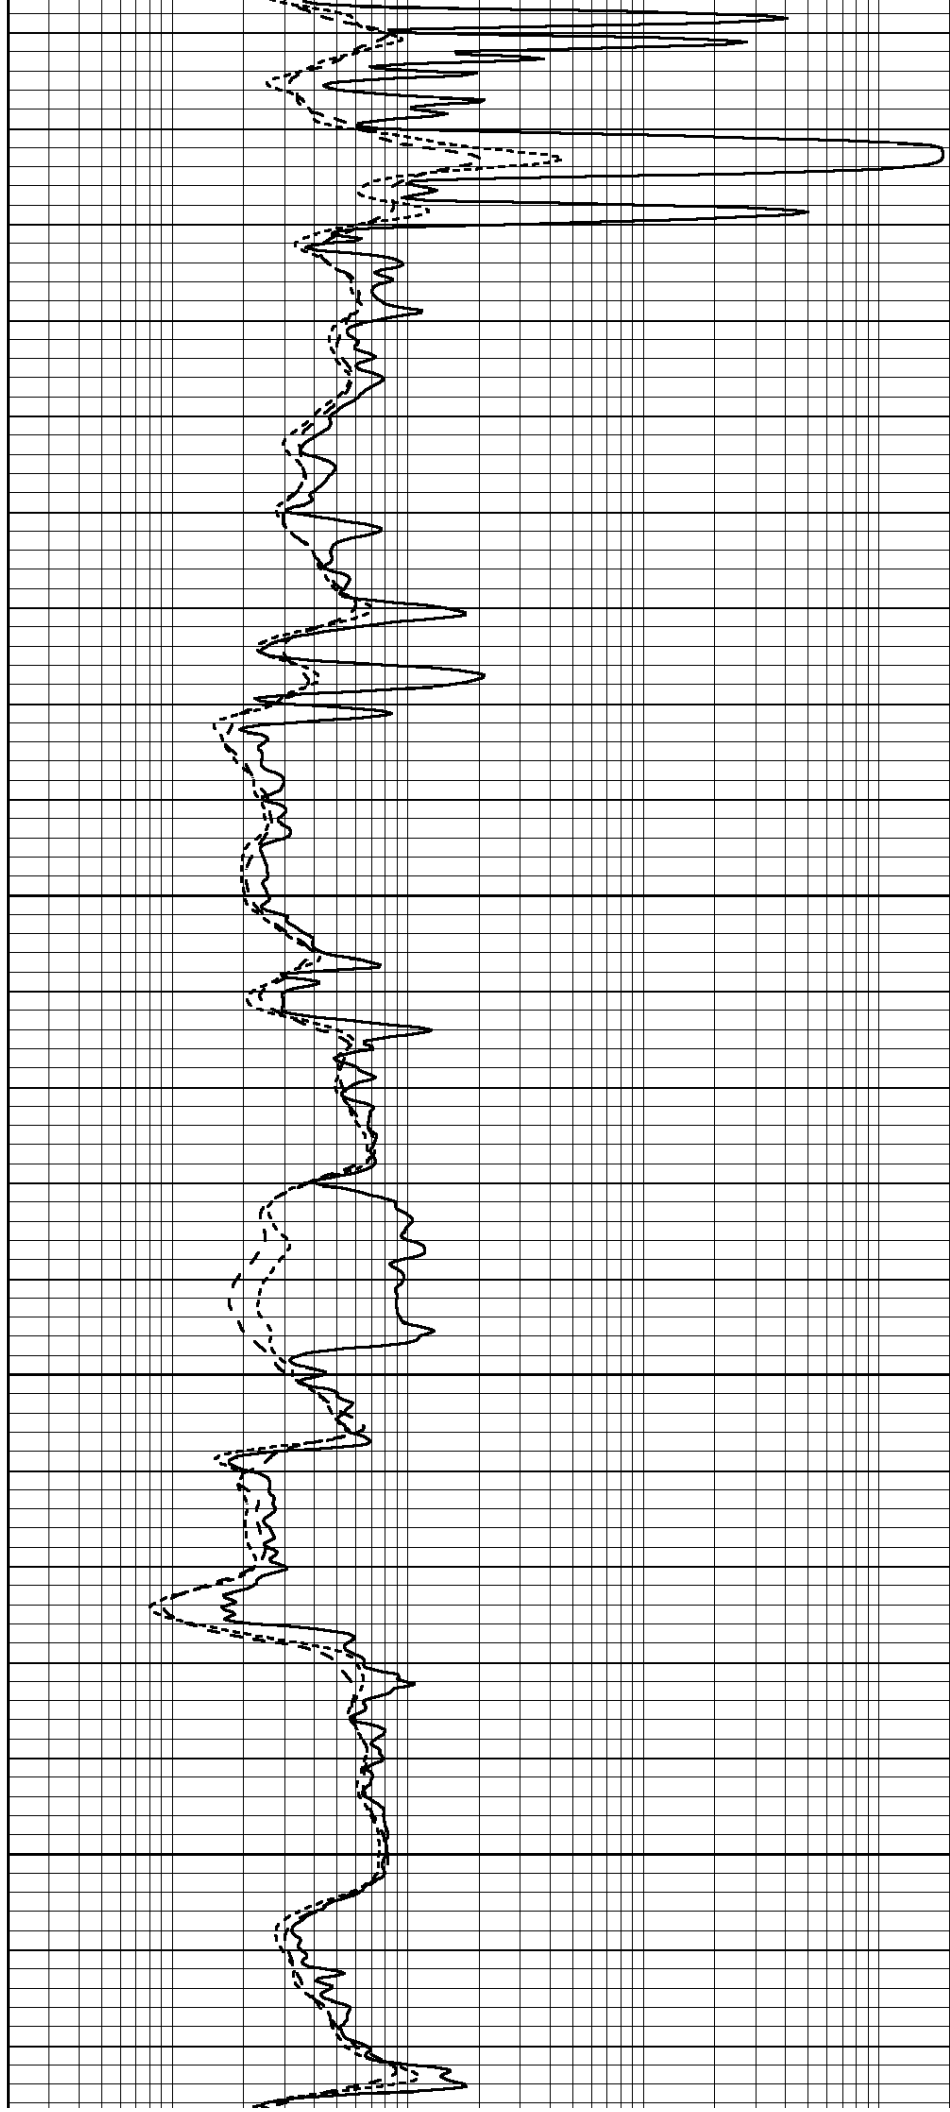

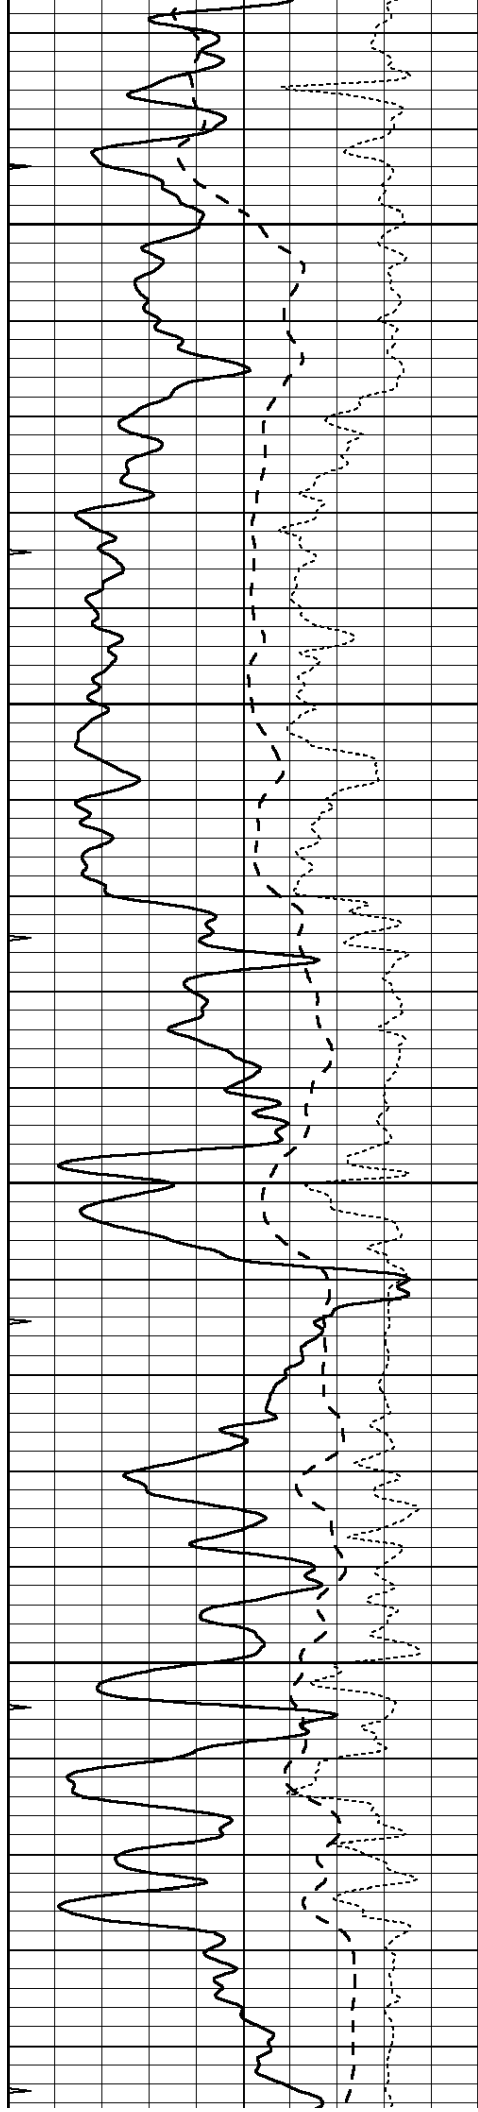



2150

2200

2250

2300

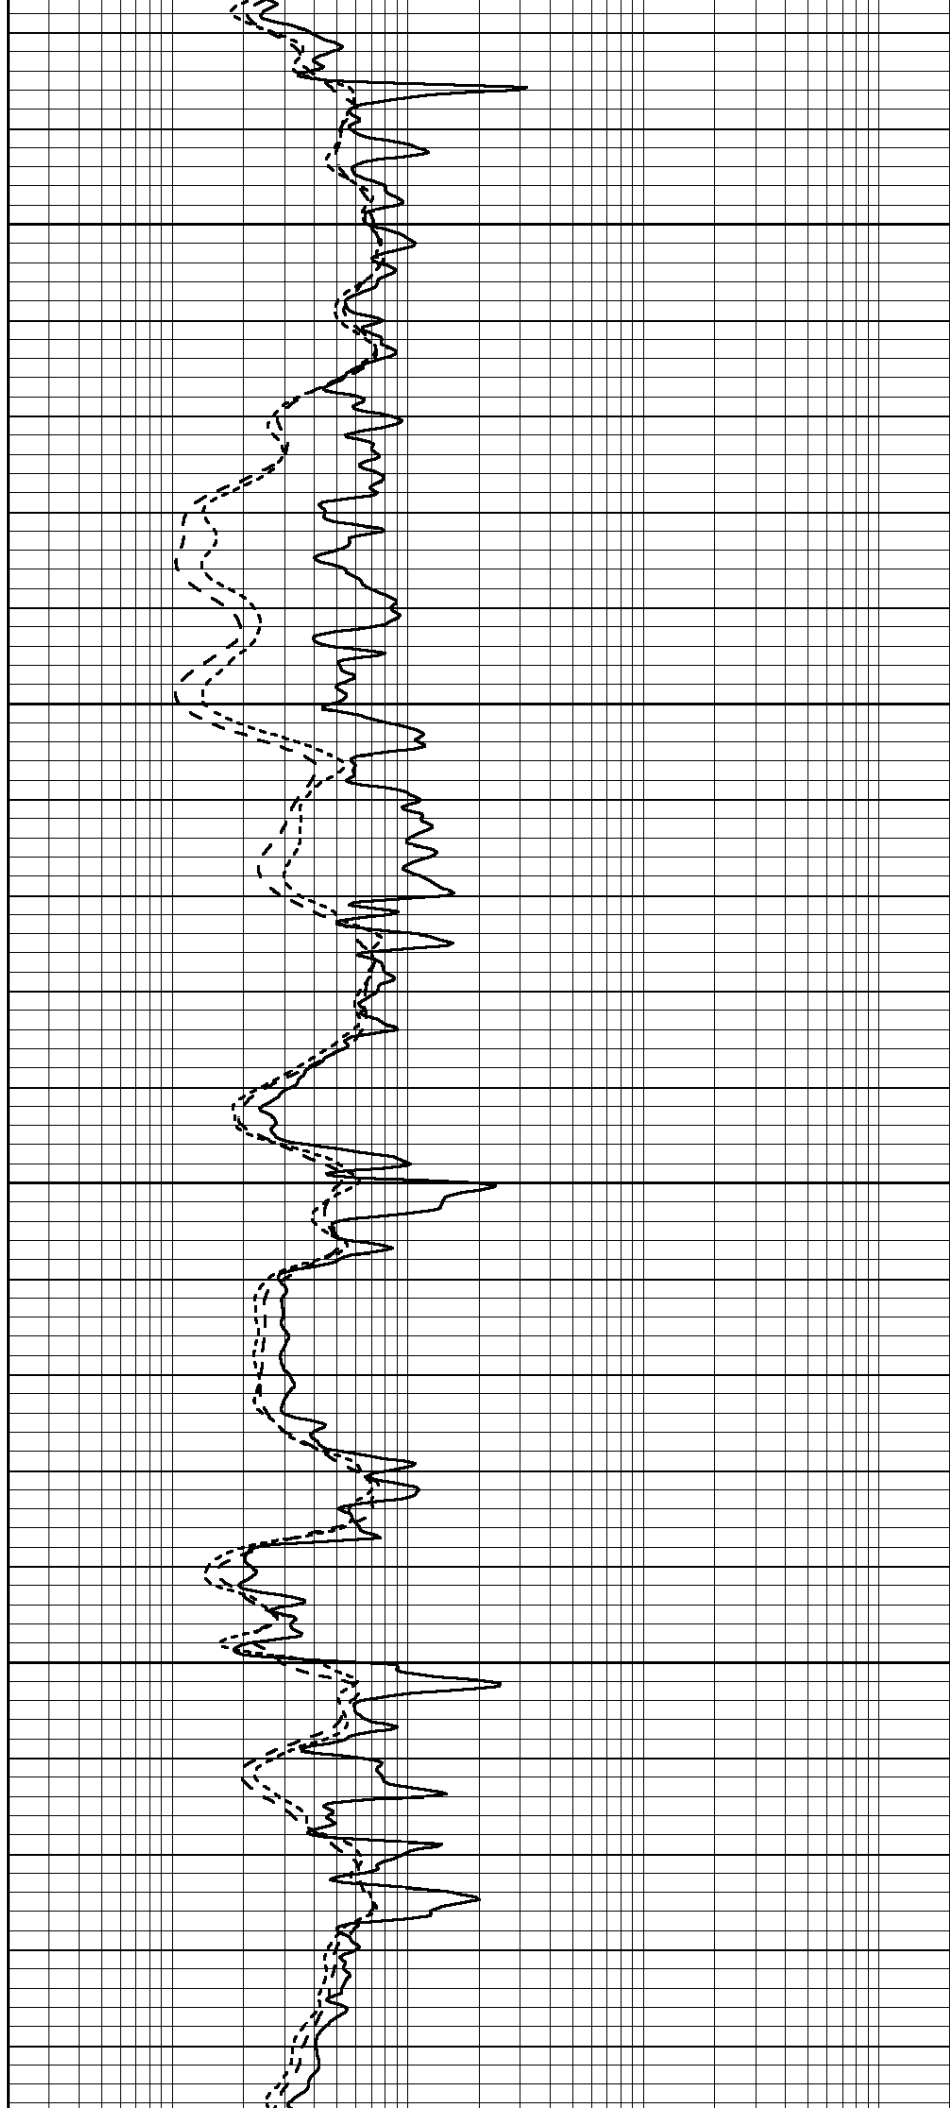

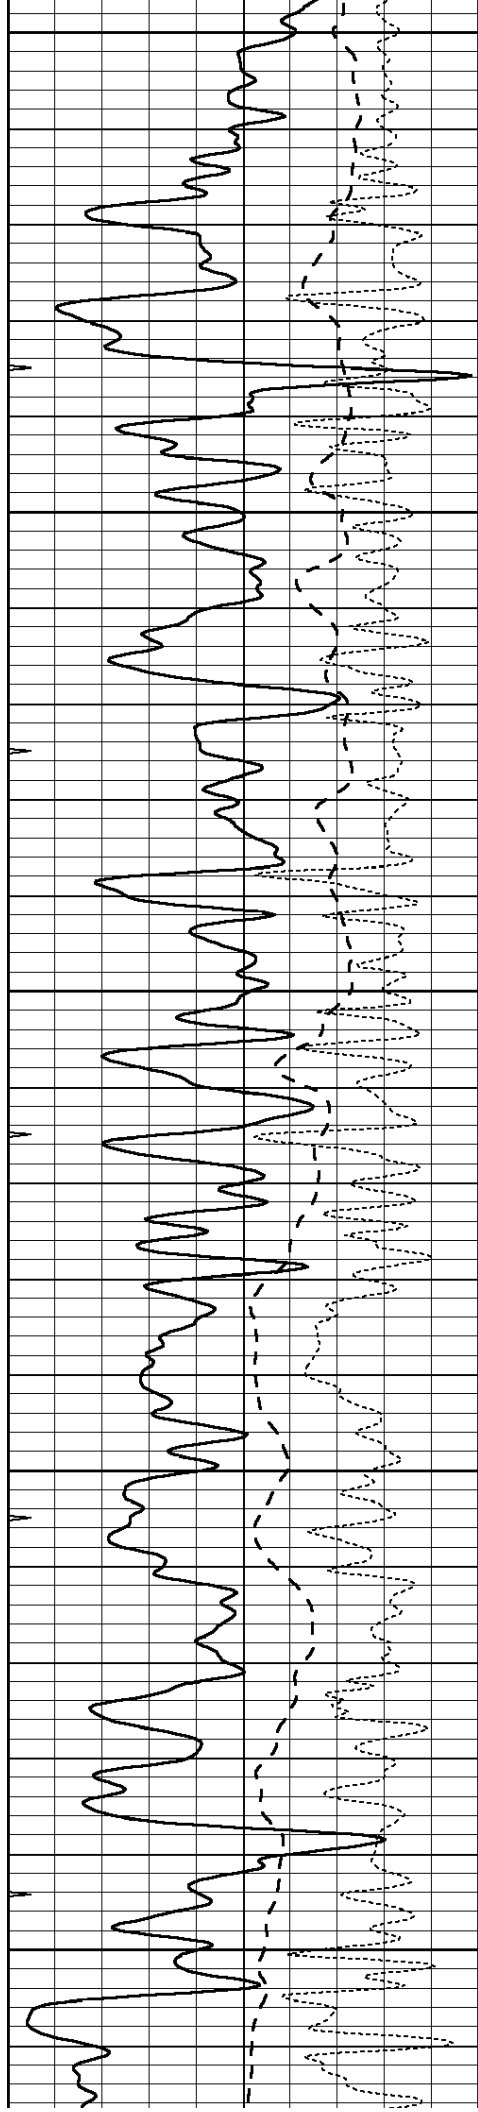


2350


2400

2450

2500

2550

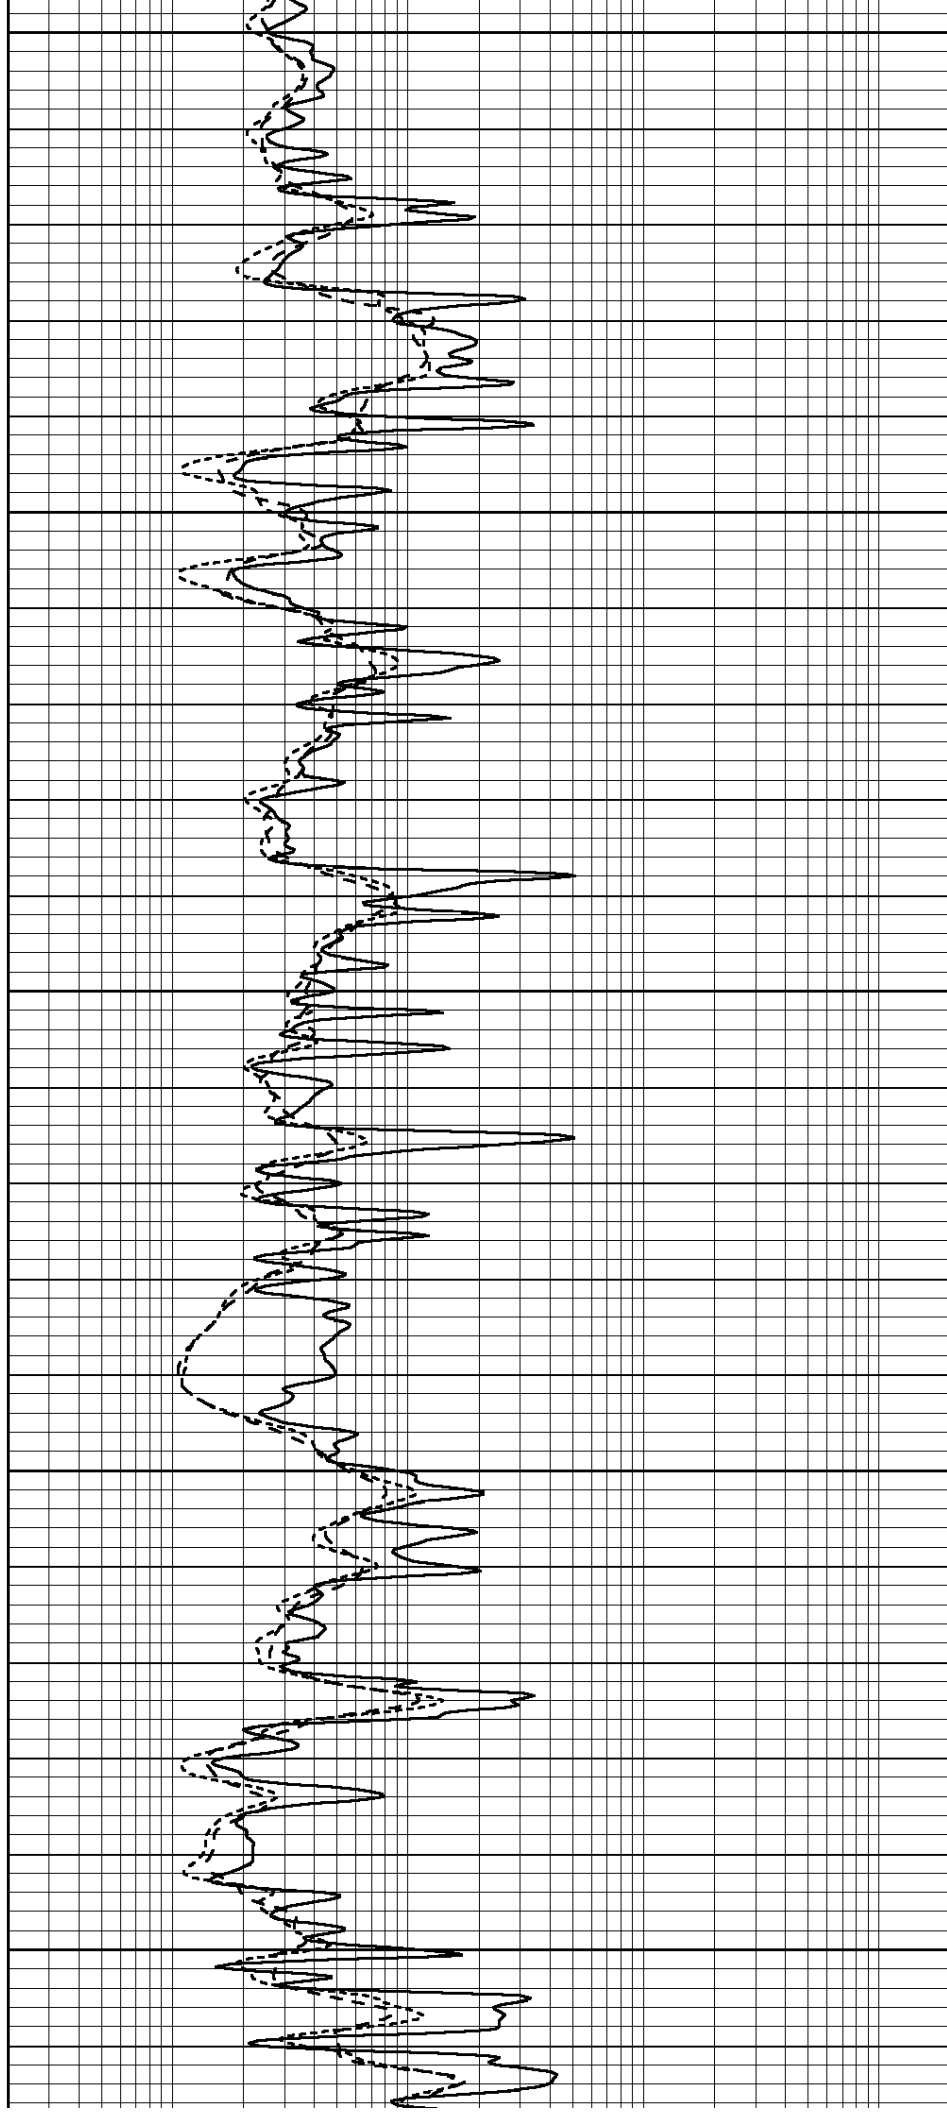

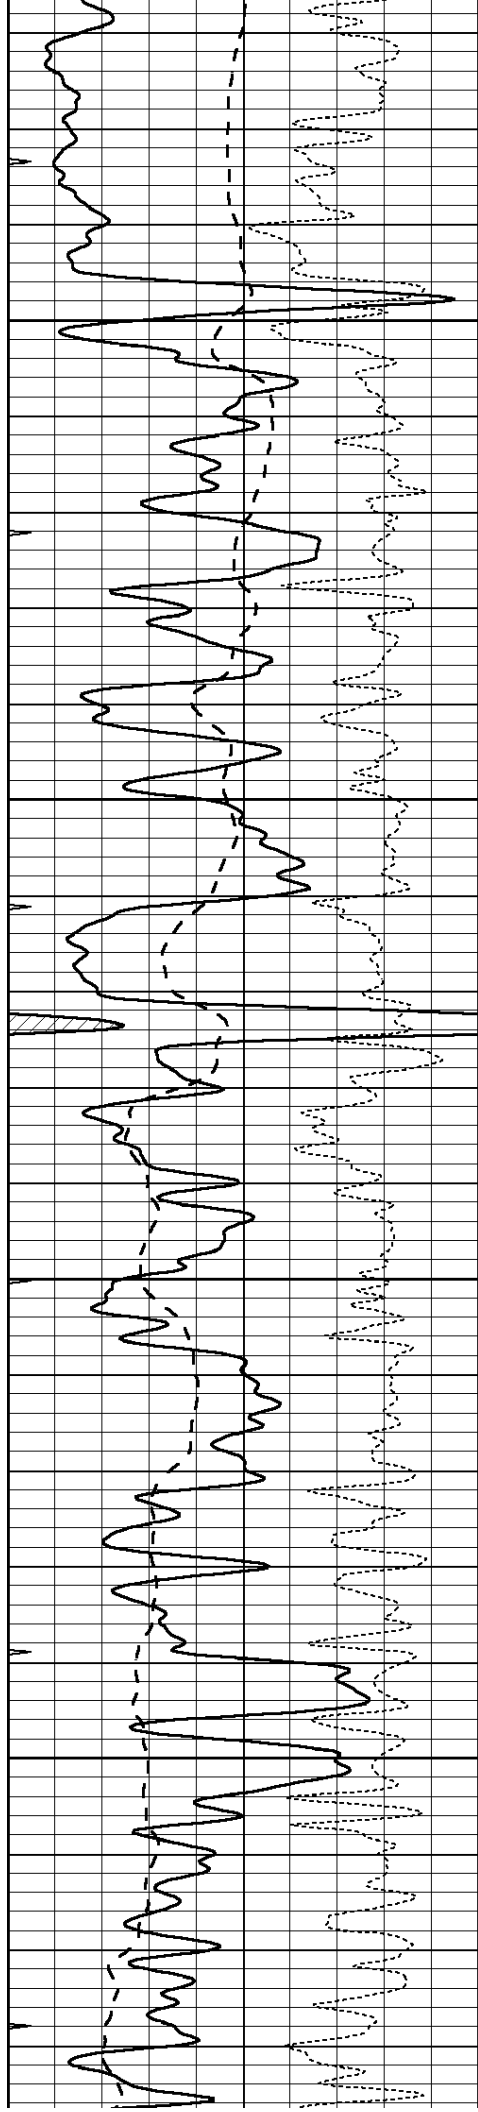



2600

2650

2700

2750

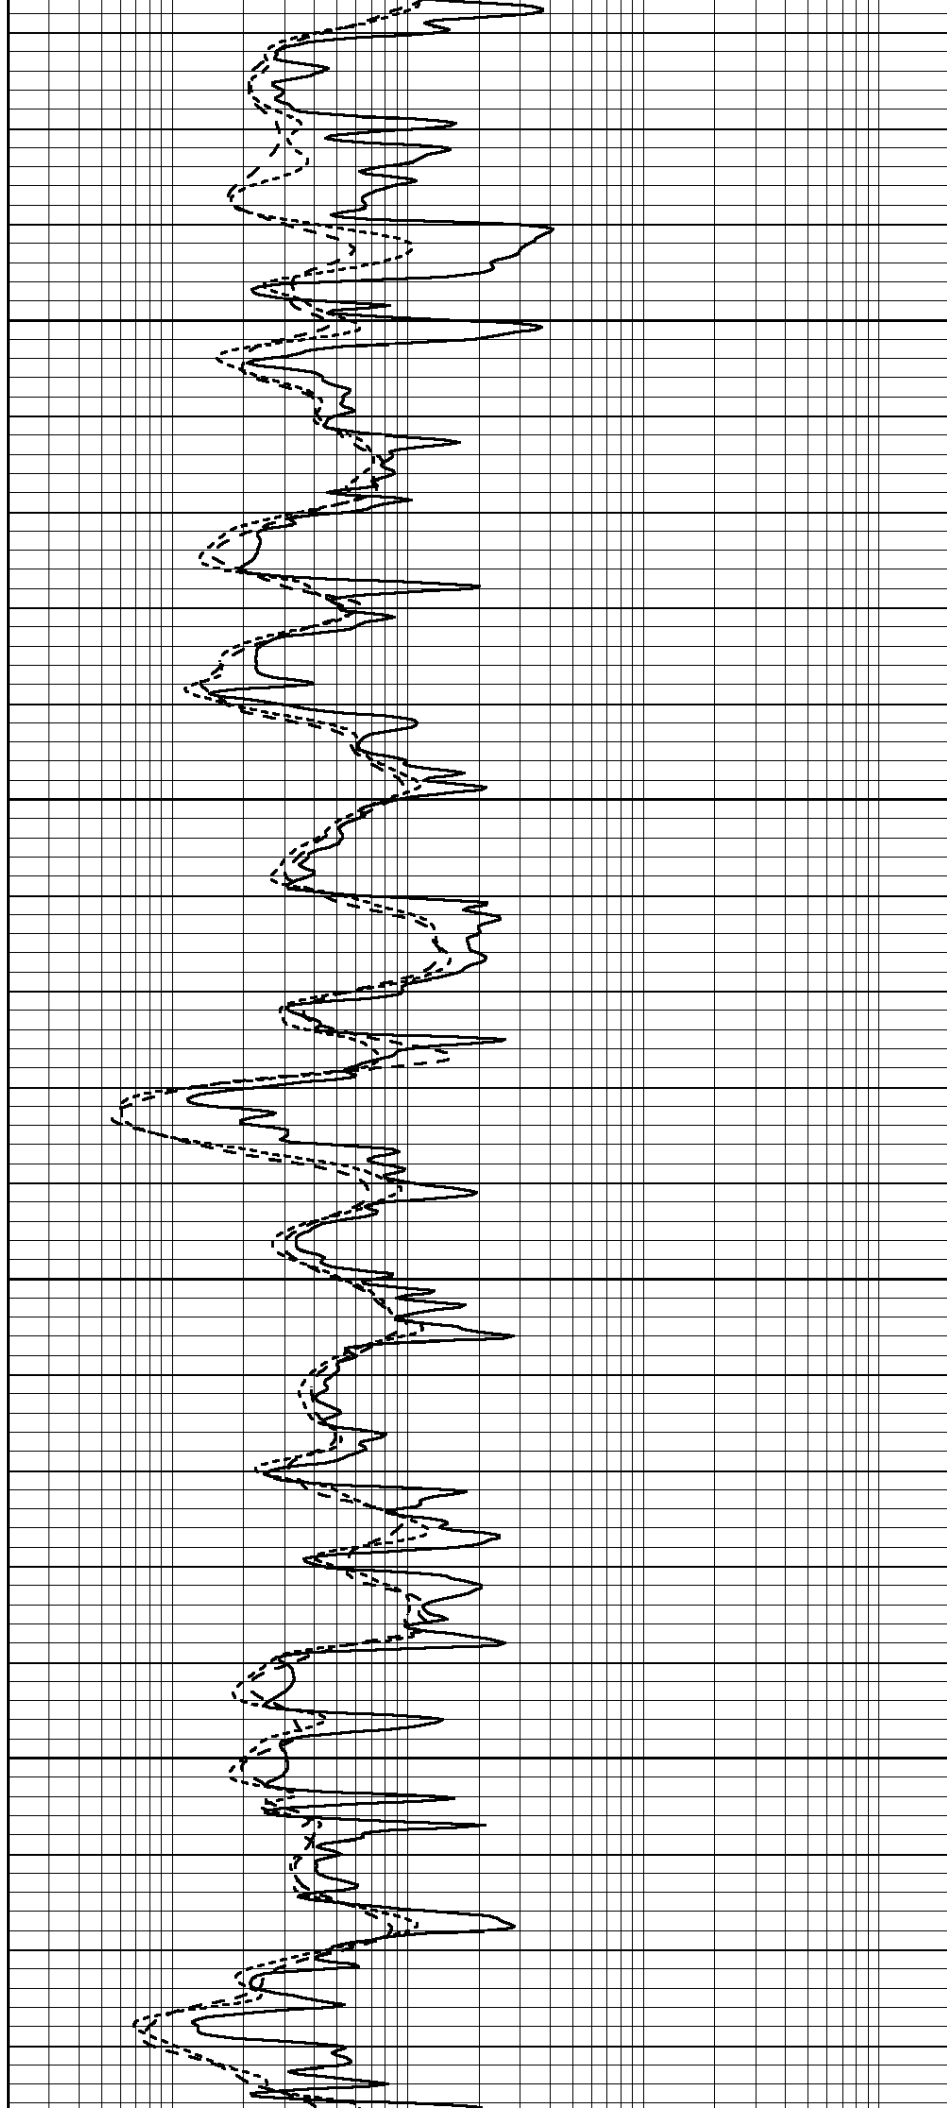

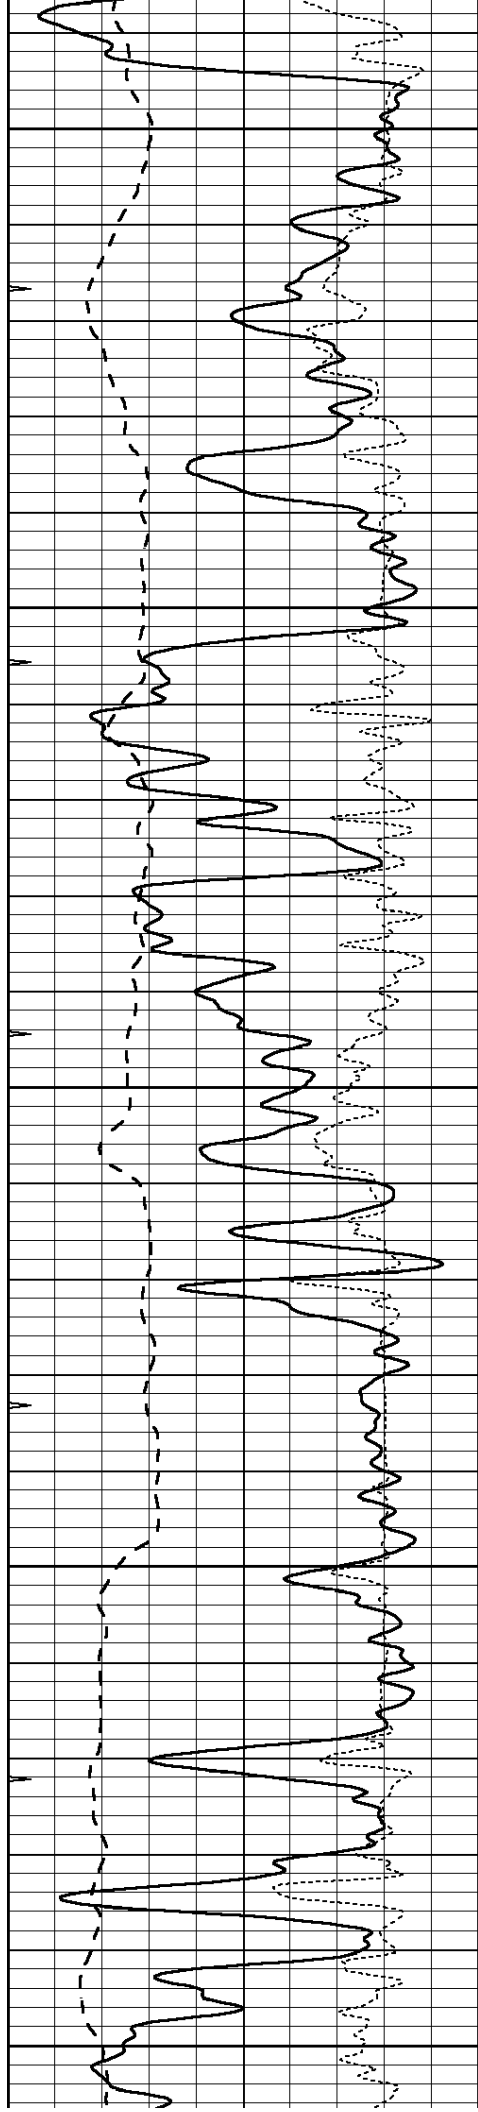


2800


2850

2900

2950

3000

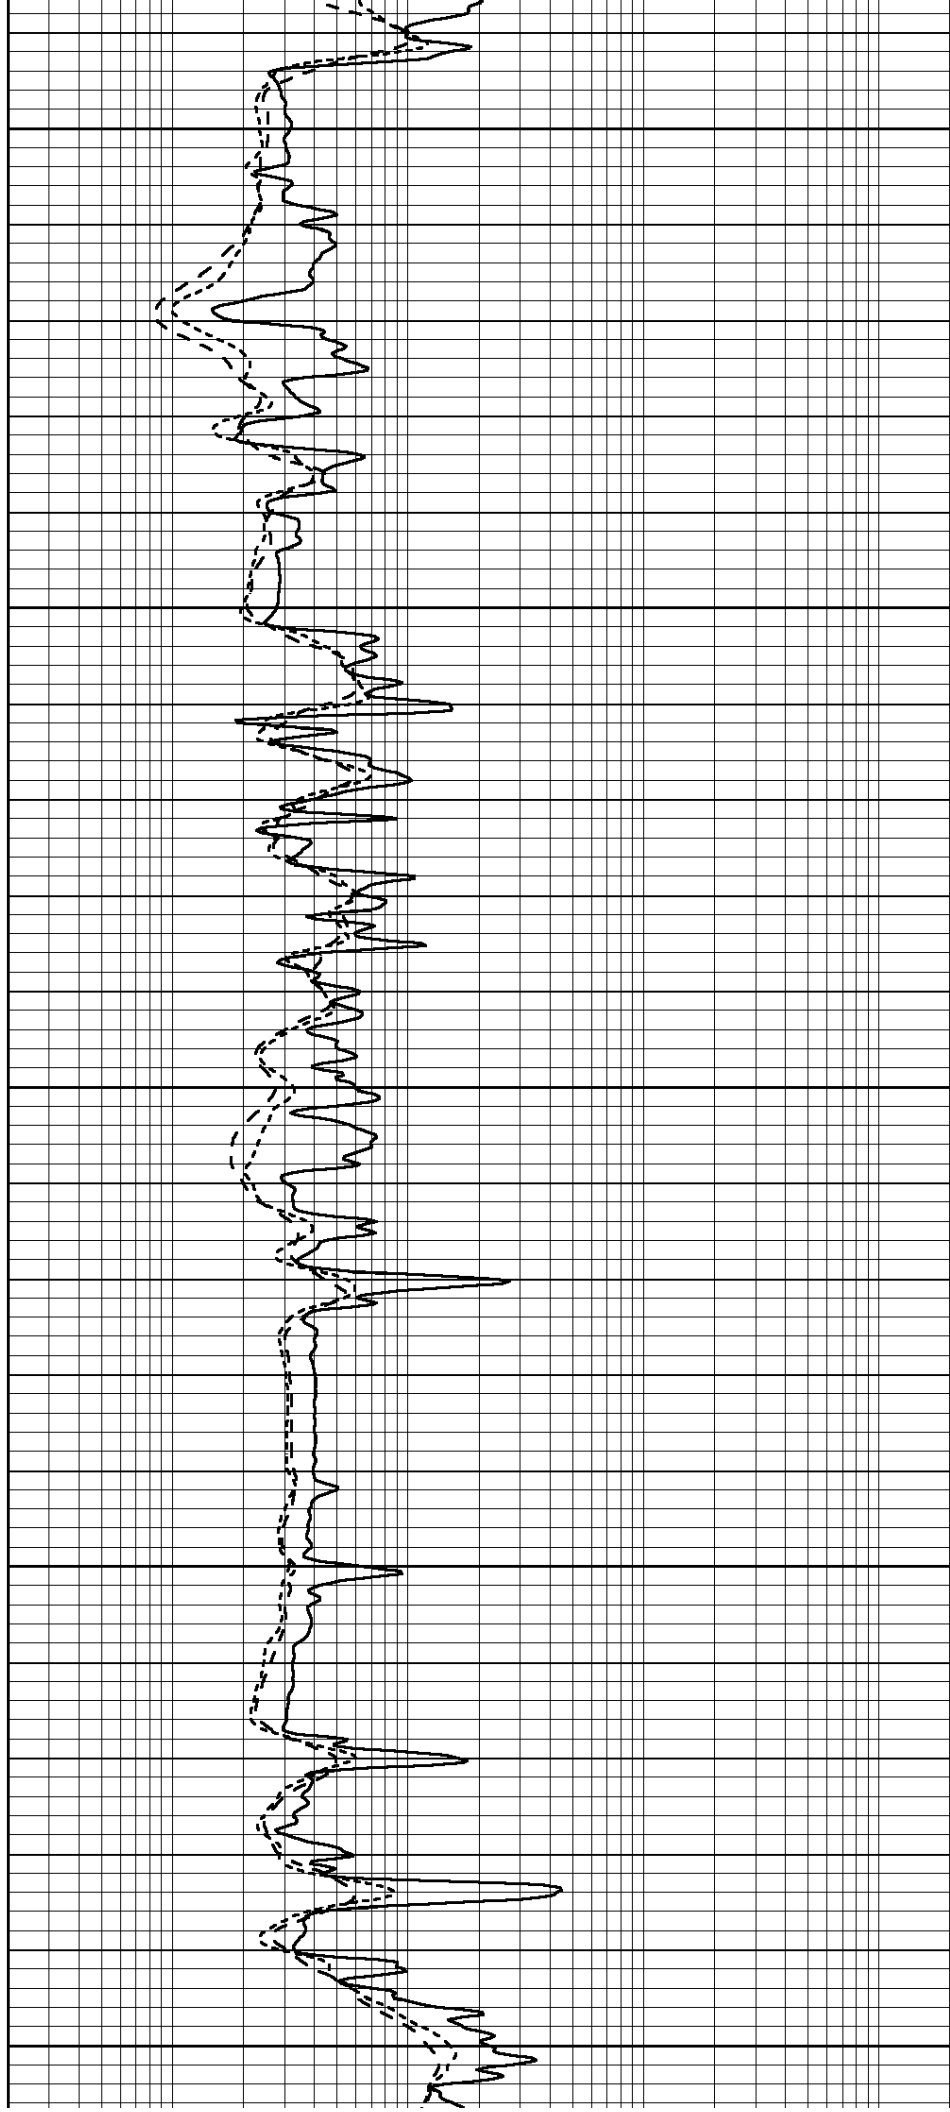

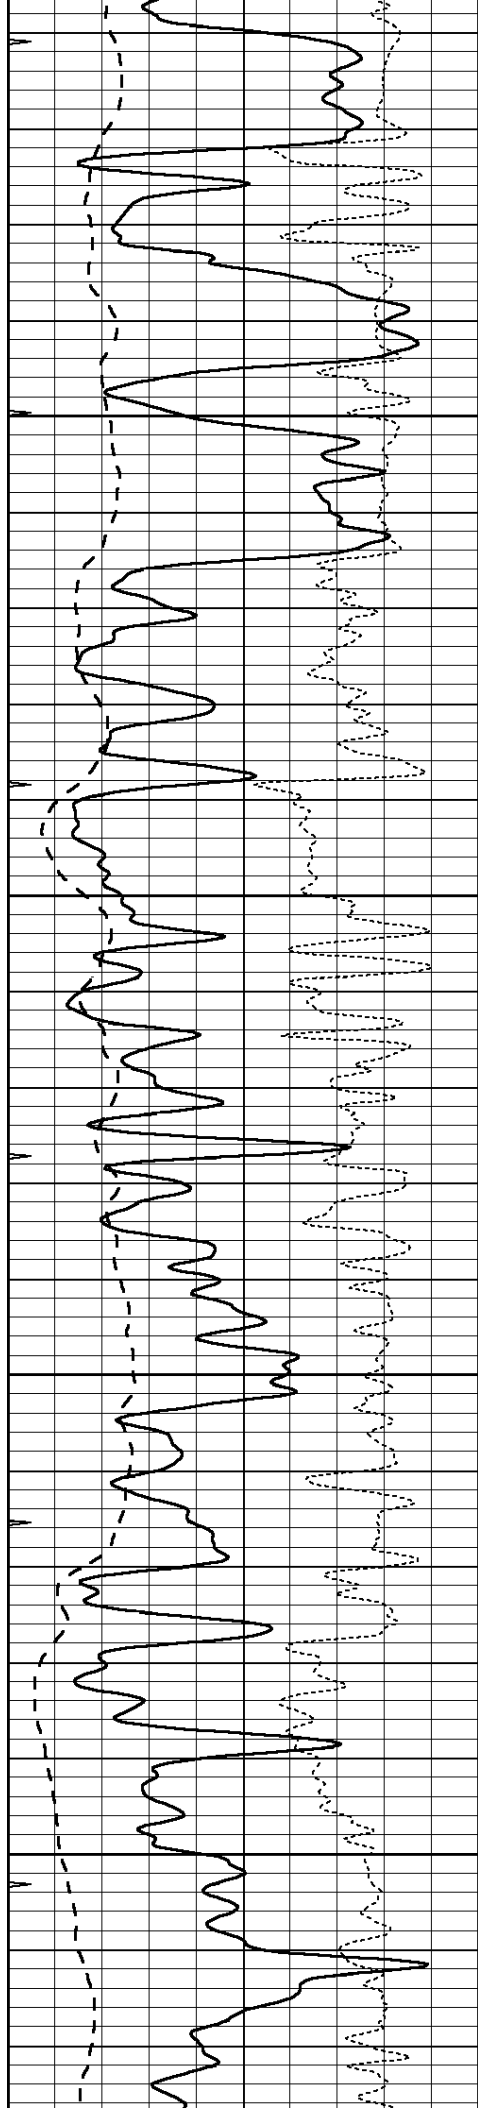



3050

3100

3150

3200

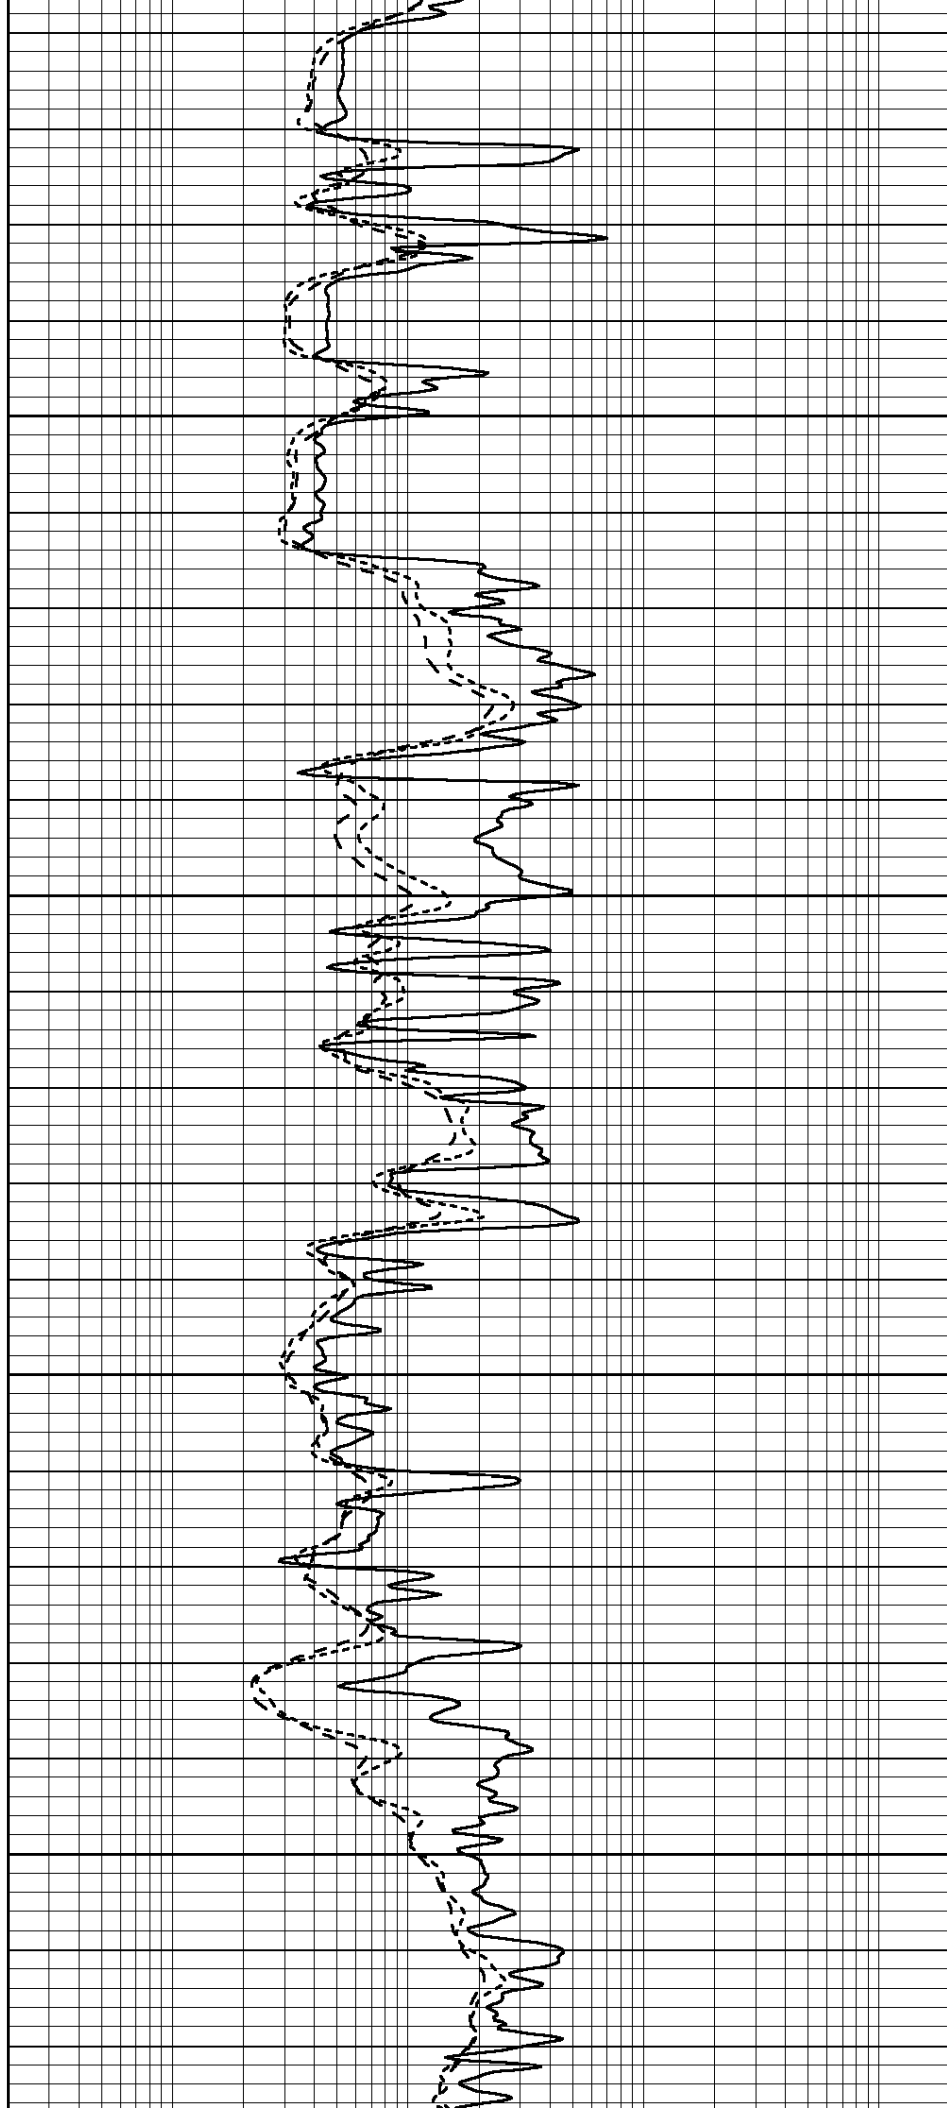

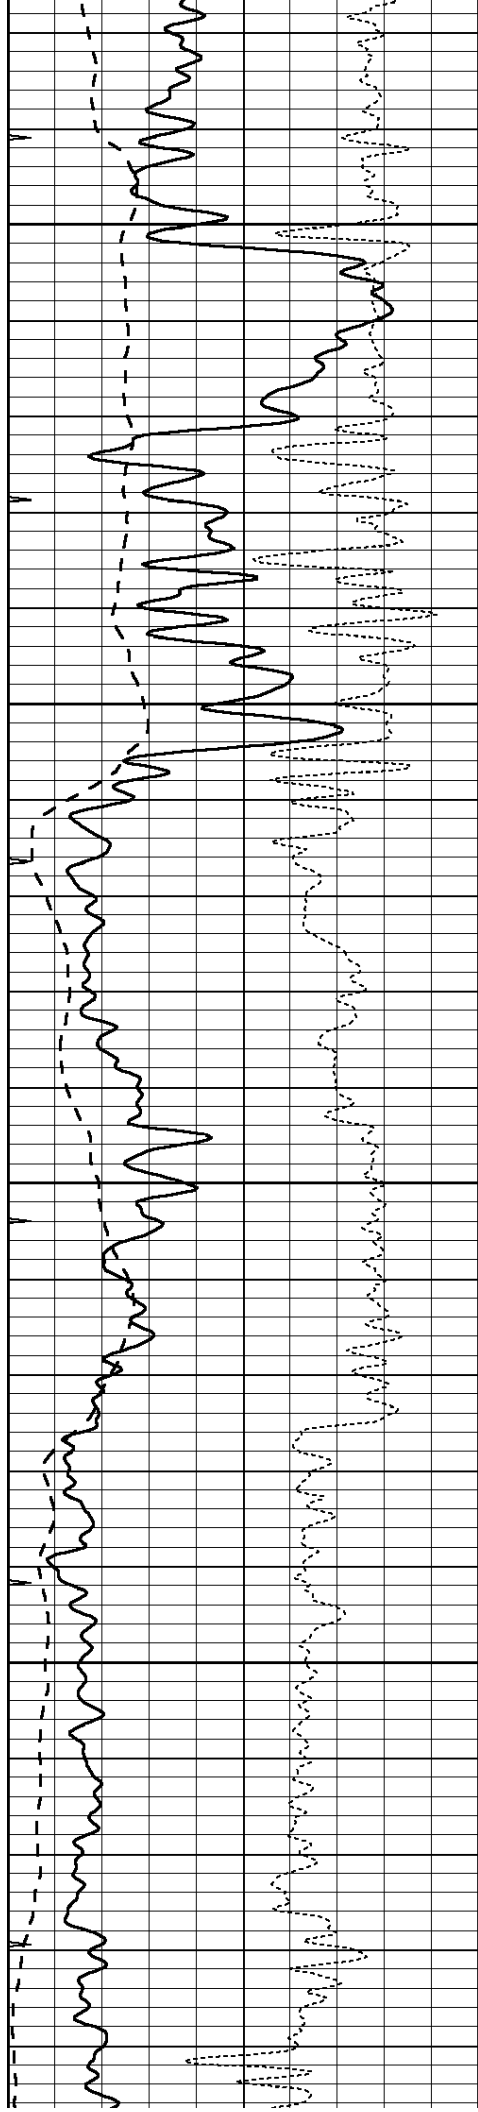



3250

3300

3350

3400

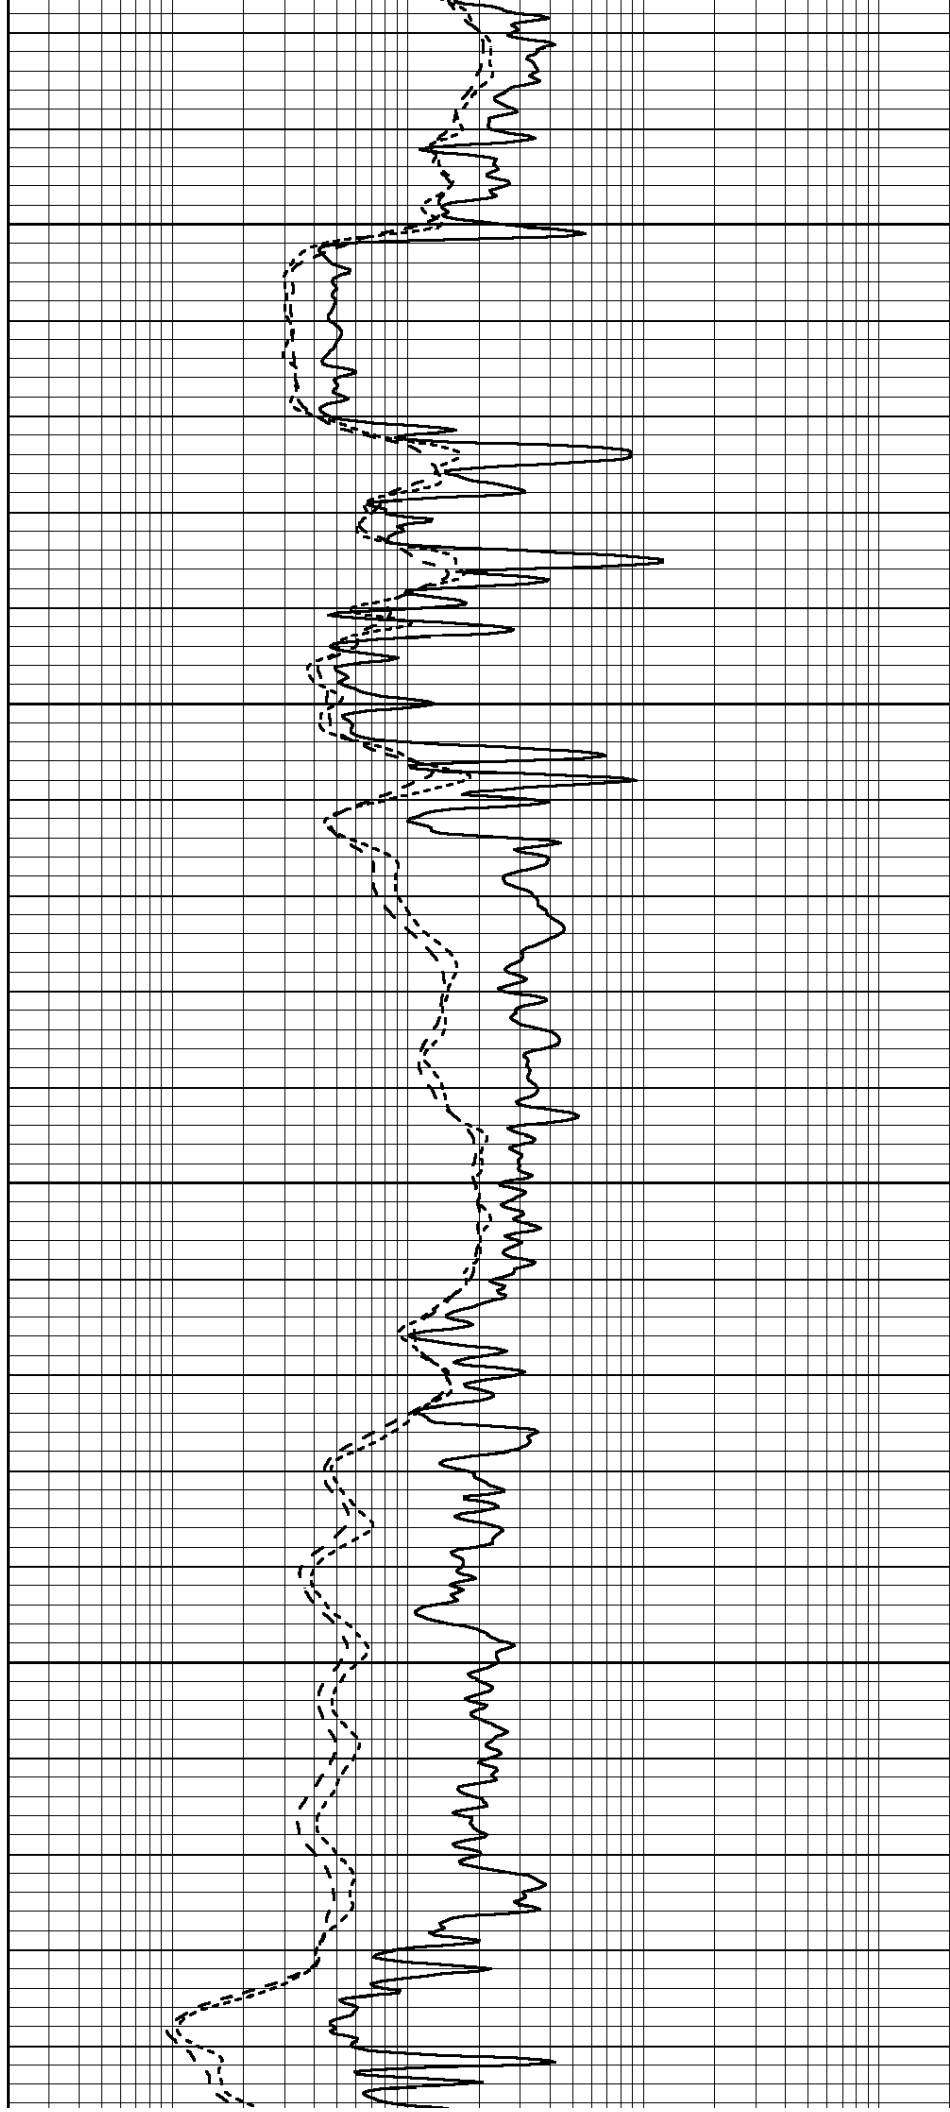

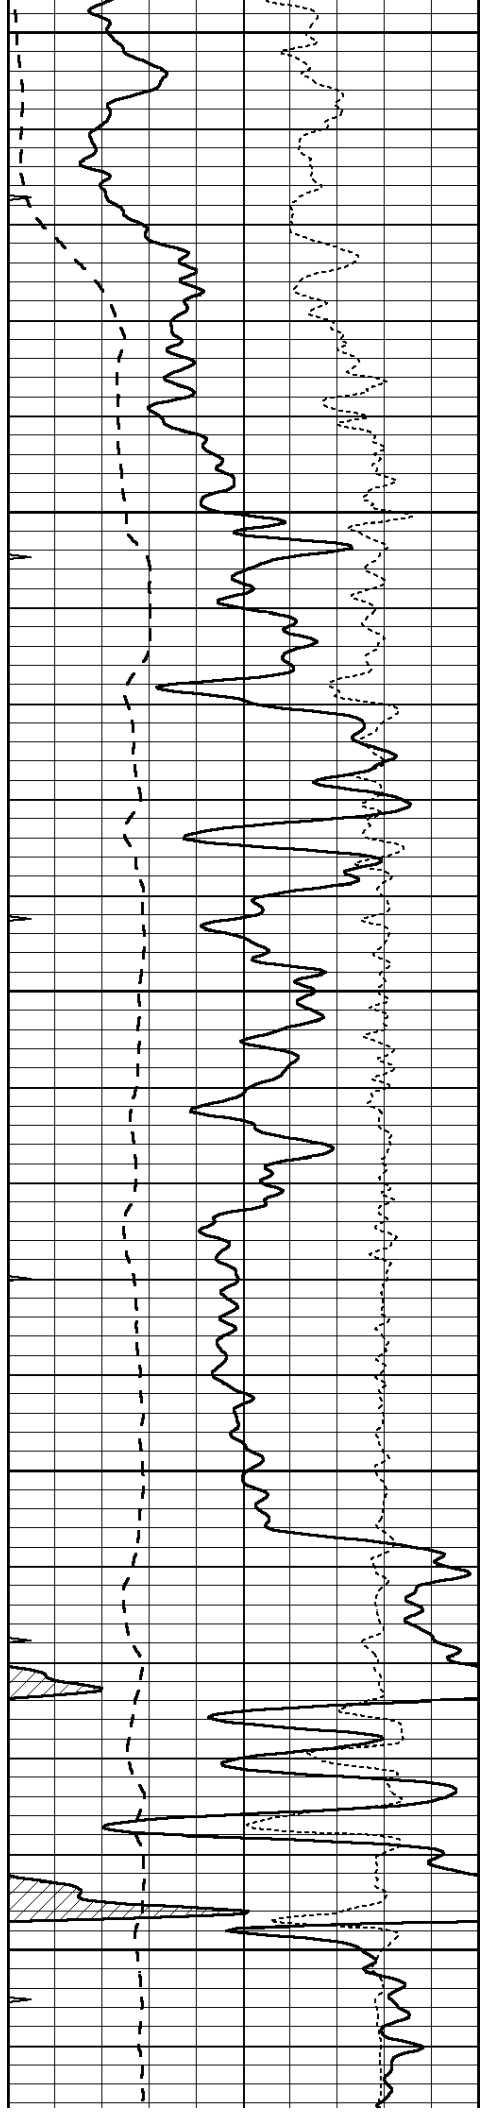


3450


3500

3550

3600

3650

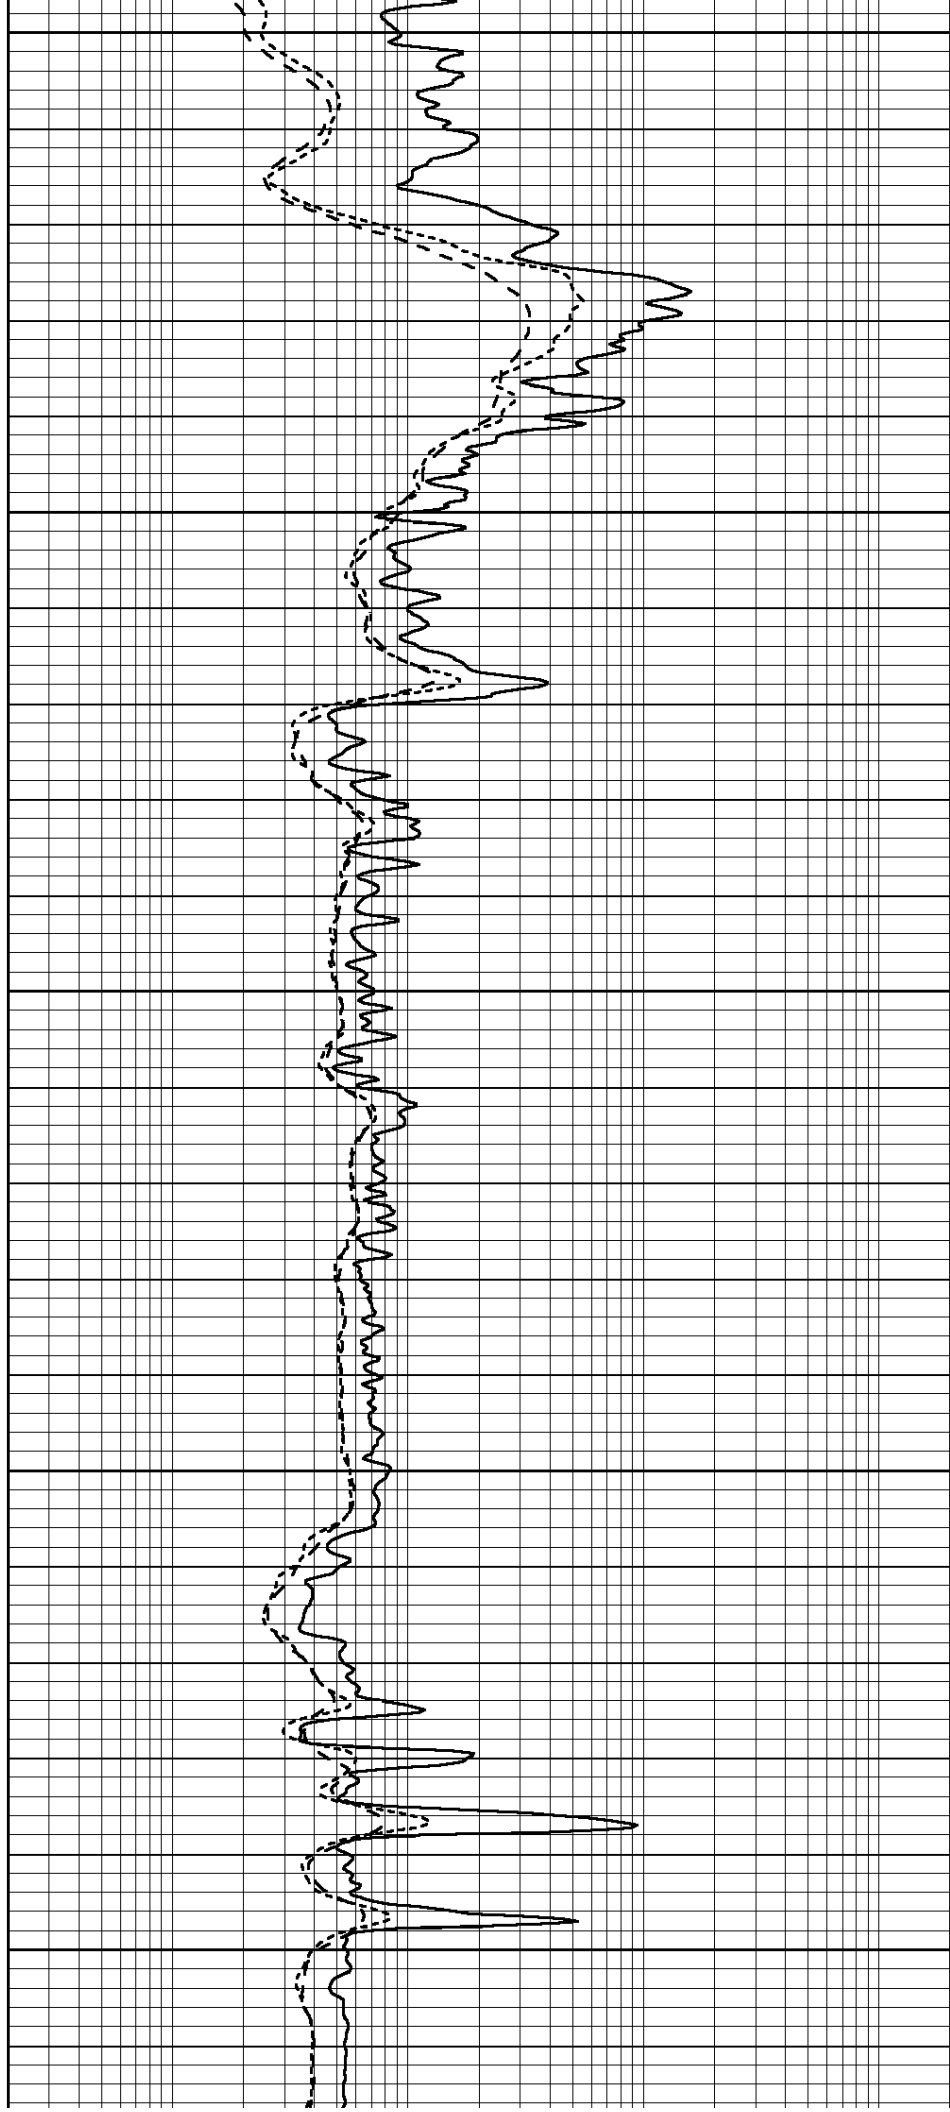

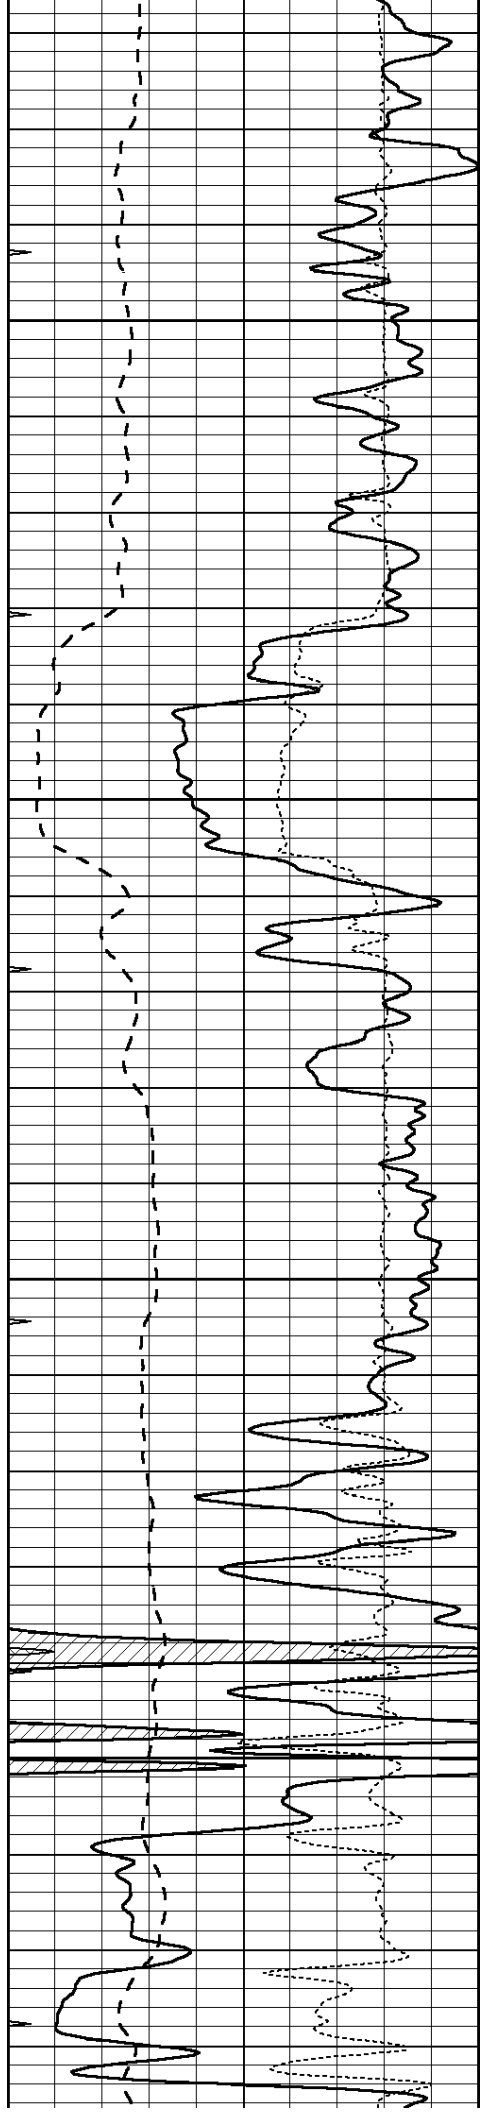



3700

3750

3800

3850

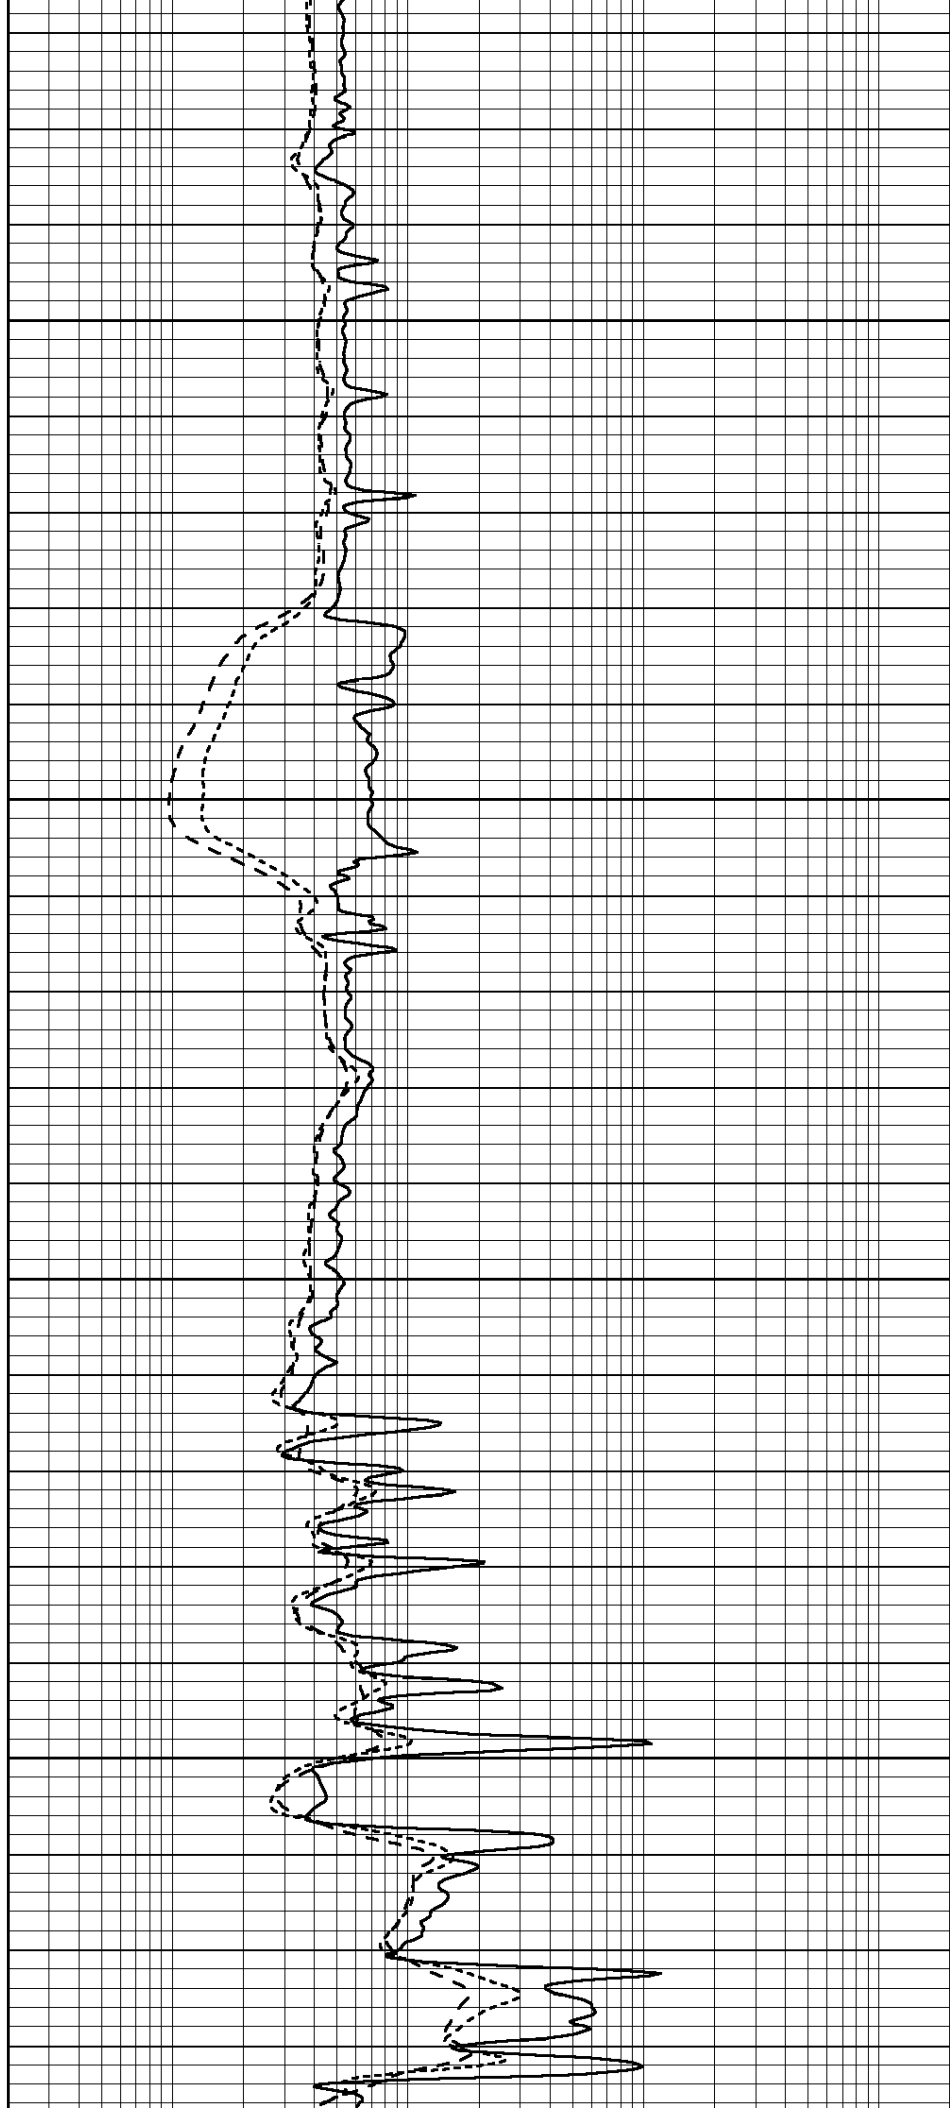

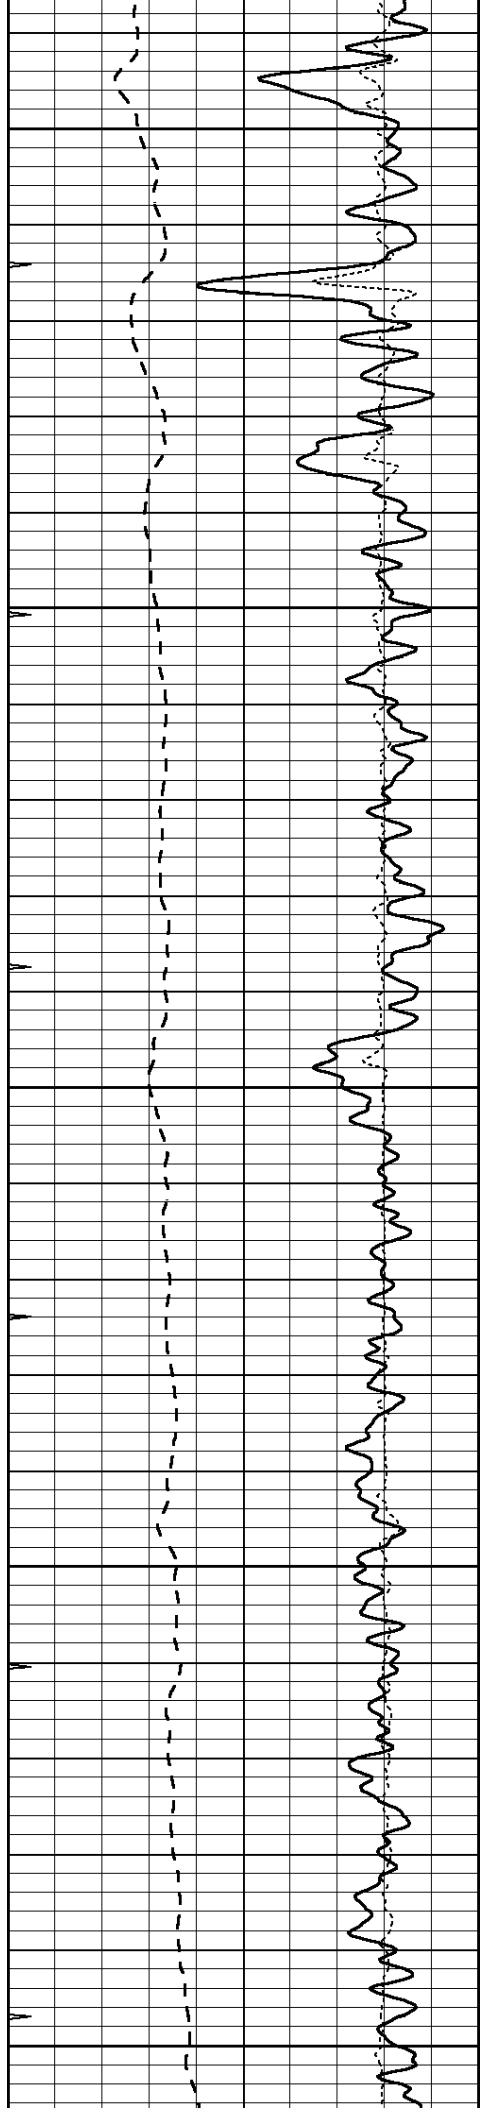


3900


3950

4000

4050

4100

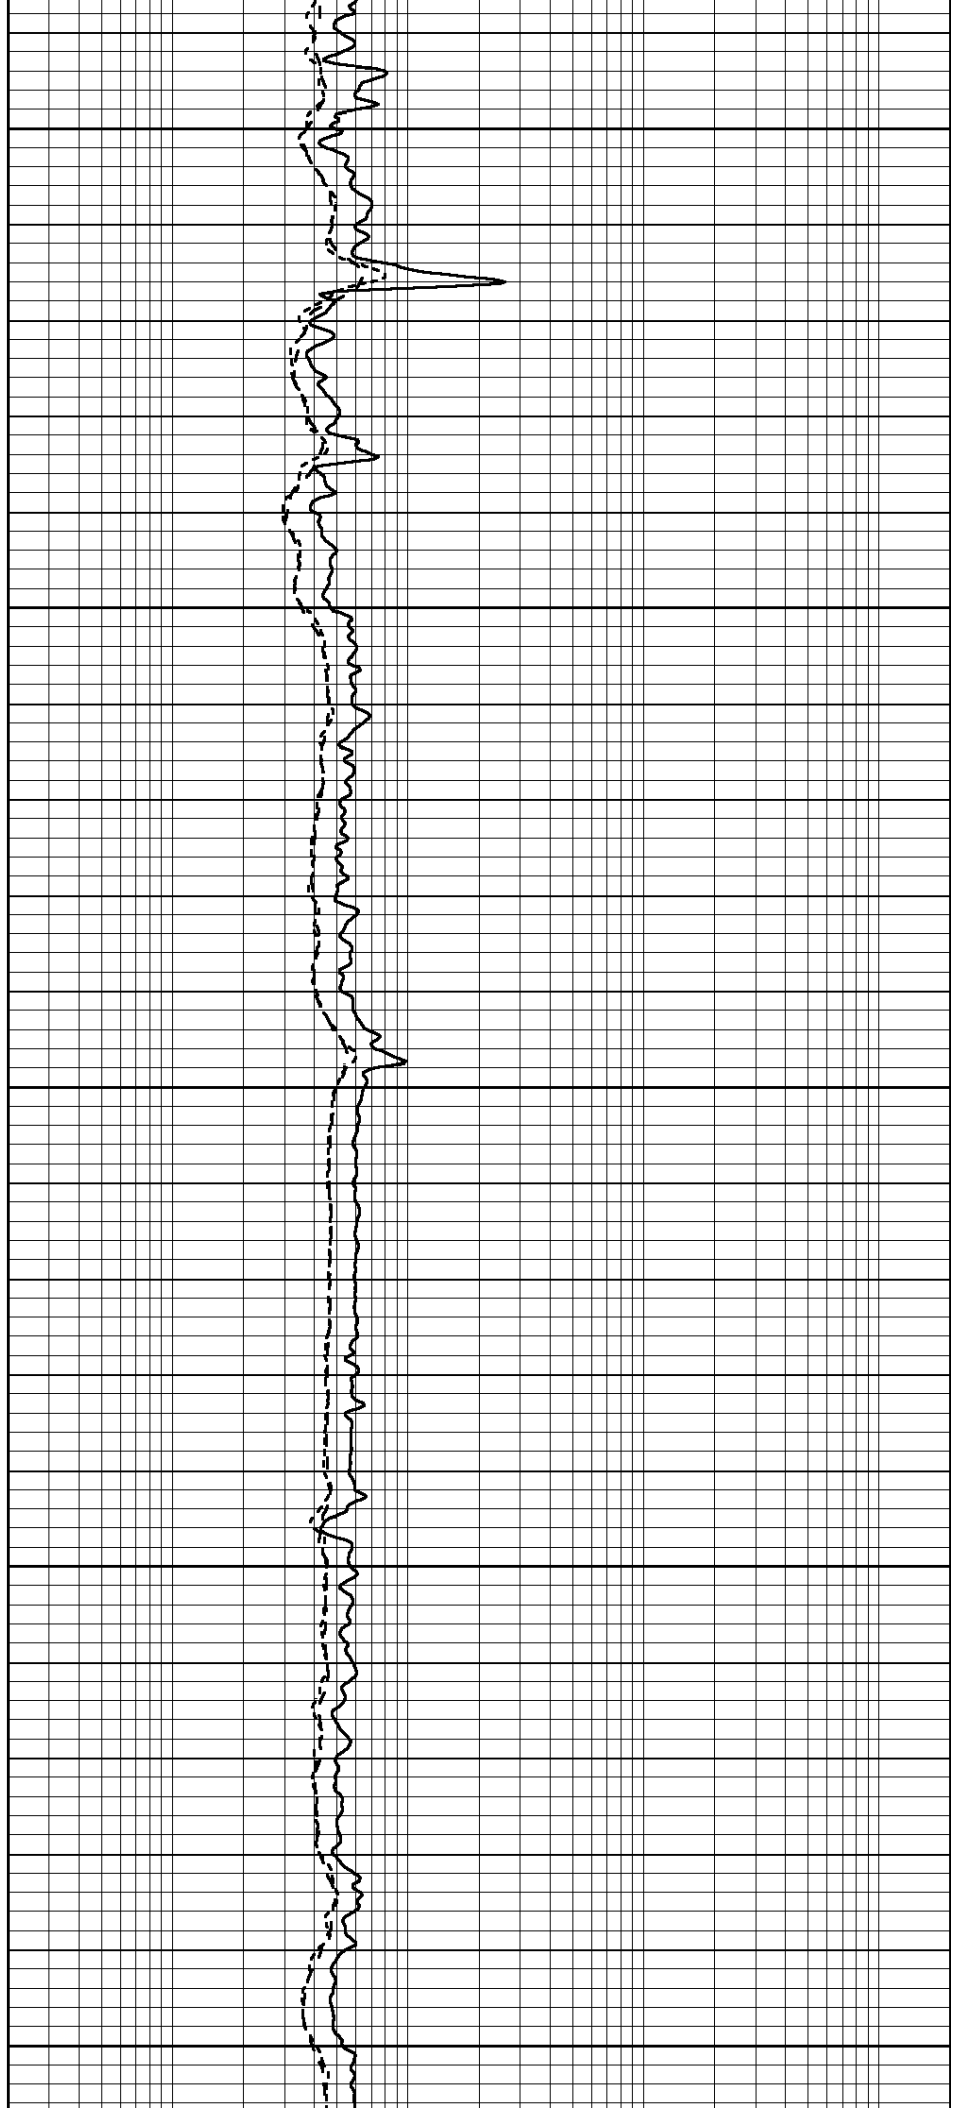

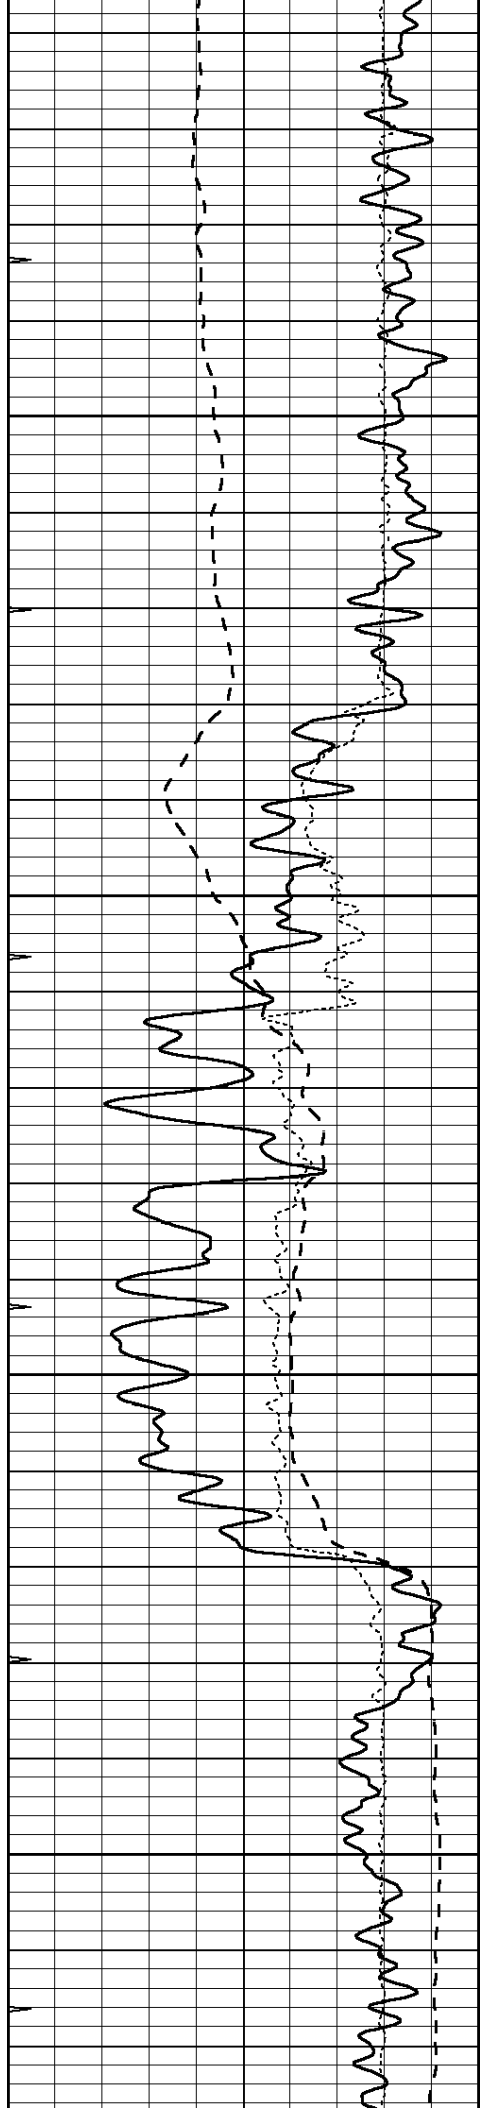



4150

4200

4250

4300

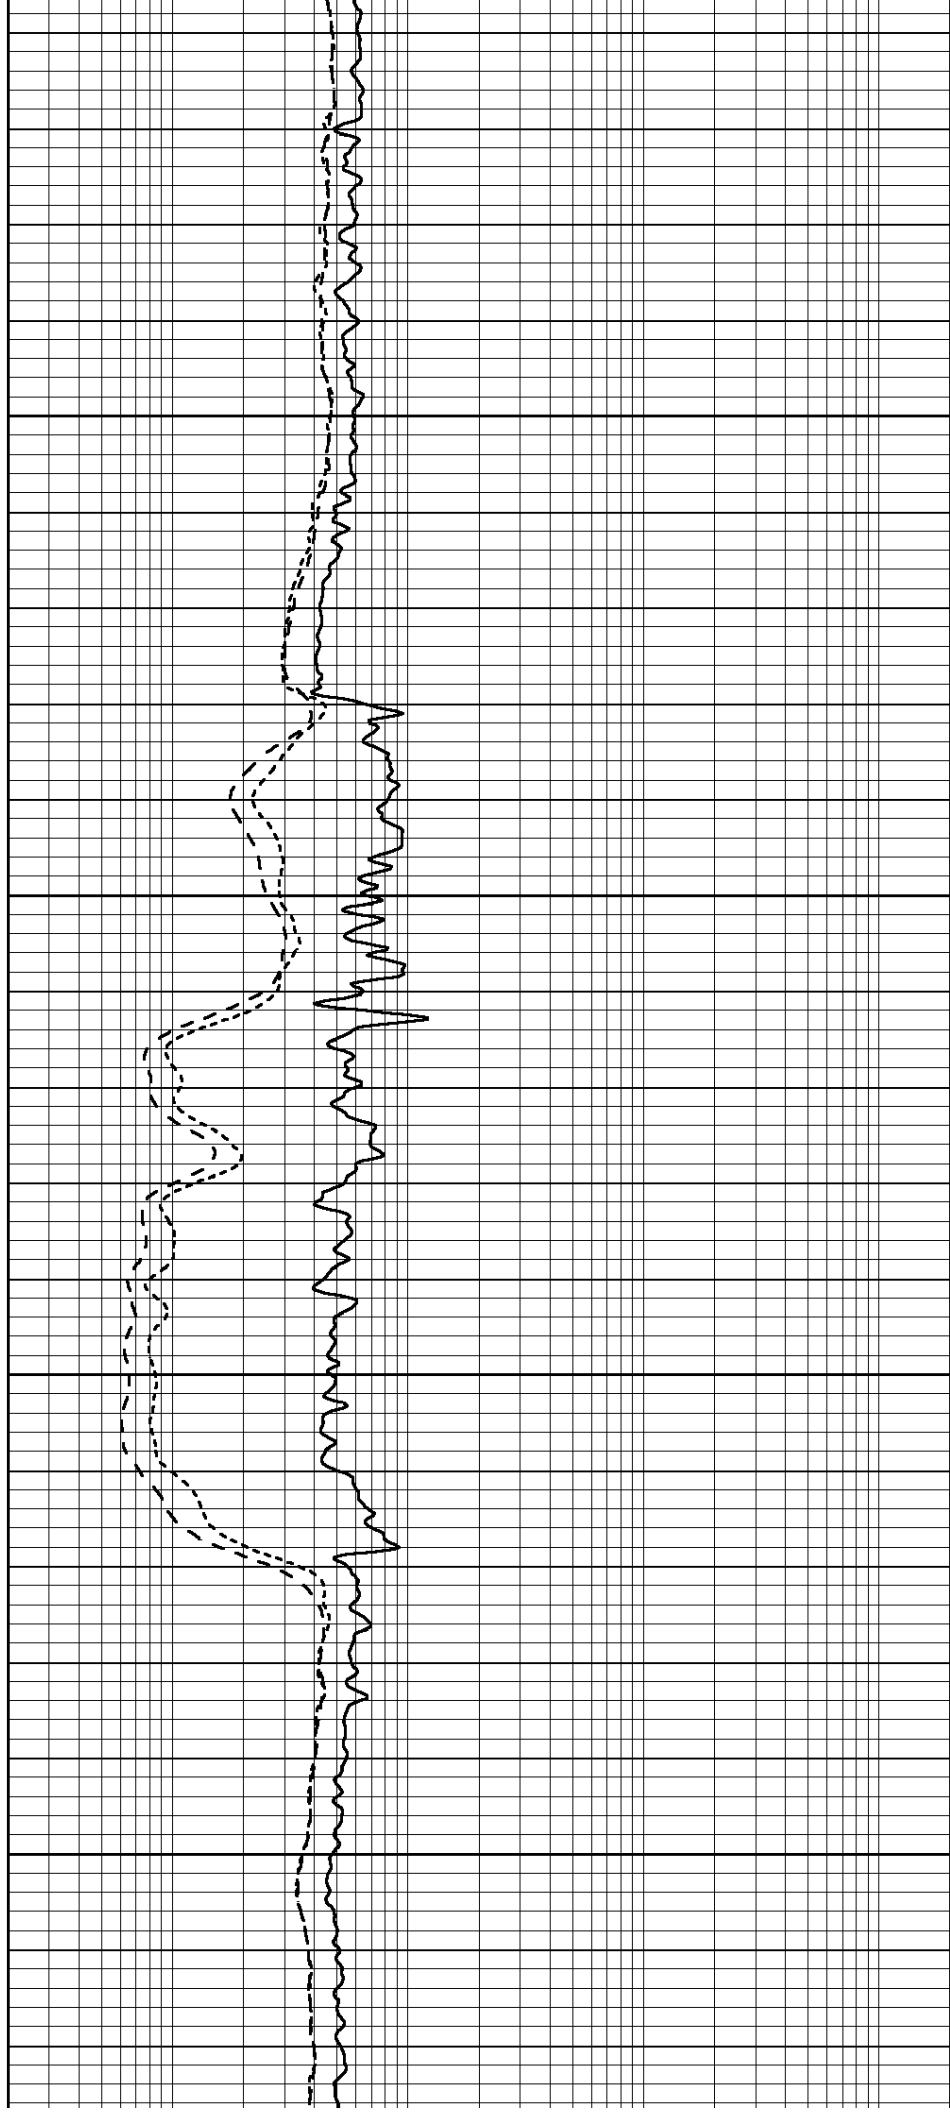

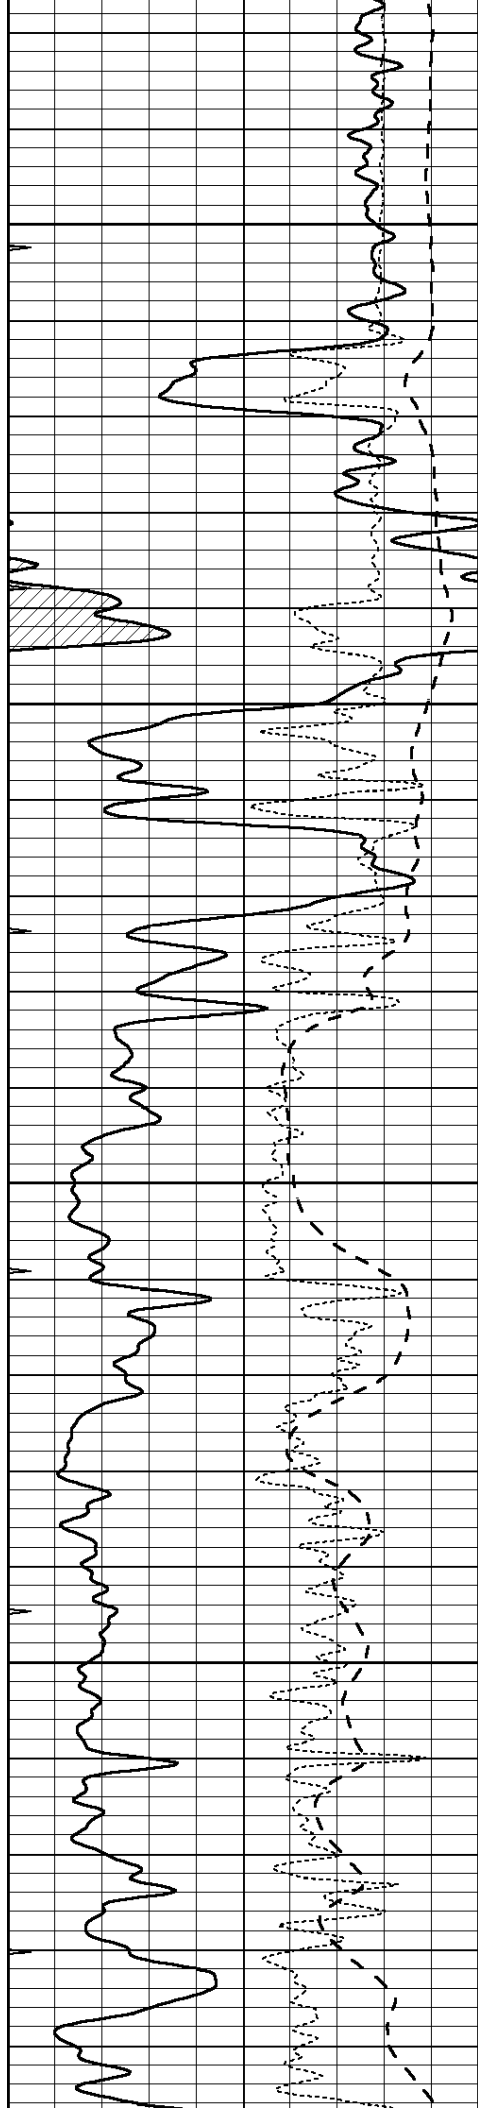



4350

4400

4450

4500

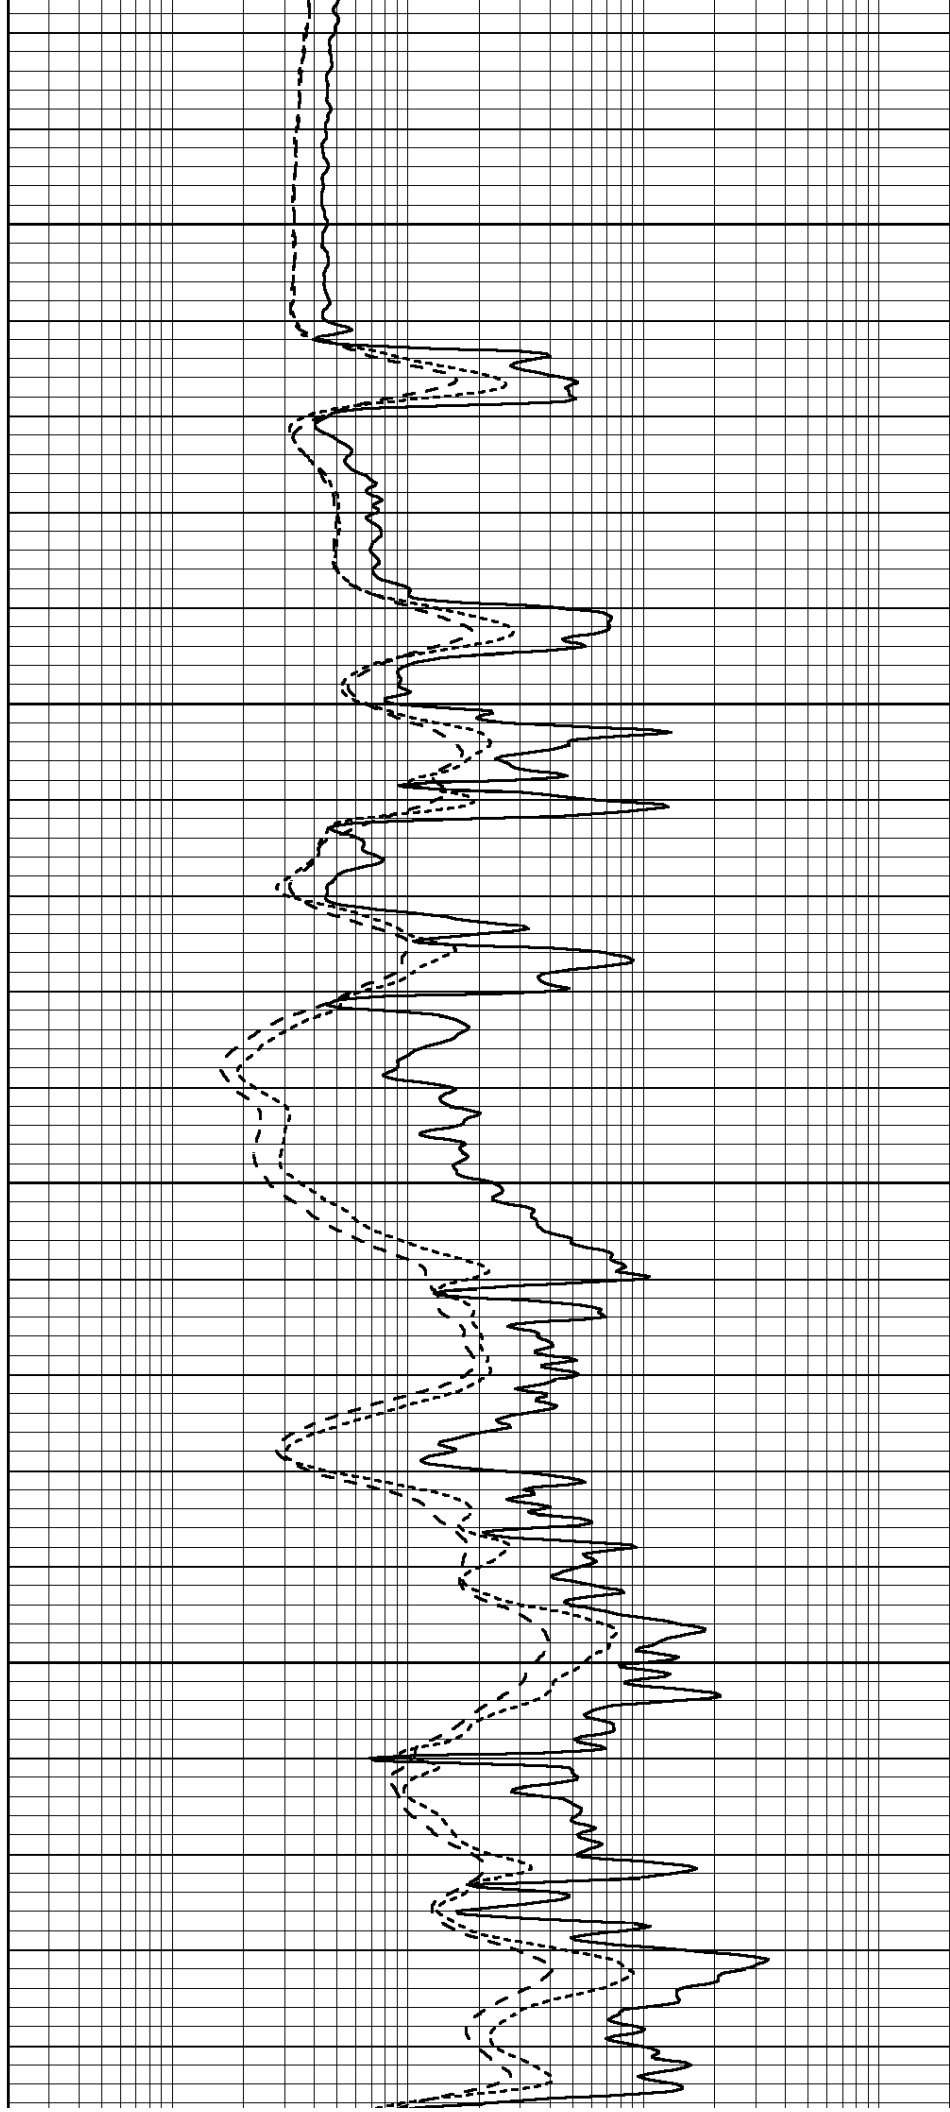

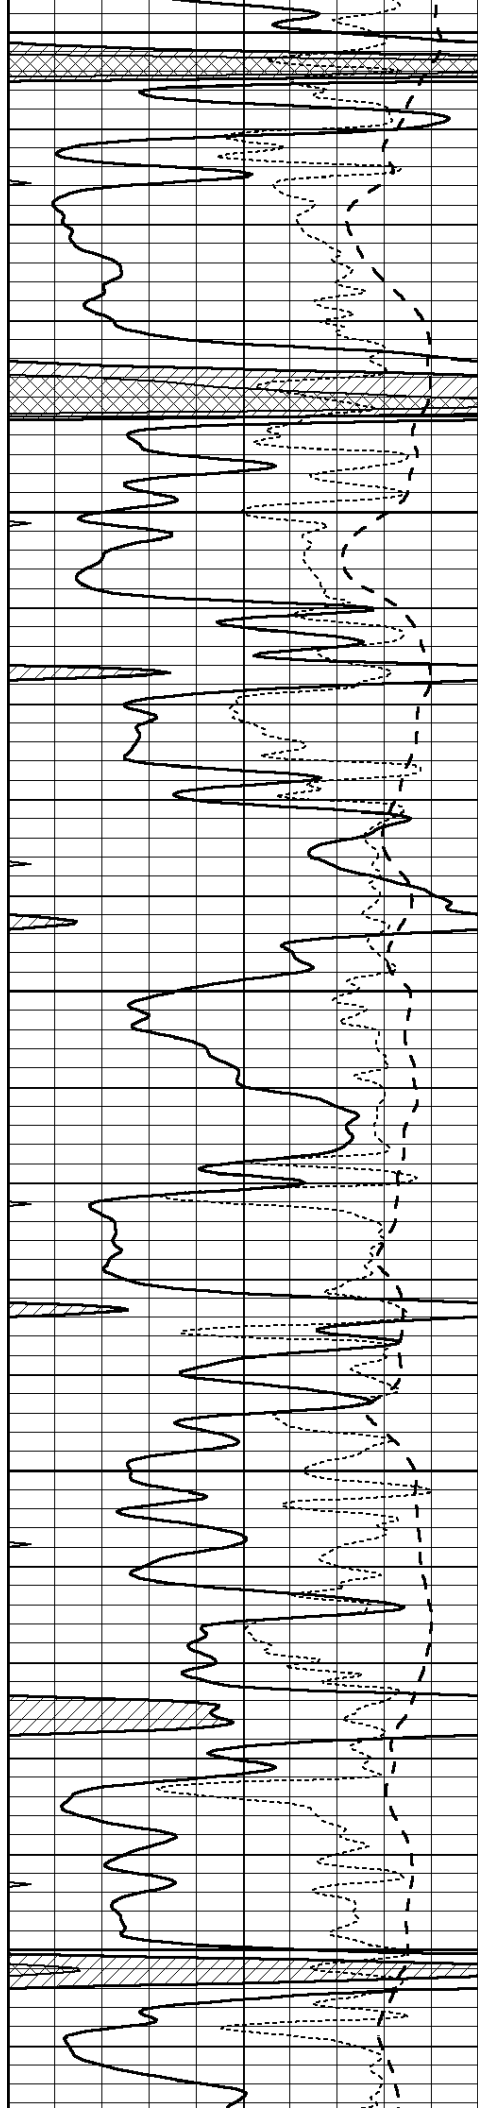


4550


4600

4650

4700

4750

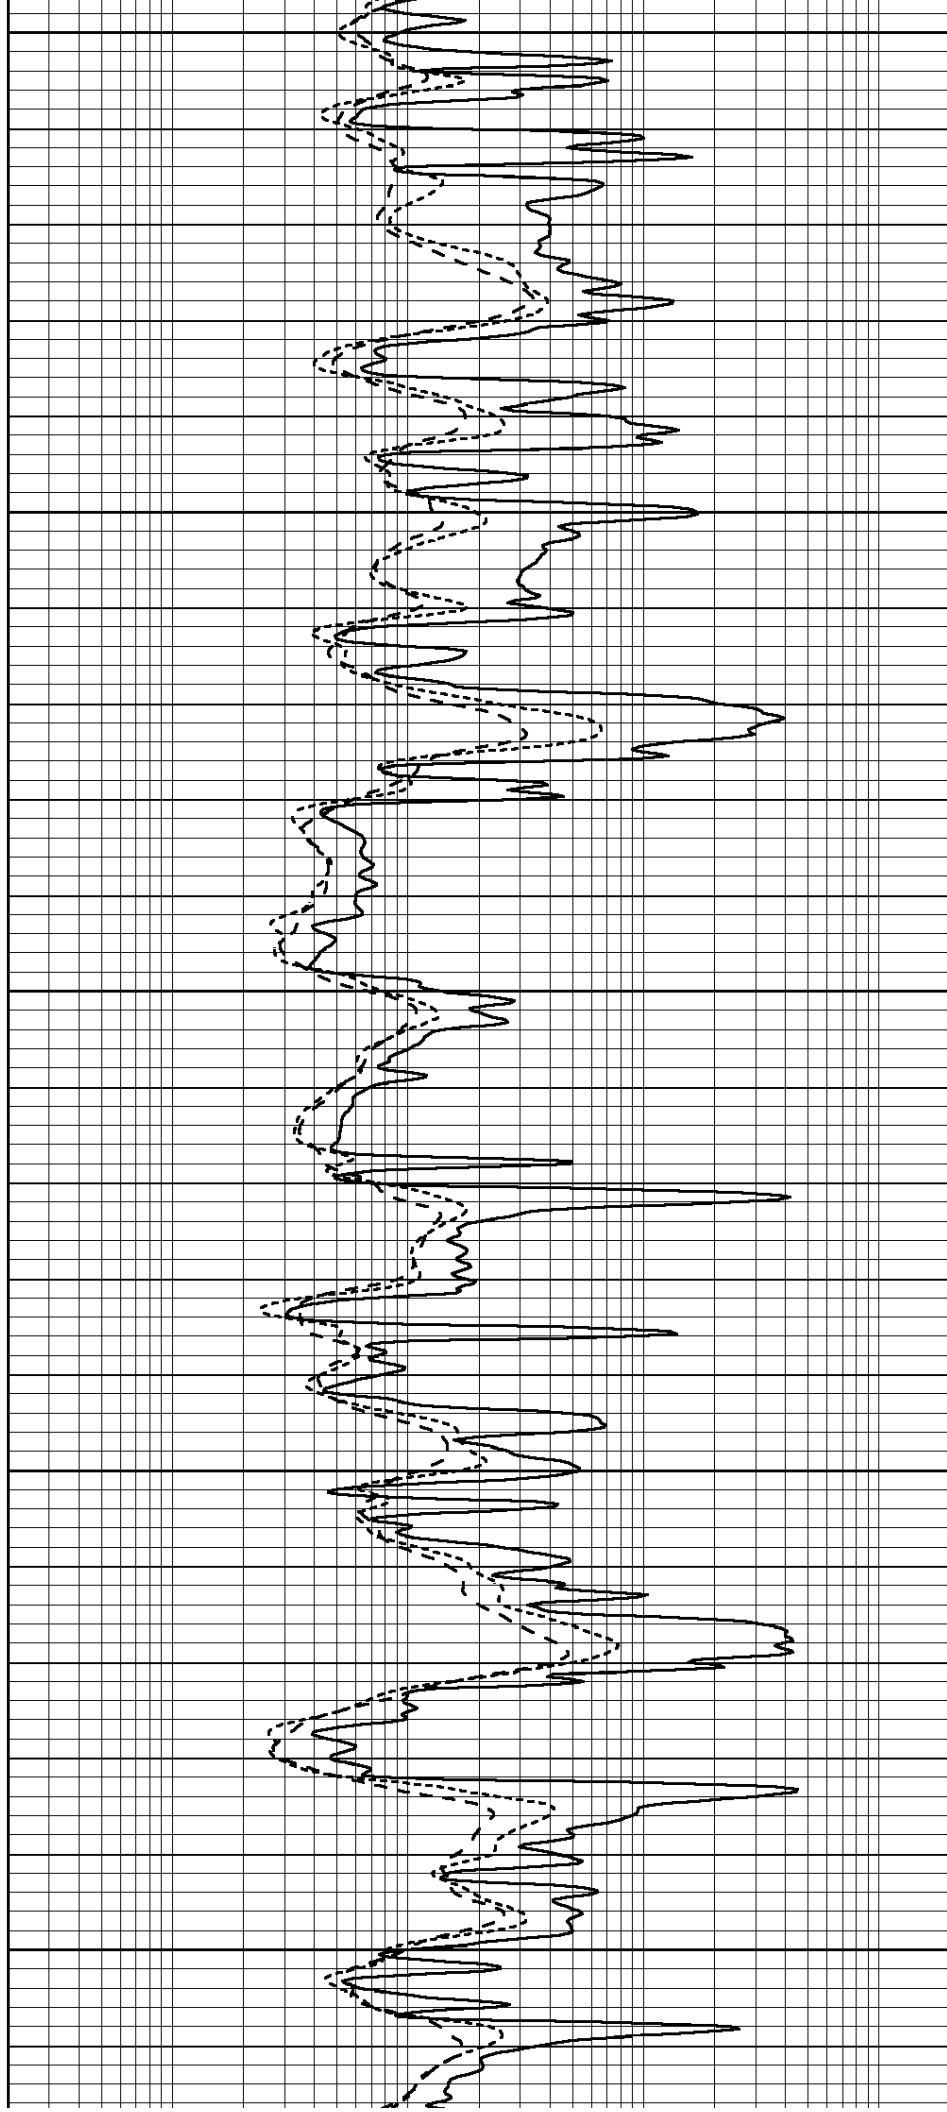

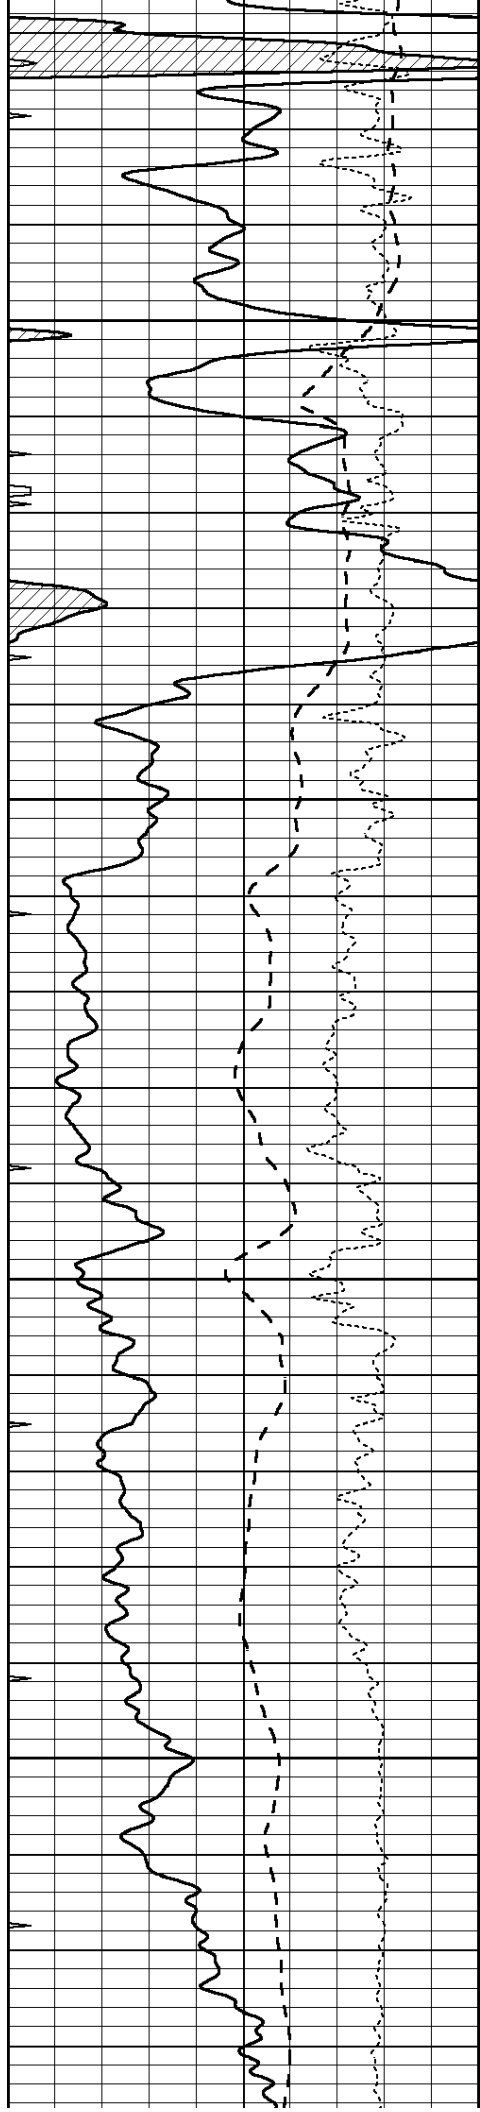



4800

4850

4900

4950

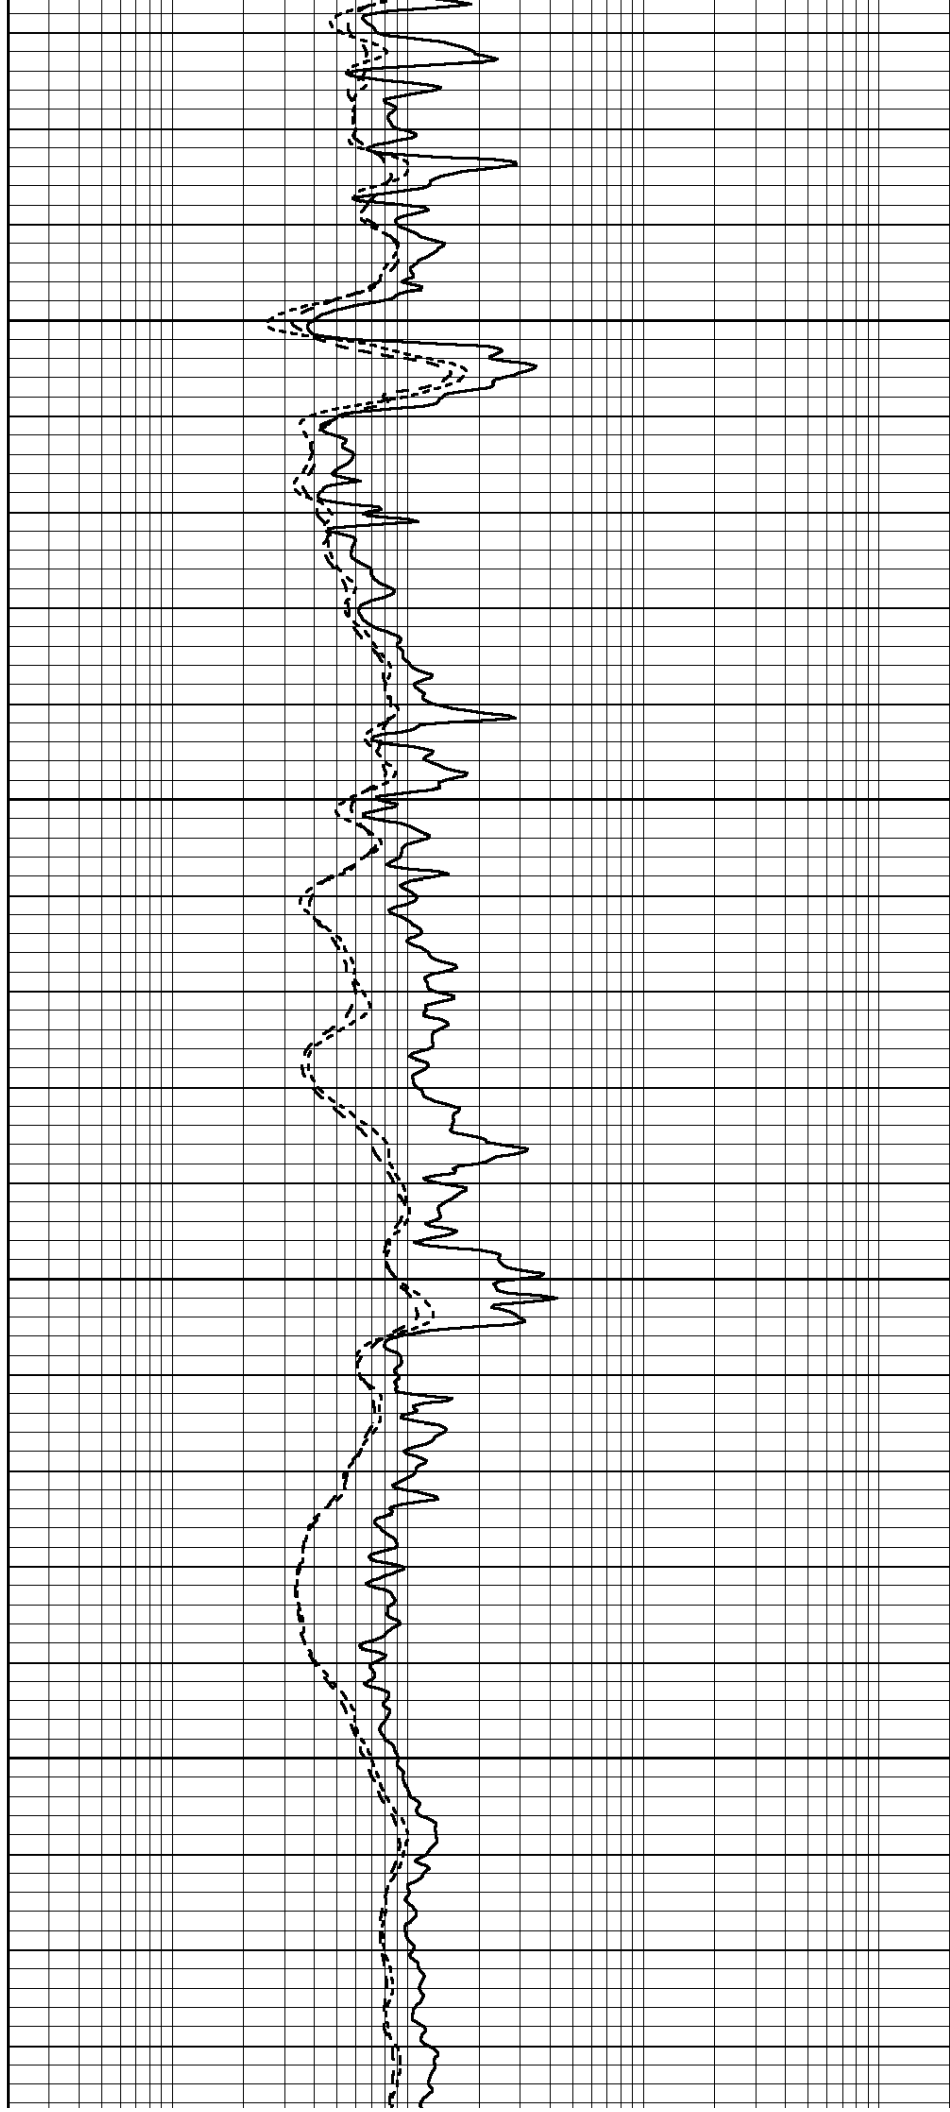

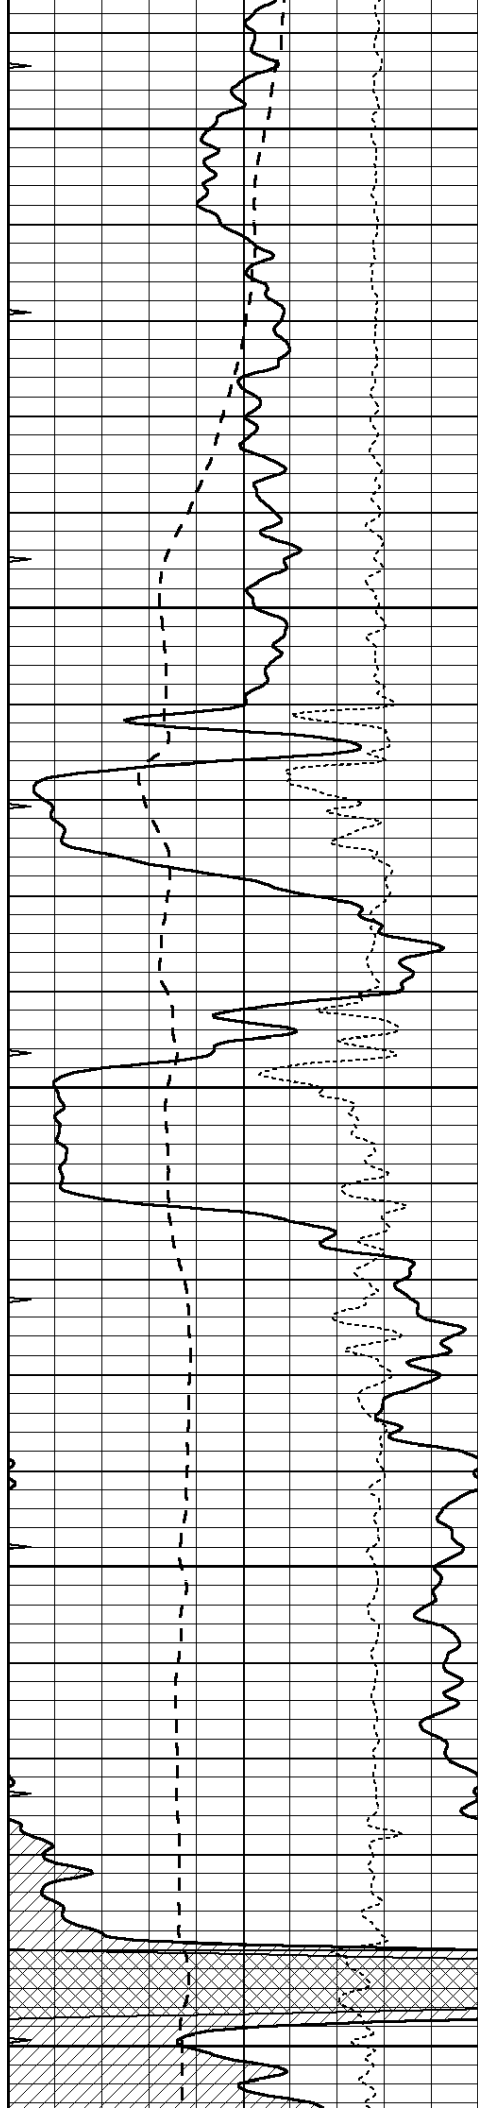


5000


5050

5100

5150

5200

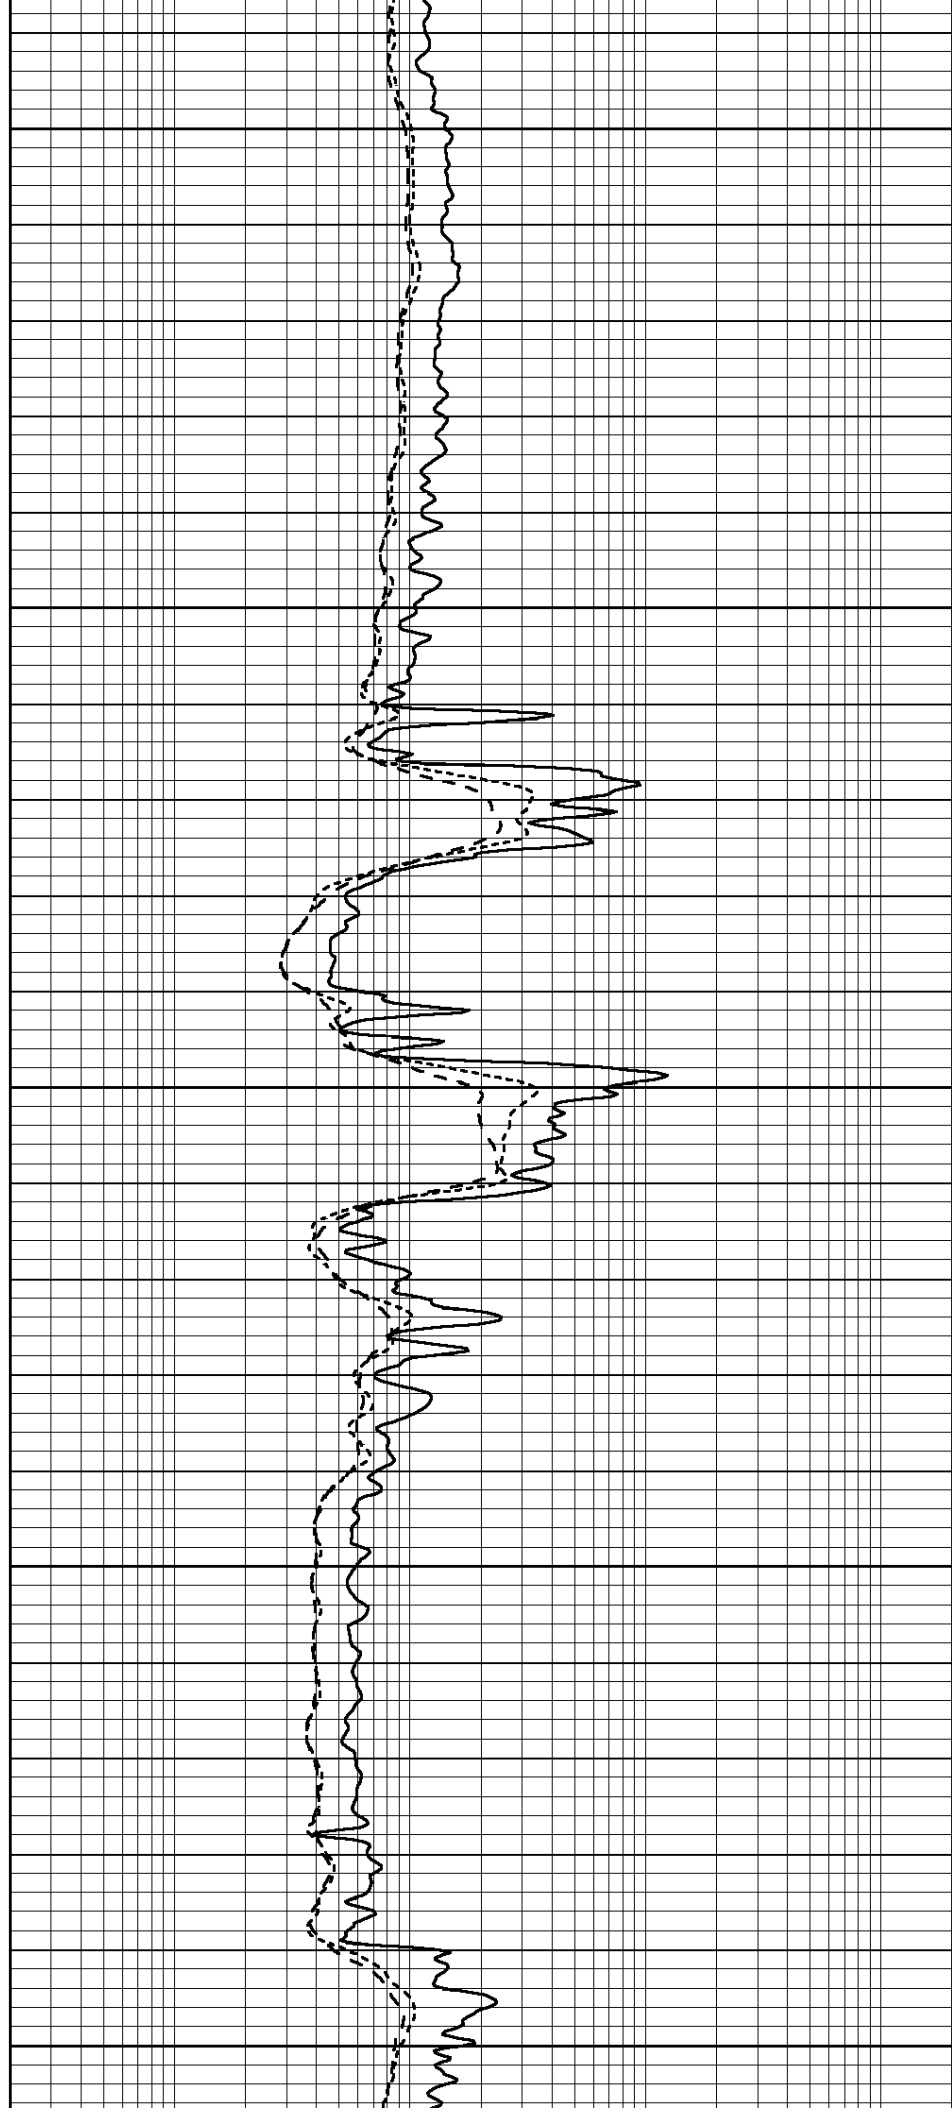

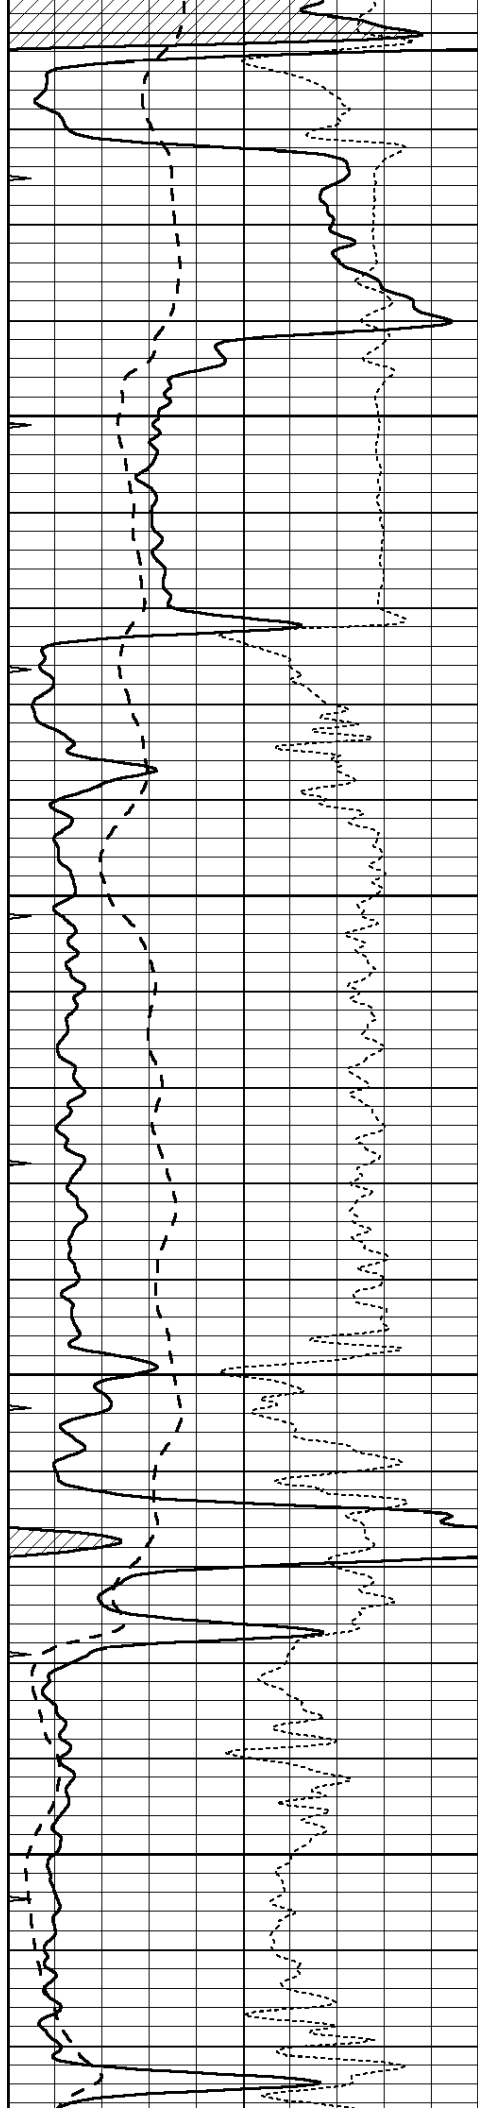



5250

5300


5350

5400

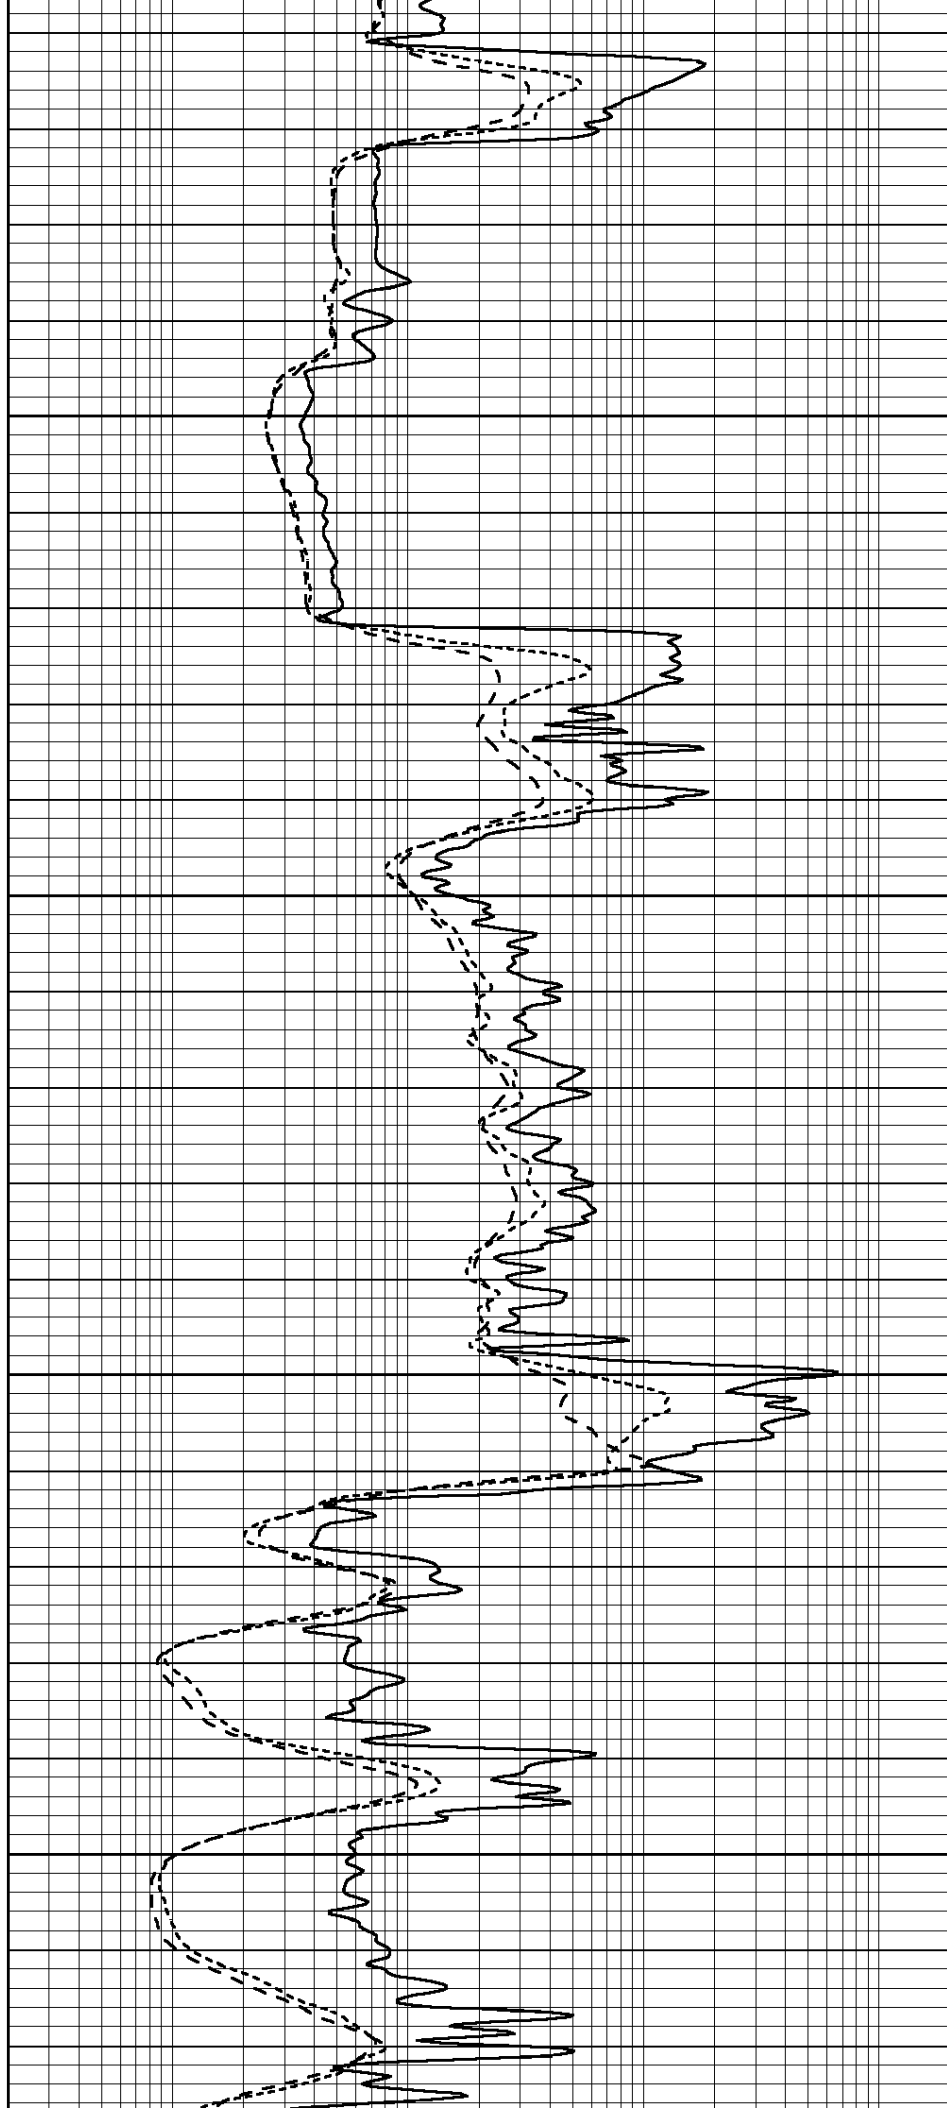

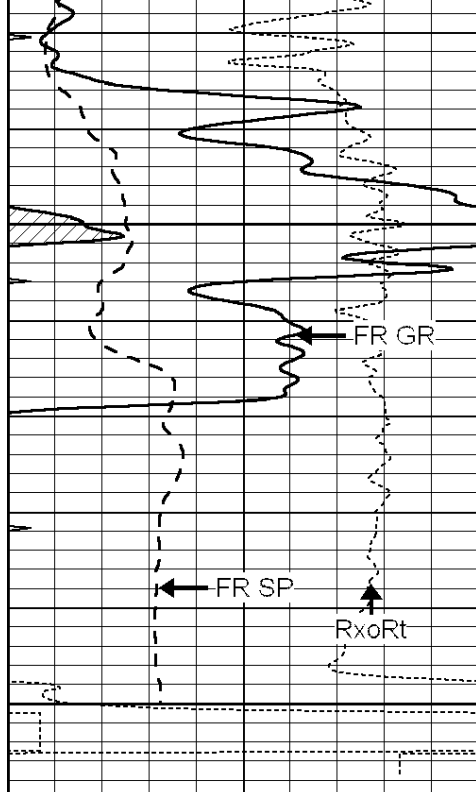

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

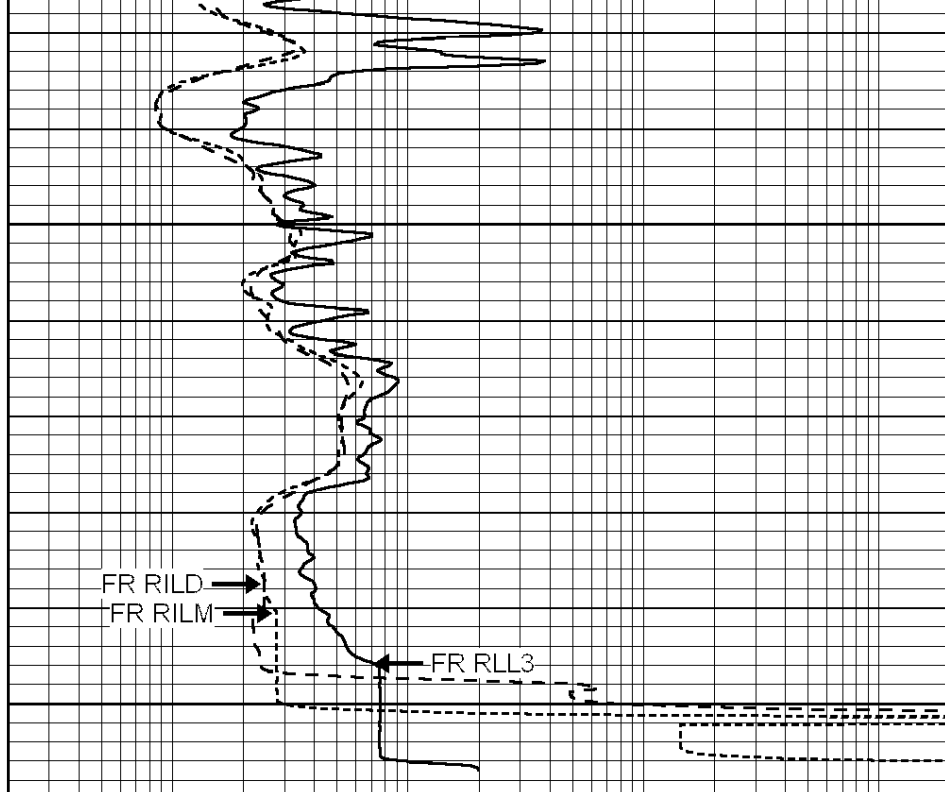

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000





**COMPLETION
& PRODUCTION
SERVICES CO.**

REPEAT SECTION

Database File: 011677pe.db
 Dataset Pathname: pass2.2
 Presentation Format: _dil
 Dataset Creation: Fri Sep 27 20:18:14 2013 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

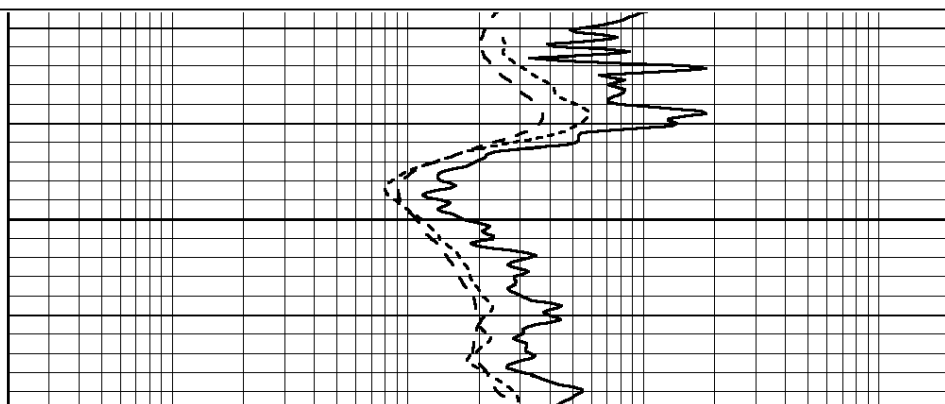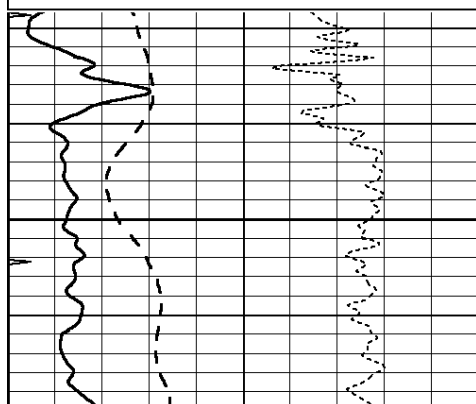




0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

5350

5400

5450

5500

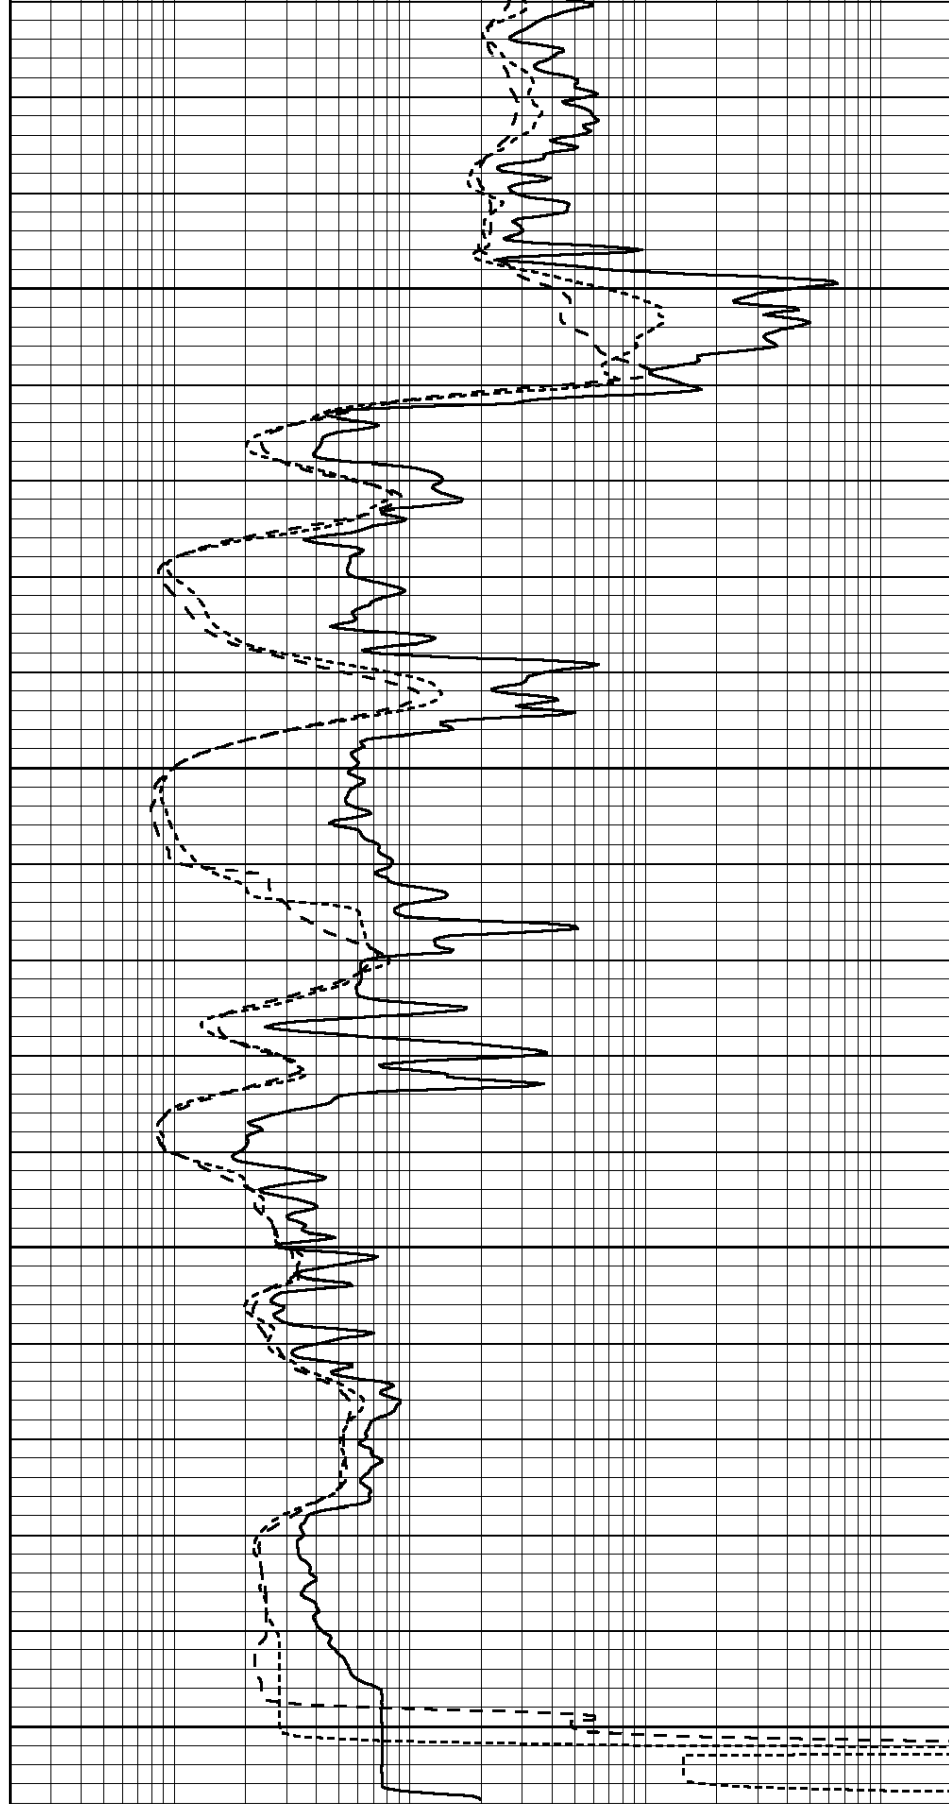

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 011677pe.db
 Dataset Pathname: pass2.2
 Dataset Creation: Fri Sep 27 20:18:14 2013 by Calc SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
 Surface Cal Performed: Thu Sep 19 14:49:33 2013
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	-5.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-14.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 006 Model: PRB

Master Calibration

Performed Thu Sep 26 15:53:45 2013

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1565.4	12562.4	3739.8	12212.1	cps
Window 2	1413.2	8067.0	2864.0	8623.7	cps
Window 3	1076.5	3958.2	1664.4	4154.1	cps
Window 4	186.1	185.7	176.4	168.9	cps
Long Space	0.0	6653.9	1450.8	7210.6	cps
Short Space	2.5	2515.7	1653.9	2694.6	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.6	Rib Slope	: 0.986	Density/Spine Ratio	: 0.557
Spine Angle	: 74.6	Spine Slope	: 3.631	Spine Intercept	: -19.6

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Wed Jun 12 18:25:42 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3500	GAPI/cps