

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-22067-00-00
Spot: N2SWSE Sec/Twnshp/Rge: 22-29S-14W
990 feet from S Section Line, 1980 feet from E Section Line
Lease Name: EADS Well #: 2-22
County: PRATT Total Vertical Depth: 4676 feet

Operator License No.: 3180
Op Name: DEUTSCH, KENT A. DBA DEUTSCH OI
Address: 8100 E. 22ND ST. N.
WICHITA, KS 67226

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4550		
PROD	4.5	4647	2000	WITH 275 SX CMT
SURF	8.625	268		WITH 200 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/25/2005 9:15 AM
Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
Proposal Rcvd. from: CURT GLEN Company: D S & W WELL SERVICING, INC. Phone: (620) 587-3361

Proposed Plugging Method: SAND BACK TO 4300' & 4 SX CMT. PLUG AT 830' WITH 10 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/25/2005 10:45 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SAND BACK TO 4300' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 830' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4567	4569		
4388	4392		


Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

INVOICED

DATE 11-4-05
INV. NO. 2006060701

District: 01

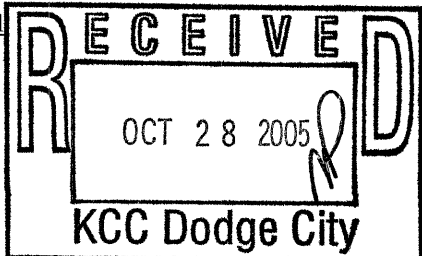

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED
NOV 04 2005
KCC WICHITA

Form CP 2/3