

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-151-21342-00-01
 Spot: SWSE Sec/Twnshp/Rge: 22-29S-14W
660 feet from S Section Line, 1980 feet from E Section Line
 Lease Name: EADS Well #: 1-22
 County: PRATT Total Vertical Depth: 4710 feet

Operator License No.: 3180
 Op Name: DEUTSCH, KENT A. DBA DEUTSCH OI
 Address: 8100 E. 22ND ST. N.
WICHITA, KS 67226

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3900		WITH 2 SX CMT
CIBP		4440		
PROD	4.5	4703	2467	WITH 100 SX CMT
SURF	8.625	864		WITH 250 SX CMT

08

#153

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/27/2005 9:30 AM
 Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
 Proposal Rcvd. from: CURT GLEN Company: D S & W WELL SERVICING, INC. Phone: (620) 587-3361

Proposed Plugging Method: SAND BACK TO 3900' & 4 SX CMT. PLUG AT 890' WITH 10 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER Witness Type: COMPLETE (100%)
 Date/Time Plugging Completed: 10/27/2005 10:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 3900' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. RUN 2 3/8" TUBING IN TO PLUG THROUGH. 1ST PLUG AT 890' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 300' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4523	4527		
4454	4456		
4363	4369		
4324	4329		
3979	3981		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

INVOICED
 DATE 11-4-05
 INV. NO. 2006060706

District: 01

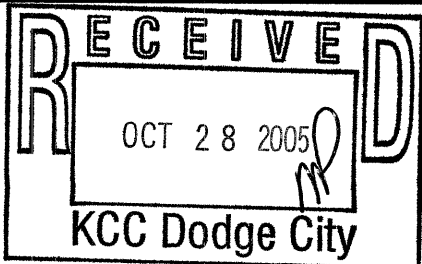

Signed _____

Steve Pfeifer
 (TECHNICIAN)

RECEIVED
 NOV 04 2005
 KCC WICHITA