

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-21486-00-00
Spot: NENENE Sec/Twnshp/Rge: 22-29S-34W
330 feet from N Section Line, 330 feet from E Section Line
Lease Name: MLP POOH Well #: 1-22
County: HASKELL Total Vertical Depth: 5511 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, INC.
Address: PO BOX 18496 6200 N WESTERN AVE.
OKLAHOMA CITY, OK 73154

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		2995		WITH 500 SX CMT
PROD	5.5	5514	0	WITH 220 SX CMT
SURF	8.625	1807		WITH 775 SX CMT

\$179¹¹

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/06/2005 12:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: PUMP 500# HULLS & 25 SX CMT. PUMP MUD SPACER TO 1825' & CIRCULATE CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/18/2005 2:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 500# HULLS & 25 SX CMT FOR BOTTOM PLUG. PUMP 70 BBL MUD SPACER TO 1825'. PUMP 160 SX CMT INSIDE 5 1/2" FROM 1825' TO SURFACE. CASING ON VACUUM. PUMPED 75 SX CMT DOWN 5 1/2". DID NOT FILL. WILL CHECK TOC. RIG UP TO BACKSIDE. PUMP 15 SX CMT. PRESSURED TO 300# & SHUT IN. 10/18/05: FOUND TOP OF CMT AT 1000'. PUMPED 100 SX CMT. FILLED 5 1/2" TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
5282	5344		


INVOICED

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

DATE 11-4-05
INV. NO. 2006060699

Plugged through: CSG

District: 01

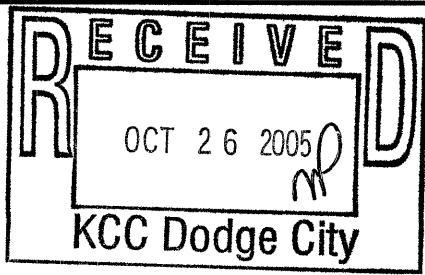

Signed Jim Holland (TECHNICIAN)

RECEIVED
NOV 04 2005
KCC WICHITA

Form C-28