



GAMMA-RAY-NEUTRON-CCL LOG

Company SM OIL & GAS, INC.
 Well FULSOM "B" #3A
 Field LENITON
 County CHAUTAUQUA
 State KANSAS

Company SM OIL & GAS, INC.
 Well FULSOM "B" #3A
 Field LENITON
 County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27531-00-00
 SE NE NW NE
 500'FNL & 1370'FEL
 SEC 17 TWP 33S RGE 10E
 Permanent Datum GL Elevation 1040'
 Log Measured From GL
 Drilling Measured From GL
 Other Services GR-CBL PERFORATE
 Elevation K.B. D.F. G.L. 1040'

Date	OCTOBER 22, 2015						
Run Number	TWO						
Depth Driller	1600'						
Depth Logger	1597'						
Bottom Logged Interval	1596'						
Top Log Interval	00						
Open Hole Size	6.75"						
Type Fluid	WATER						
Density / Viscosity	NA						
Max. Recorded Temp.	NA						
Estimated Cement Top	238'						
Time Well Ready	ON ARRIVAL						
Time Logger on Bottom	9:15AM						
Equipment Number	48						
Location	HOMINY						
Recorded By	J. FISHER						
Witnessed By	J. POTTS						
	D. GRAHAM						
	T. BARNES						
Borehole Record							
Run Number	Bit	From	To	Size	Weight	From	To
ONE	12.25"	00	51'				
TWO	6.75"	51'	1604'				
Tubing Record							
Casing Record	Size	Wgt/Ft	Top	Bottom			
Surface String	8.625"	24#	00	51'			
Prot. String							
Production String	4.50"	11.6#	00	1600'			
Liner							


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


CEMENT TOP WAS LOGGED AT @238'
 PERFORATED FROM 1504'-1512' 2HPFT WITH A TOTAL OF 16 HOLES ON 10-22-2015
 JOB WAS PERFORMED OFF OF PORTABLE DERRICK
 THANK YOU FOR USING FWS, INC. HOMINY, OKLAHOMA. (918) 885 6564


Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
GR	5.59					

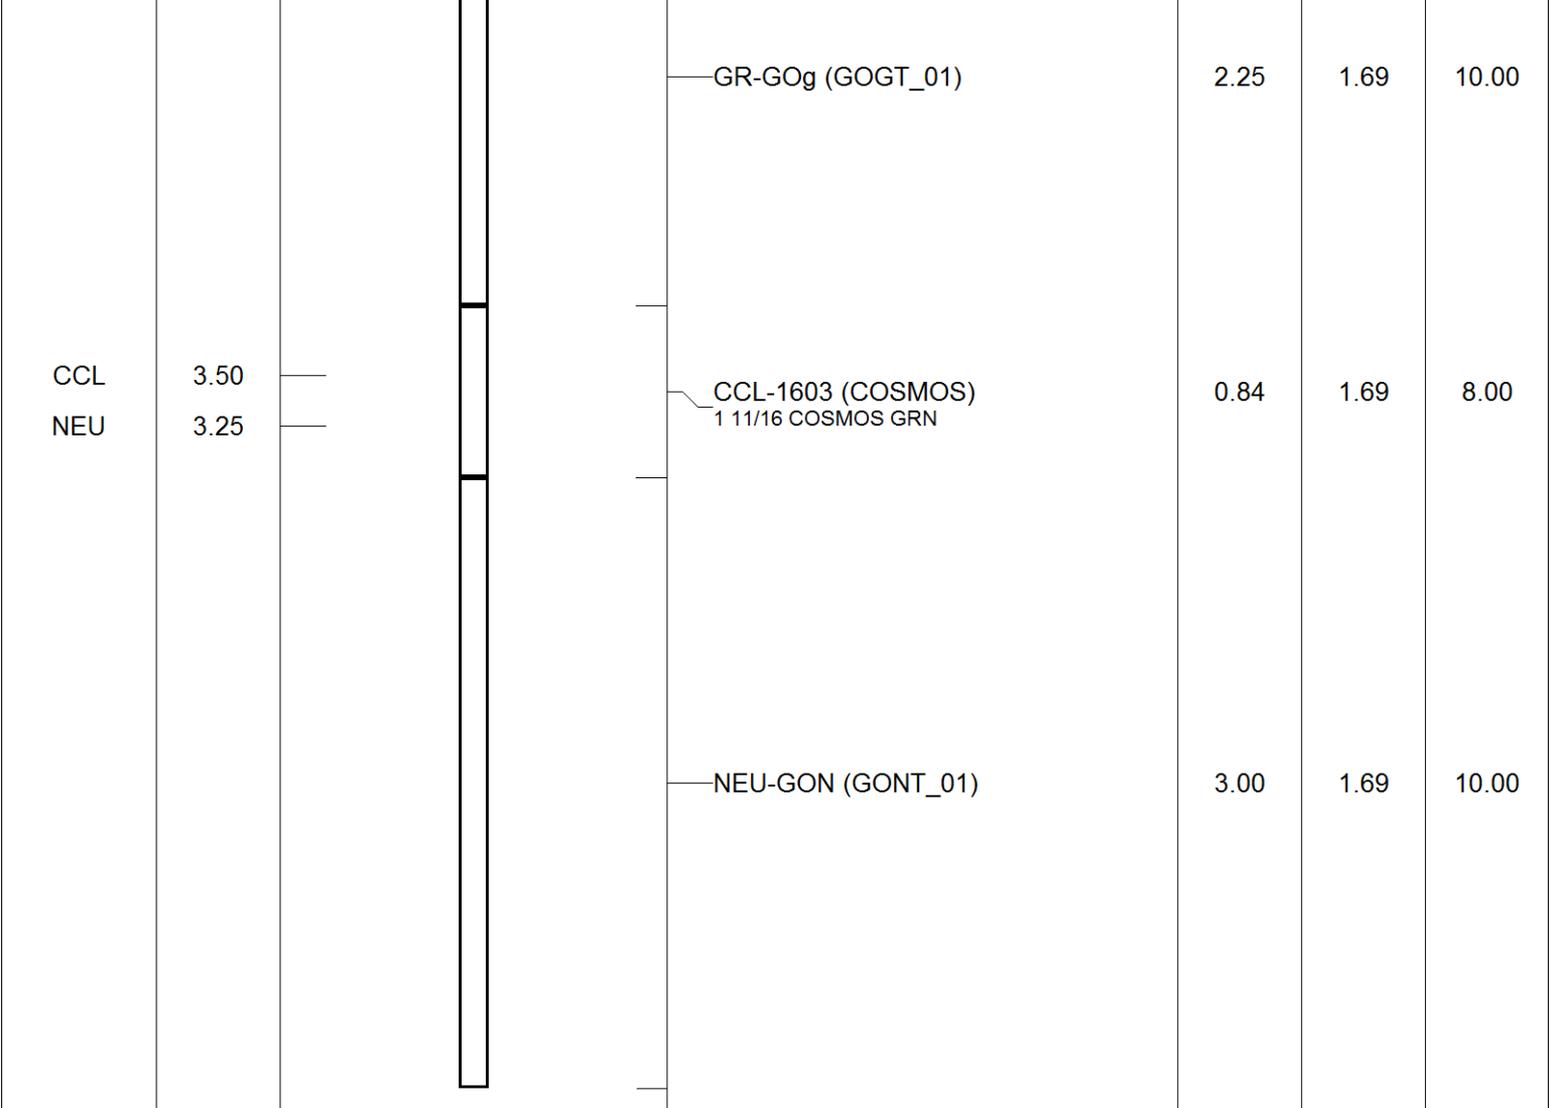

Dataset: sm#4518.db: field/fulsom/run1/pass4
 Total Length: 6.09 ft
 Total Weight: 28.00 lb
 O.D.: 1.69 in

Database File: sm#4518.db
 Dataset Pathname: fulsom/run1/pass4
 Presentation Format: gr-n-ccl
 Dataset Creation: Thu Oct 22 09:30:24 2015 by Log 7.0 B1
 Charted by: Depth in Feet scaled 1:240

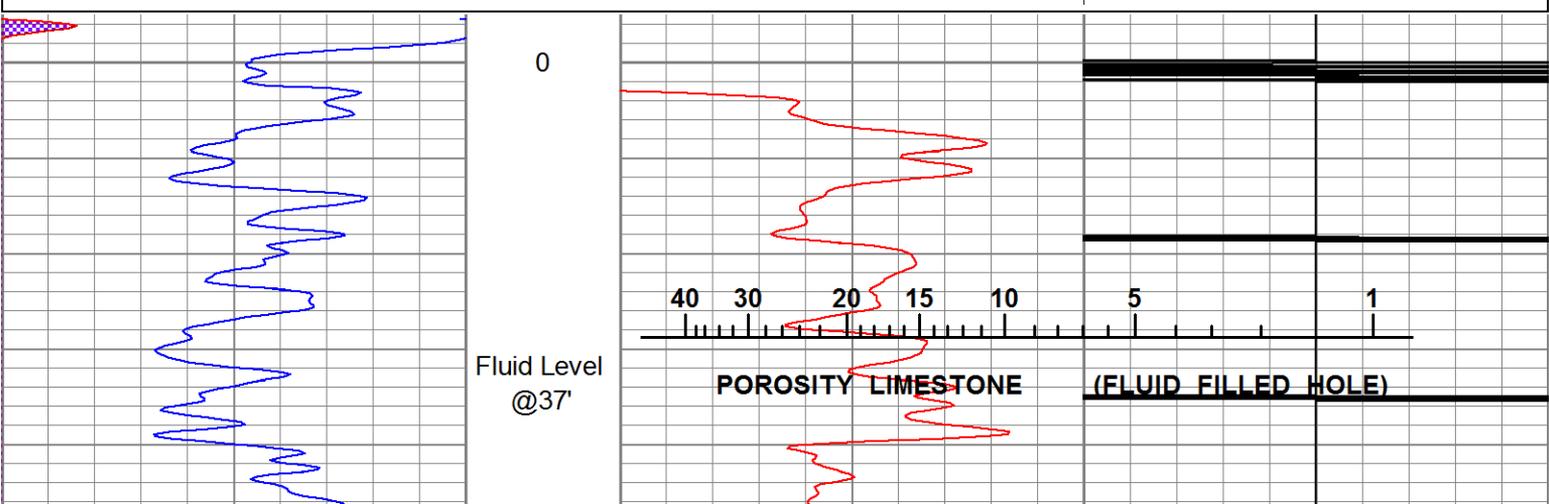

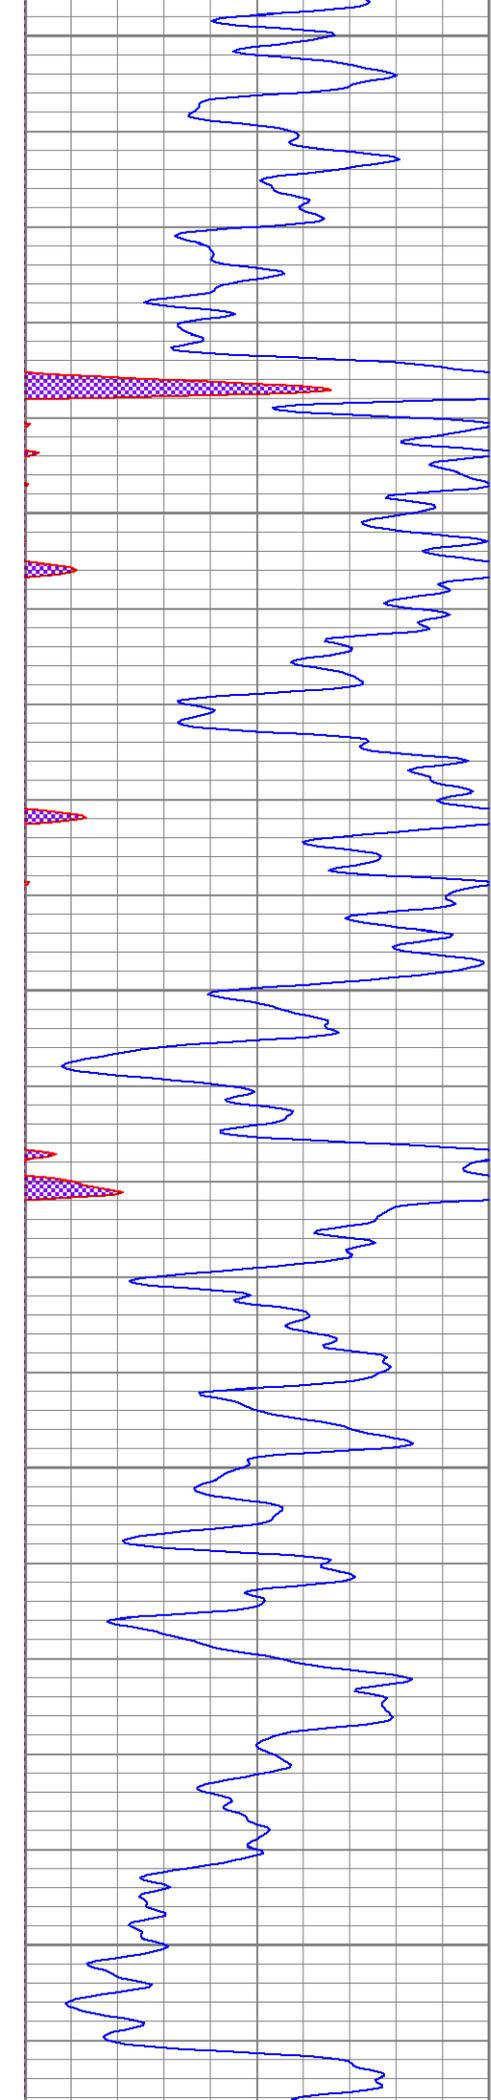


50


100

150

200

250

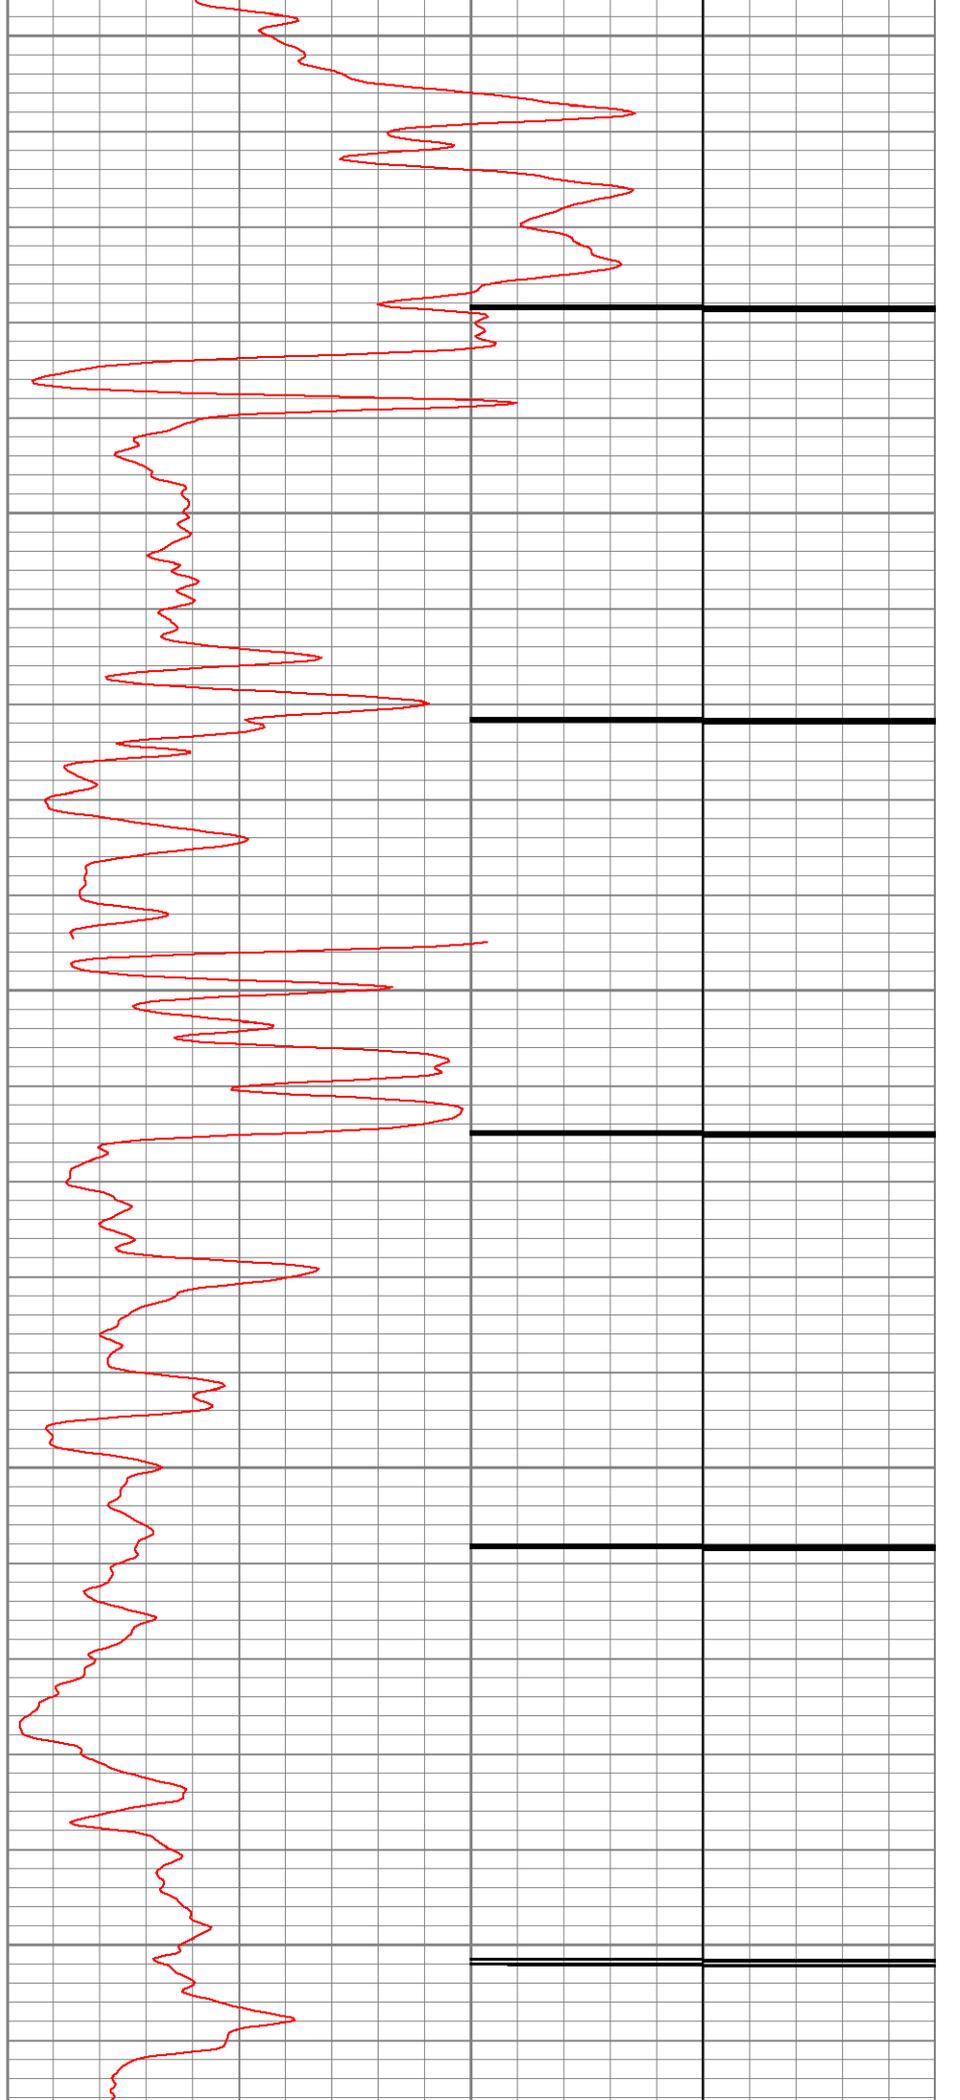

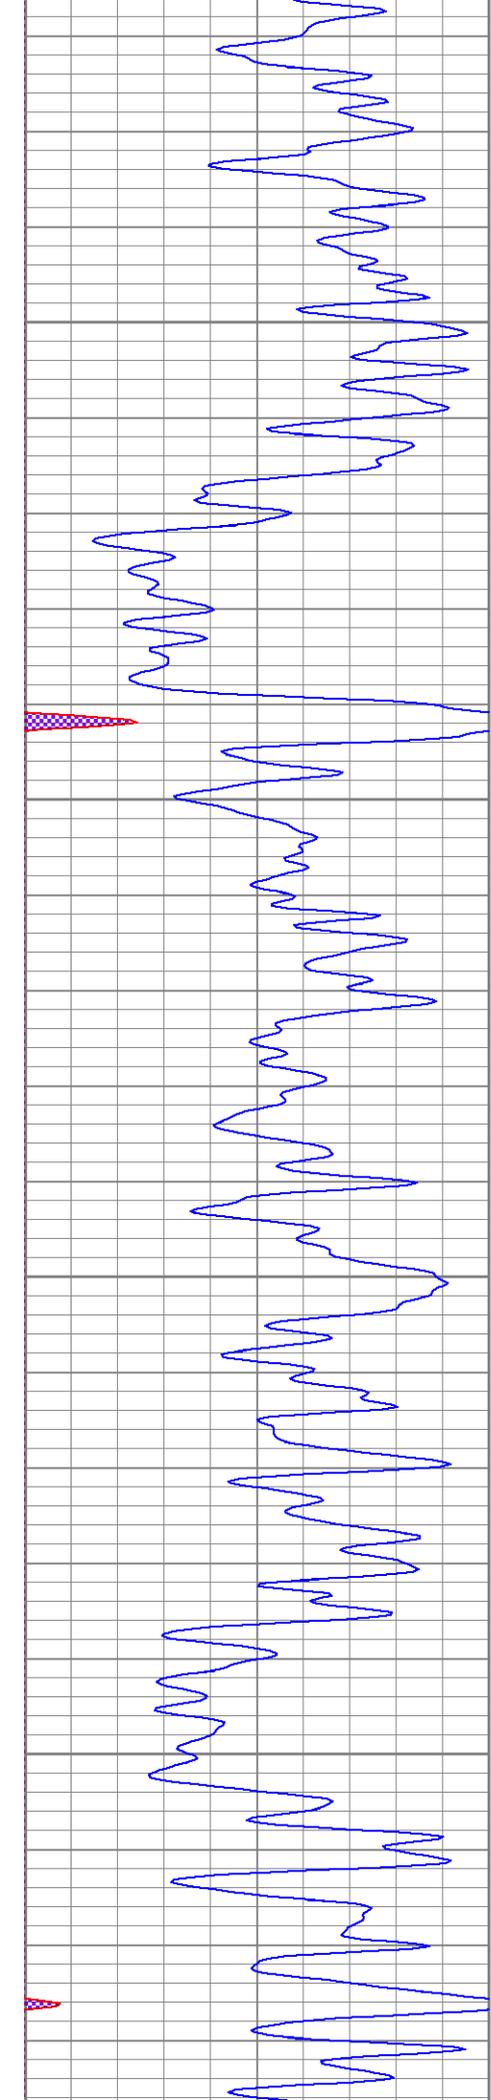



300

350

400

450

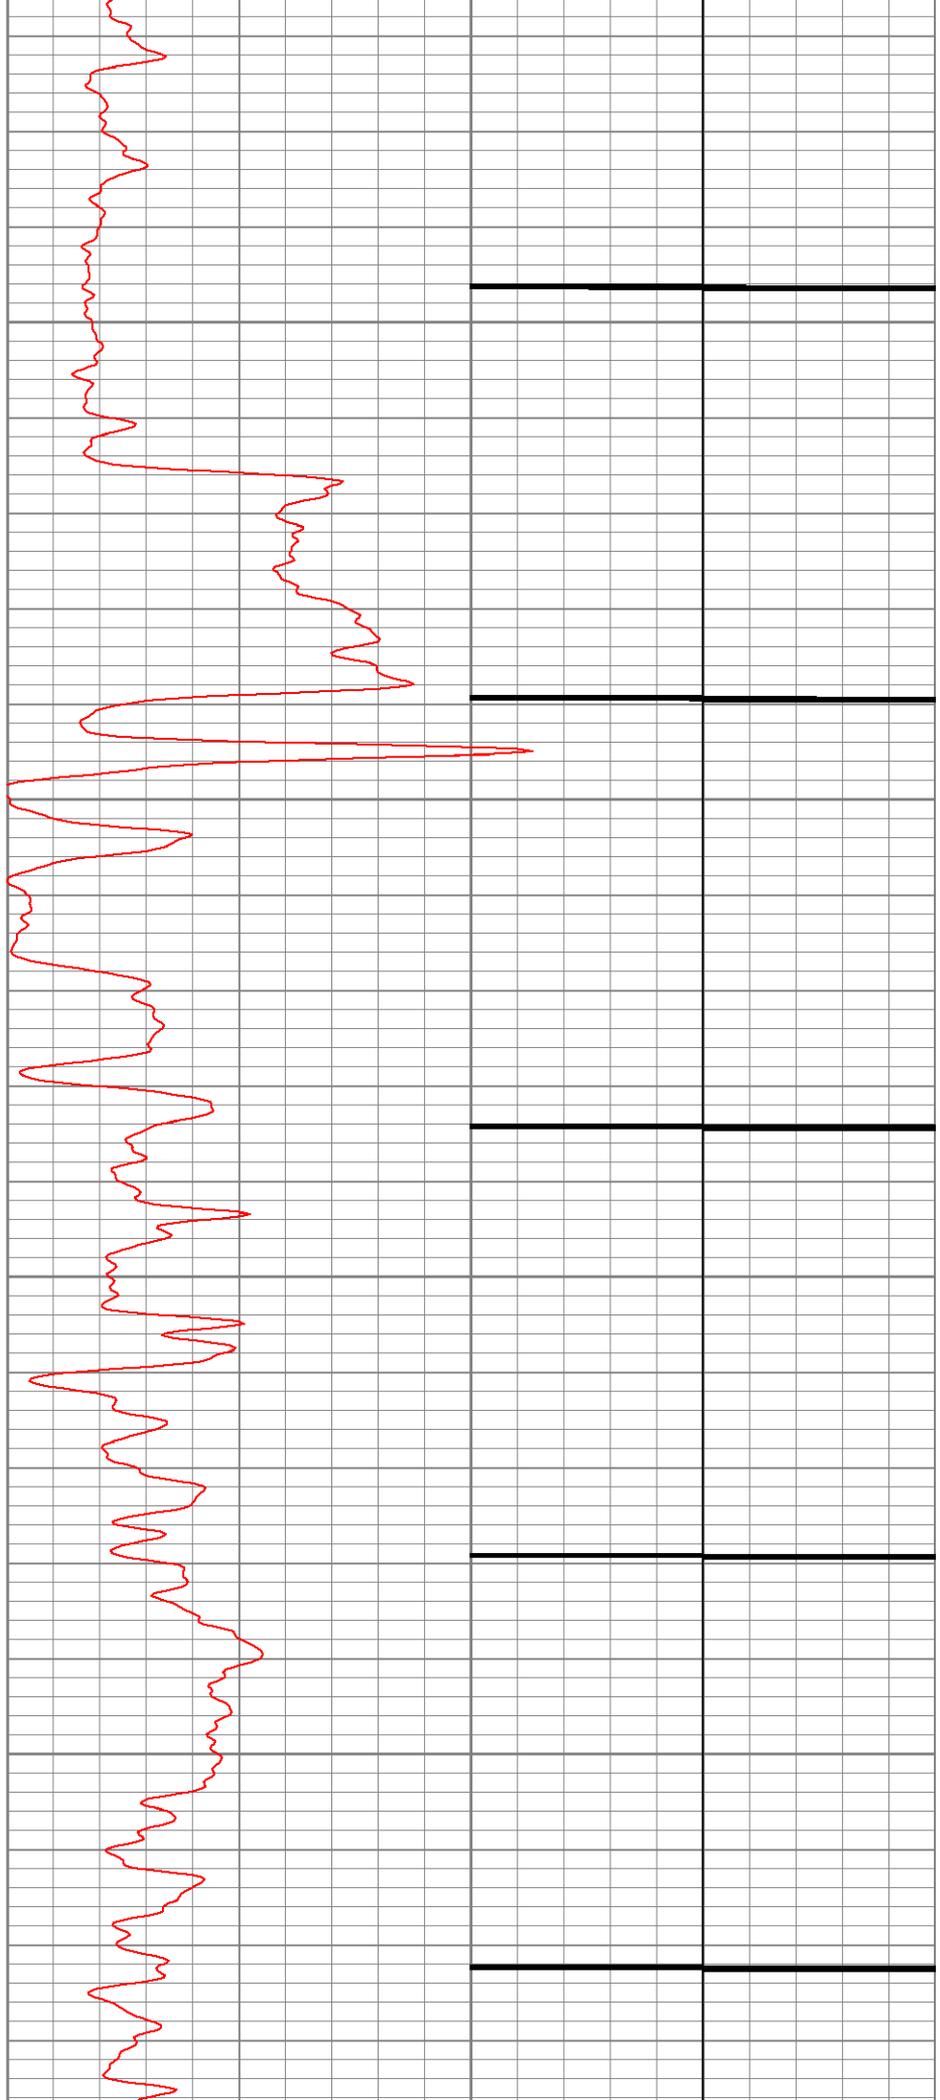

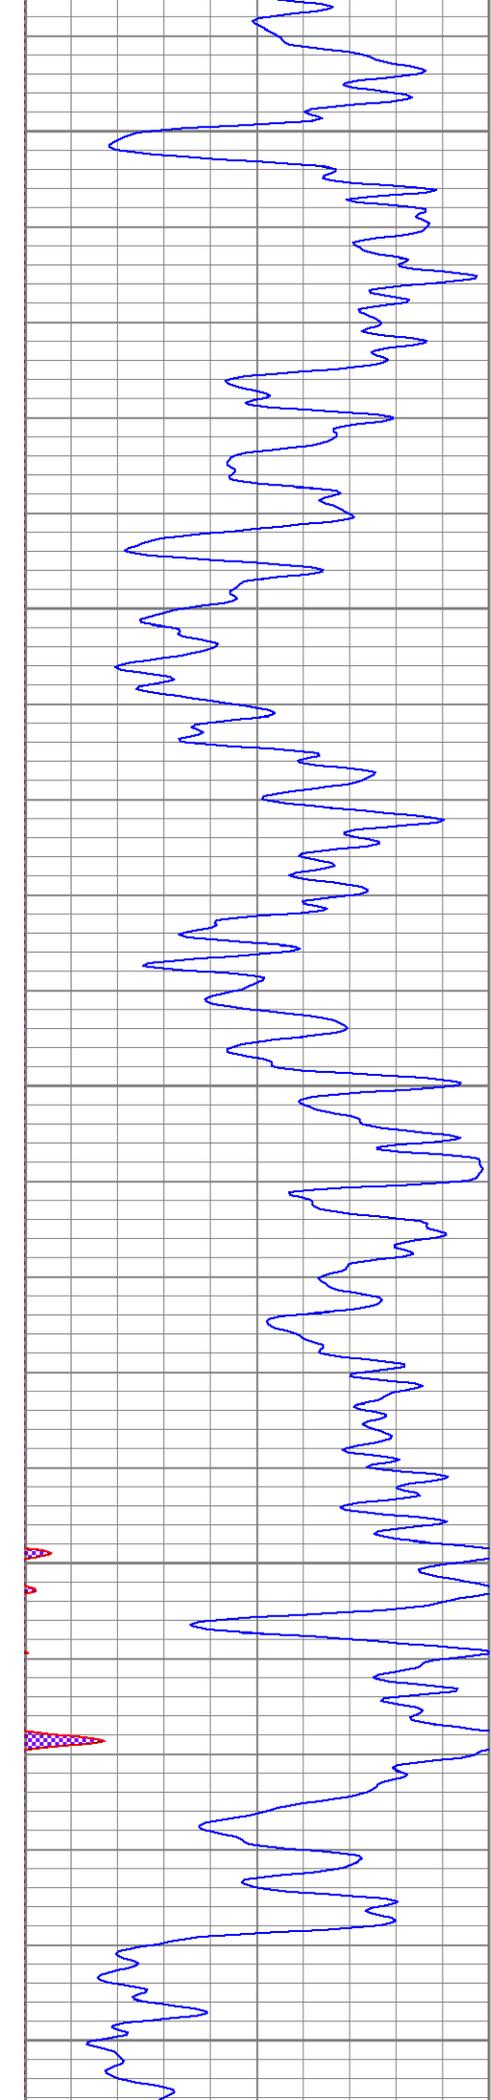


500


550

600

650

700

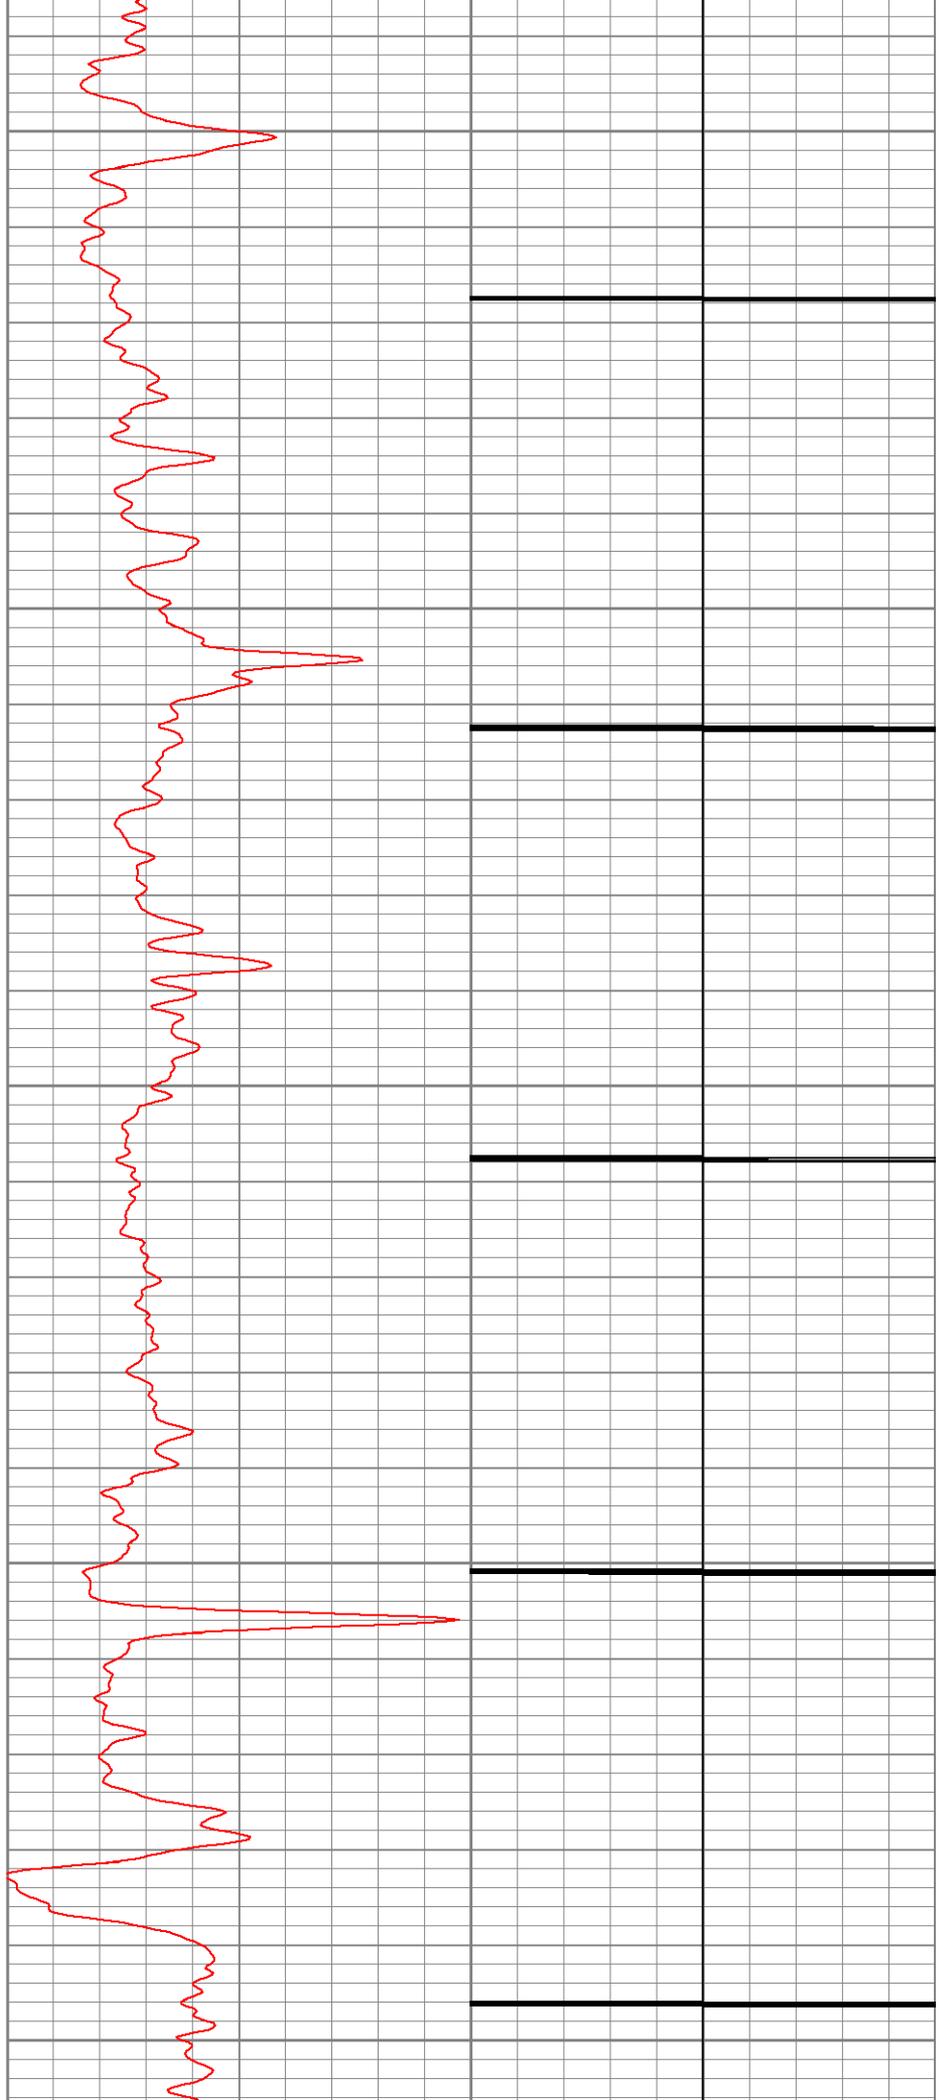


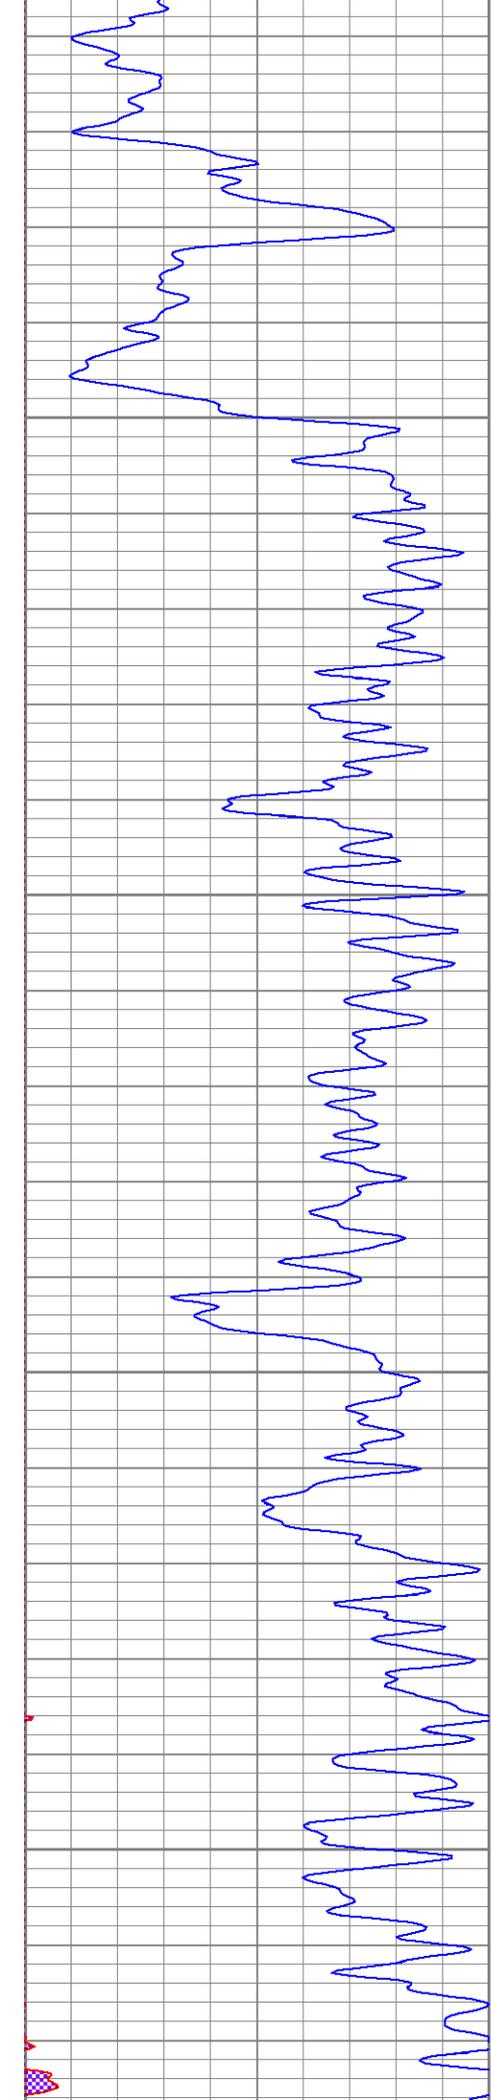



750

800

850

900

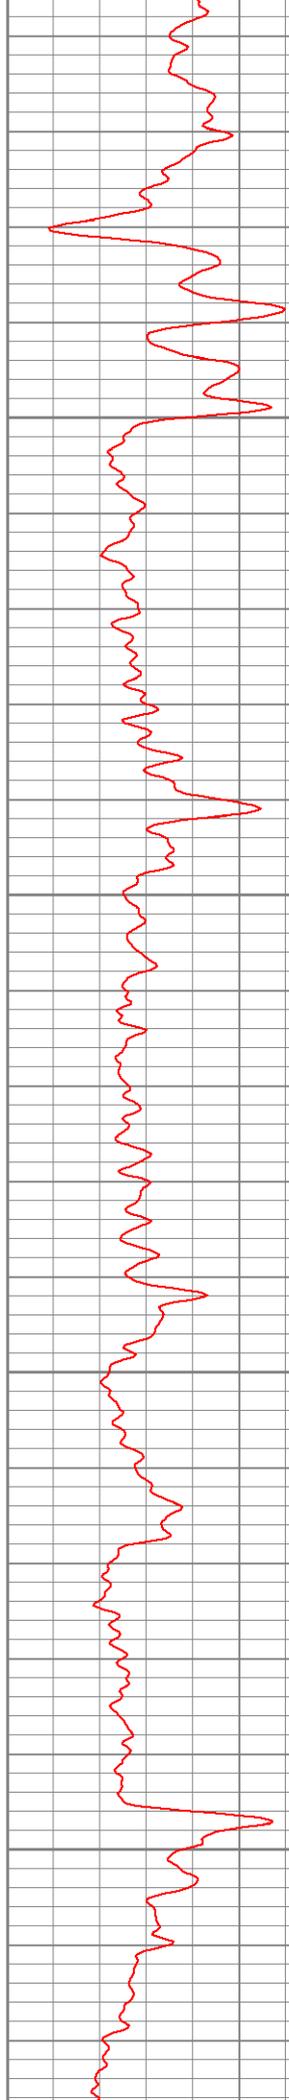

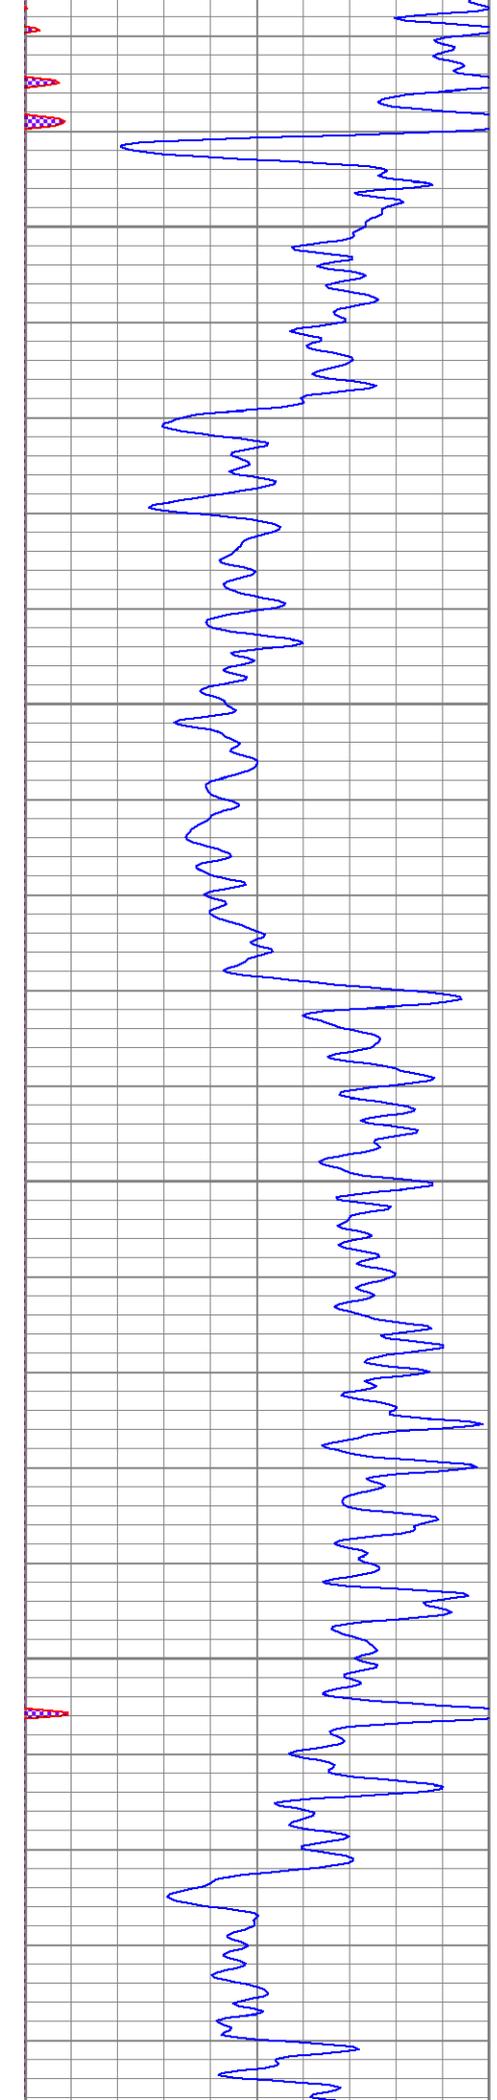



950

1000

1050

1100

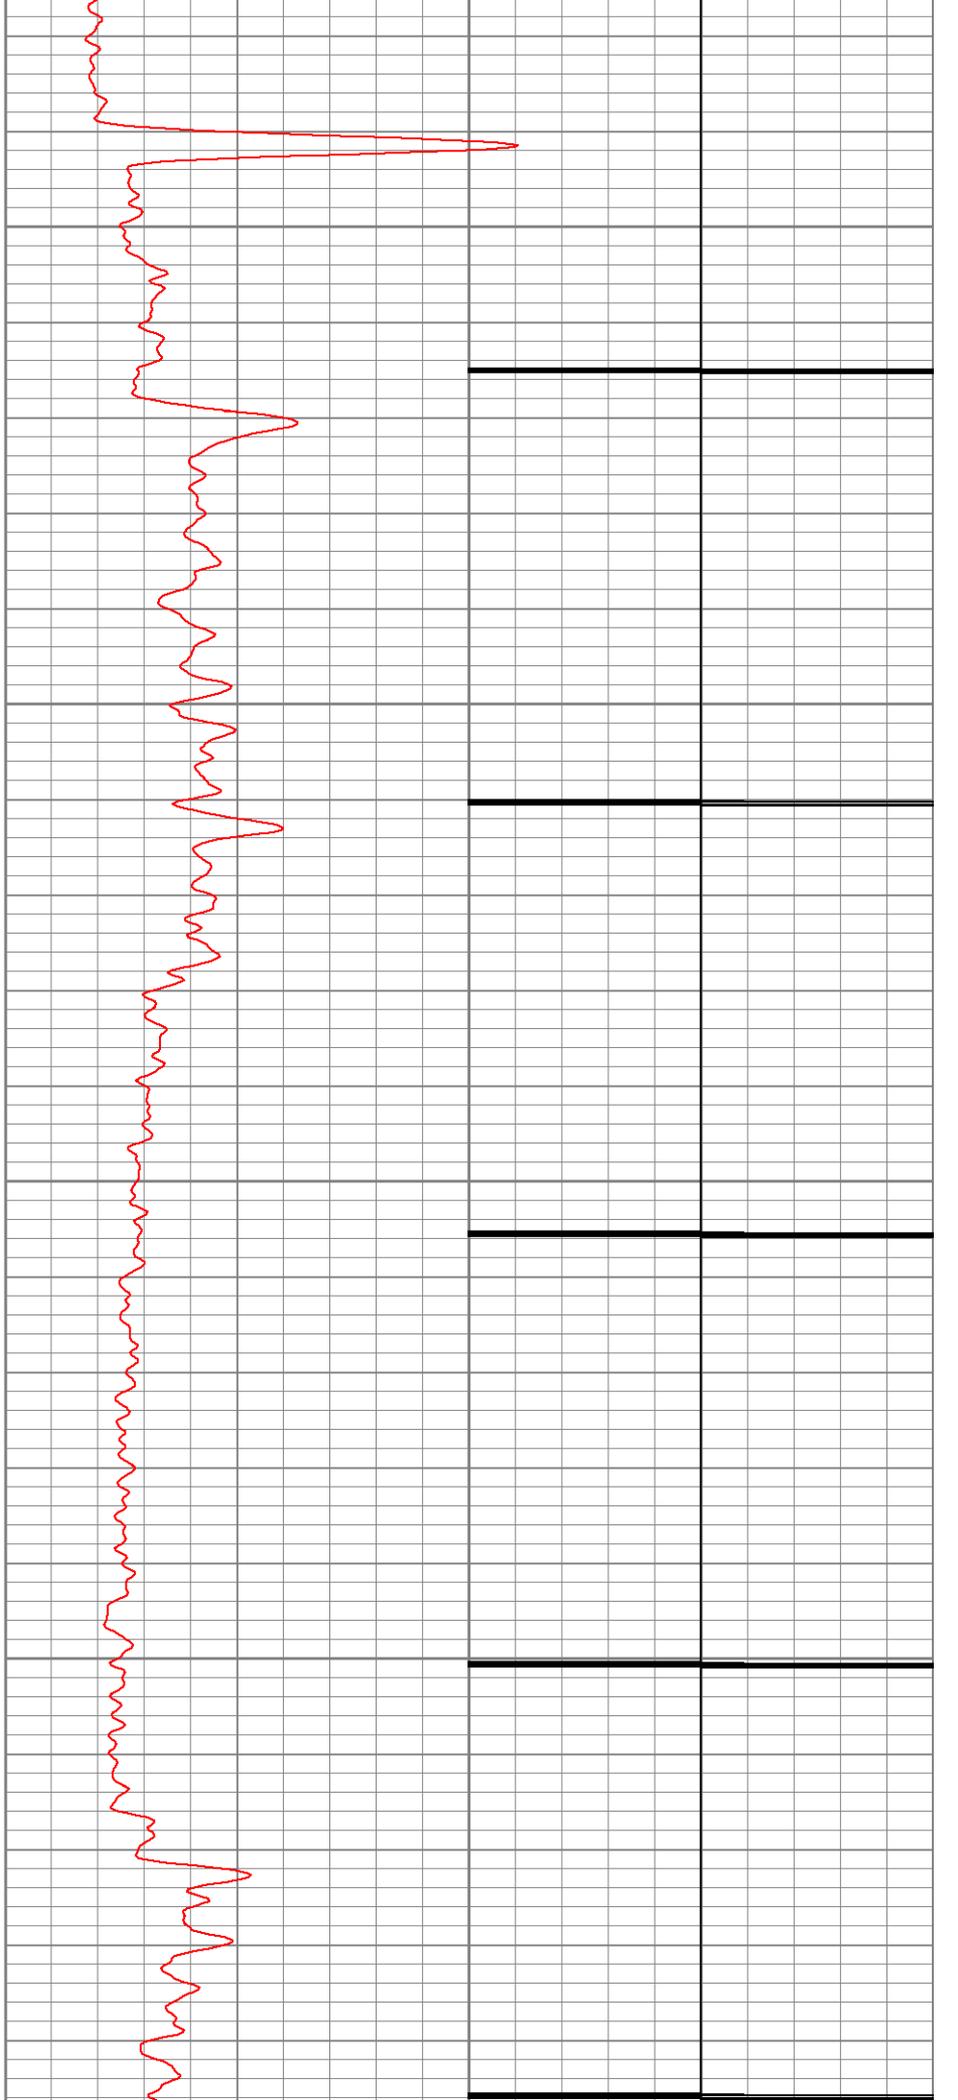

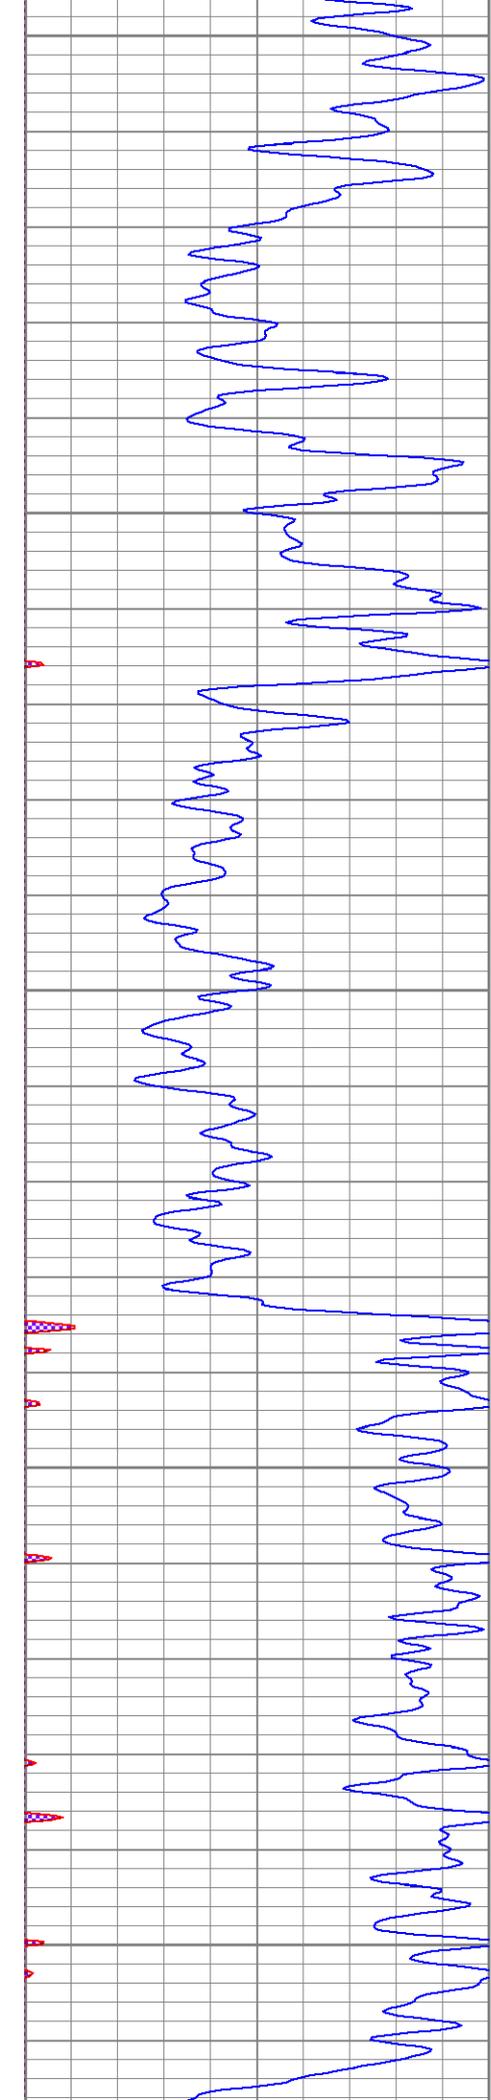


1150


1200

1250

1300

1350

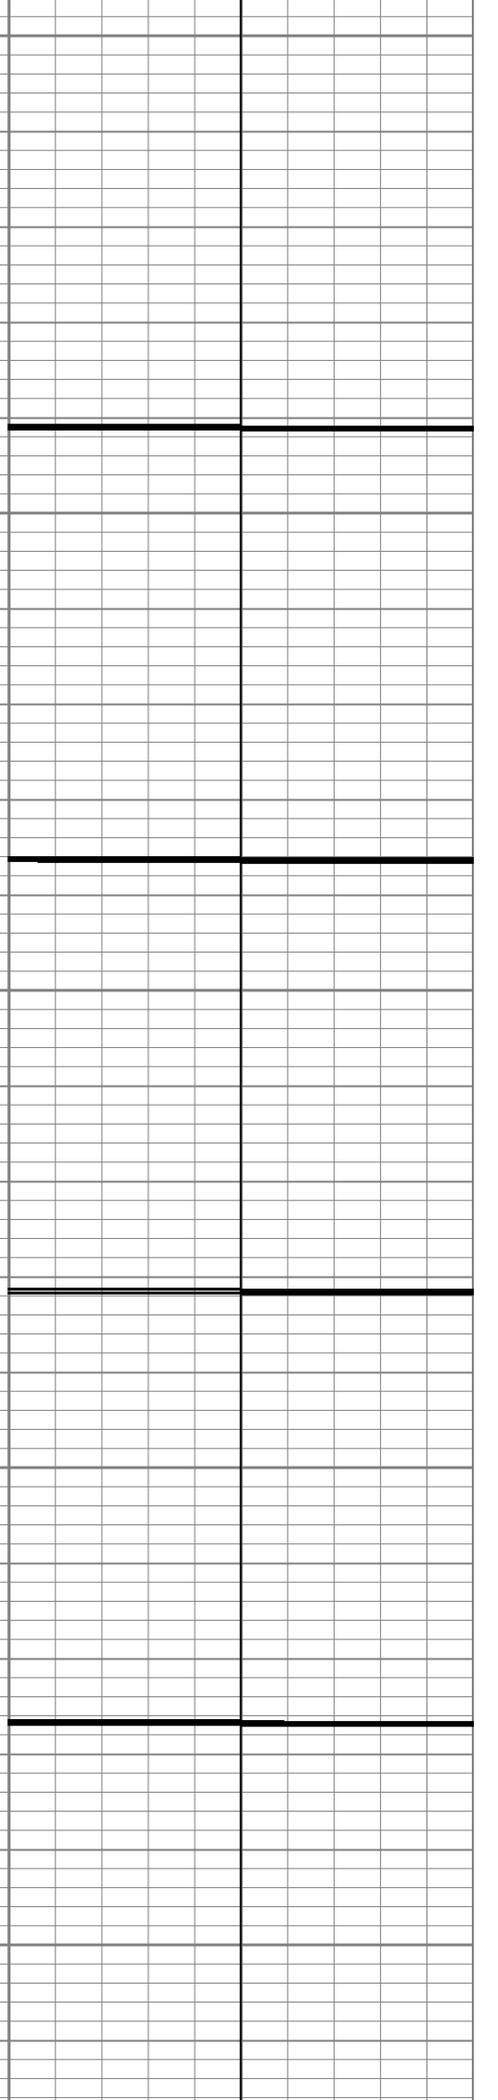


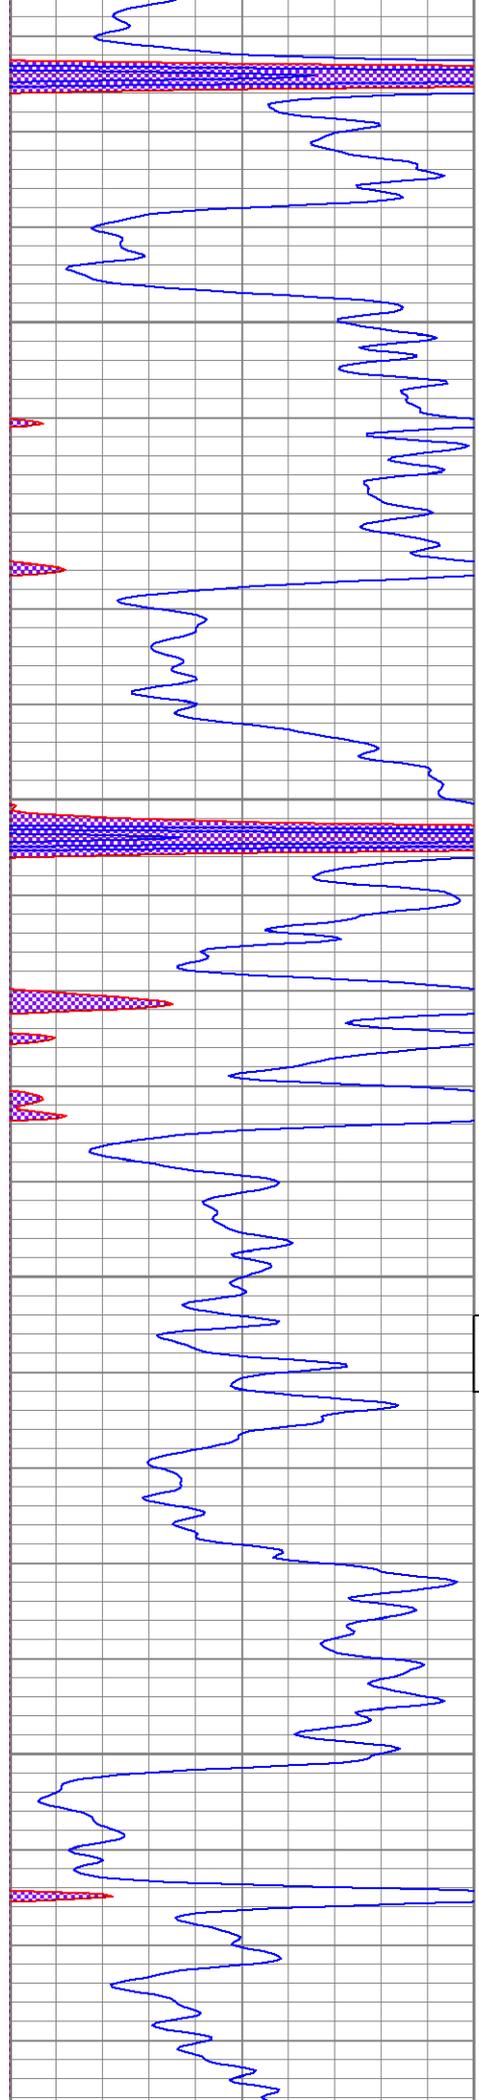


1400

1450


1500

1550

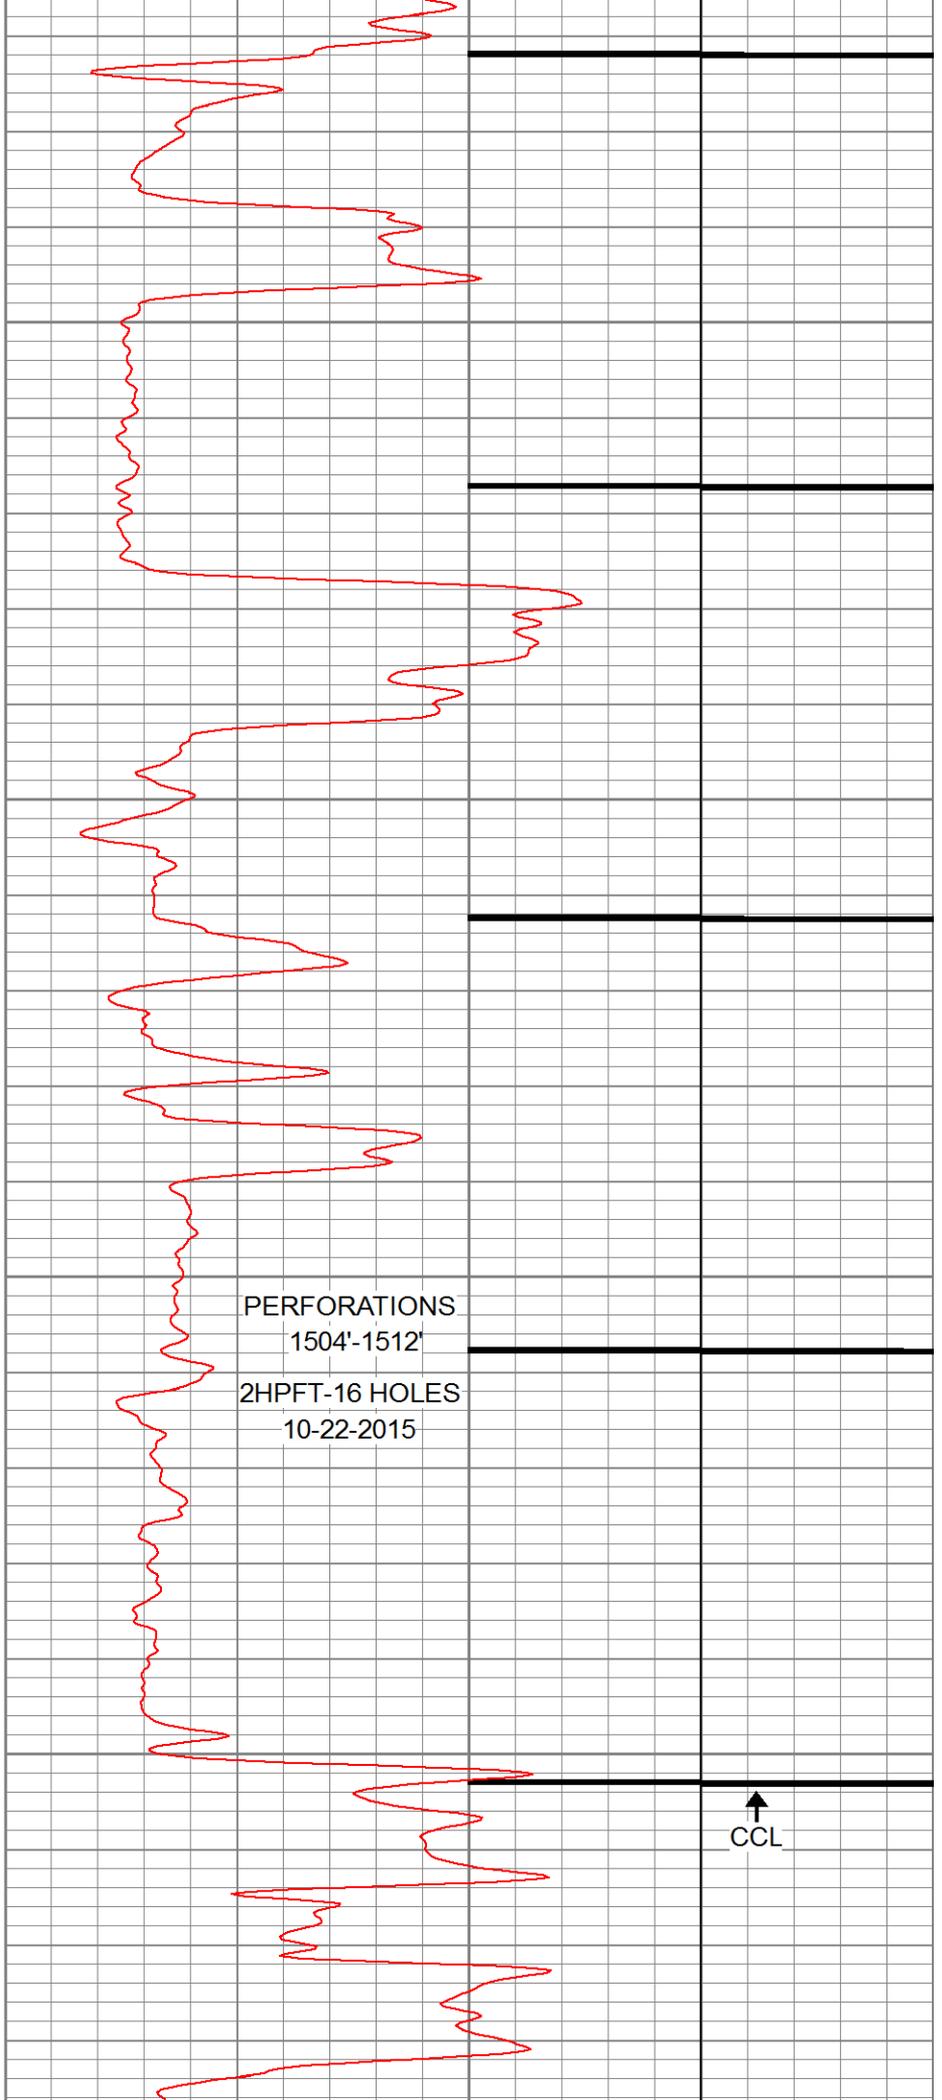

PERFORATIONS
1504'-1512'
2HPFT-16 HOLES
10-22-2015

↑
CCL

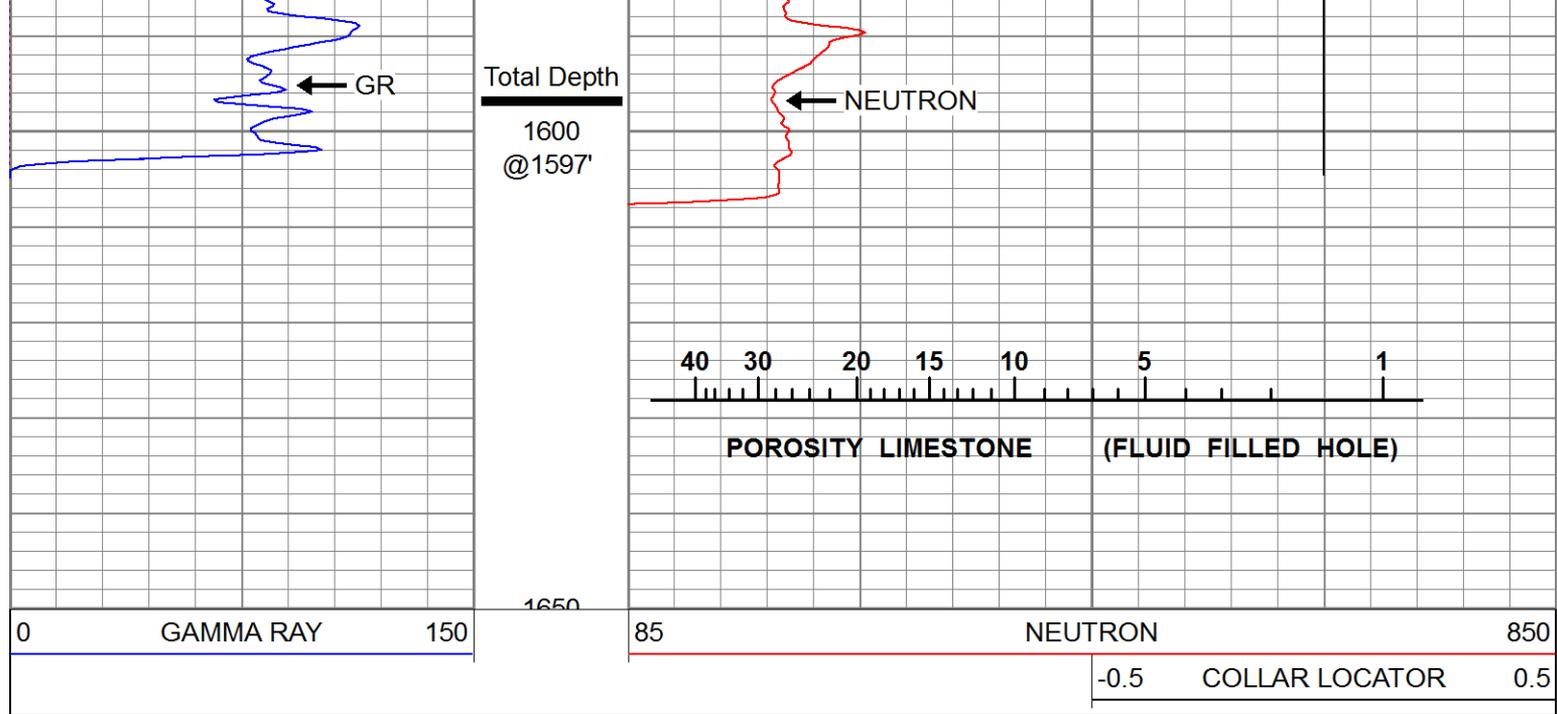

Calibration Report

Database File: sm#4518.db
 Dataset Pathname: fulsom/run1/pass4
 Dataset Creation: Thu Oct 22 09:30:24 2015 by Log 7.0 B1

Neutron Calibration Report

Serial Number: GONT_01
 Tool Model: GON
 Performed: Wed Mar 20 09:25:00 2013

Calibrator Values: 0 1
 Calibrator Readings: 0 1 cps

Sensitivity: 1 /cps

Gamma Ray Calibration Report

Serial Number: GOGT_01
 Tool Model: GOG
 Performed: Wed Sep 16 09:35:21 2015

Calibrator Value: 340.0

Background Reading: 0.0 cps
 Calibrator Reading: 100.0 cps

Sensitivity: 5.2000 /cps