NABORS COMPLETION & PRODUCTION SERVICES CO.

DUAL INDUCTION LOG

Company	ABERCROMBIE ENERGY, LLC.
Well	MOORE "A" #1-9
Field	WHITES AND CREEK NORTH
County	SCOTT
State	KANSAS

Company ABERCROMBIE ENERGY, LLC.

Well MOORE "A" #1-9

Field WHITES AND CREEK NORTH

County SCOTT State KANSAS

Location: API # : 15-171-21023-0000

1150' FSL & 1890' FWL

NE - NW - SE - SW

SEC 9 TWP 20S RGE 34W

Other Services: CDL/CNL/PE, MEL/SONIC

Permanent Datum: GROUND LEVEL Elevation: 3079

Log Measured From: KELLY BUSHING 9' A.G.L.

Drilling Measured From: KELLY BUSHING

Elevation: K.B. 3088, D.F. 3086, G.L. 3079

Date	2/11/14		
Run Number	ONE		
Depth Driller	5010		
Depth Logger	5014		
Bottom Logged Interval	5012		
Top Log Interval	00		
Casing Driller	8 5/8"@341'		
Casing Logger	341		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,400 PPM	
Density / Viscosity	9.4/47		
pH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.950@70F		
Rmf @ Meas. Temp	.713@70F		
Rmc @ Meas. Temp	1.14@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.532@125F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	4:15 P.M.		
Maximum Recorded Temperature	125F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TYLER H. SANDERS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395

DIRECTIONS

SCOTT CITY, KS. 10S. ON HWY 83 TO "RD. 40", (FEED LOT SIGN) 9 1/2W., N. INTO

NABORS COMPLETION & PRODUCTION SERVICES CO.

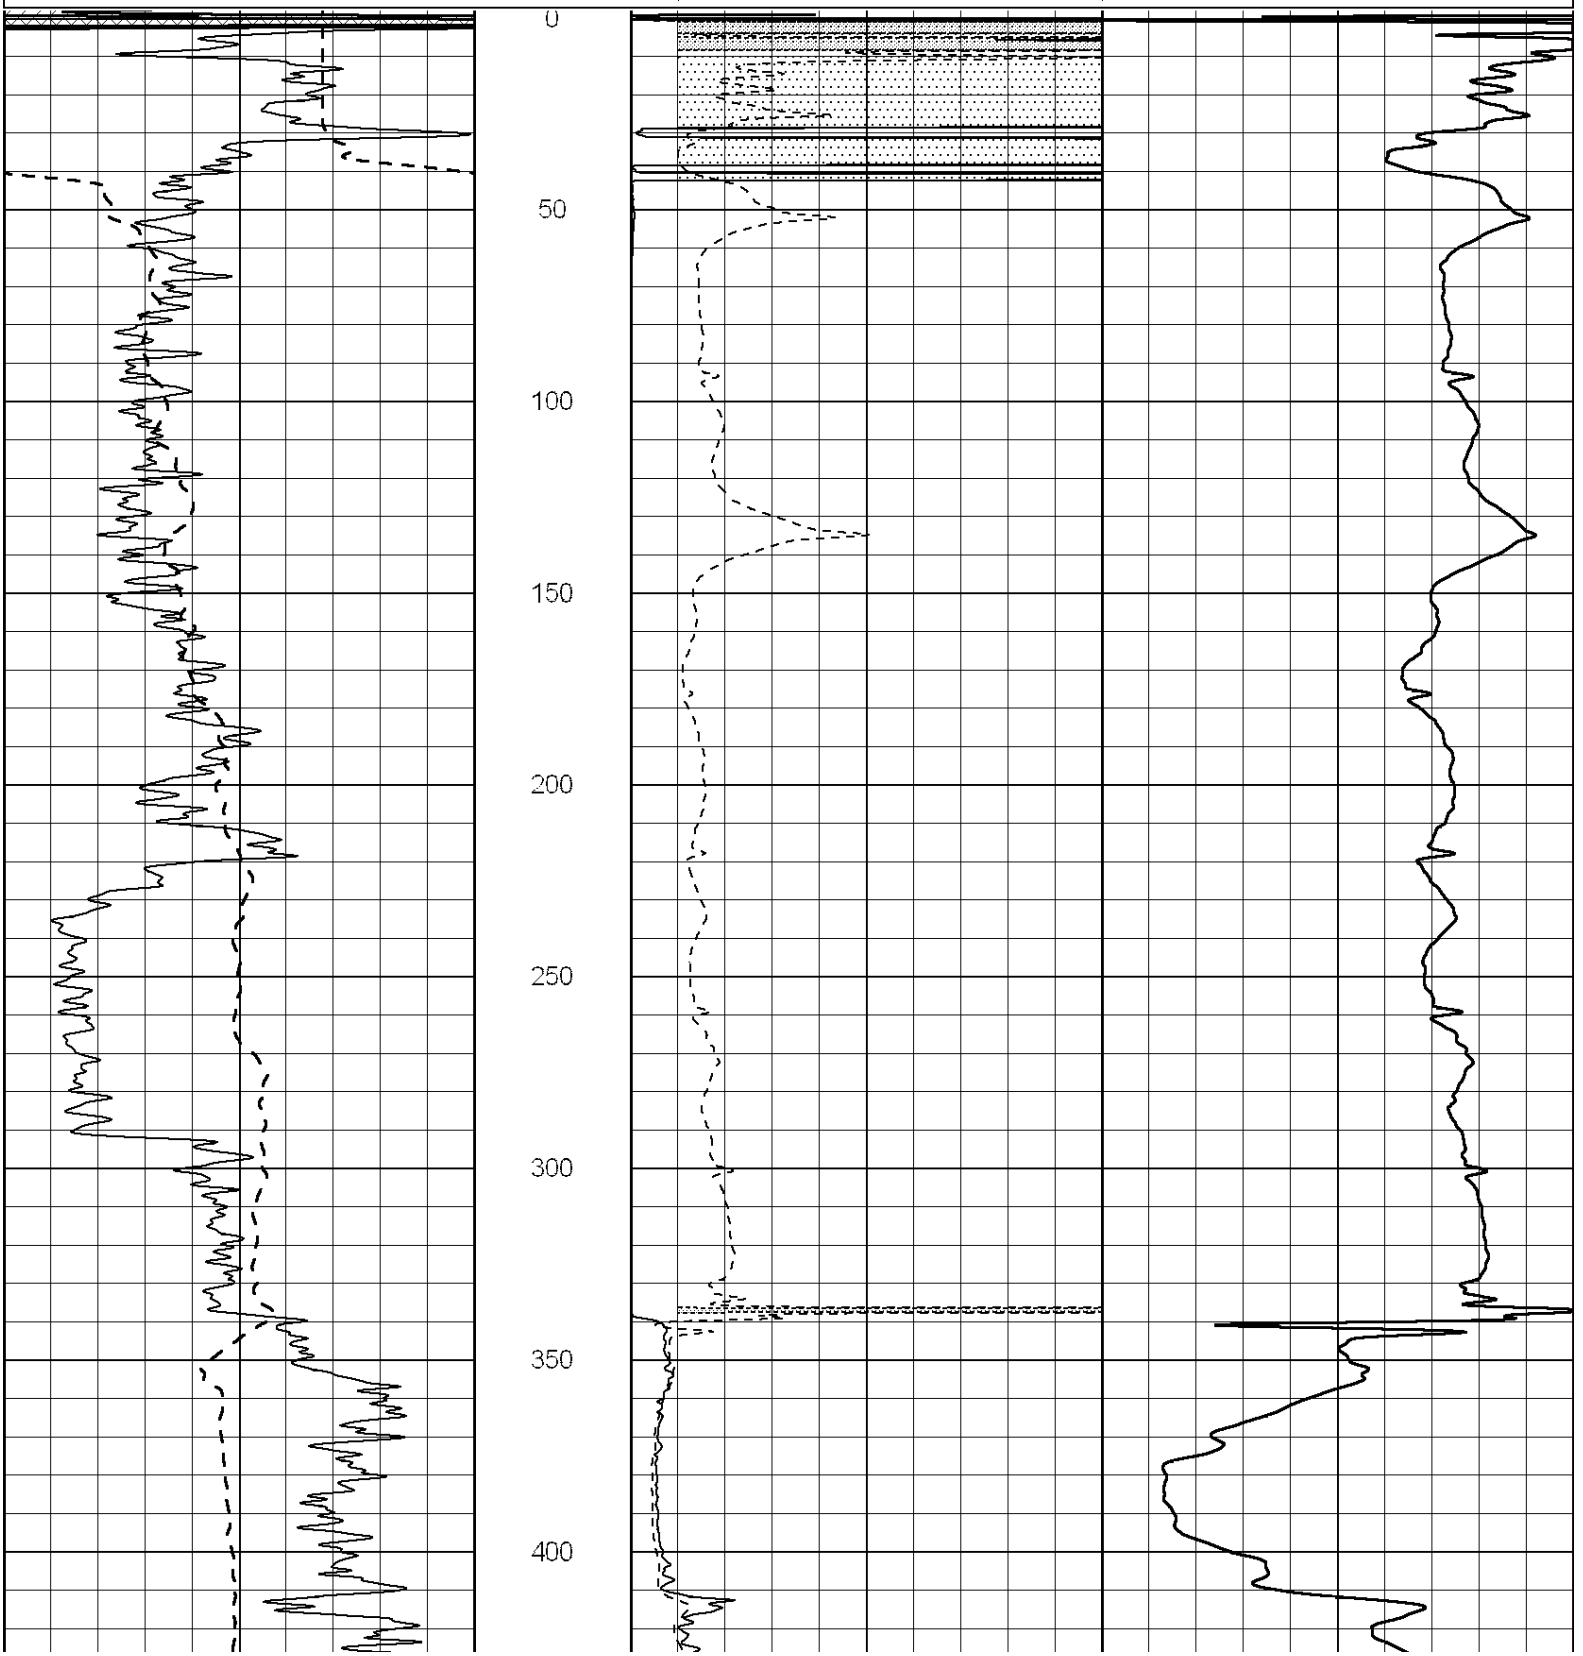
MAIN SECTION

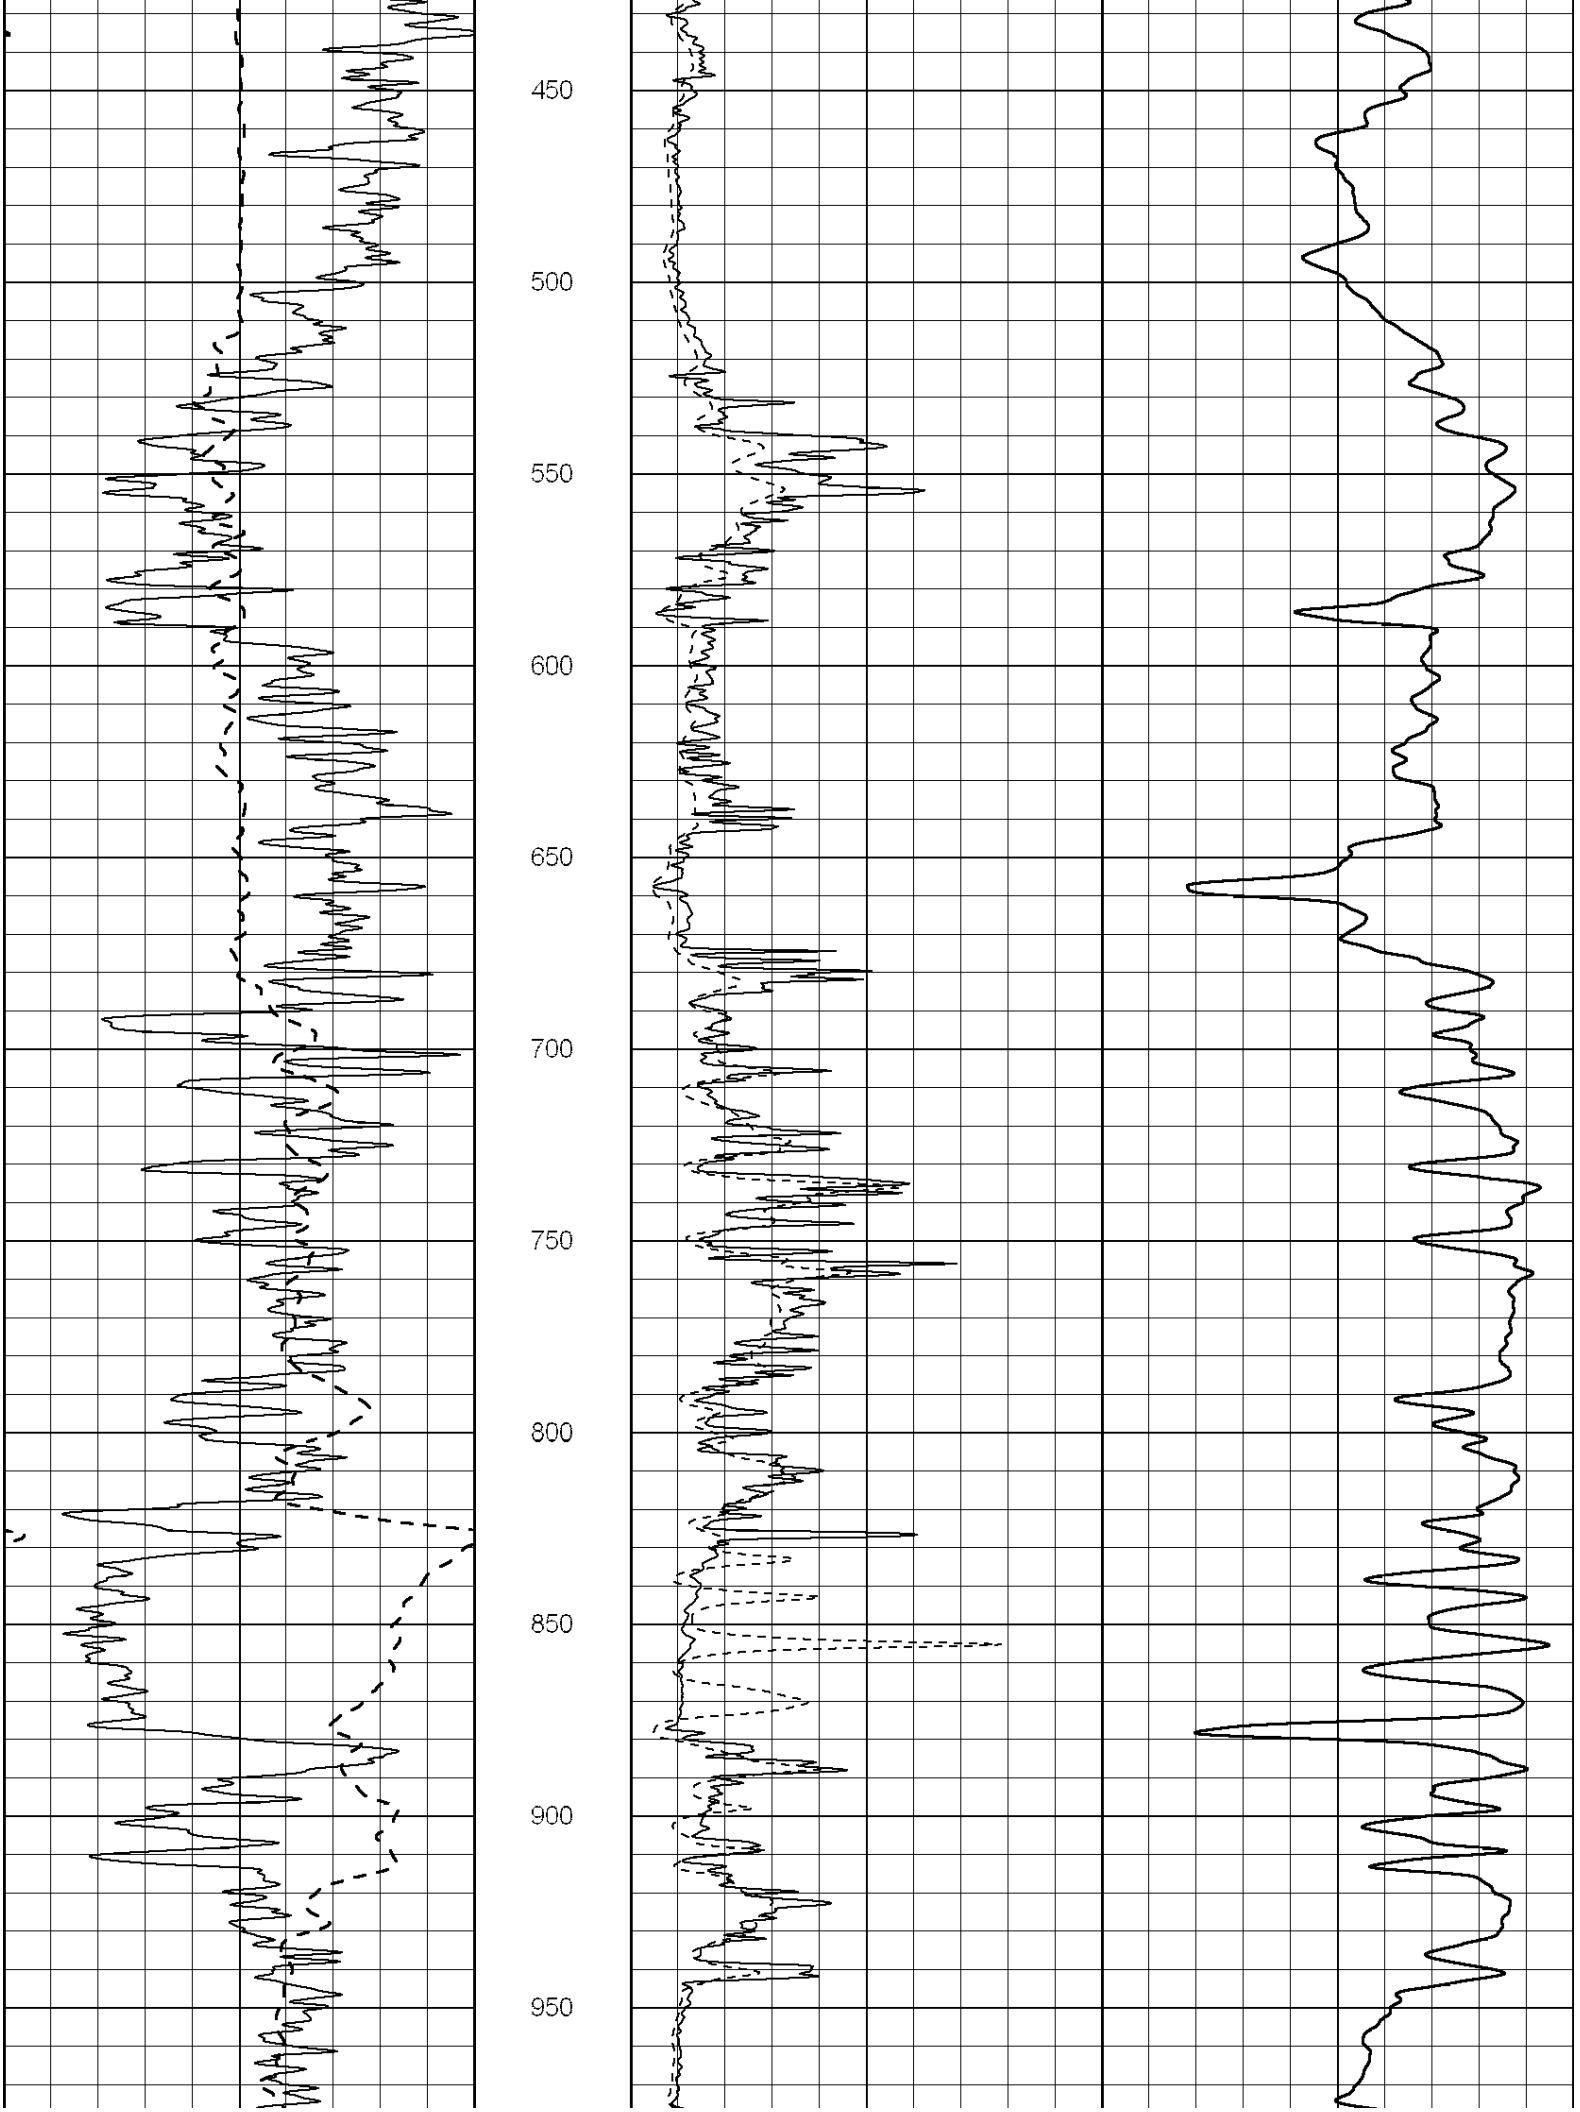
SERVICES CO.

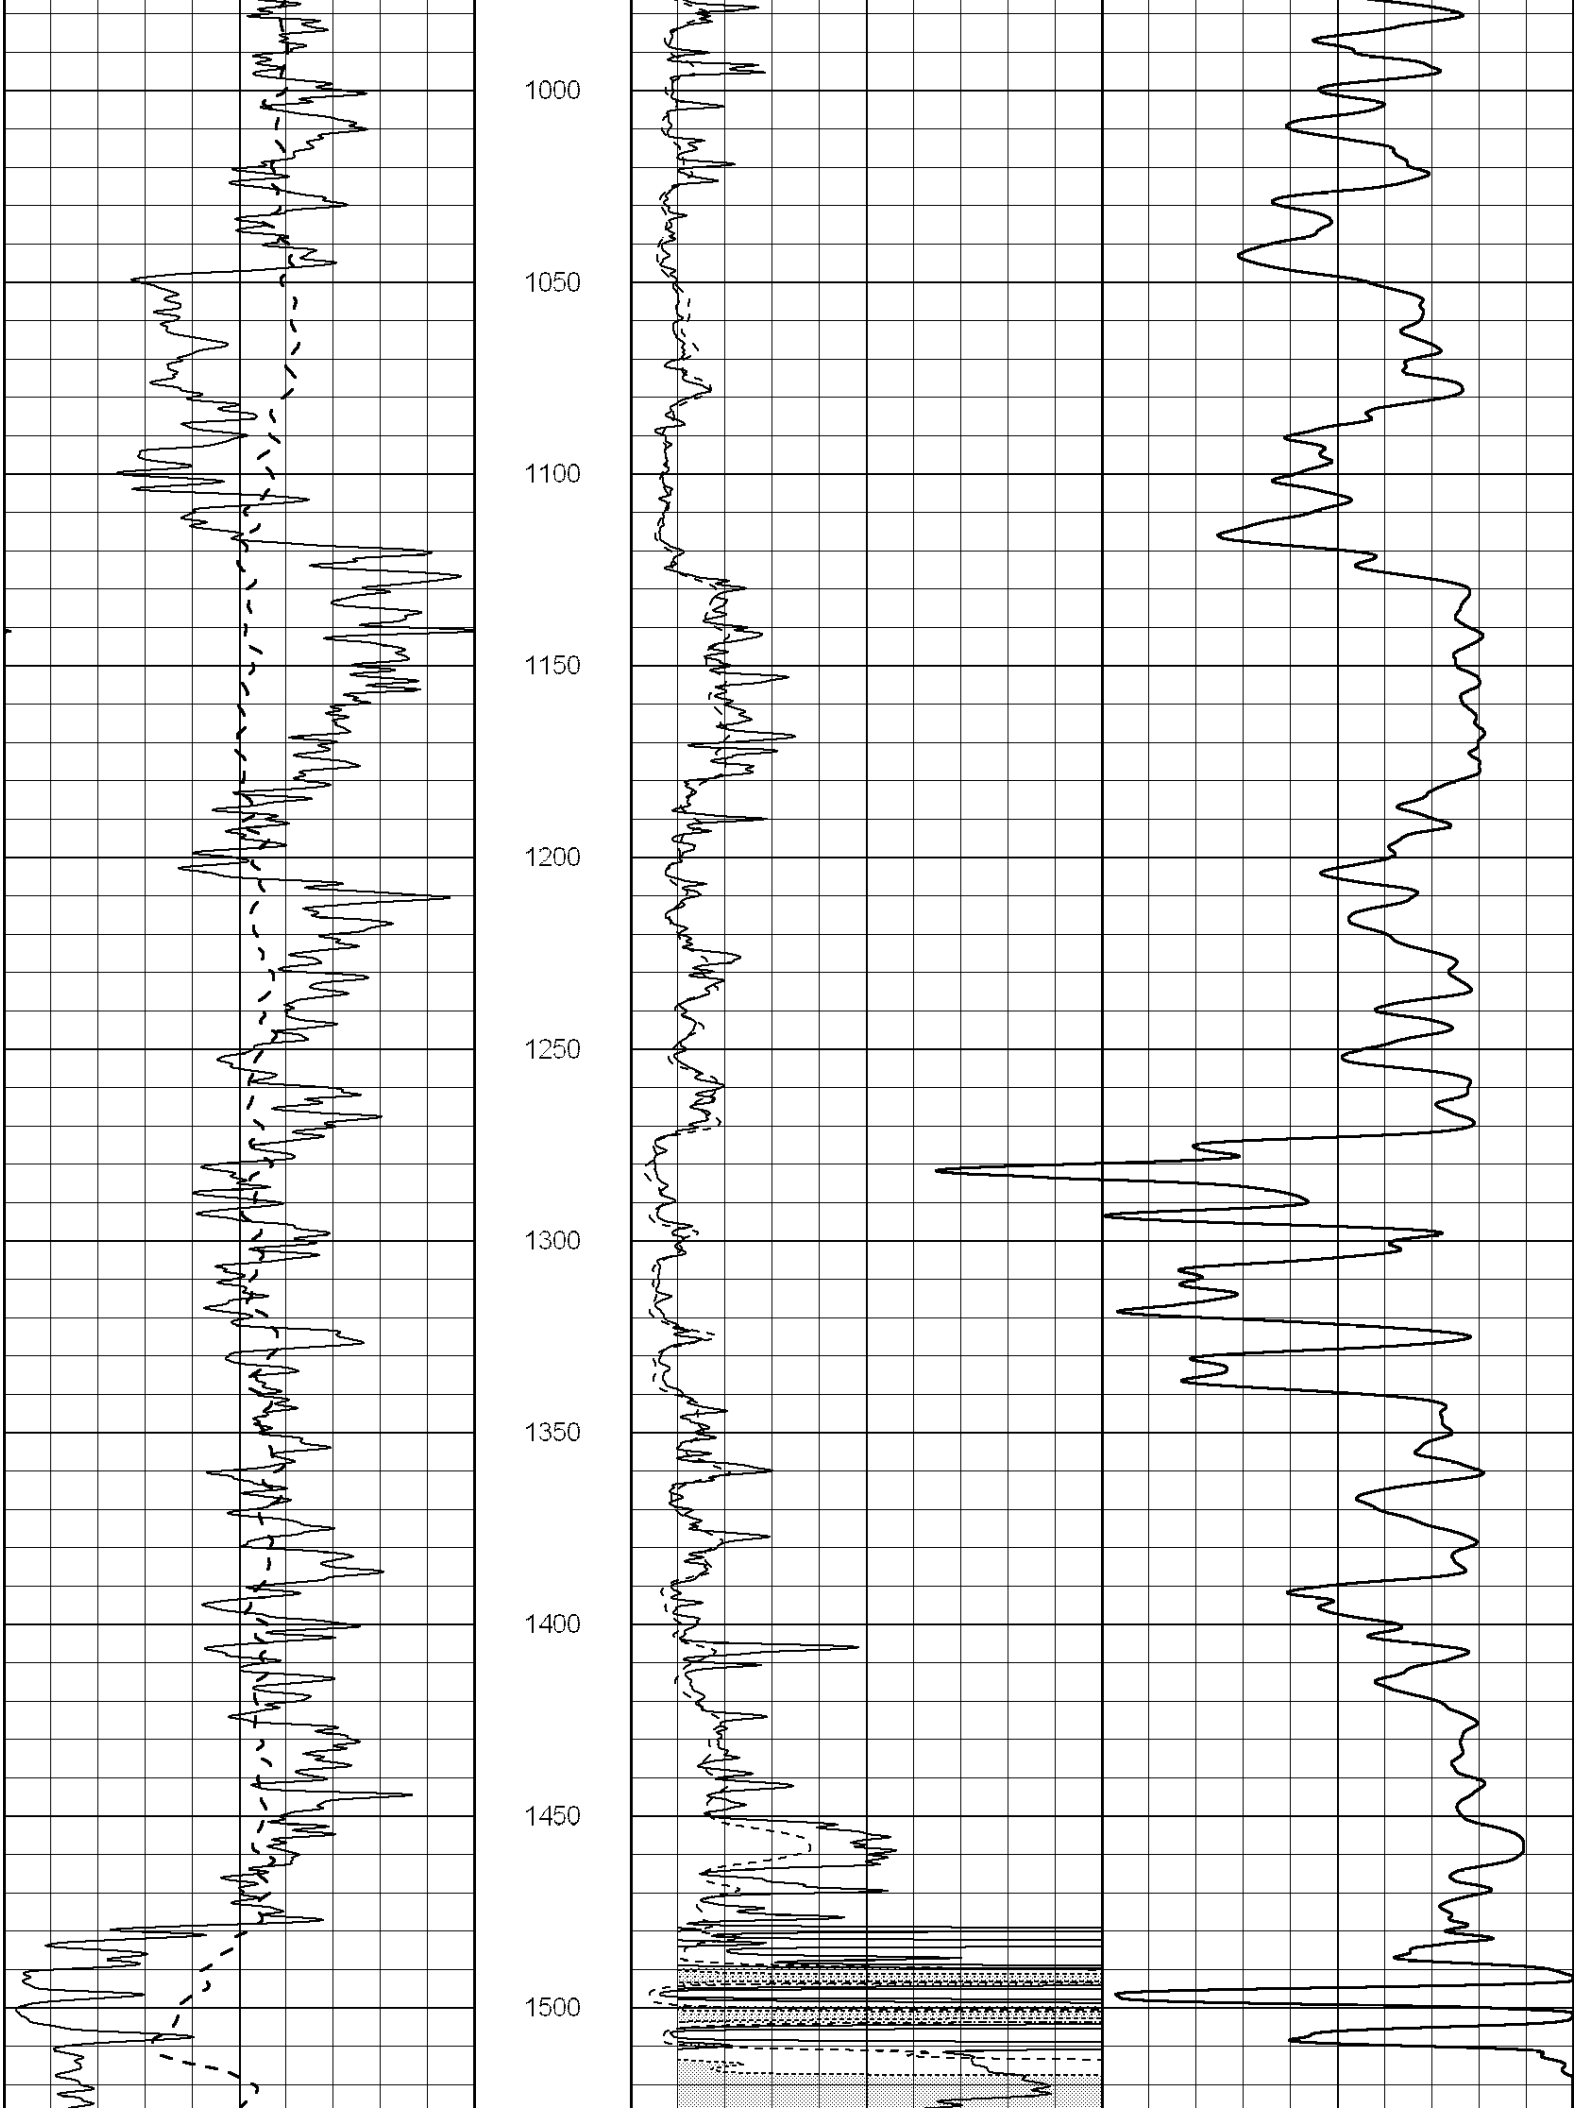
Database File: 22250pe.db
Dataset Pathname: pass3.9
Presentation Format: dil2
Dataset Creation: Tue Feb 11 18:20:06 2014
Charted by: Depth in Feet scaled 1:600

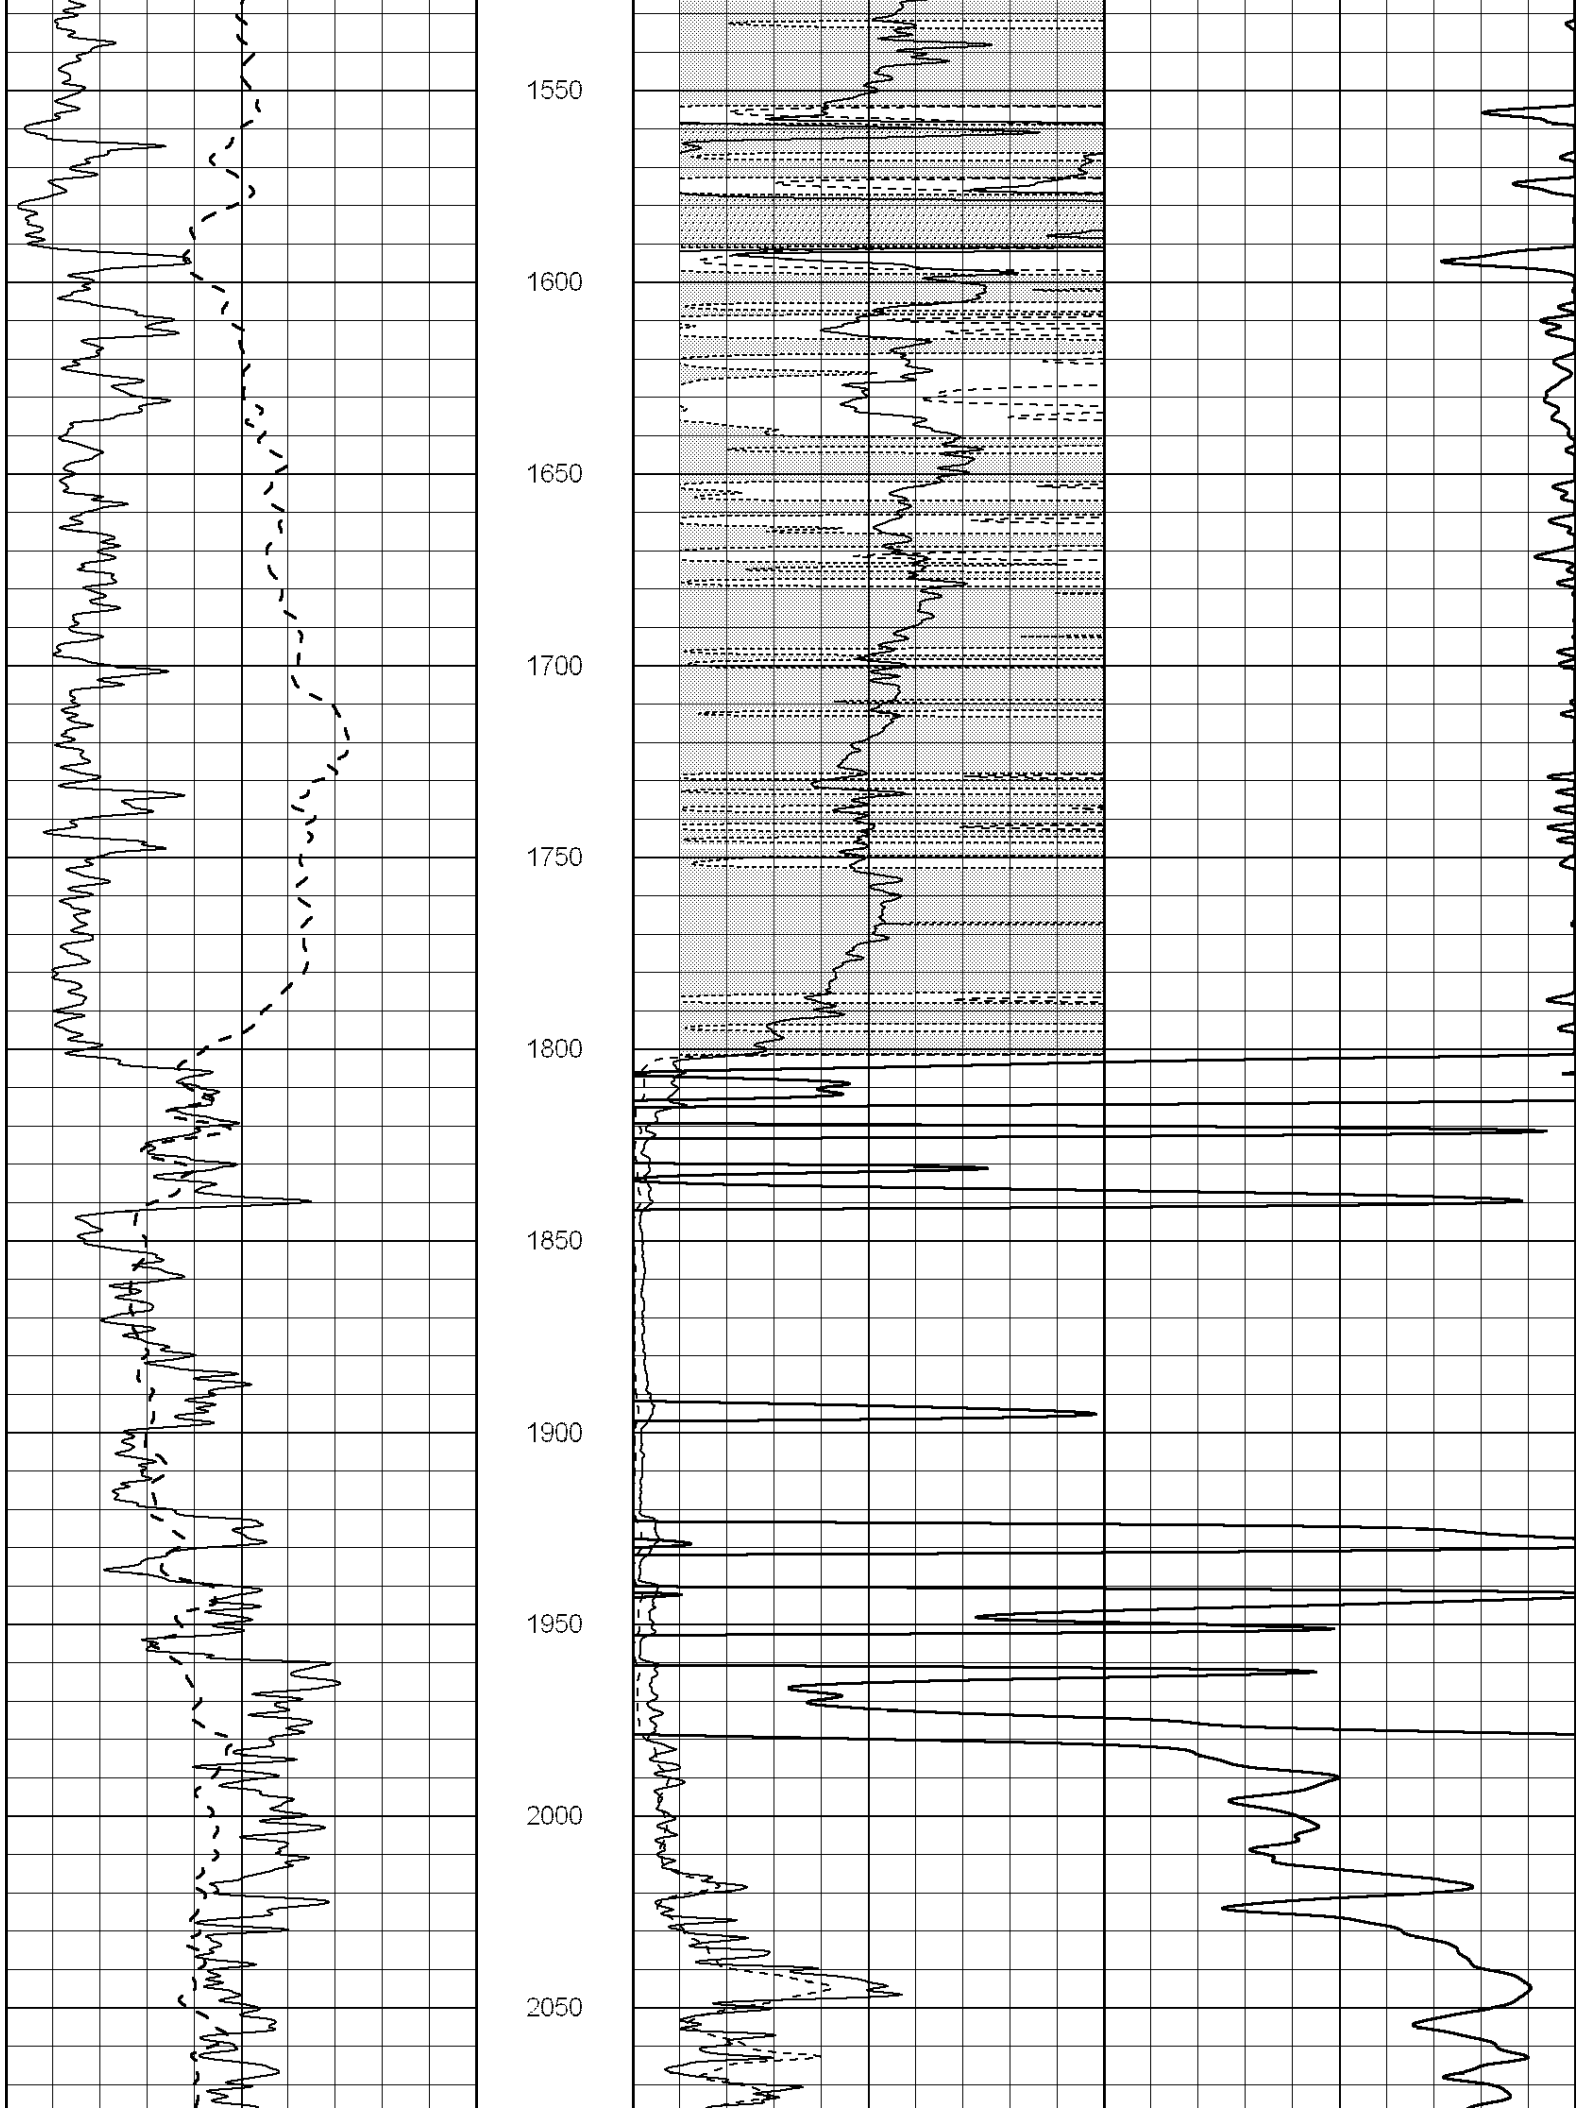
0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

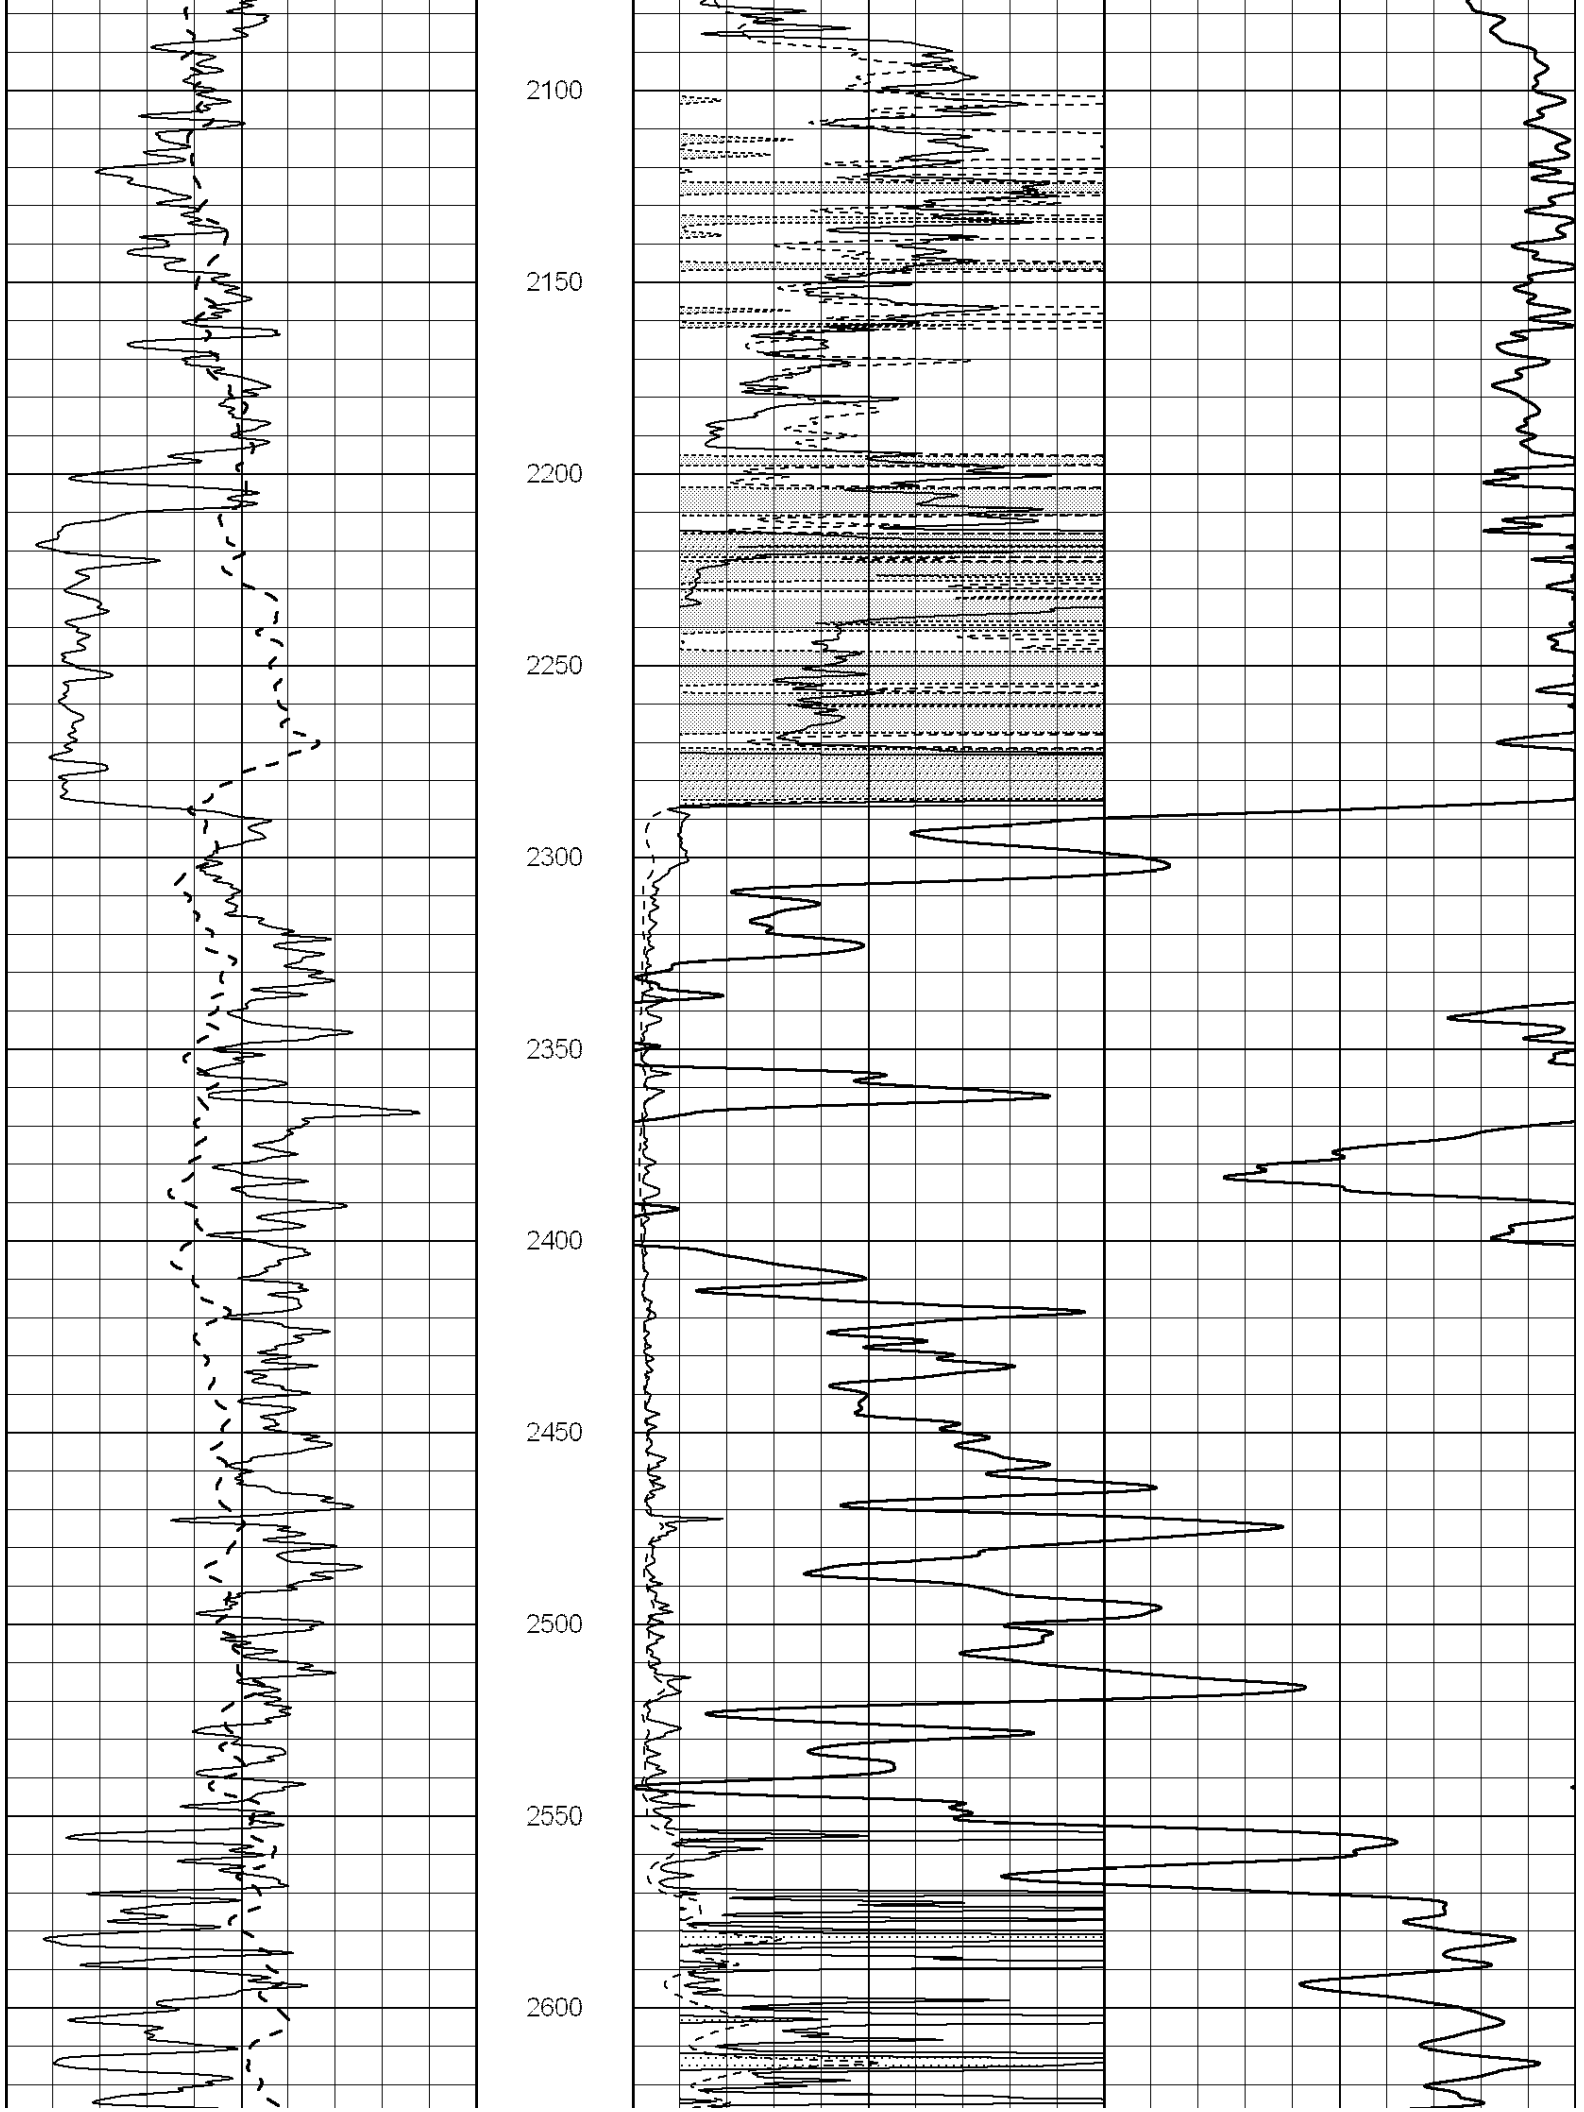
0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

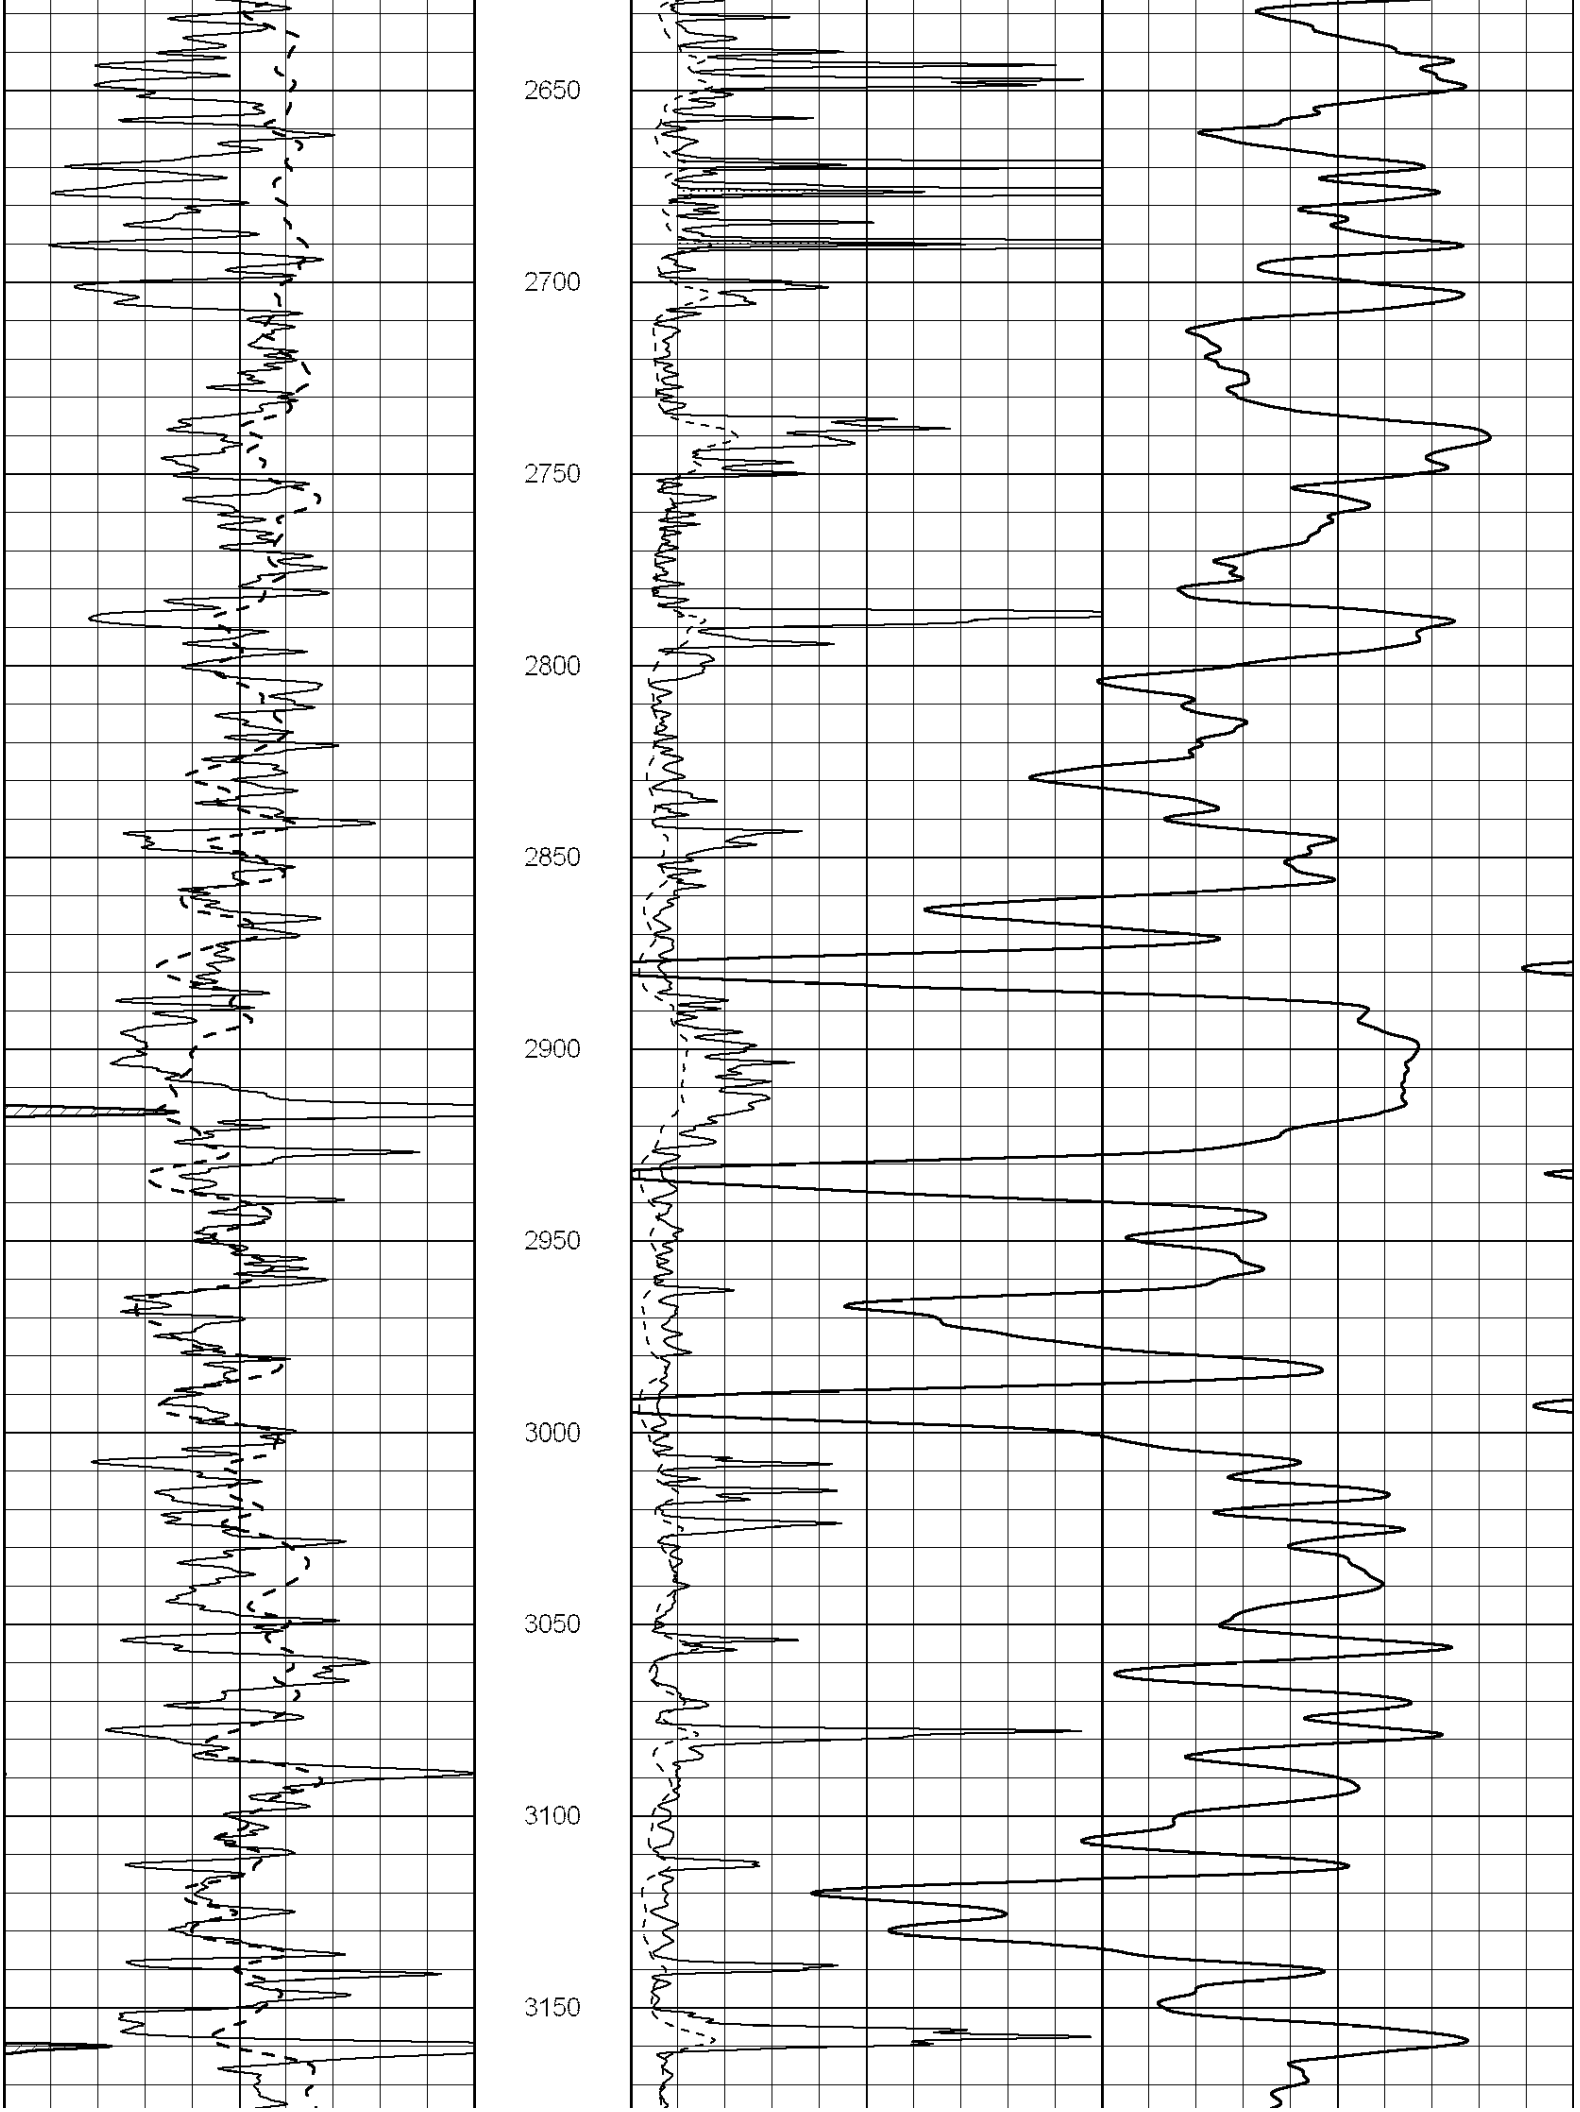


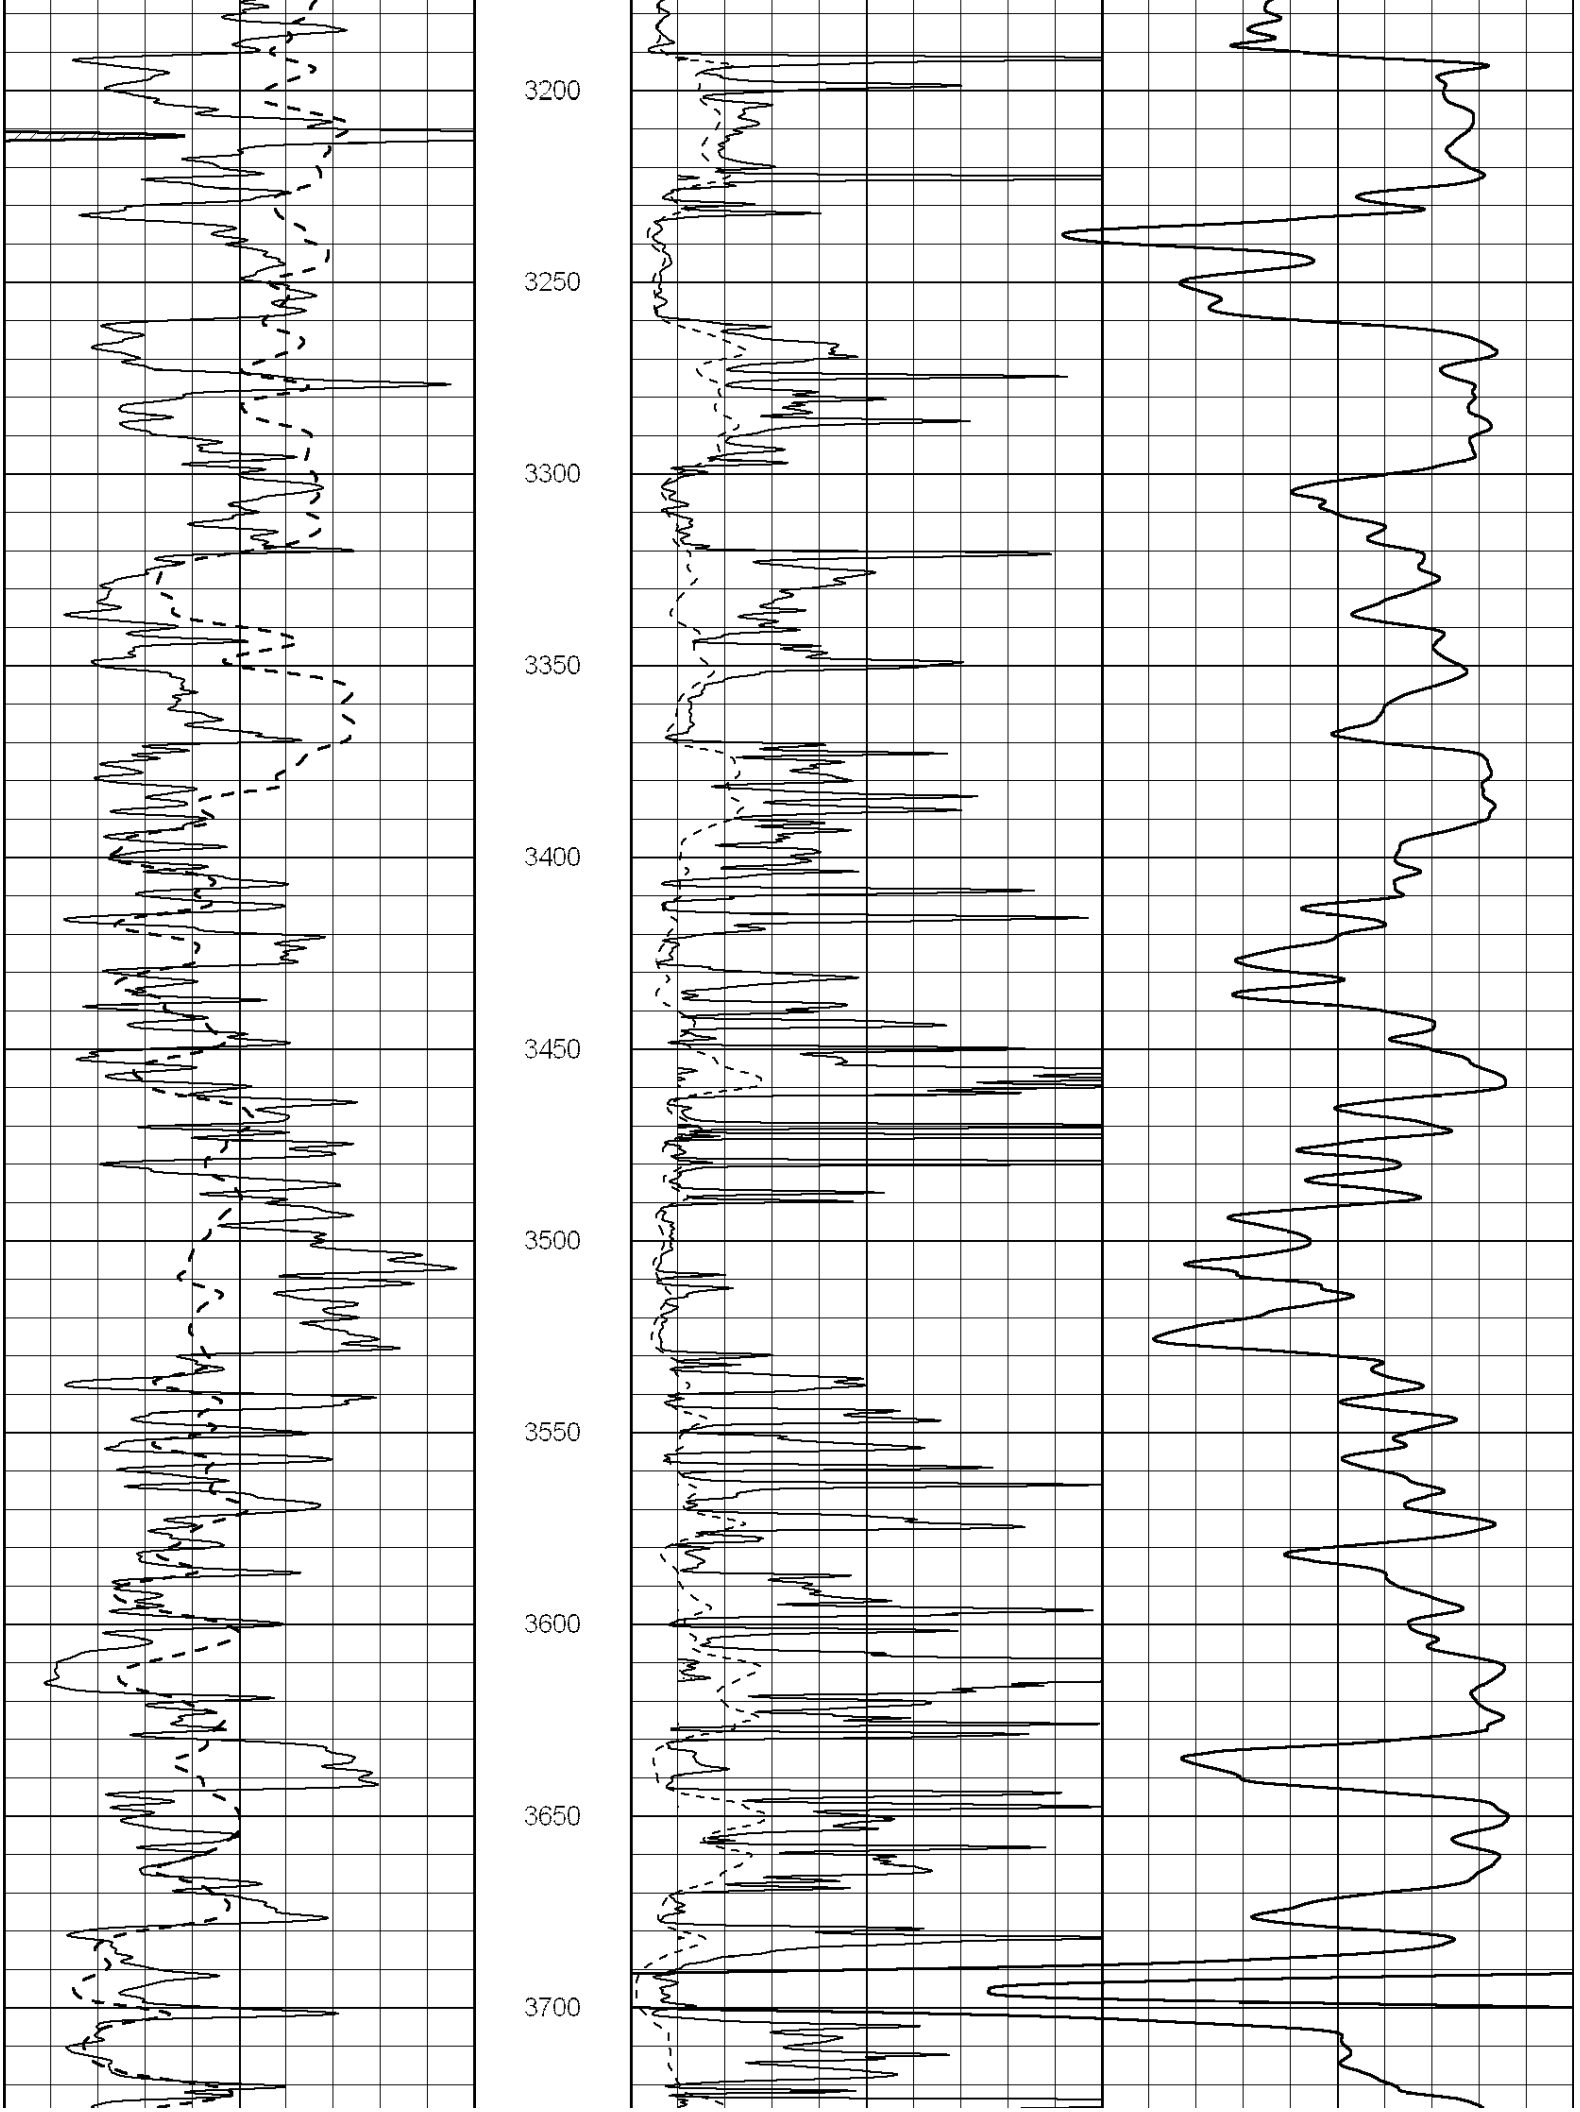

450
500
550
600
650
700
750
800
850
900
950

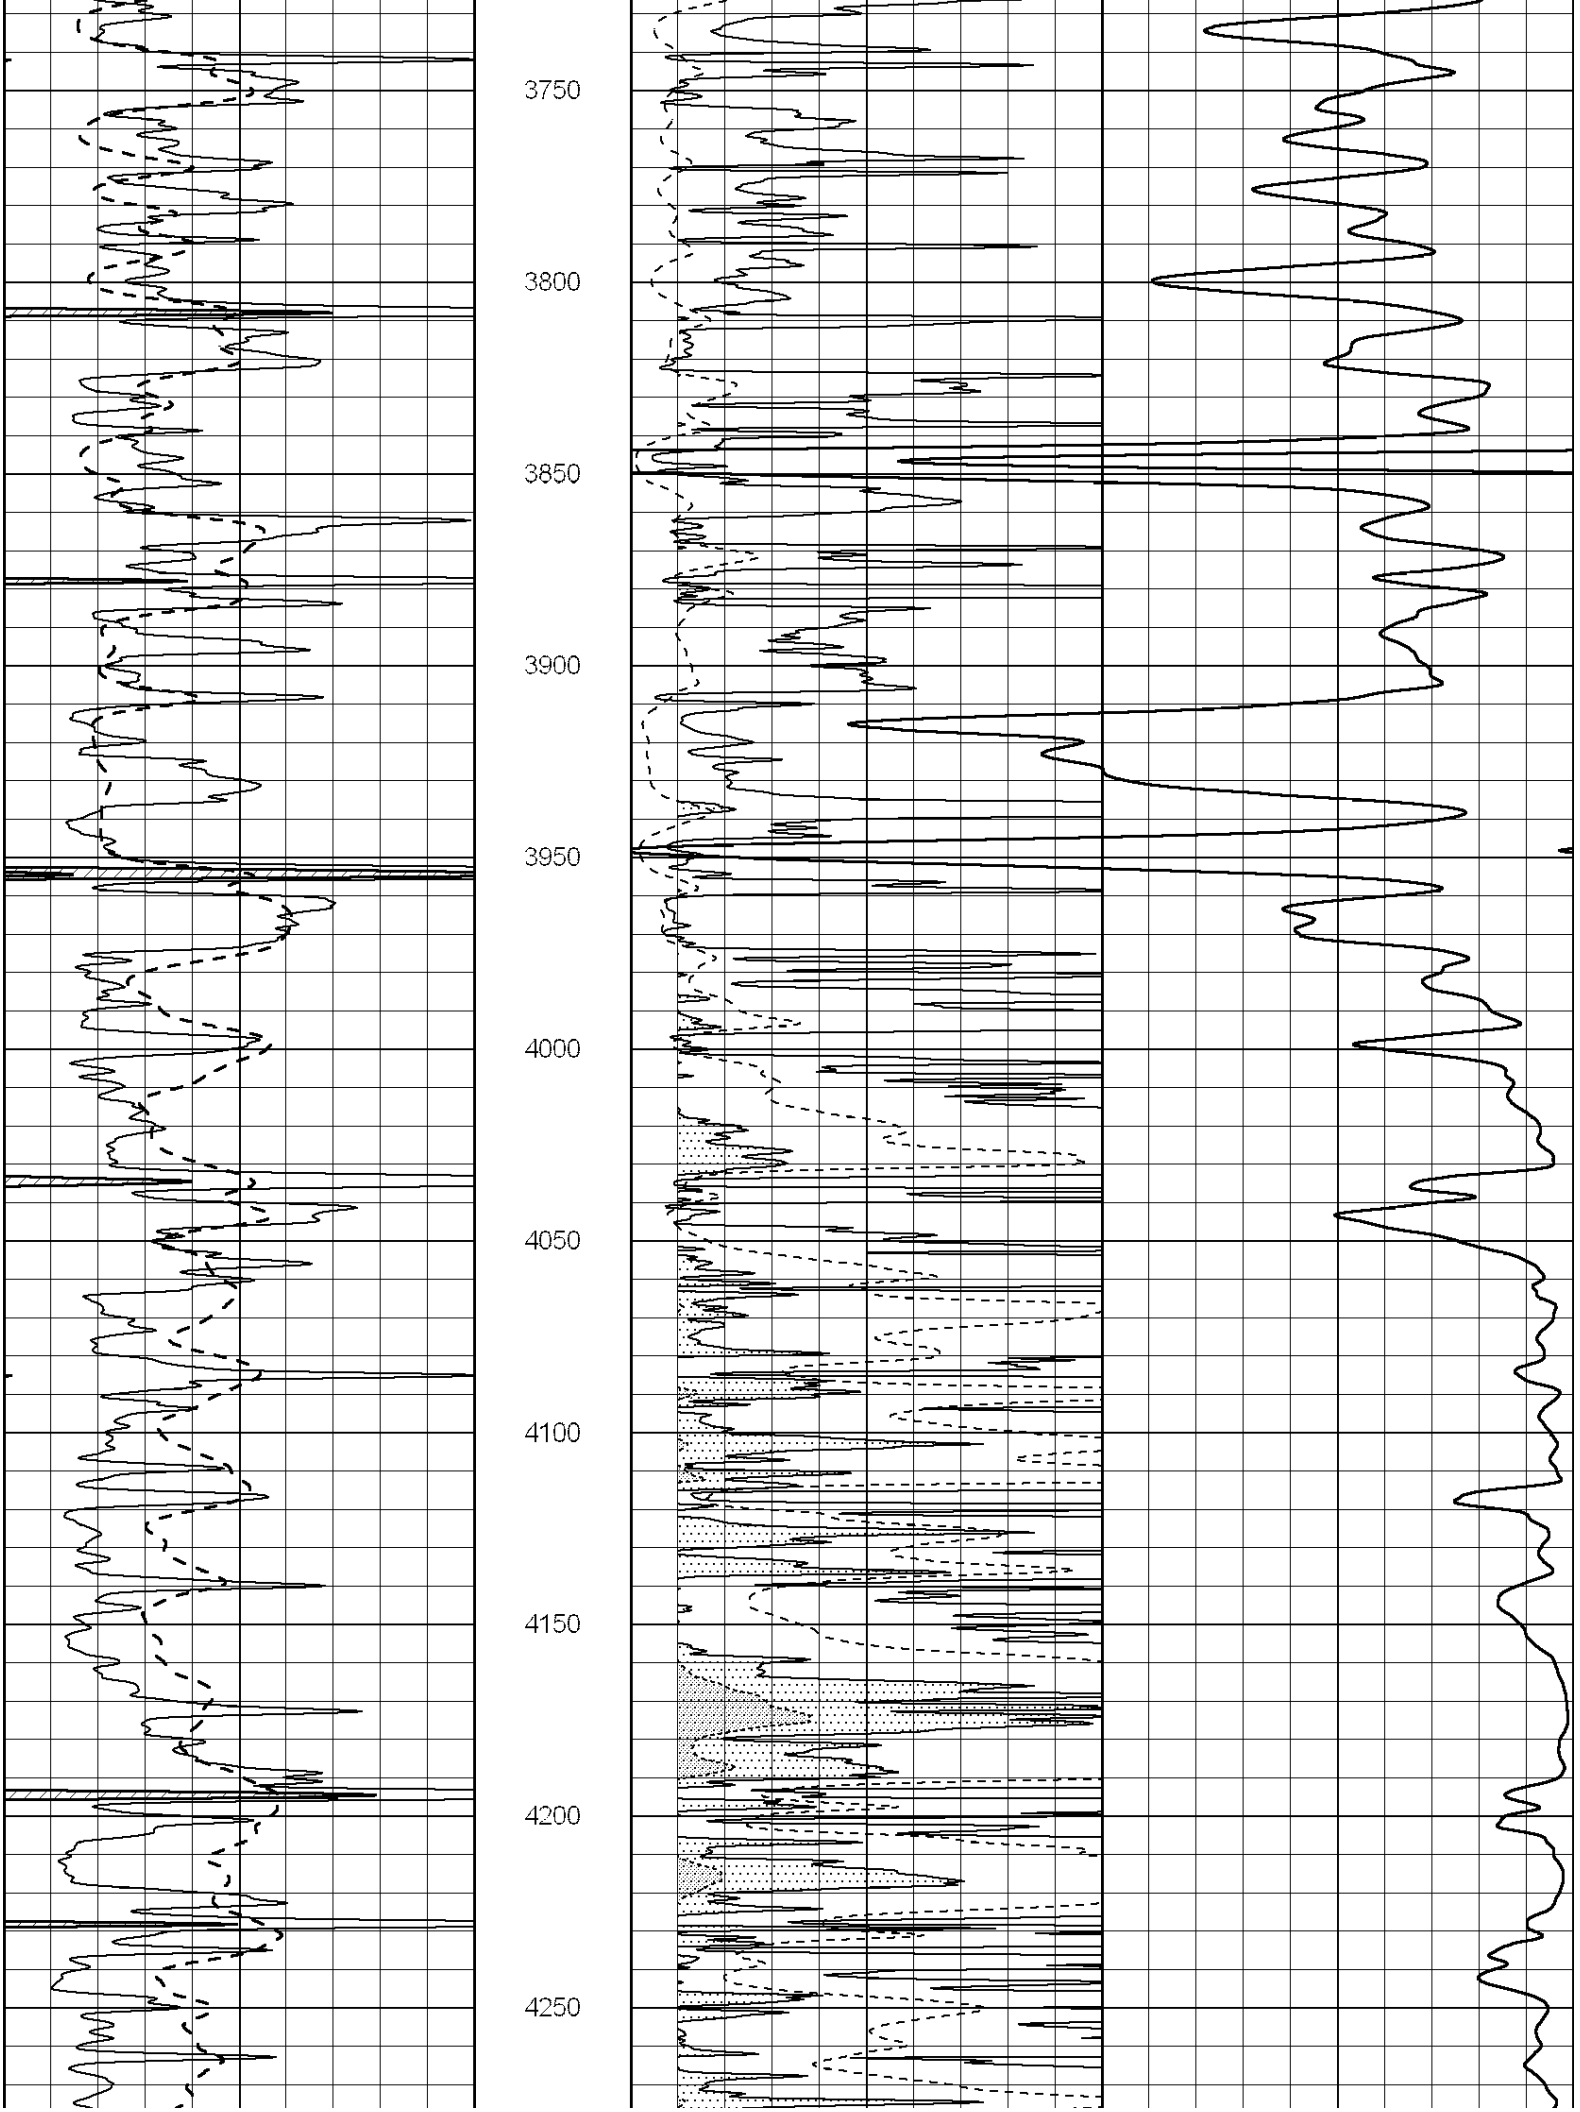

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

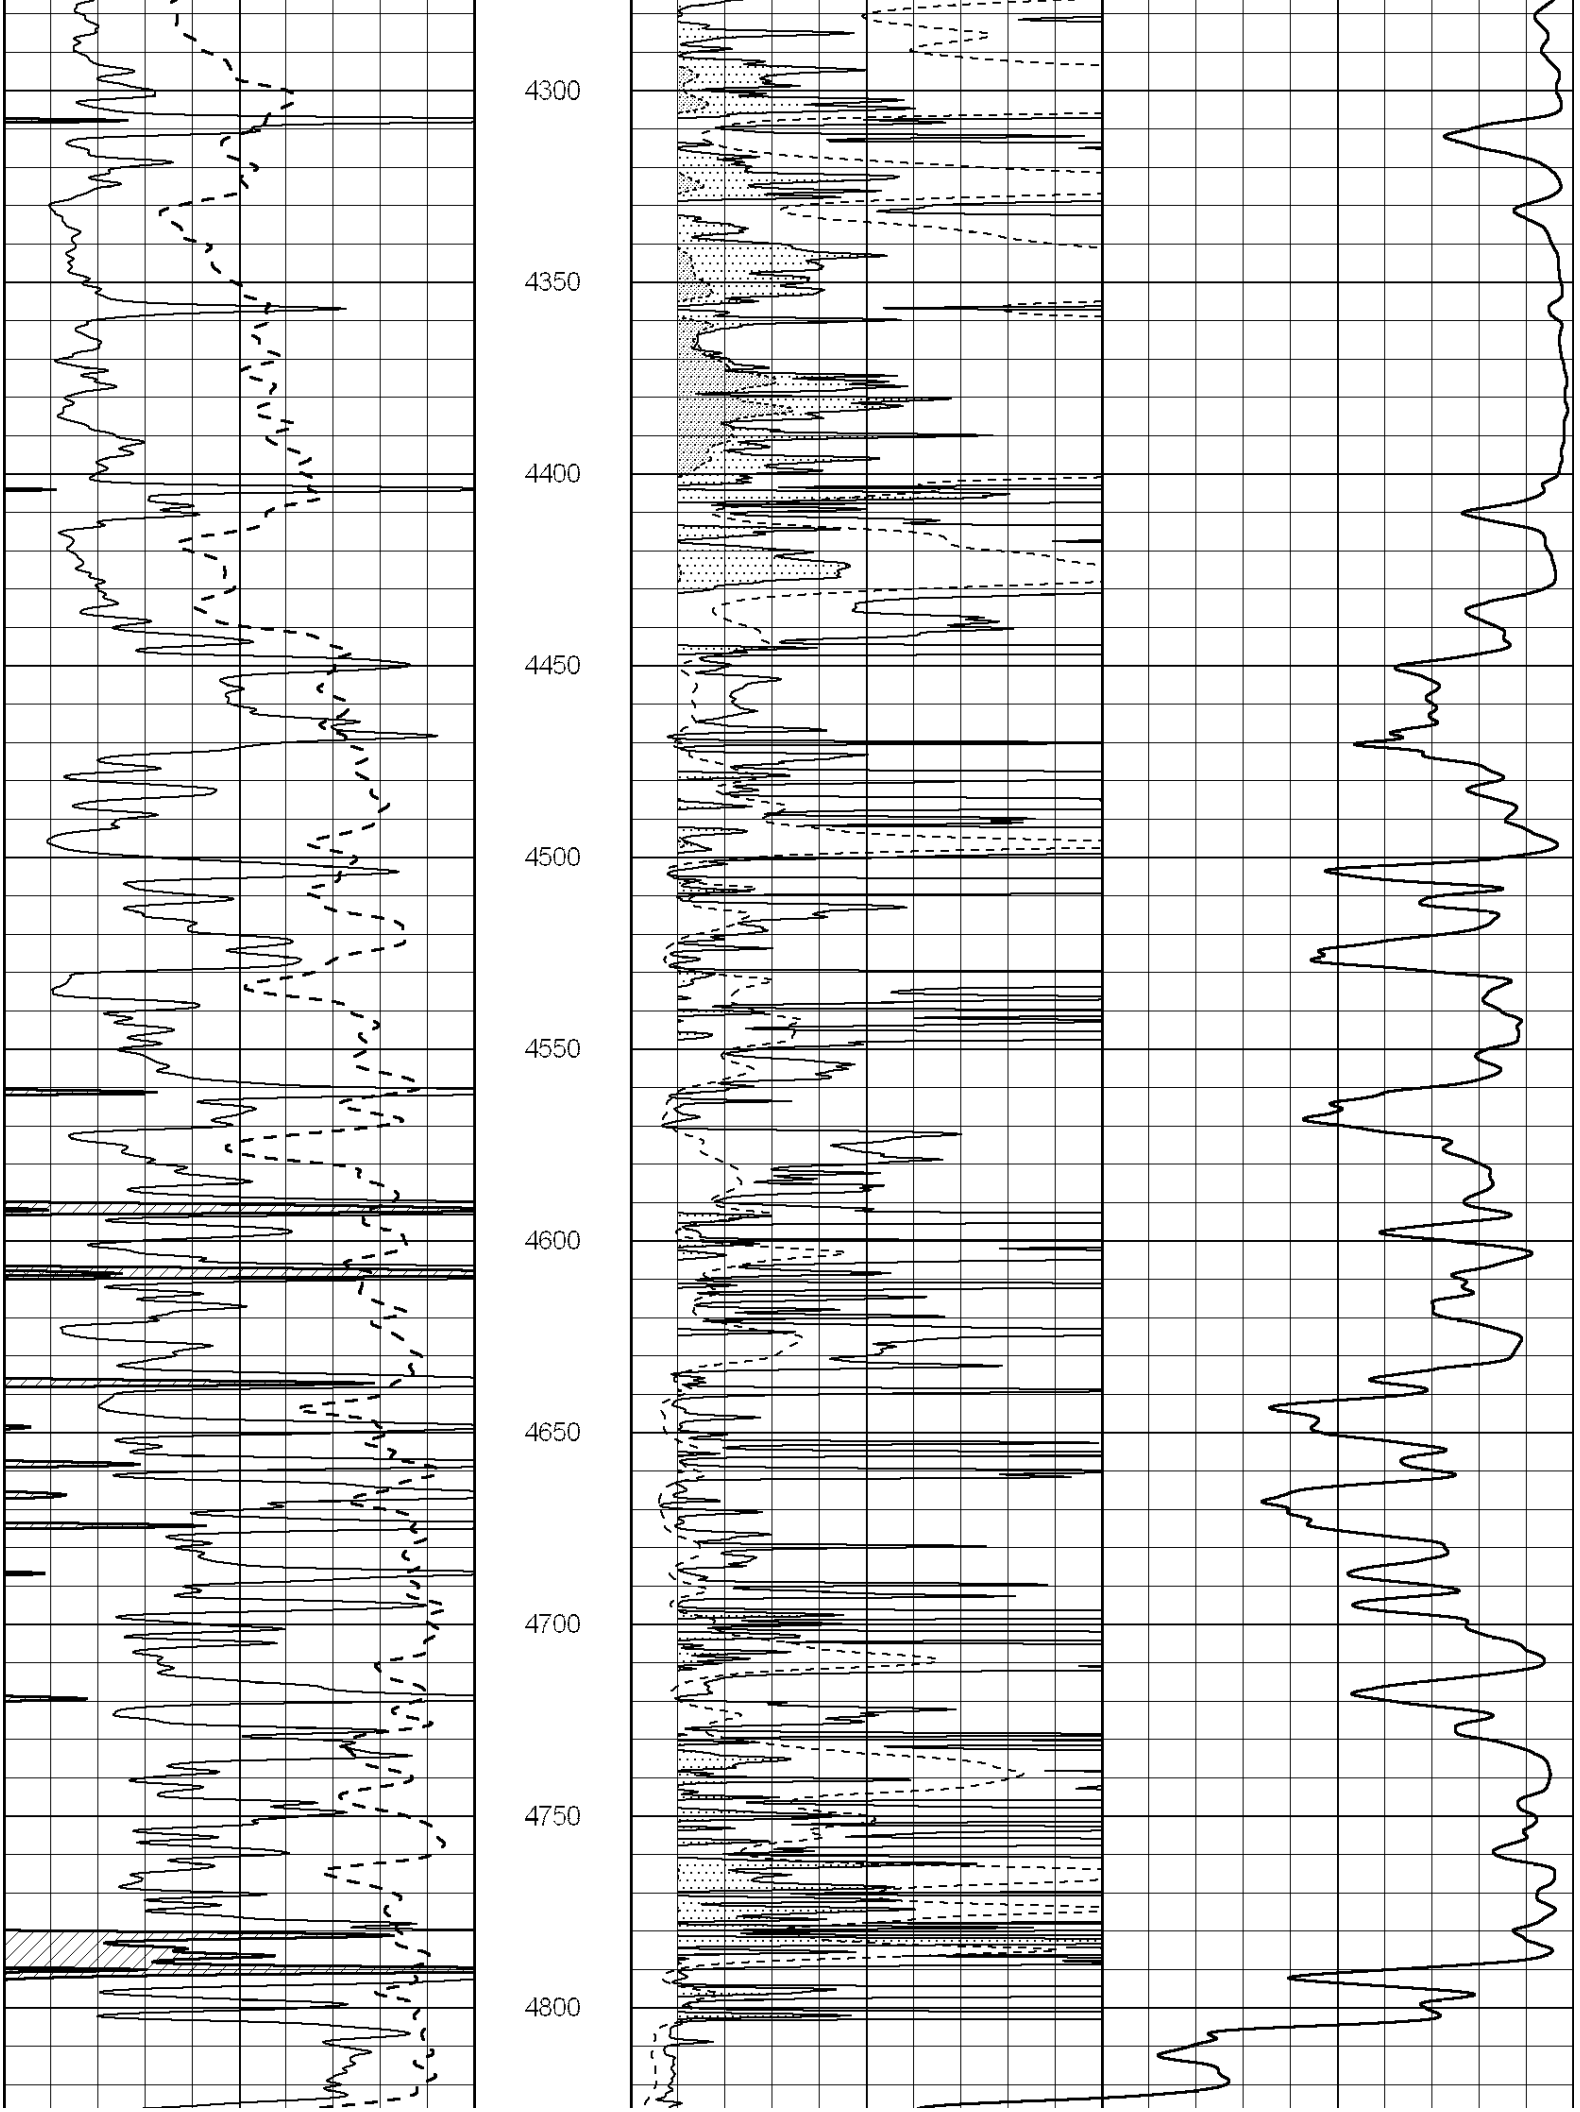

1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050

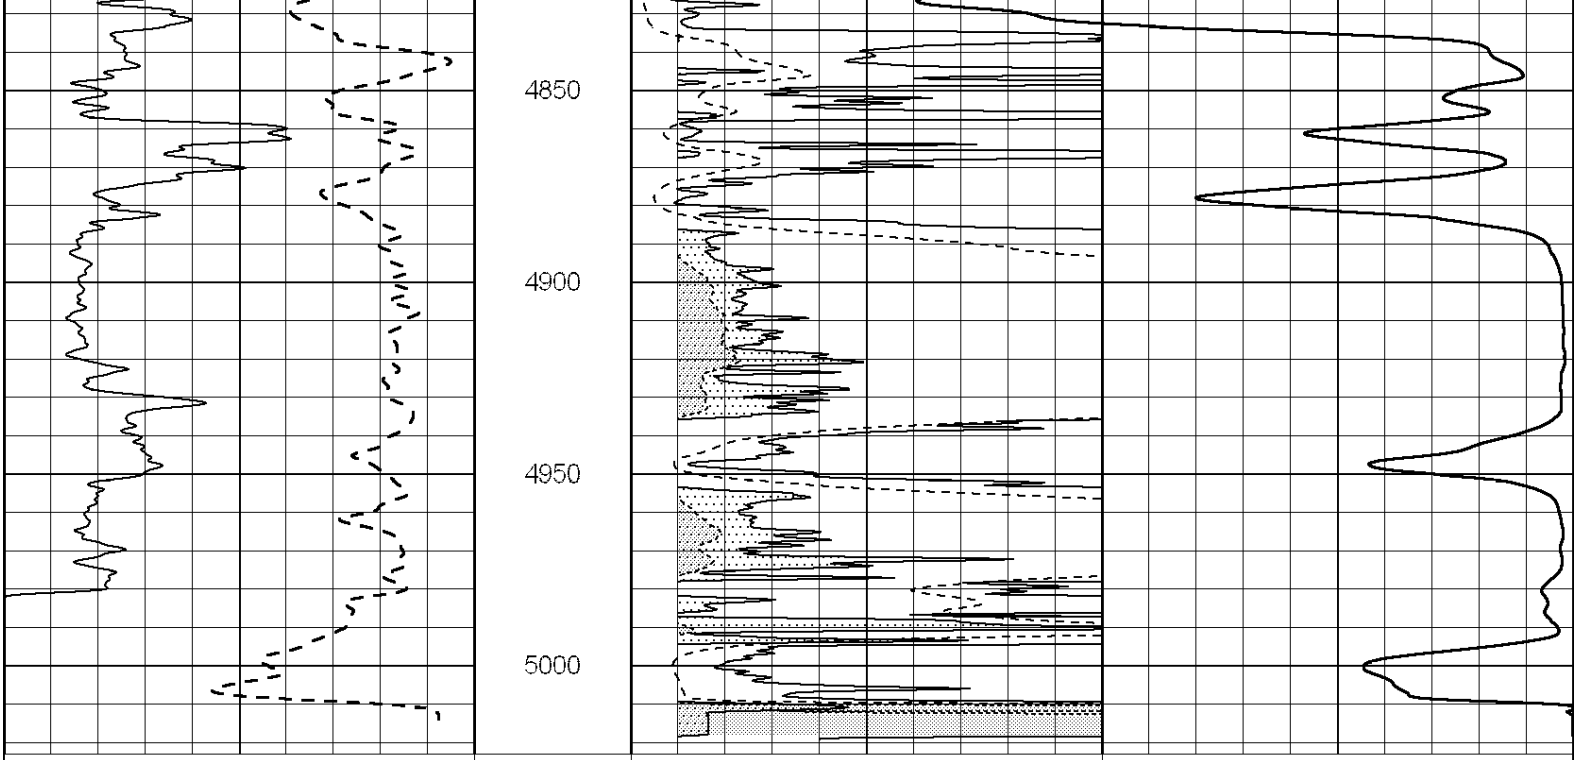

2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600


2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150


3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700


3750
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250


4300
4350
4400
4450
4500
4550
4600
4650
4700
4750
4800



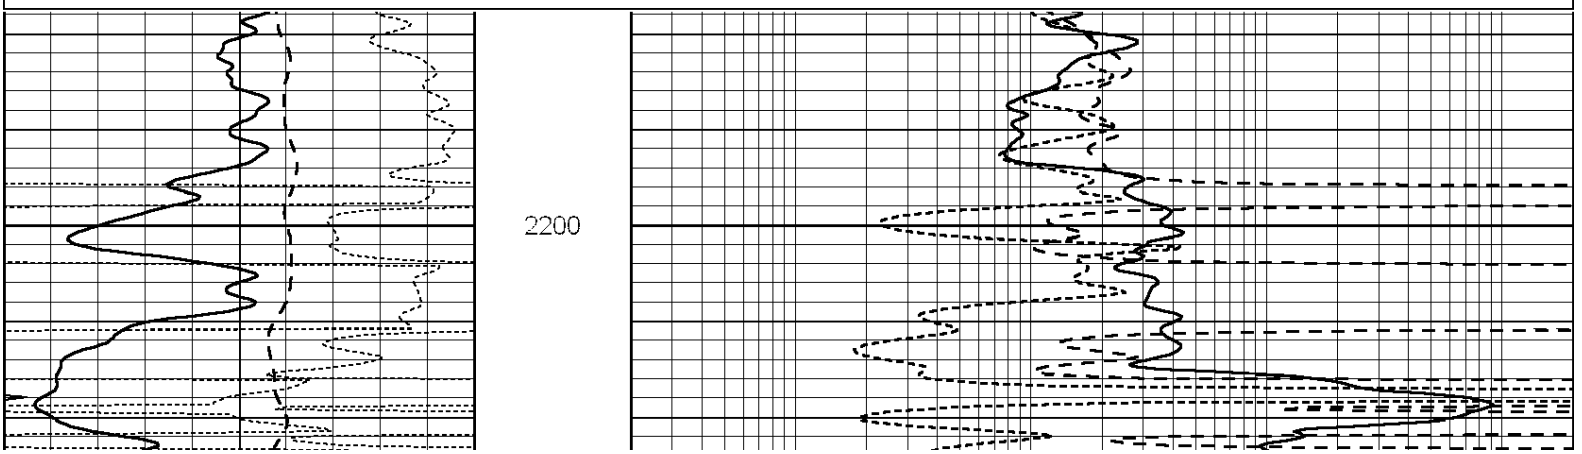
NABORS
COMPLETION & PRODUCTION SERVICES CO.

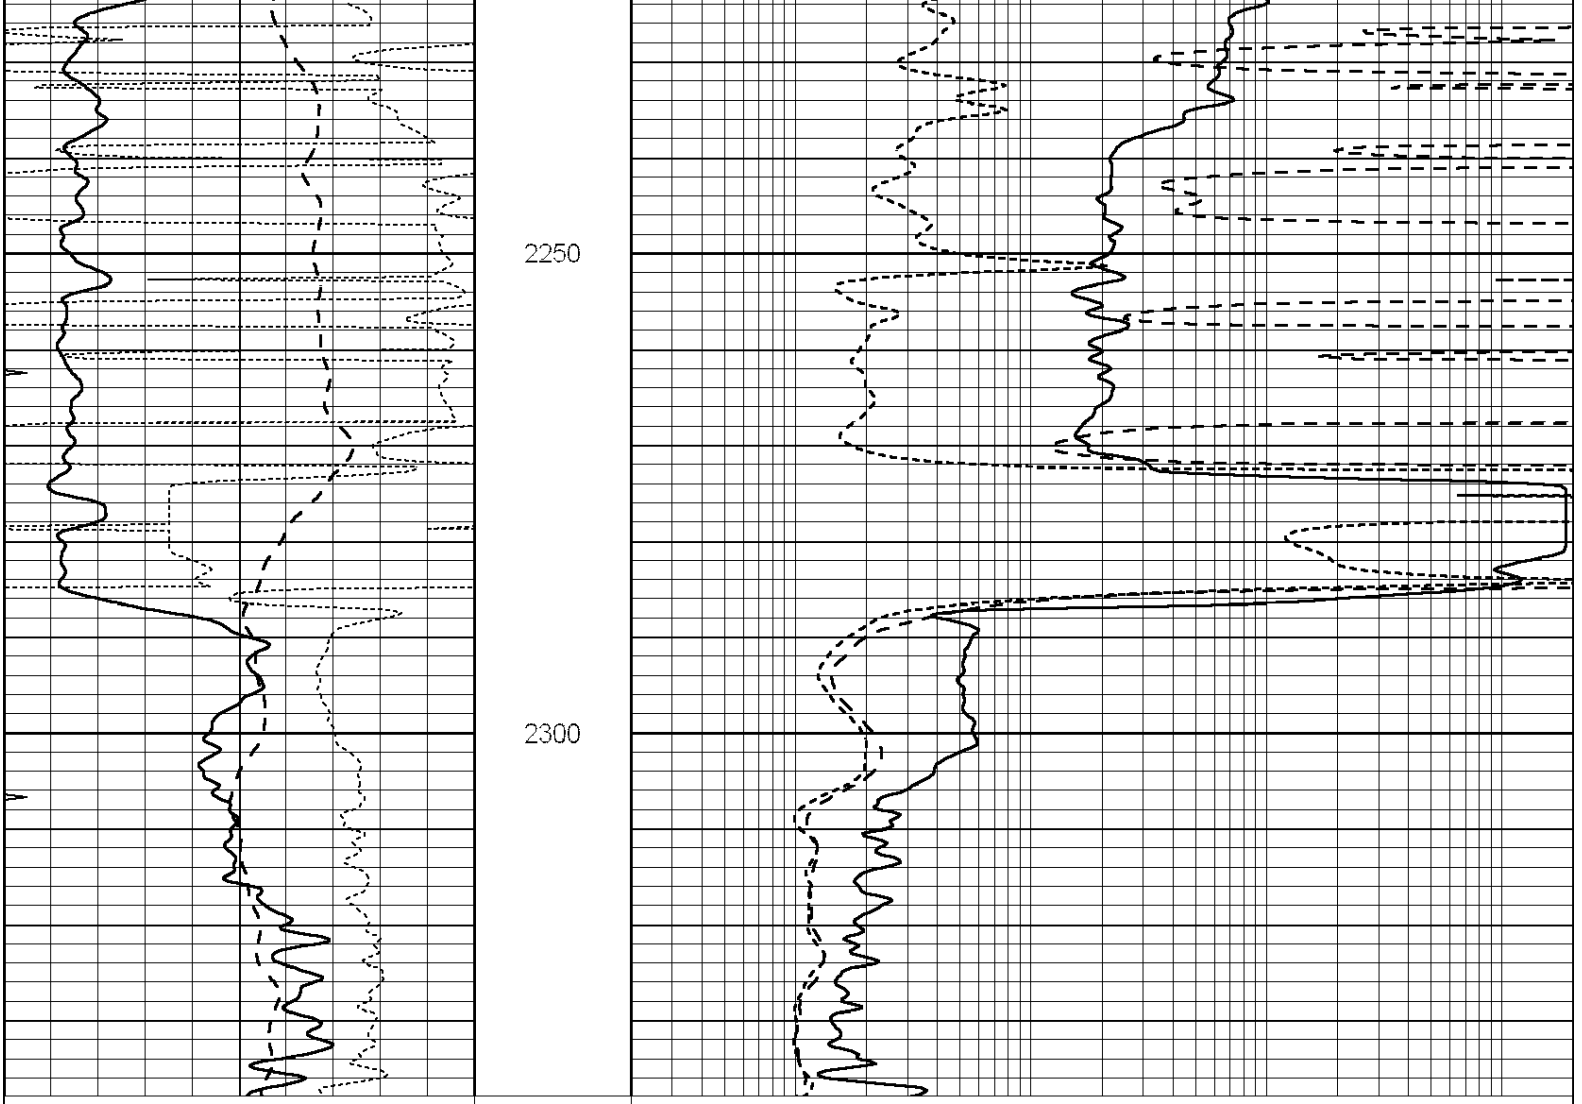
ANHYDRITE

Database File: 22250pe.db
Dataset Pathname: pass3.7
Presentation Format: _dil
Dataset Creation: Tue Feb 11 17:58:59 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000





0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000


NABORS
COMPLETION & PRODUCTION SERVICES CO.

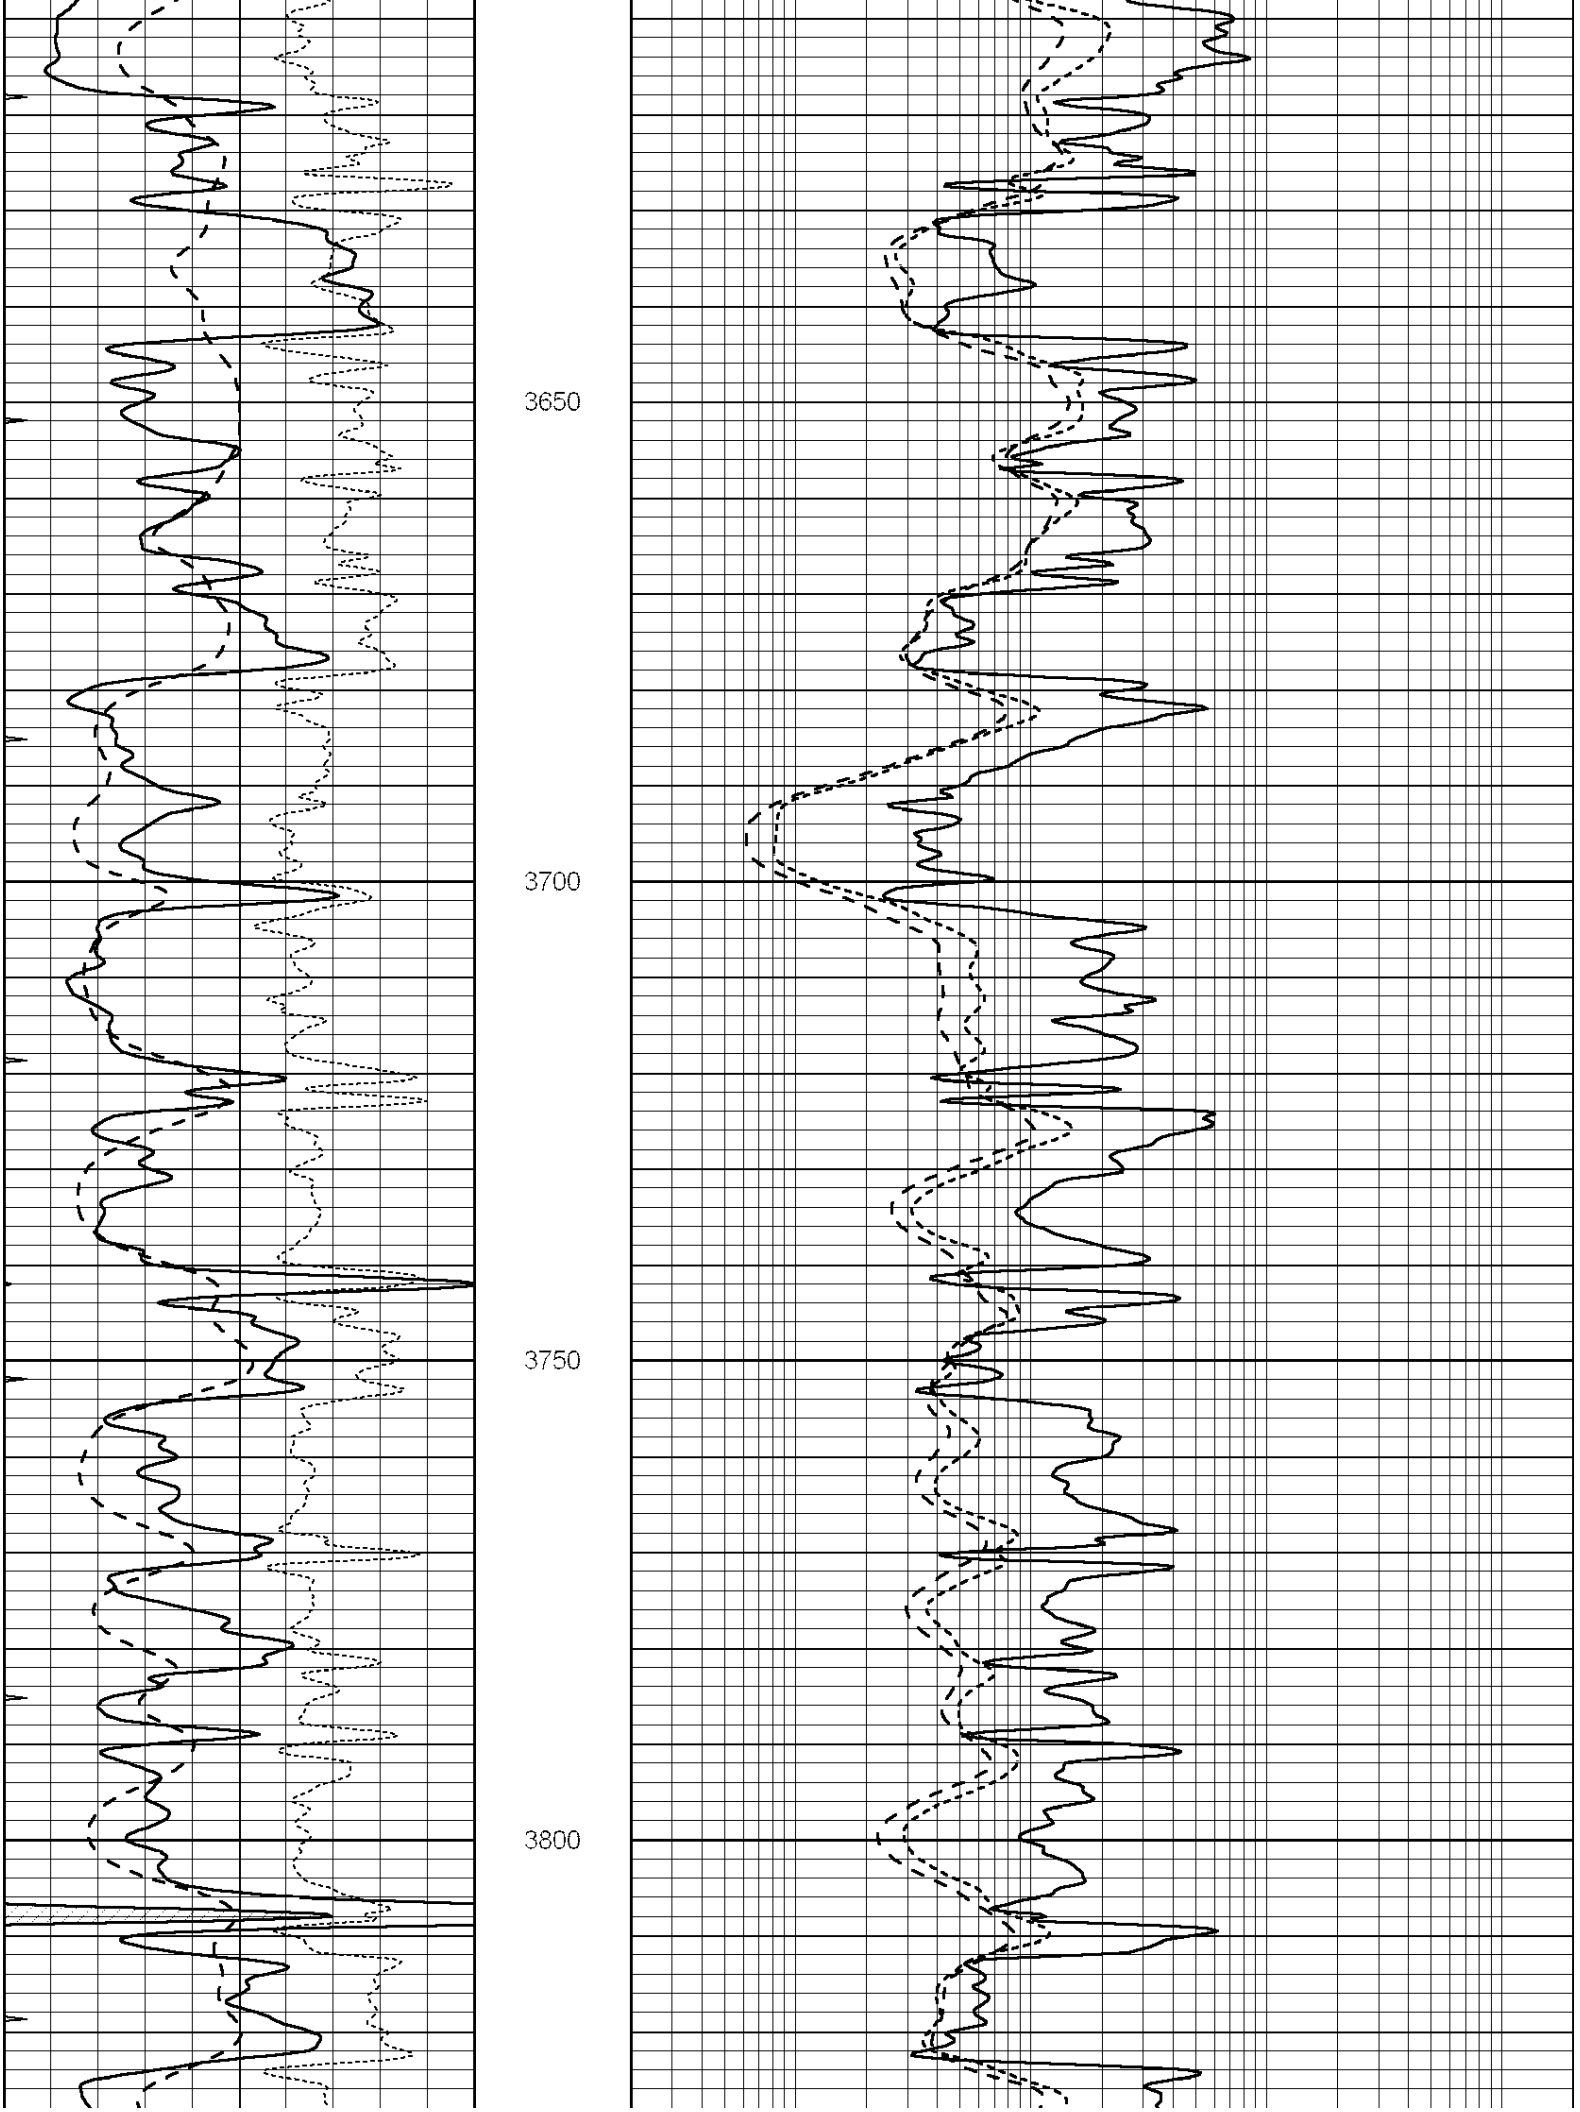
MAIN SECTION

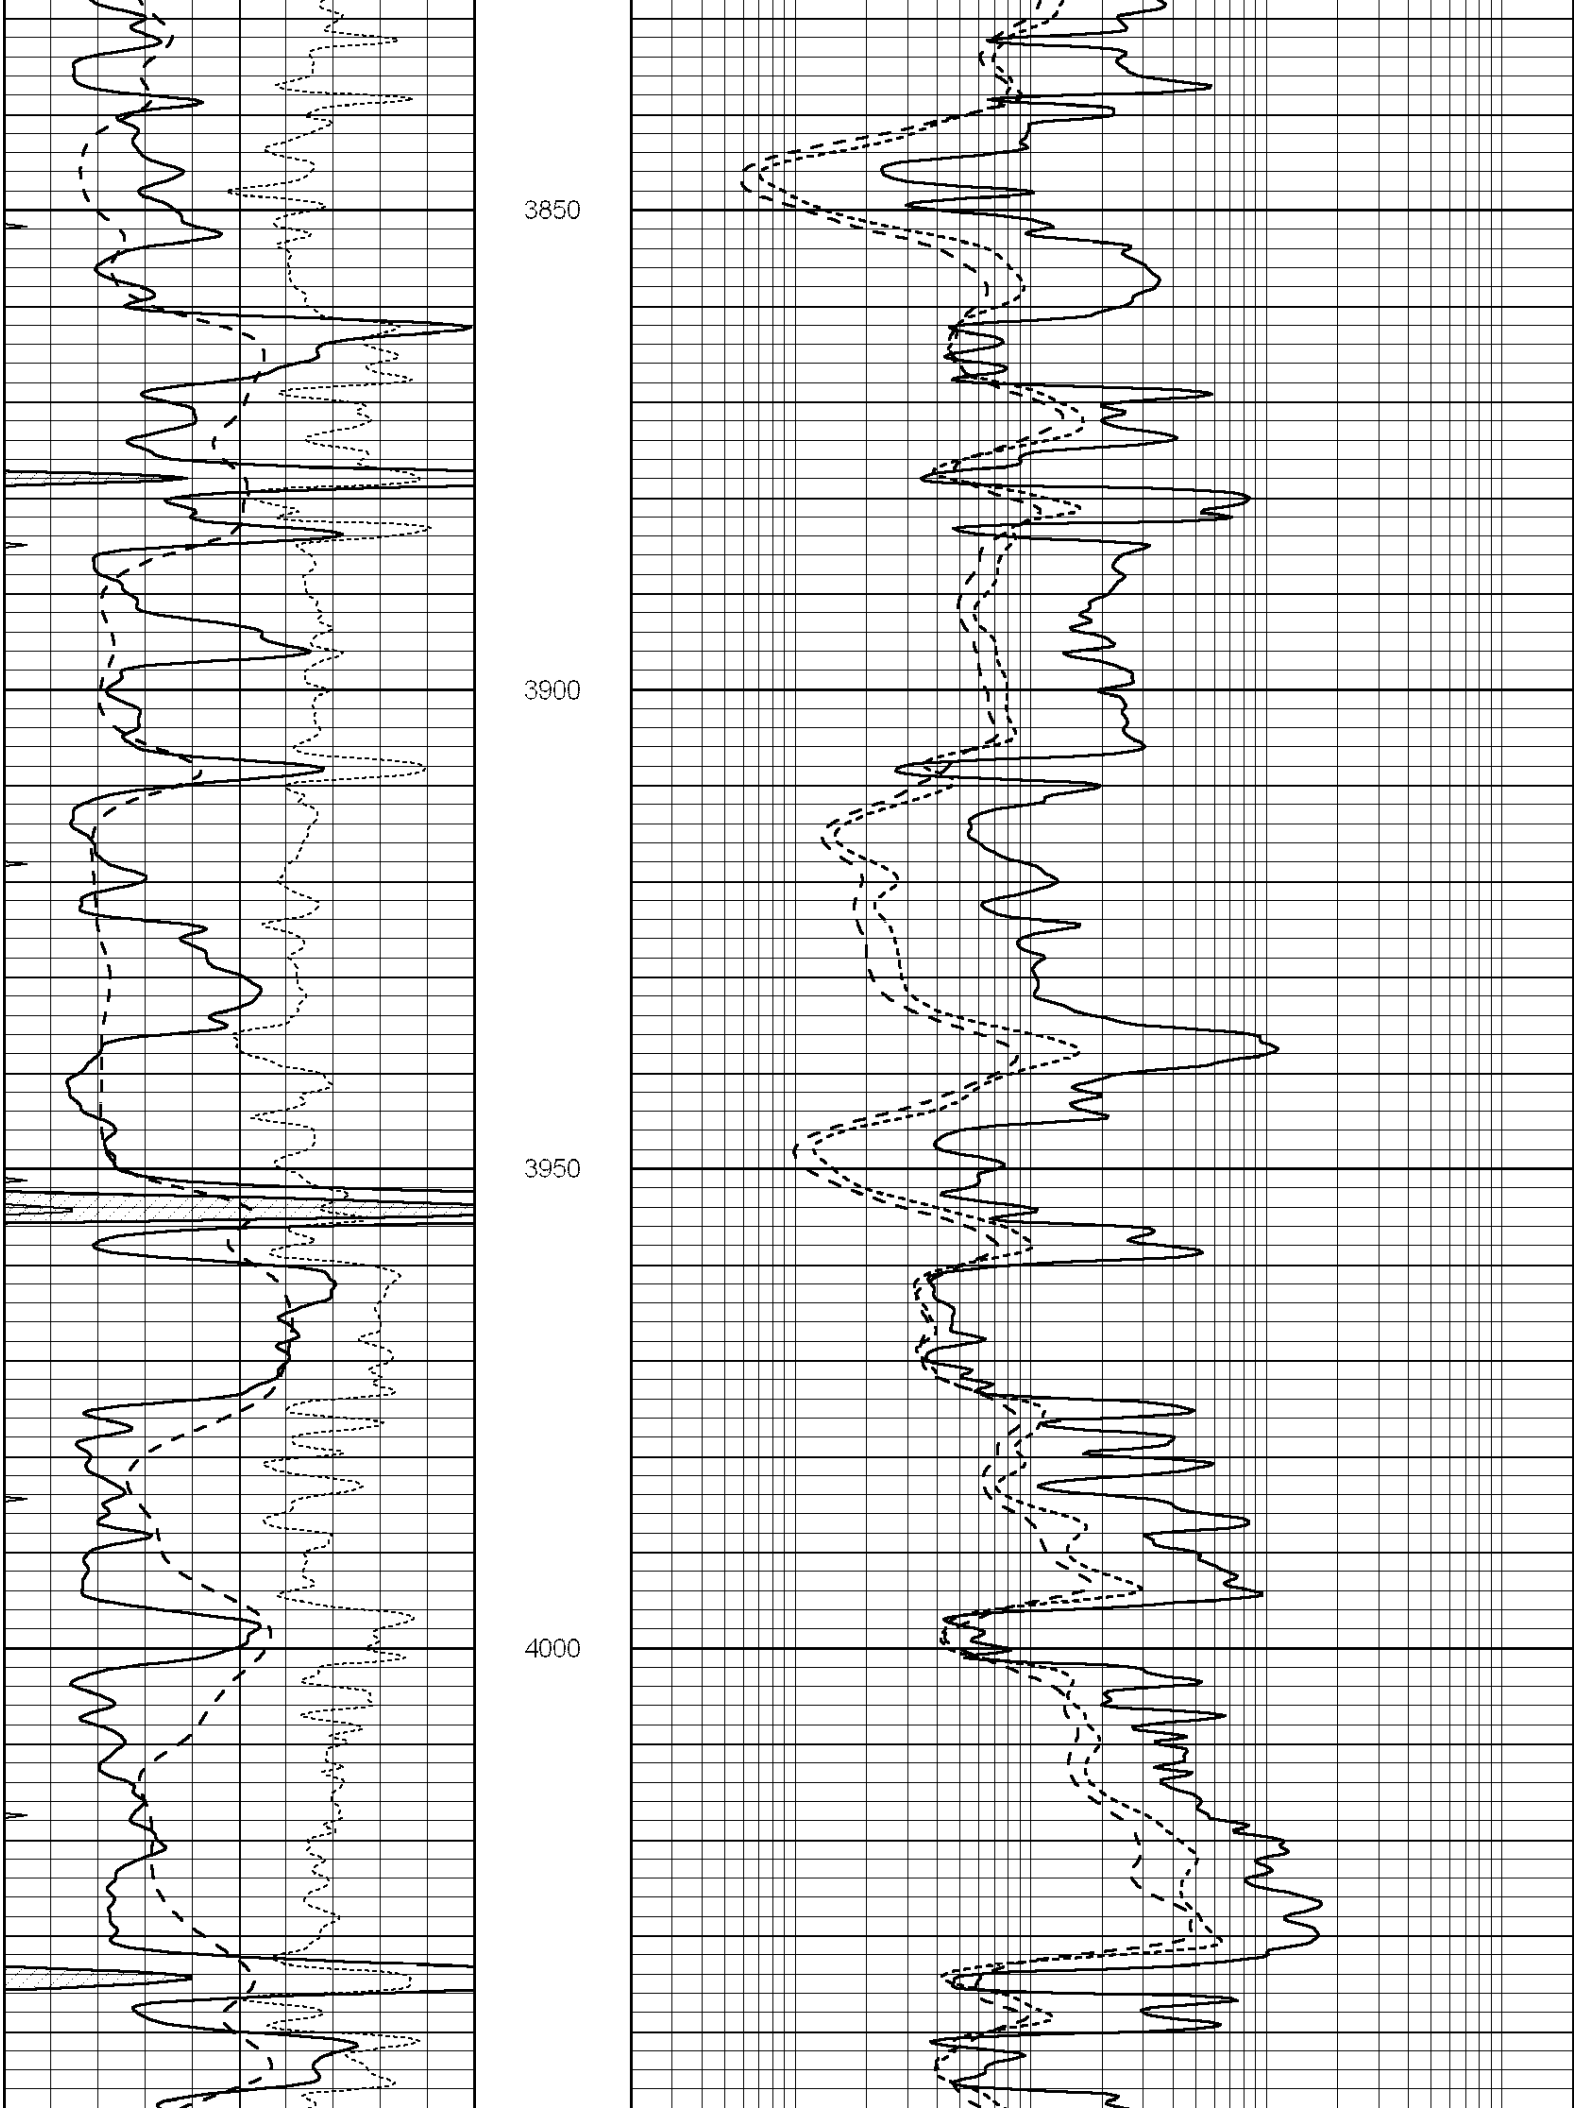
Database File:	22250pe.db
Dataset Pathname:	pass3.9
Presentation Format:	_dil
Dataset Creation:	Tue Feb 11 18:20:06 2014
Charted by:	Depth in Feet scaled 1:240

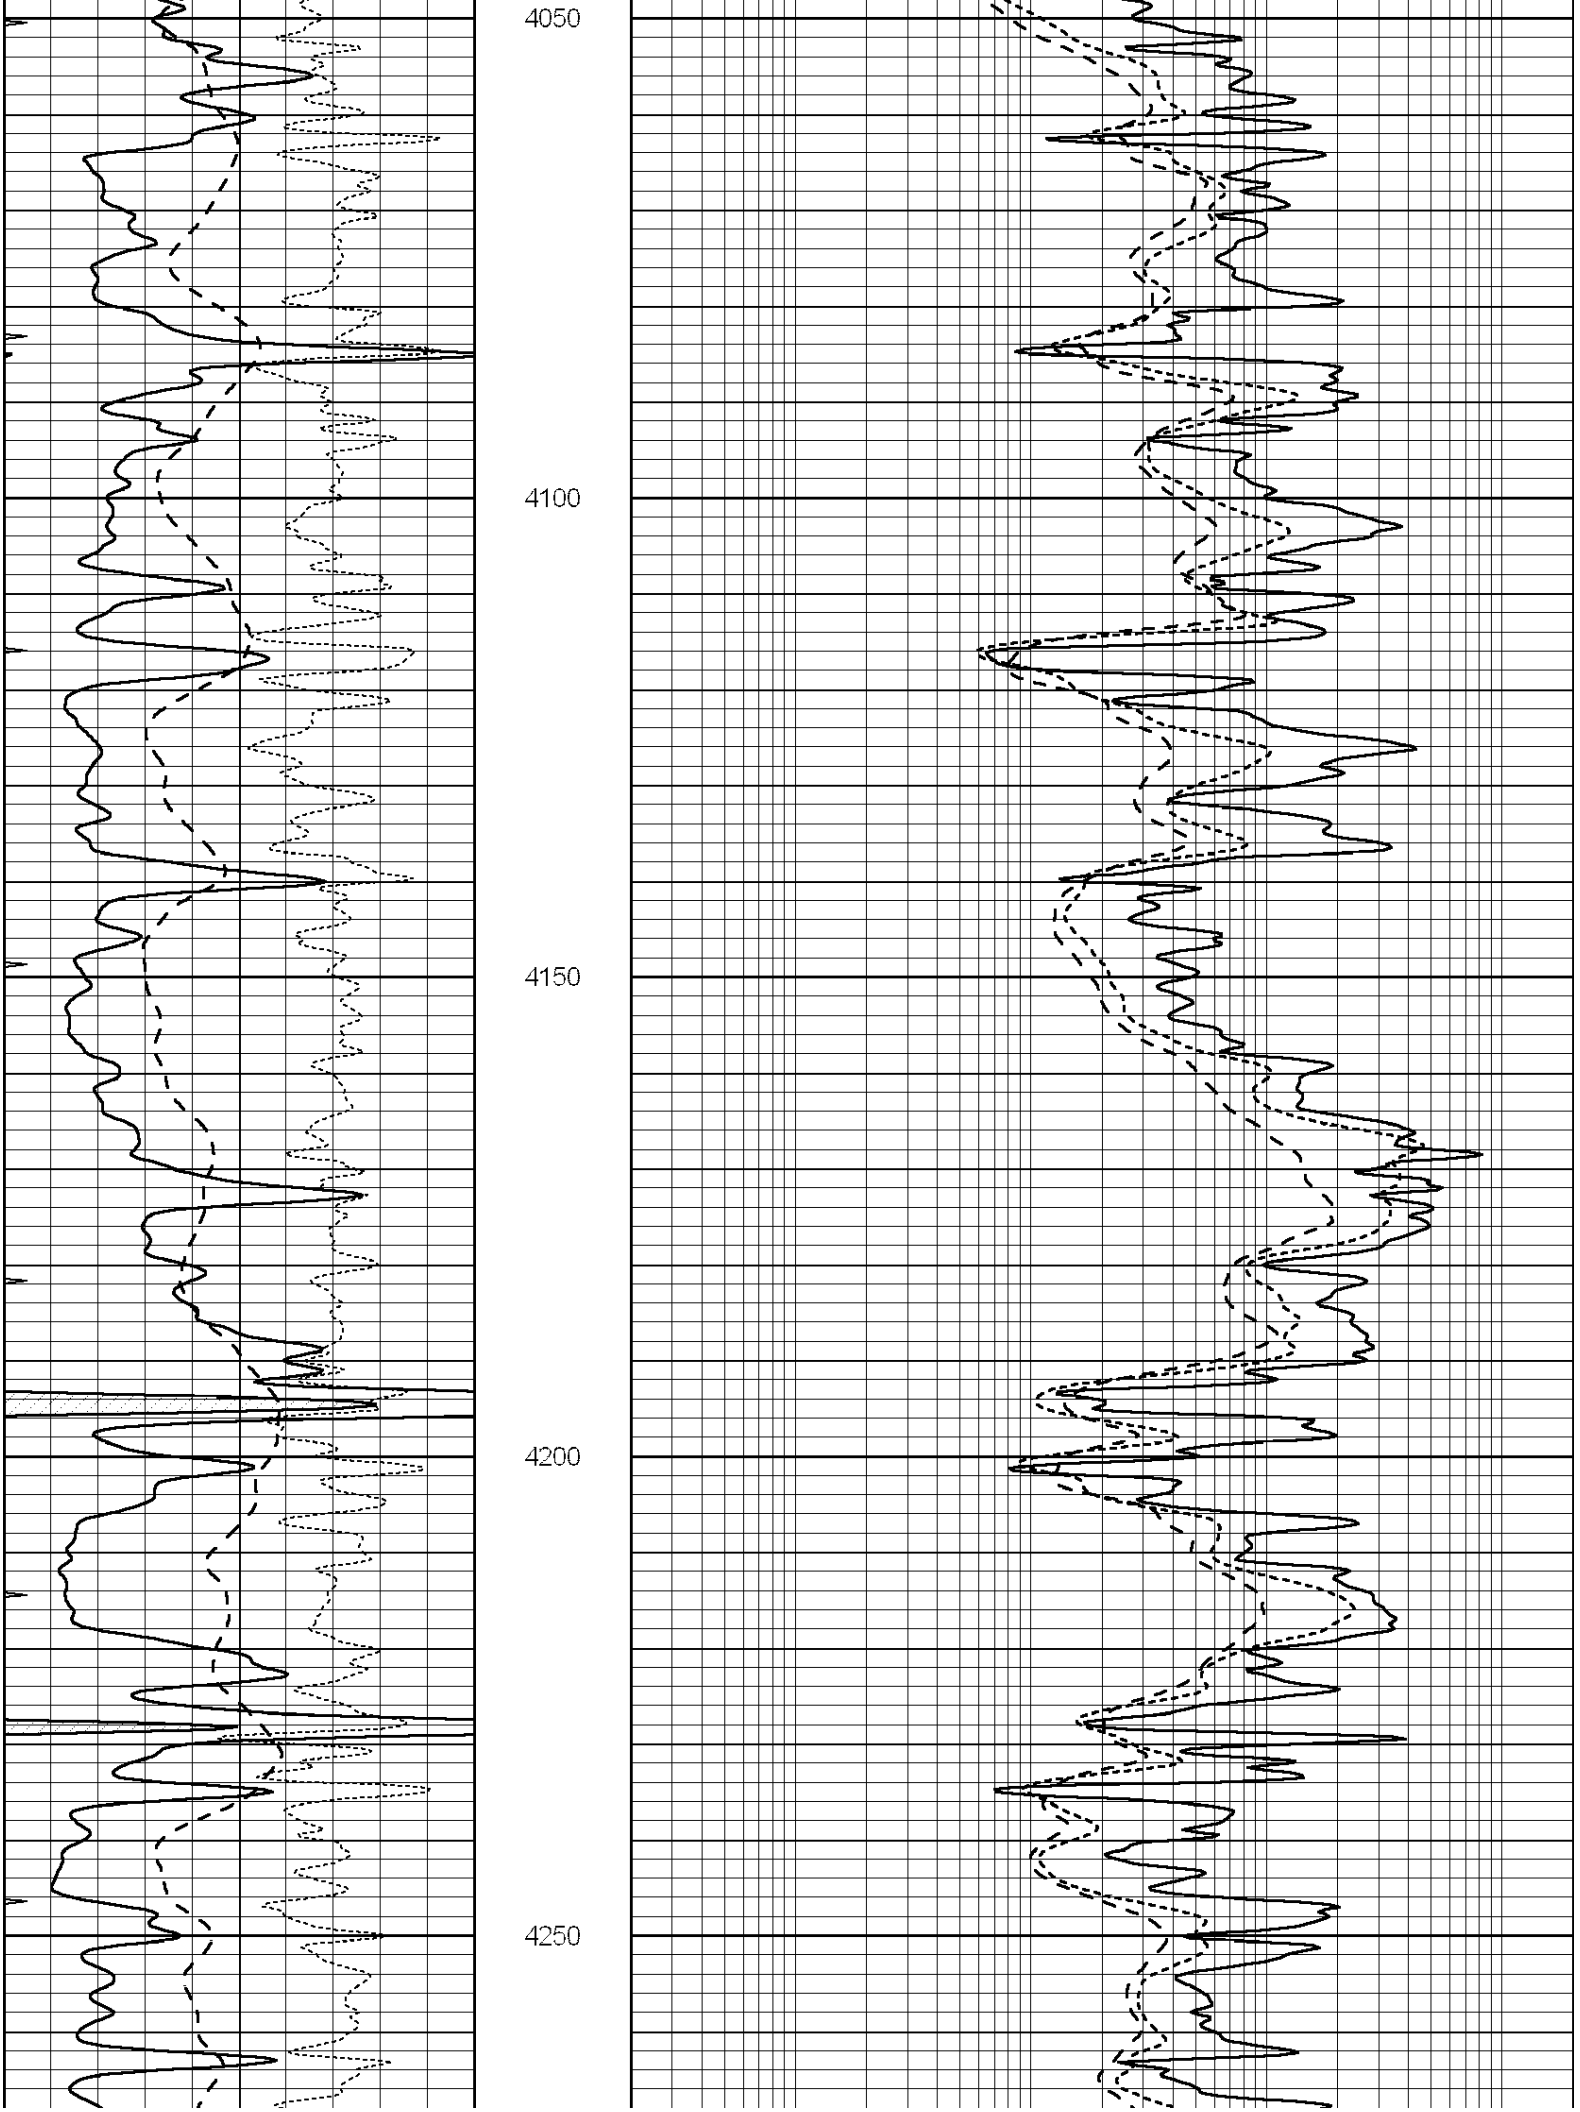
0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

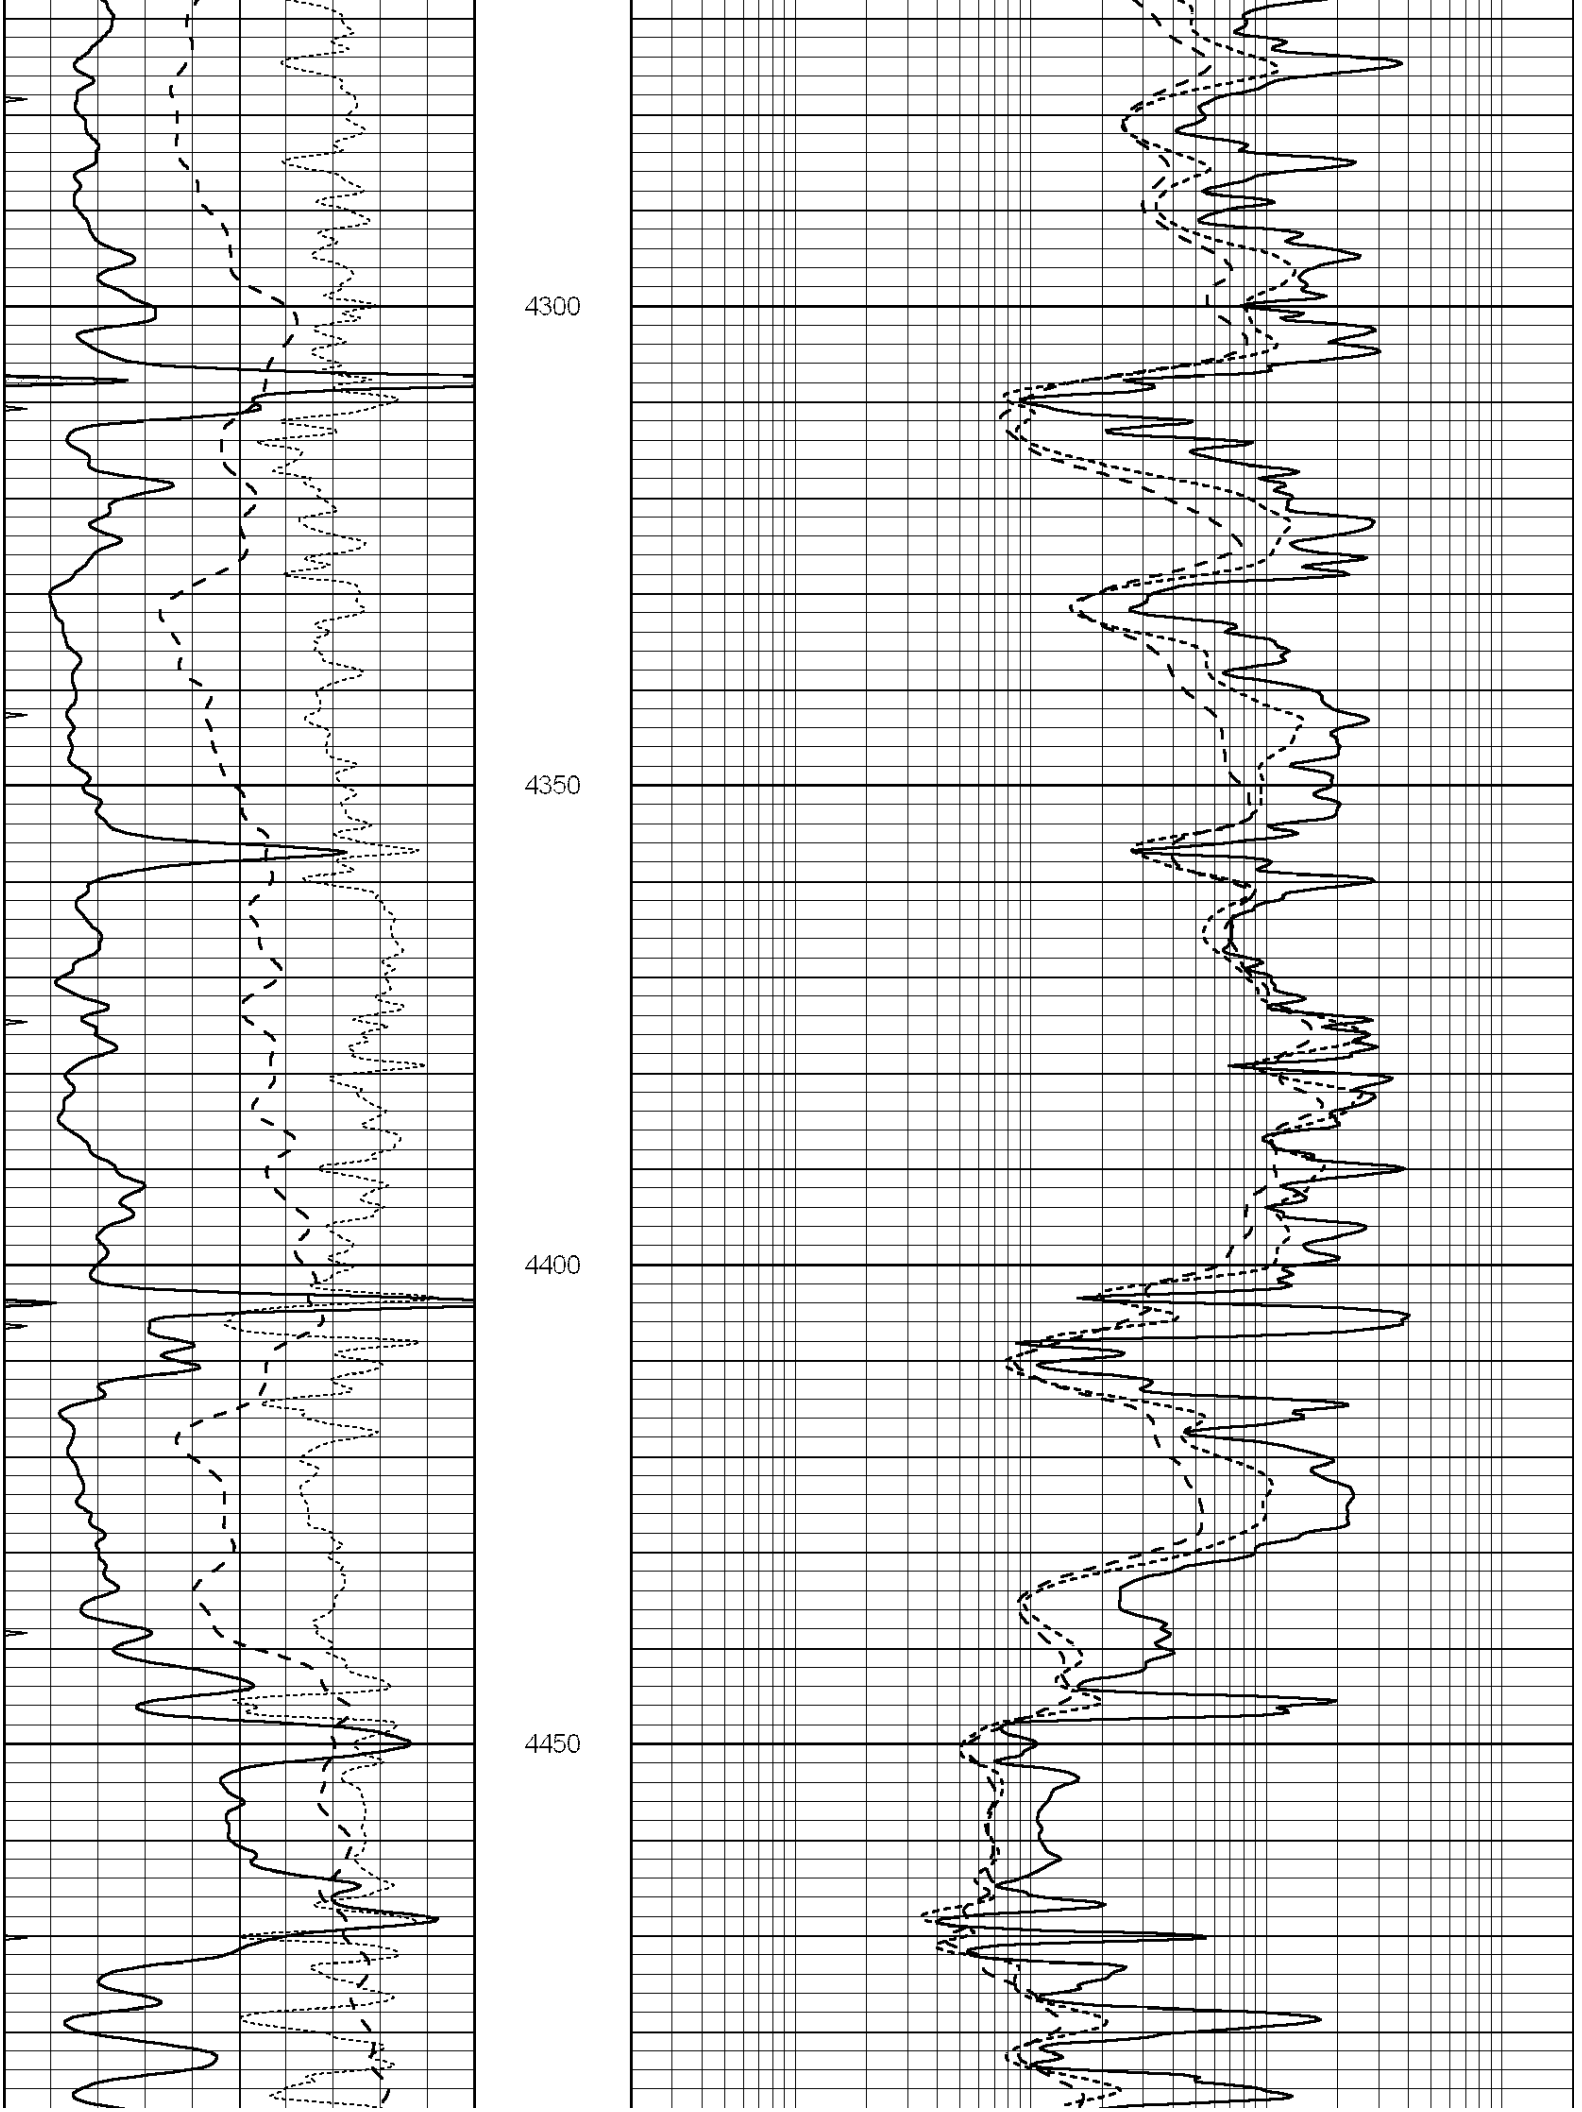
0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

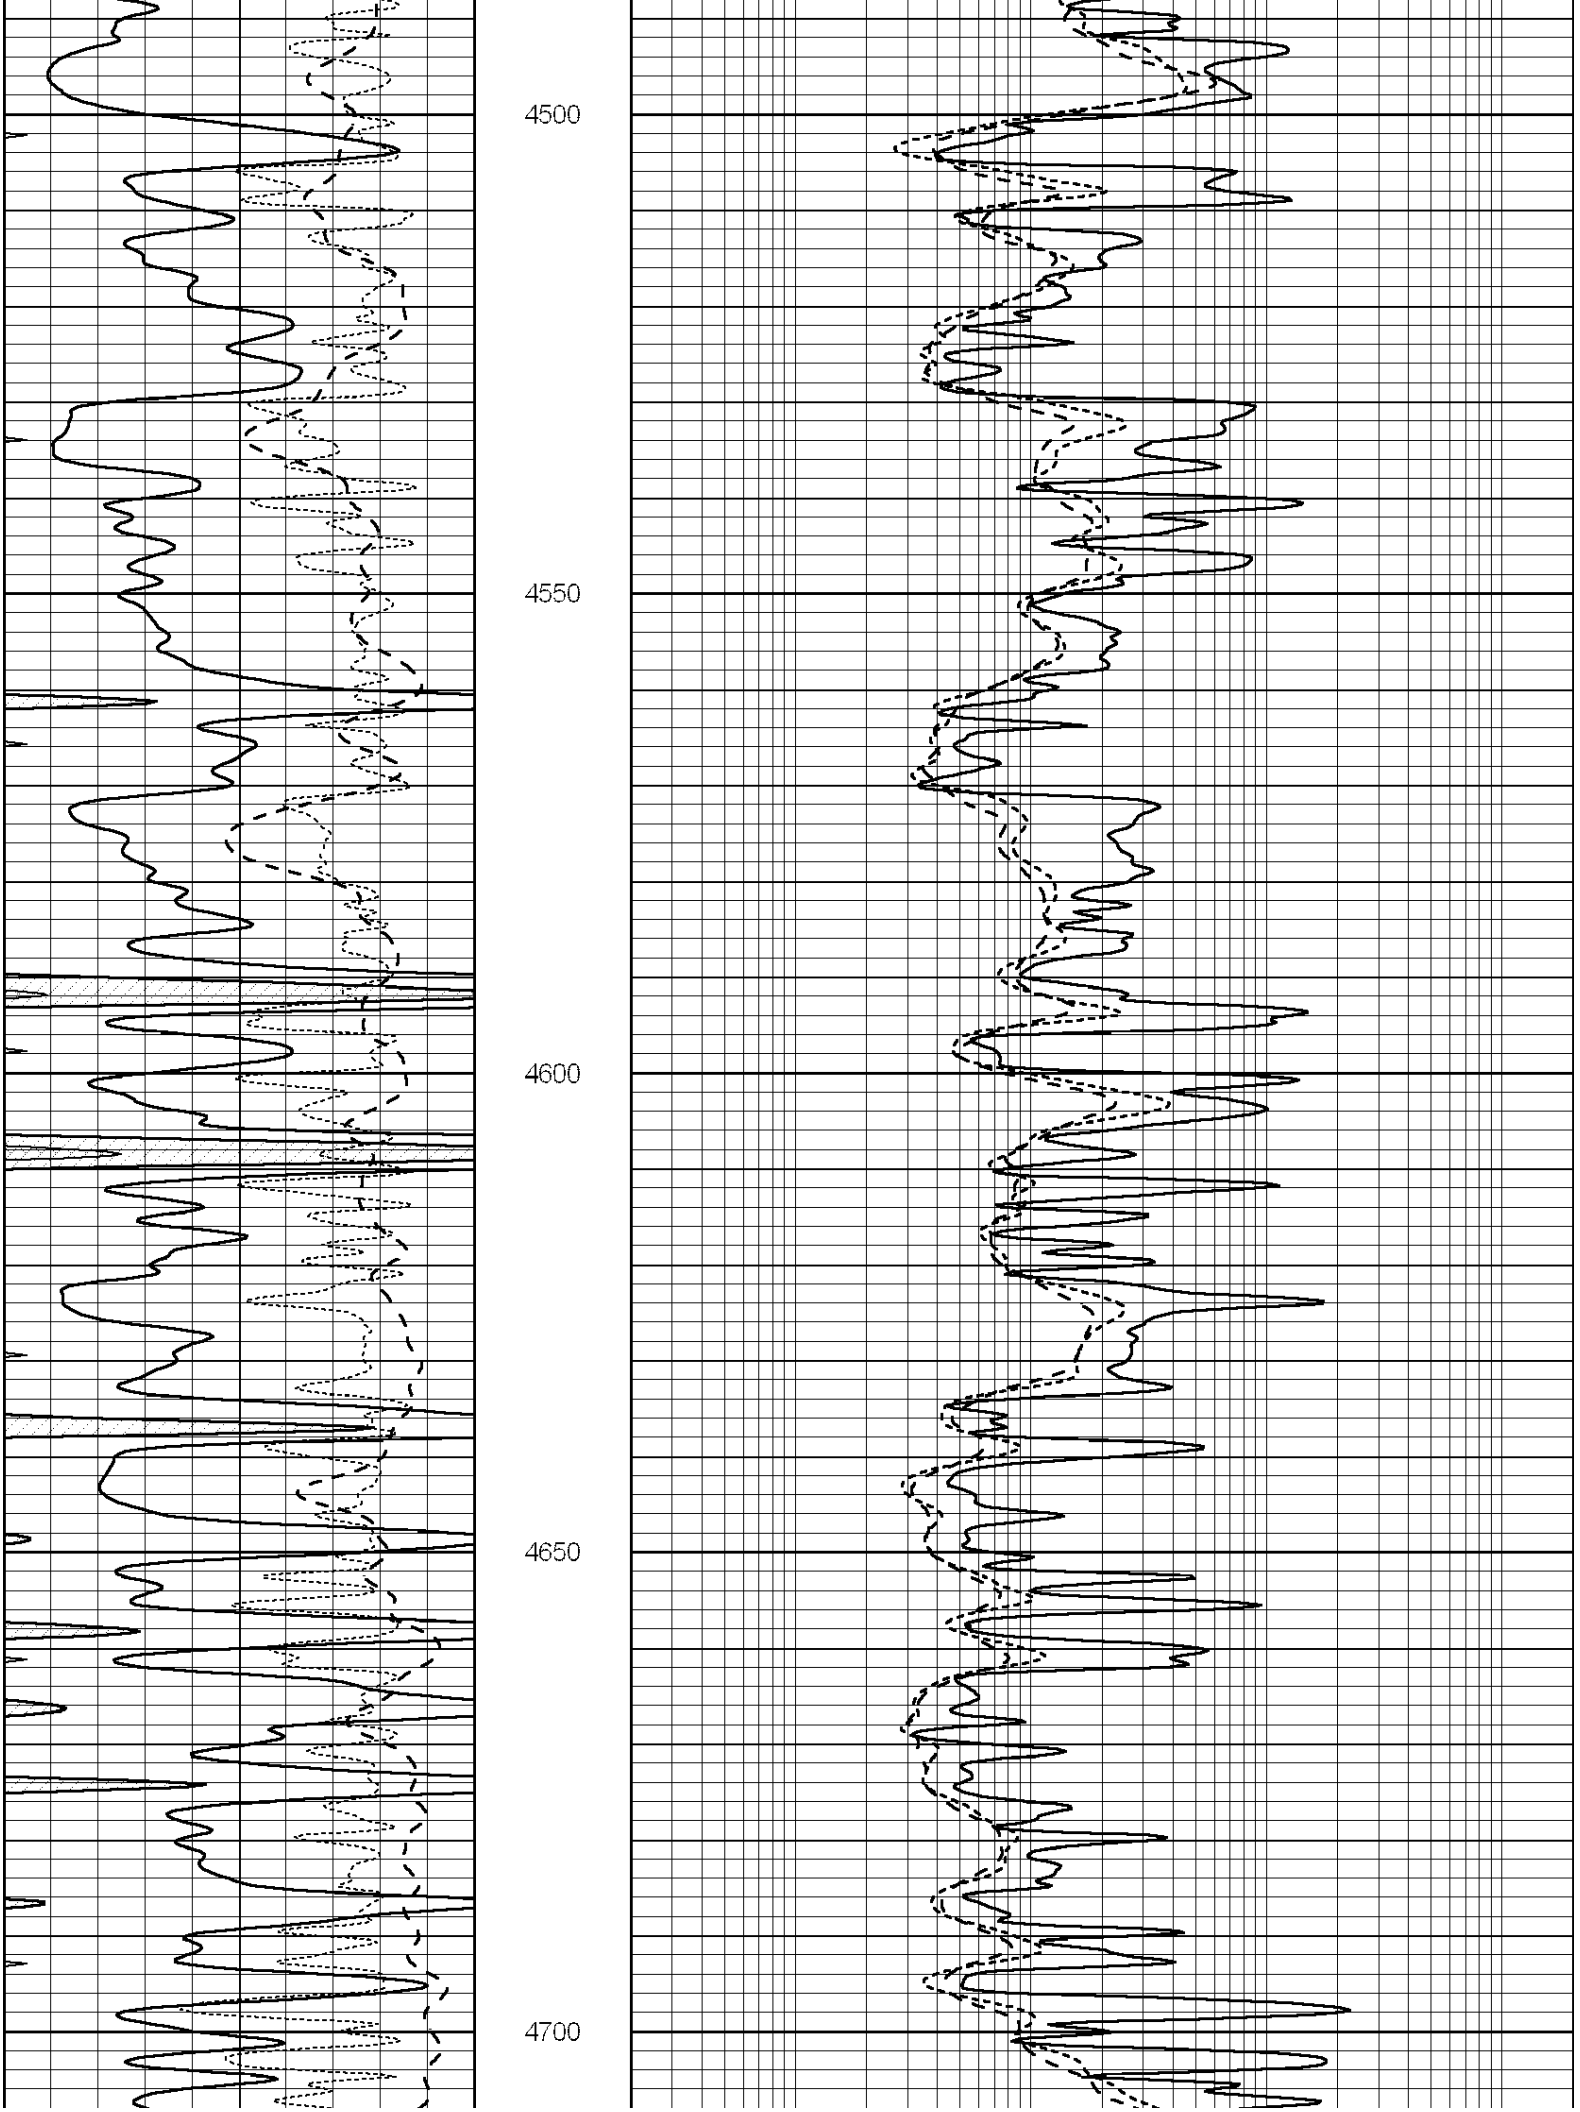


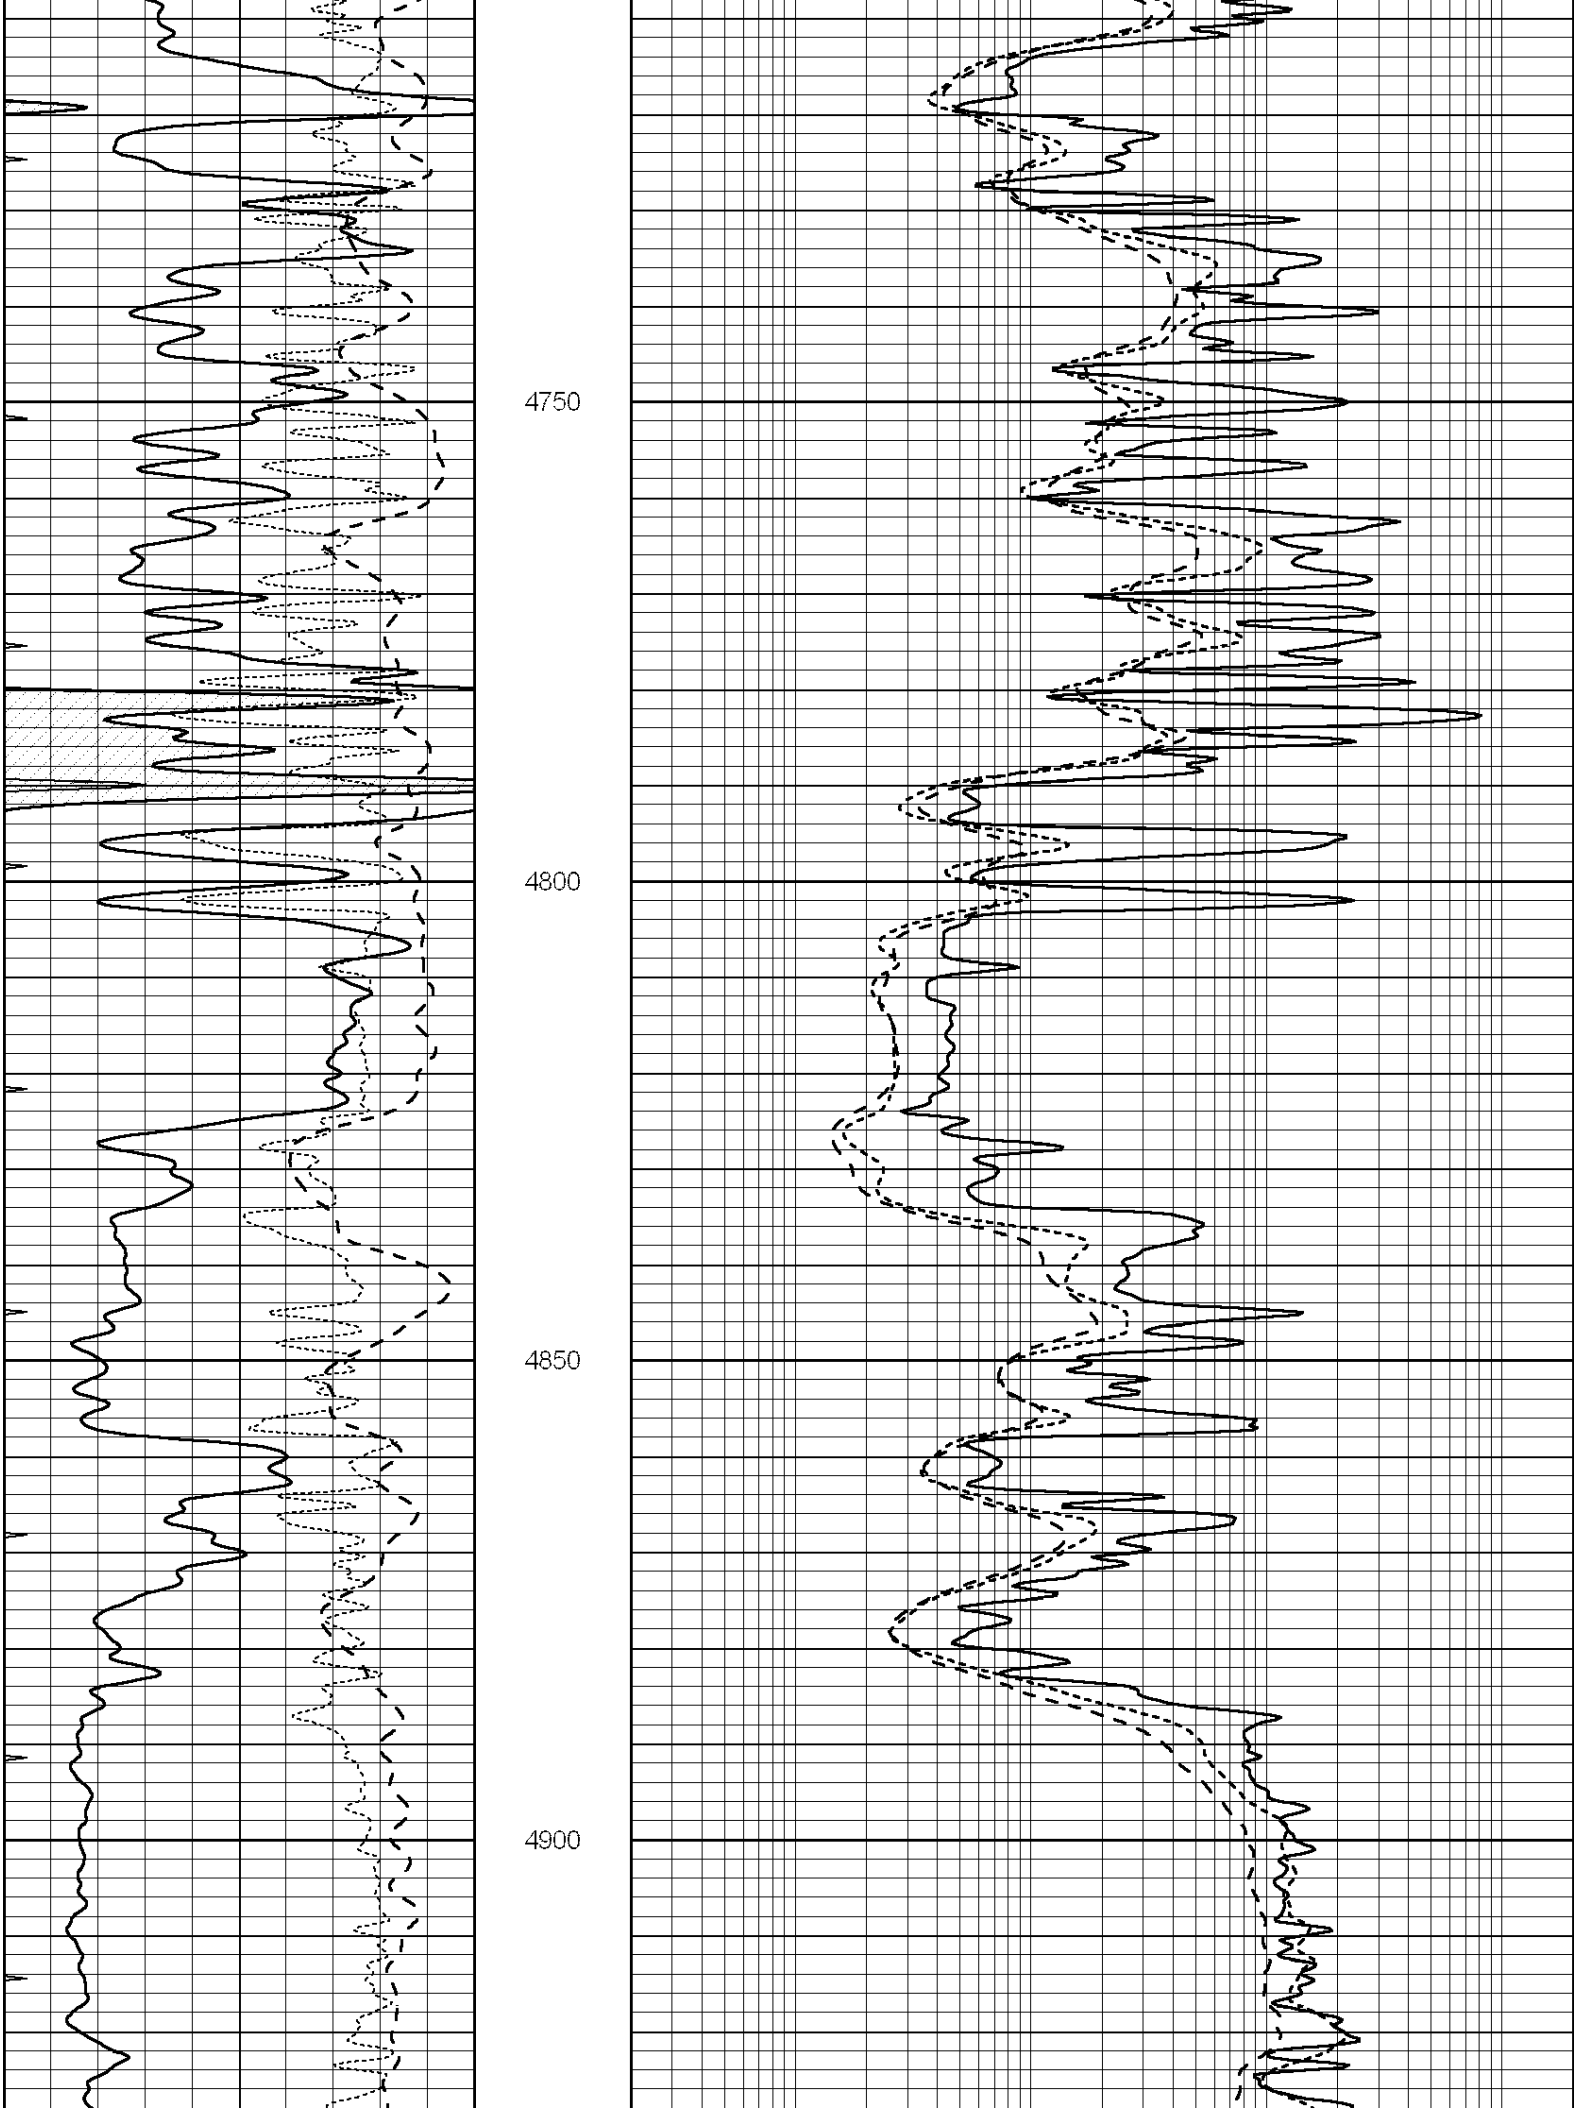

3650
3700
3750
3800

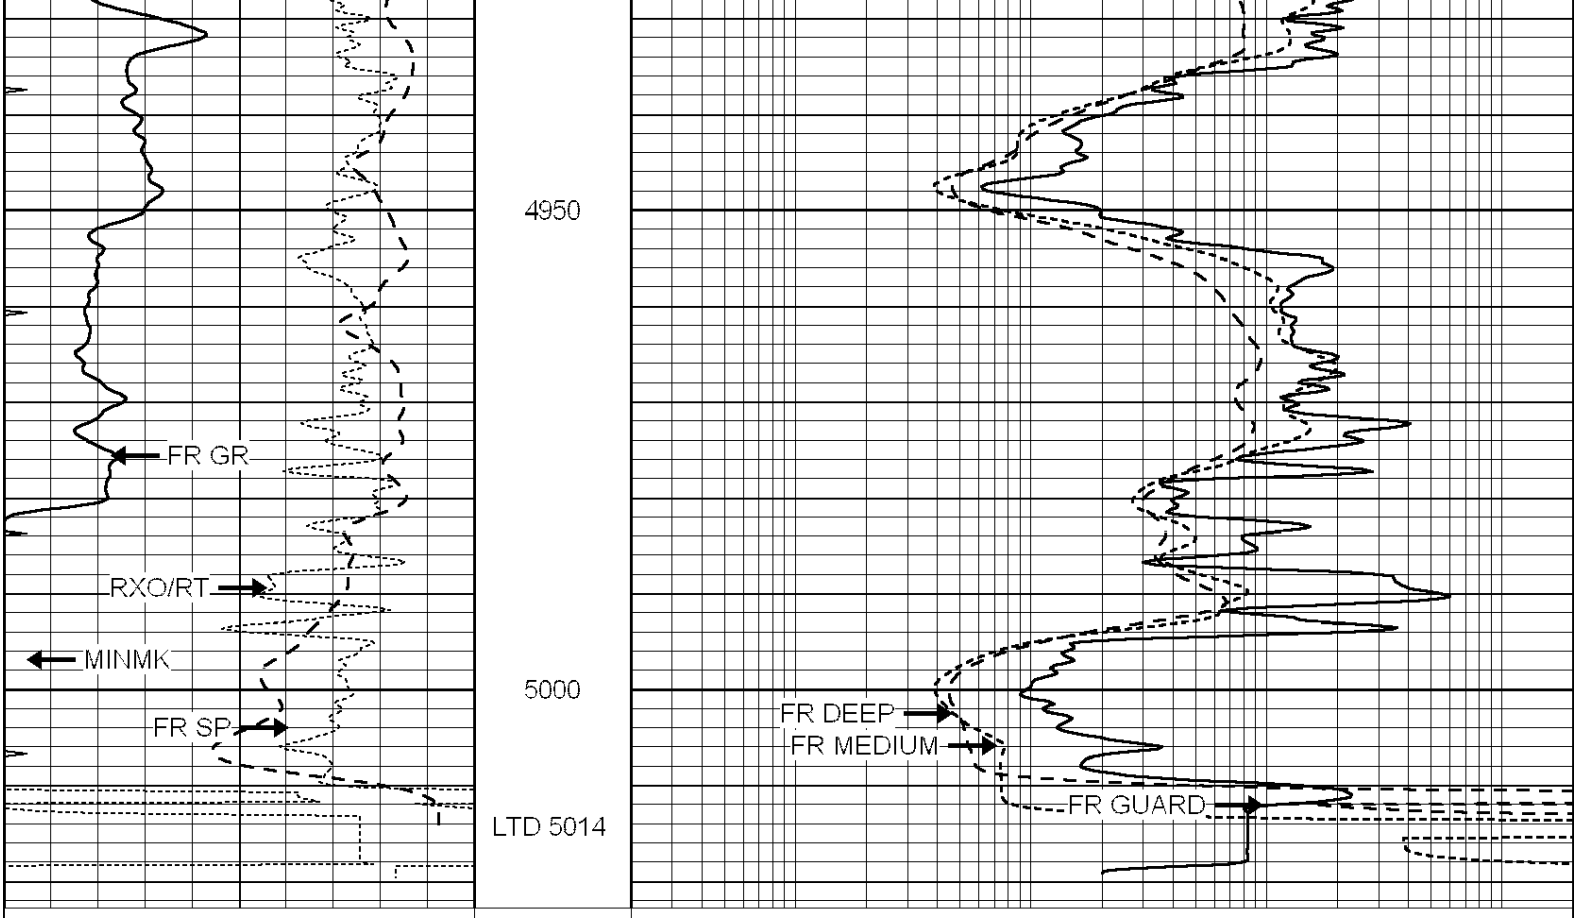

3850
3900
3950
4000


4050
4100
4150
4200
4250


4300
4350
4400
4450


4500
4550
4600
4650
4700


4750
4800
4850
4900



0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

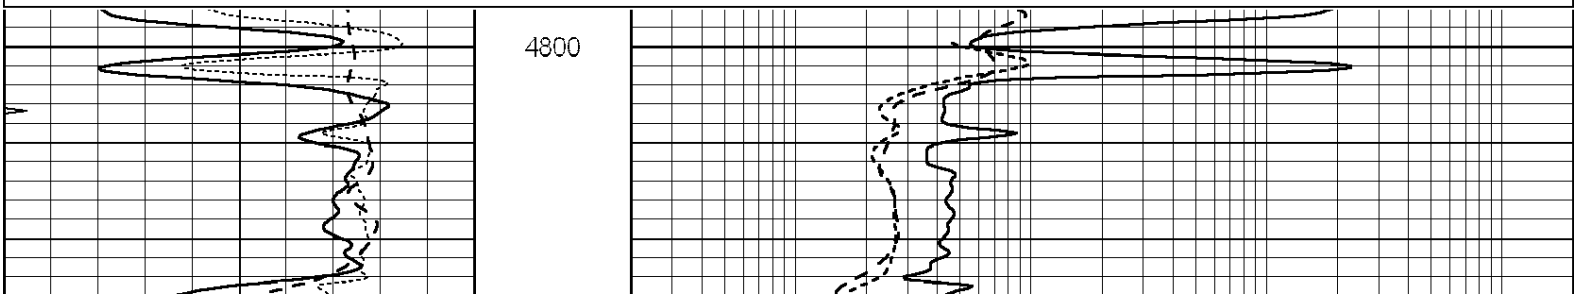
NABORS
COMPLETION & PRODUCTION SERVICES CO.

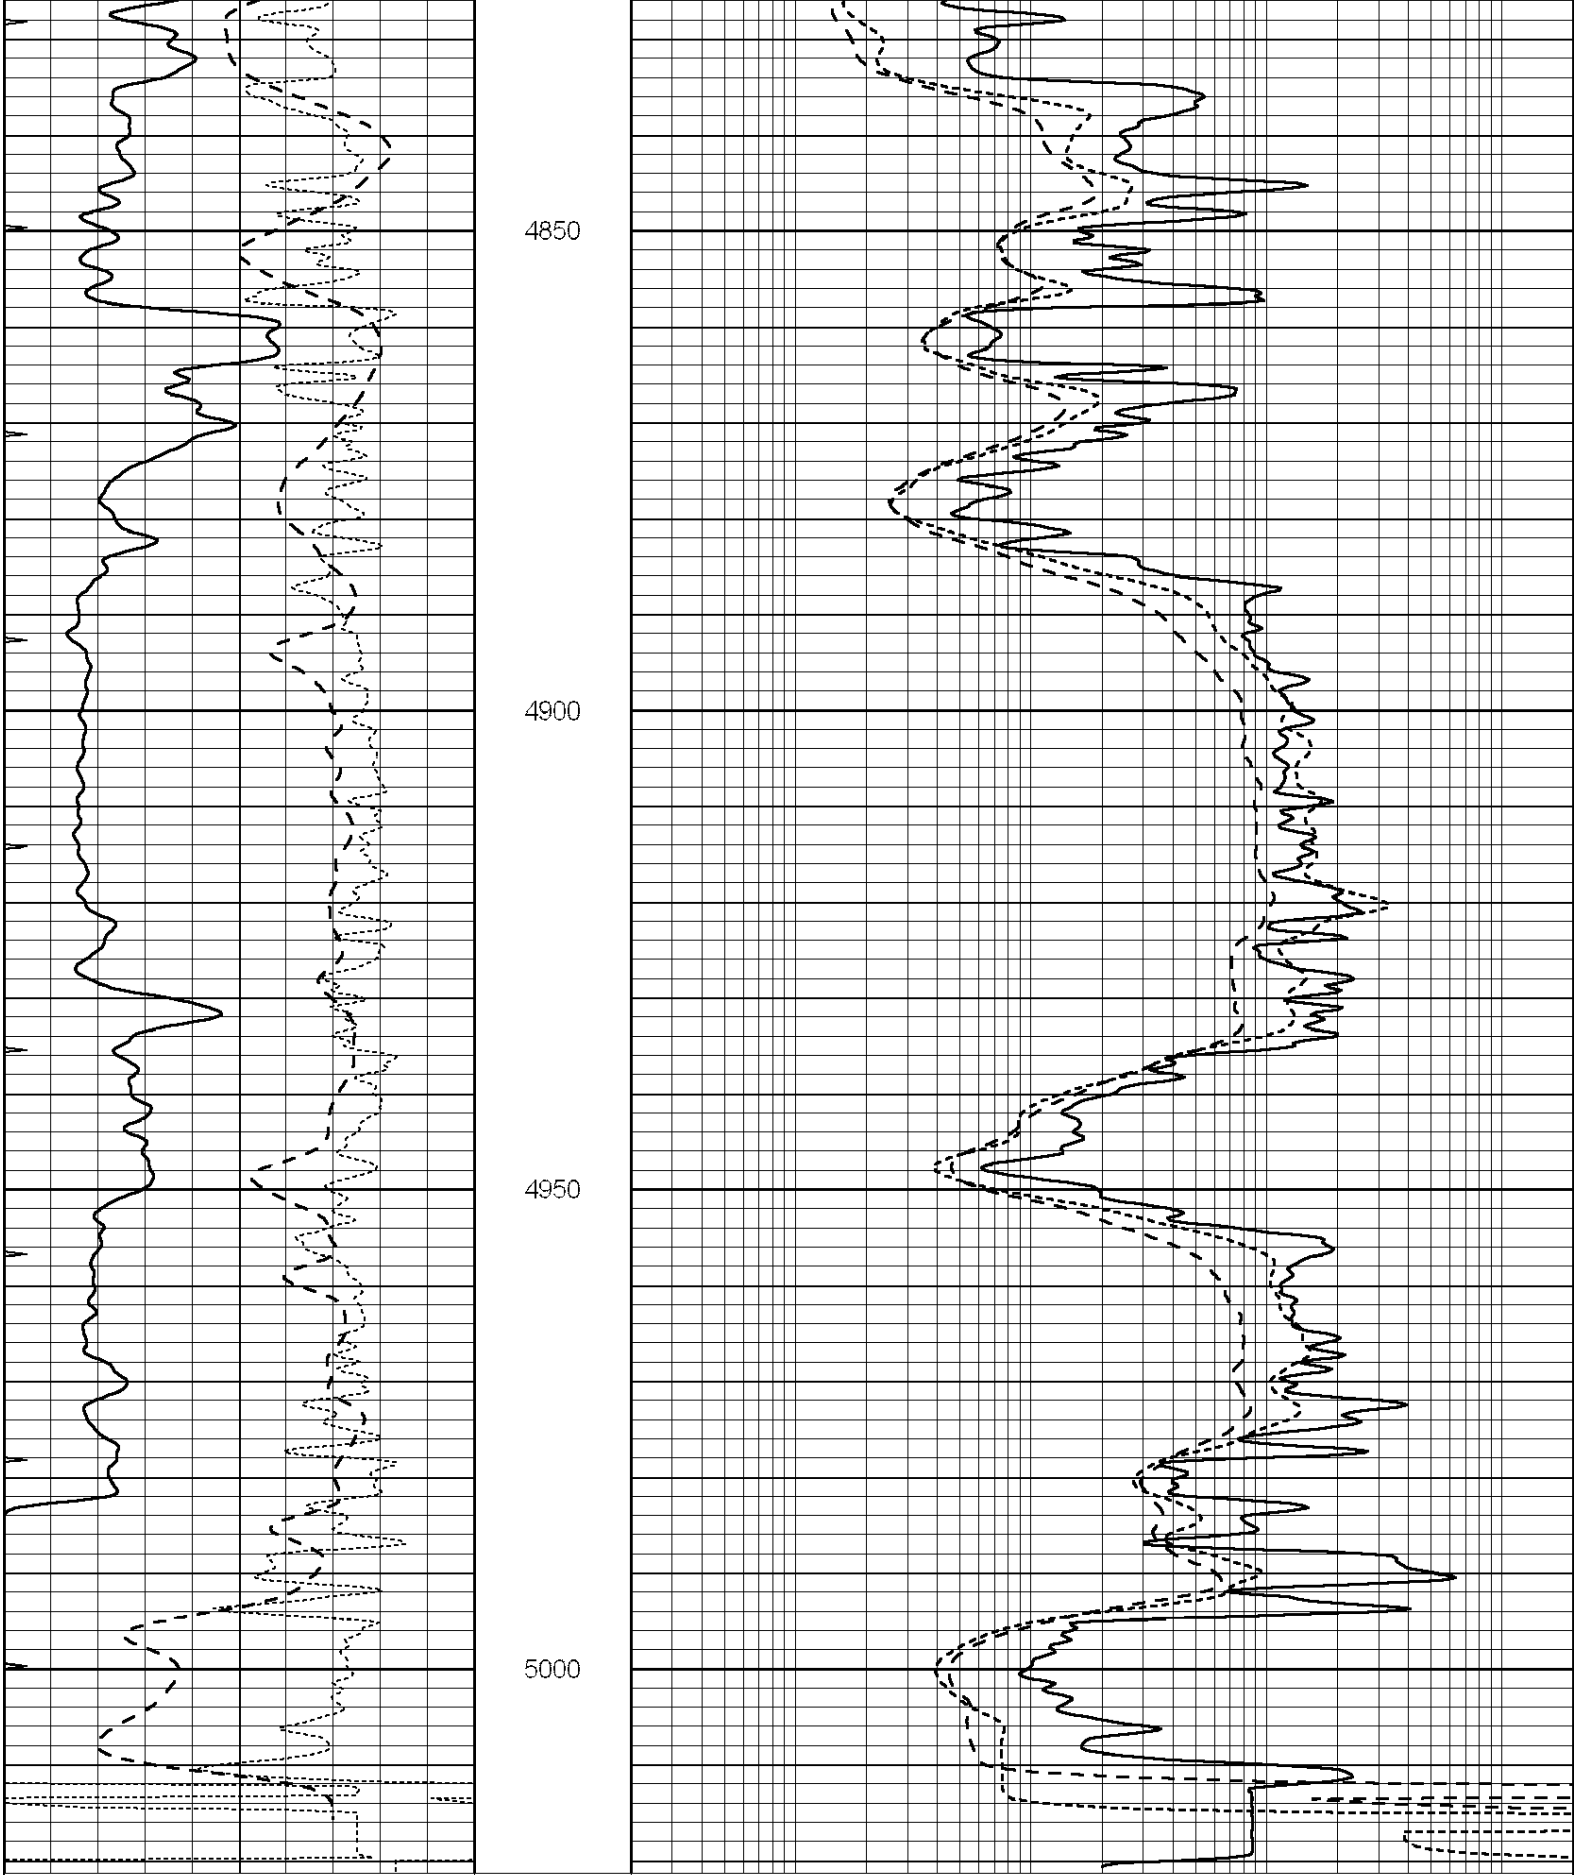
REPEAT SECTION

Database File: 22250pe.db
Dataset Pathname: pass2.5
Presentation Format: _dil
Dataset Creation: Tue Feb 11 17:01:37 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000





0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 22250pe.db
Dataset Pathname: pass3.9
Dataset Creation: Tue Feb 11 18:20:06 2014

Dual Induction Calibration Report

Serial-Model:	PROBE9-DILG
Surface Cal Performed:	Wed Feb 05 09:18:43 2014
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	650.000	-13.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	660.000	-21.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 003N Model: PRB

Master Calibration

Performed Tue Sep 08 14:14:44 2009

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2042.6	12312.8	4225.8	13758.4	cps
Window 2	1855.8	10134.7	3624.2	11113.1	cps
Window 3	1639.4	6760.2	2716.3	7260.3	cps
Window 4	466.4	469.2	466.1	476.5	cps
Long Space	0.0	8278.9	1768.4	9257.4	cps
Short Space	2.2	2377.3	1544.1	2574.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	

Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio	: 0.549
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept	: -18.8

Before Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Thu Dec 19 09:01:02 2013

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps