



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company		EAGLE CREEK CORPORATION	
Well		DECKER #1-20	
Field		WILDCAT	
County		SCOTT	
State		KANSAS	
Location:		API # : 15-171-21018-0000 2356' FSL & 1556' FEL NE - NE - NW - SE SEC 20 TWP 17S RGE 34W	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 9' A.G.L.	
Drilling Measured From		KELLY BUSHING	
Other Services		CDL/CNL/PE MEL/SONIC	
Elevation		K.B. 3090 D.F. 3088 G.L. 3081	
Date	1/26/14		
Run Number	ONE		
Depth Driller	4950		
Depth Logger	4954		
Bottom Logged Interval	4952		
Top Log Interval	00		
Casing Driller	8 5/8"@277'		
Casing Logger	274		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,500 PPM	
Density / Viscosity	9.4/60		
pH / Fluid Loss	10.5/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@70F		
Rmf @ Meas. Temp	.450@70F		
Rmc @ Meas. Temp	.720@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.336@125F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	6:30 P.M.		
Maximum Recorded Temperature	125F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	MIKE MAUNE	DAVE CALLEWAERT	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS



MODOC, KS., 2 1/2W. ON HWY 96 TO (SCOTT/WICHITA CO.LINE), 4N.TO "RD. 190", 2E., TO DIRT TRAIL,
1N. TO "T", 1/4W. IN PASTURE, N. INTO


50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

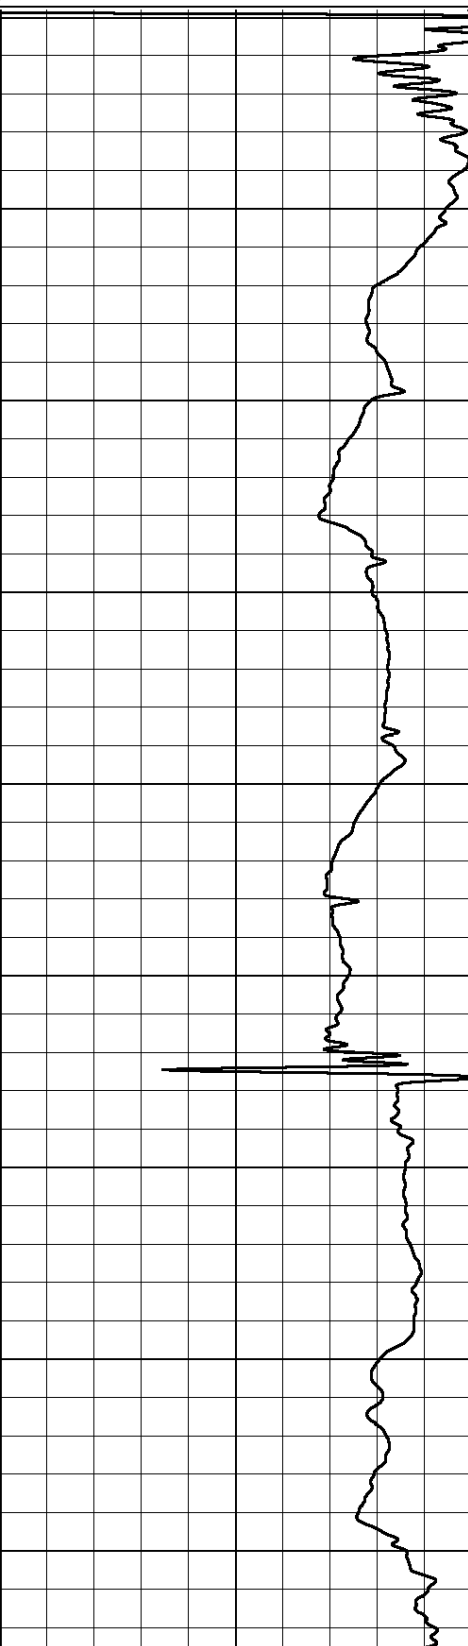

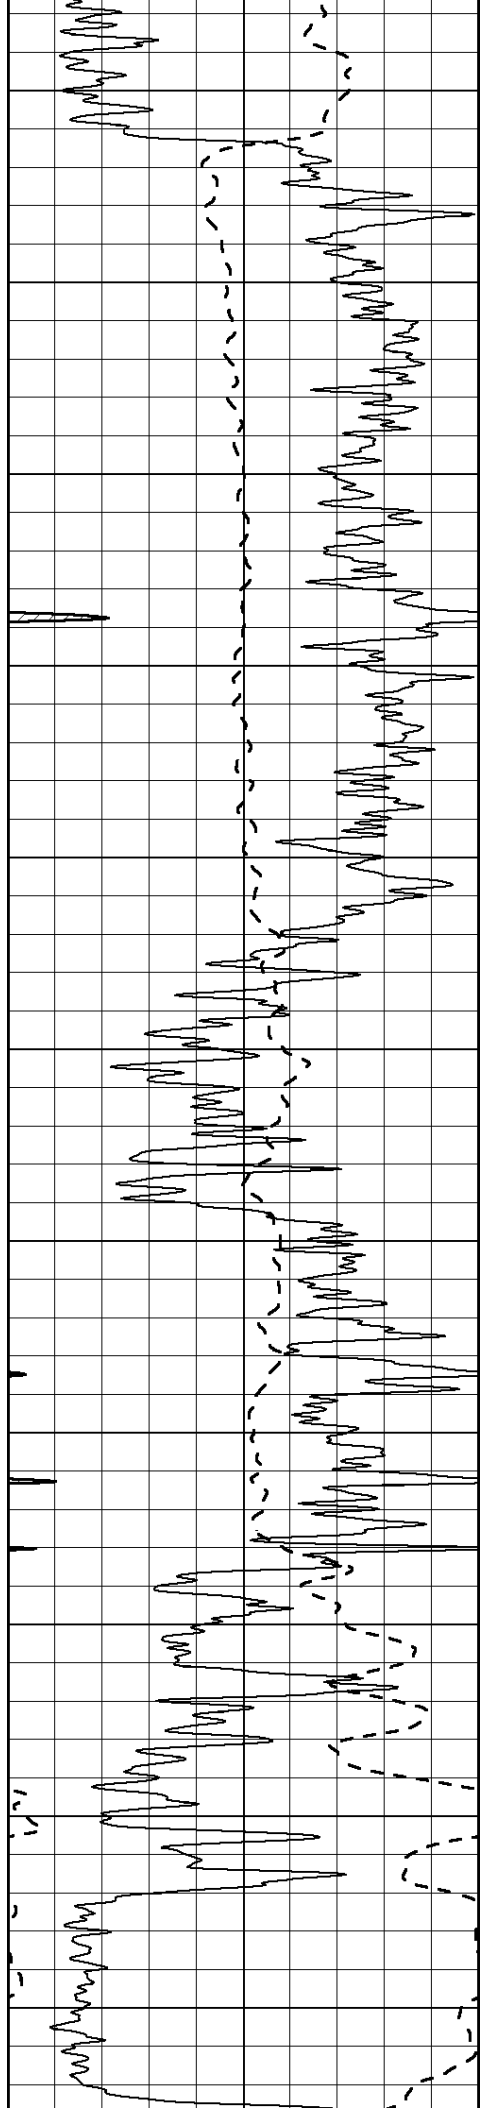

450
500
550
600
650
700
750
800
850
900
950

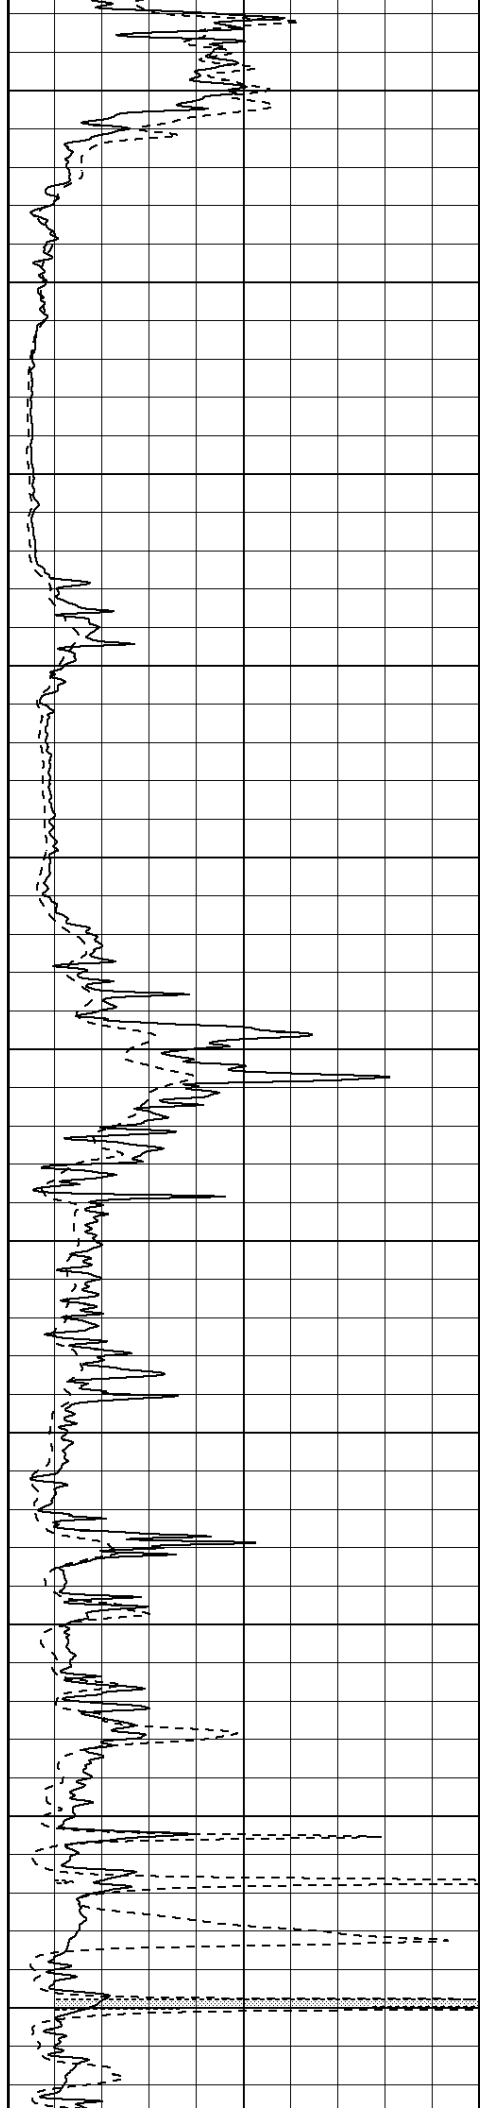

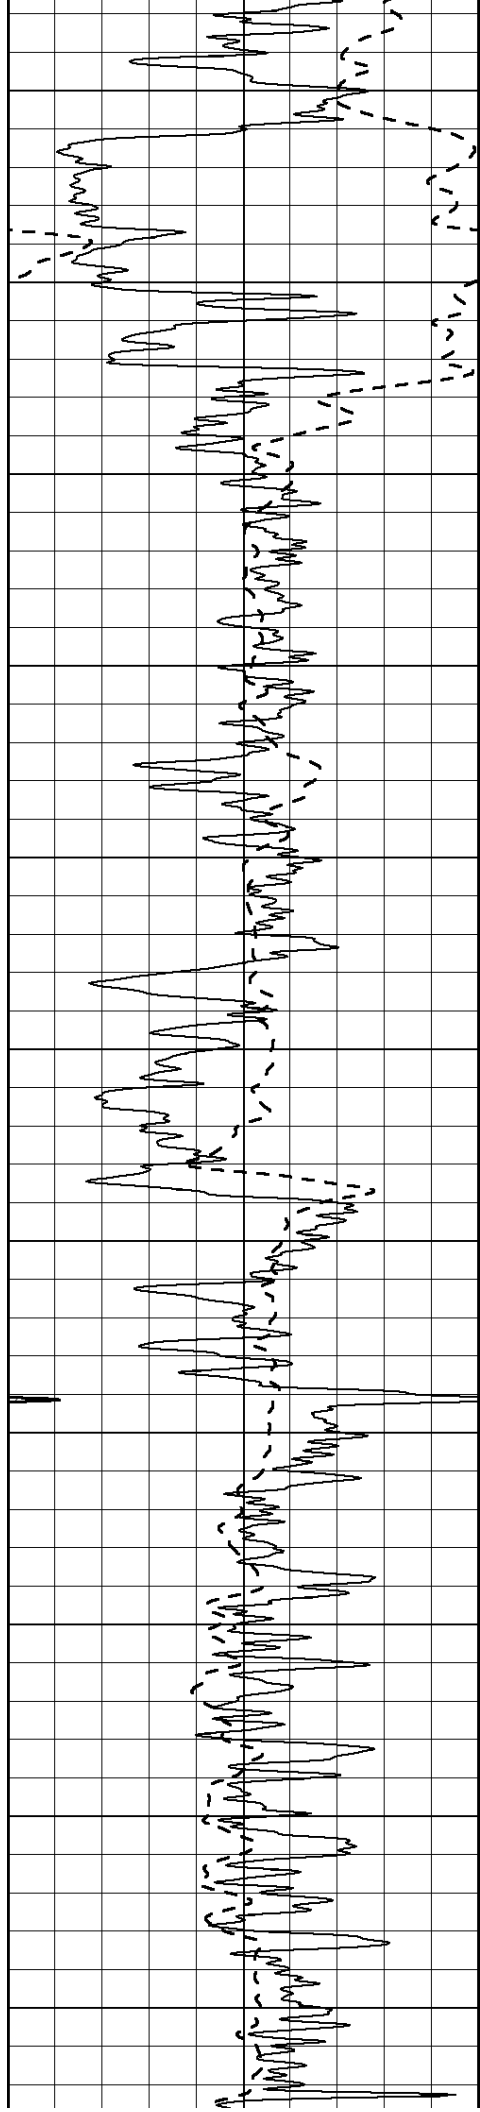

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

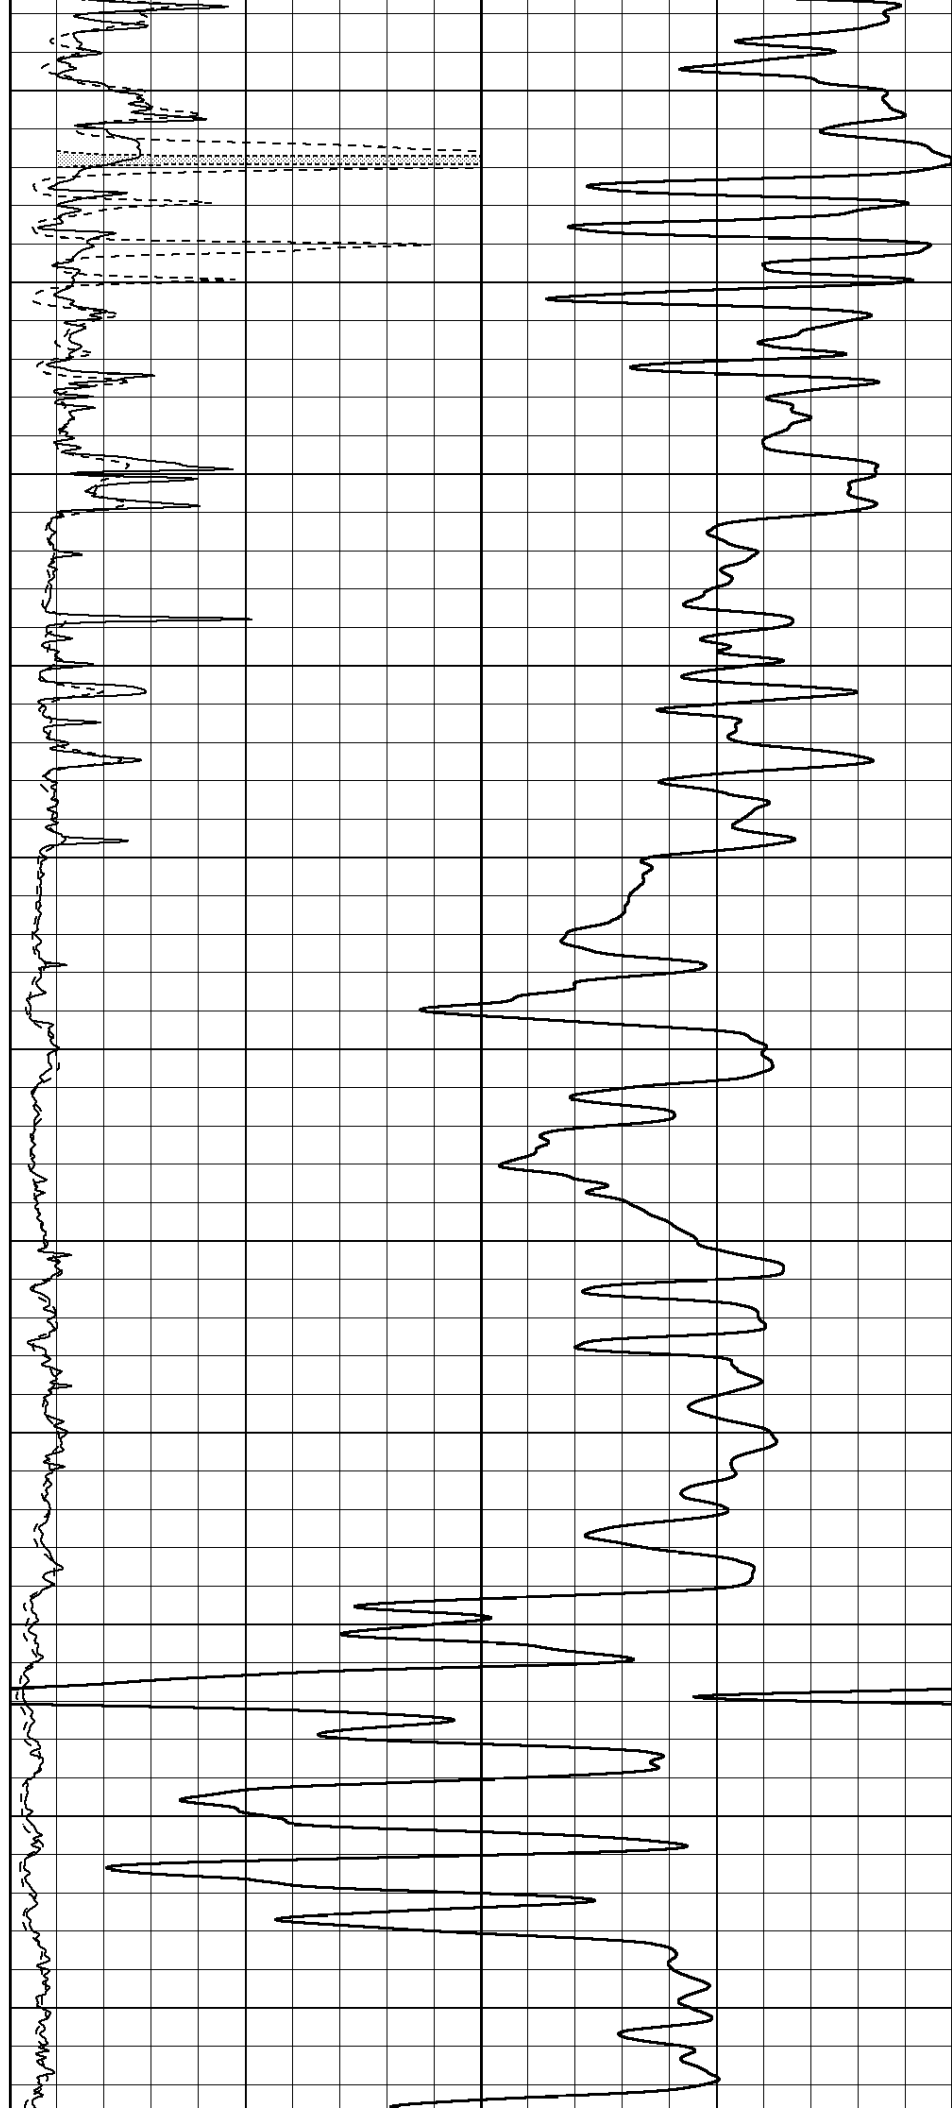

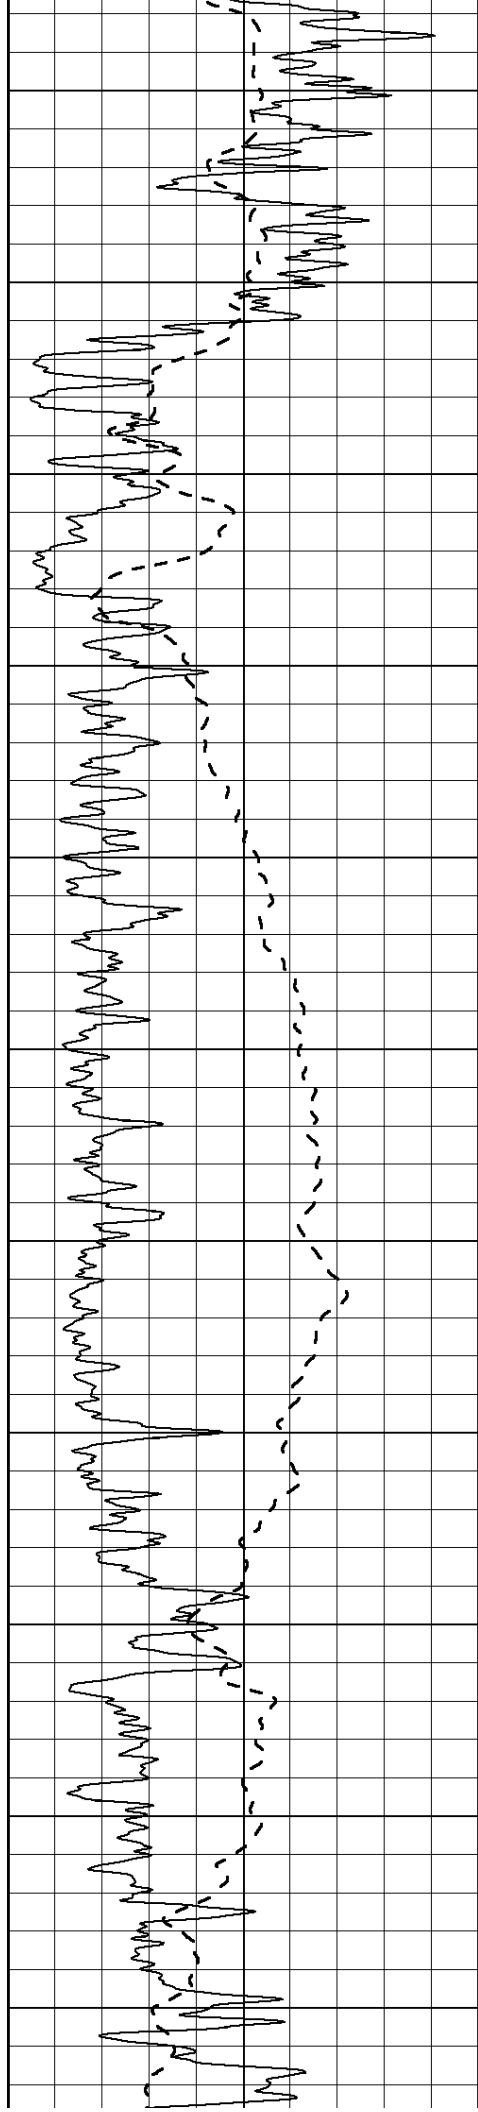

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

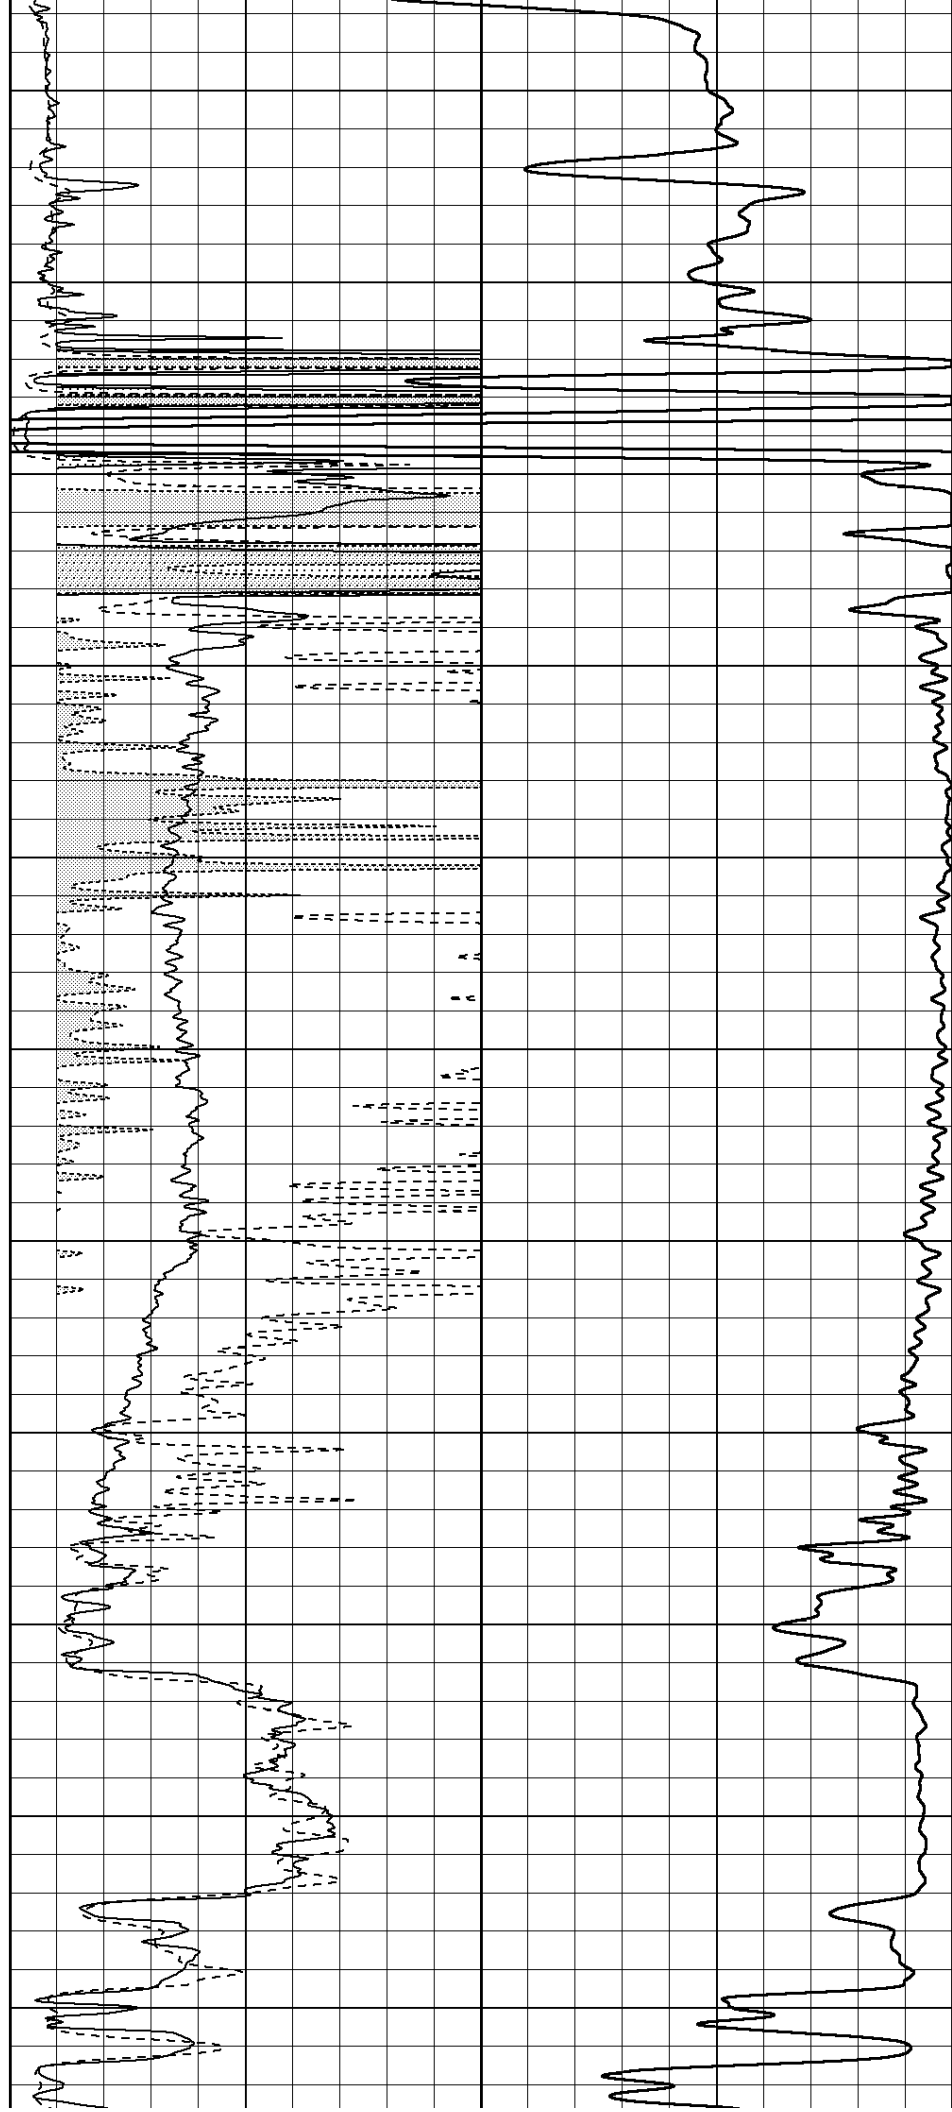

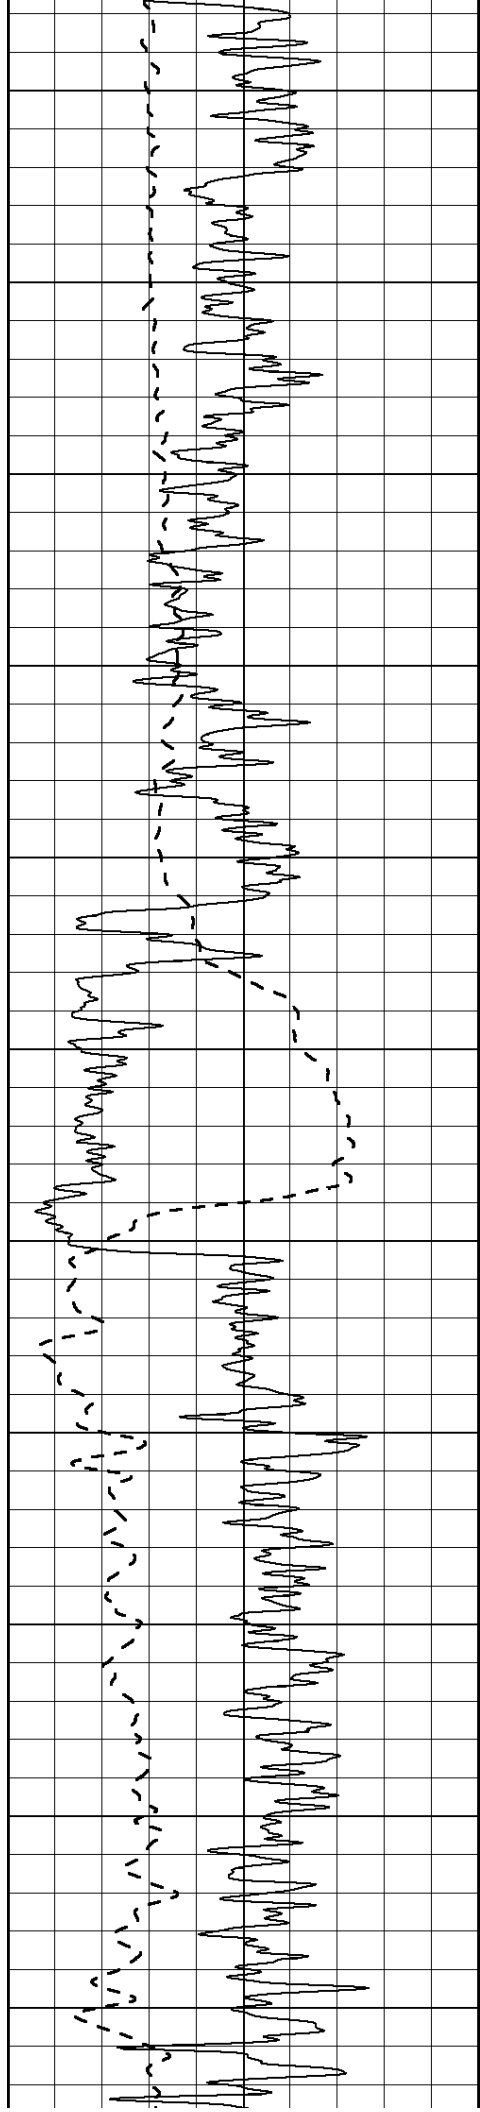

2100

2150

2200

2250

2300

2350



2400


2450

2500

2550

2600

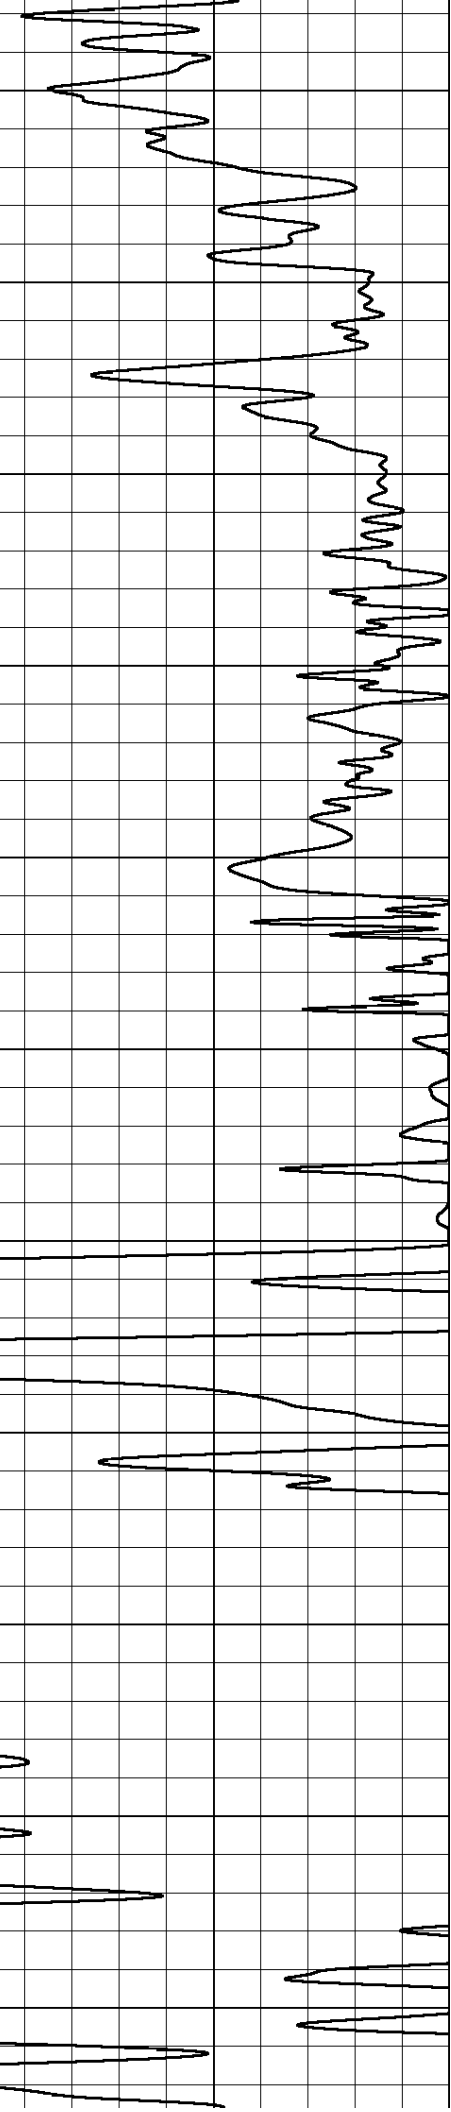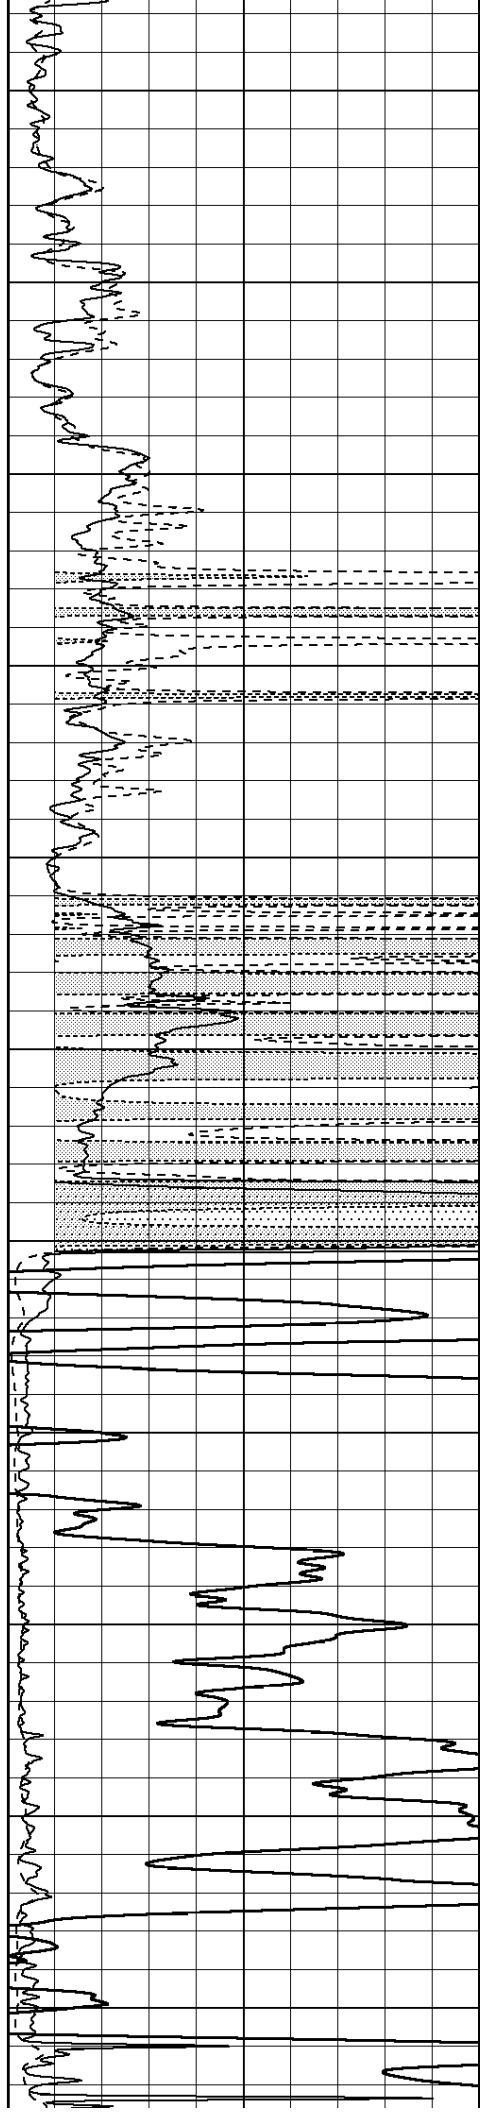

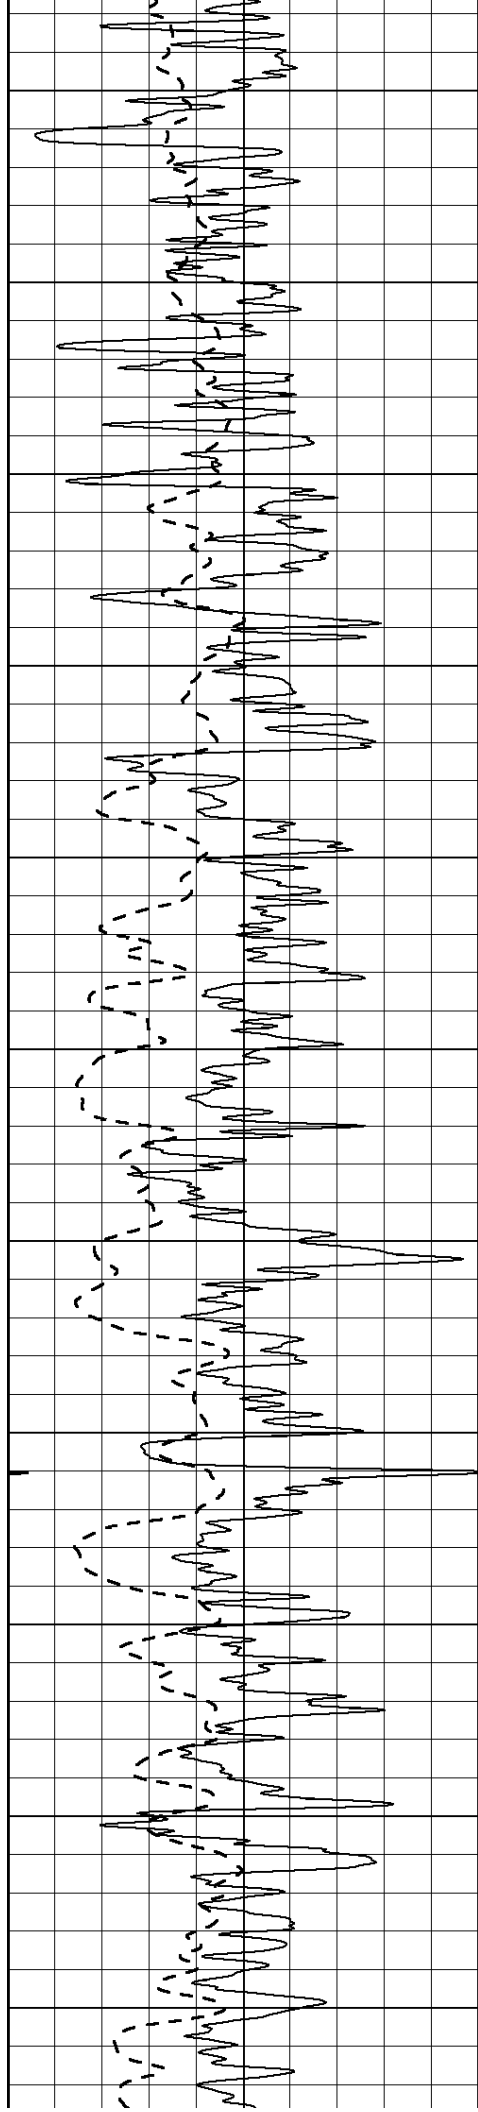

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

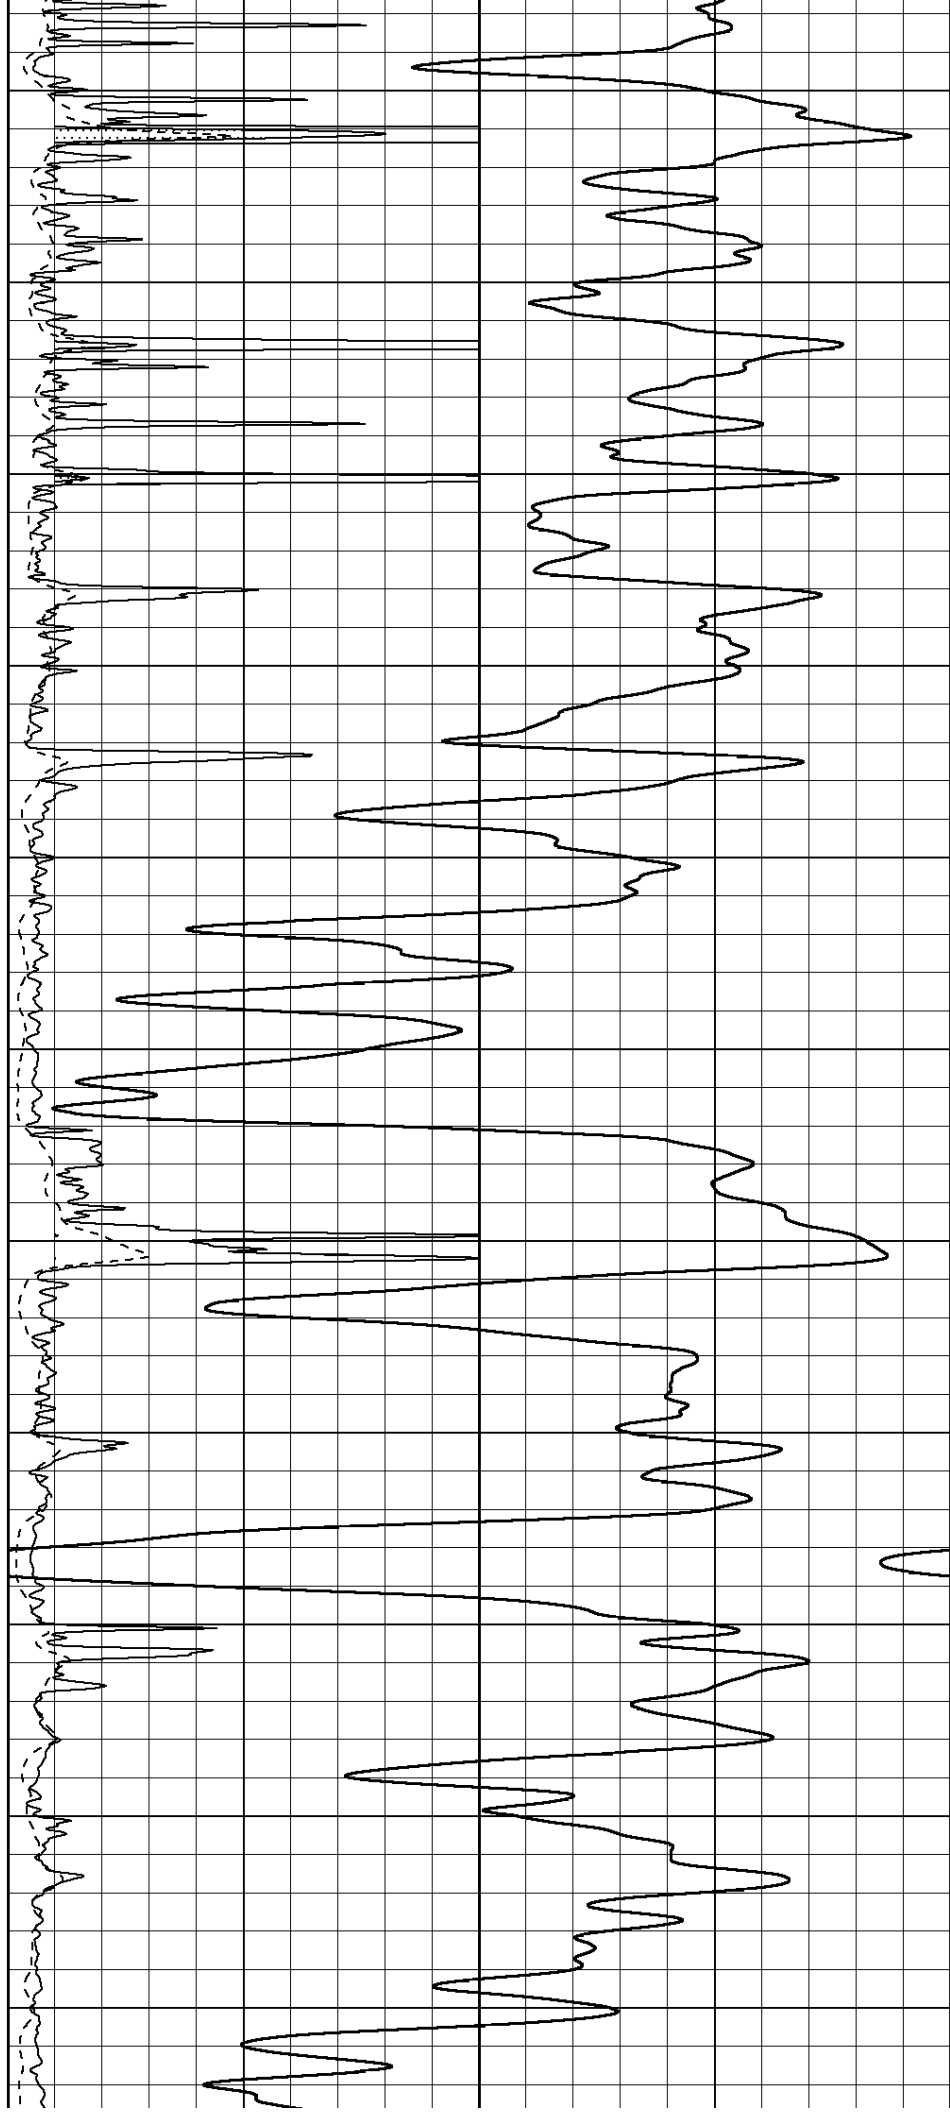

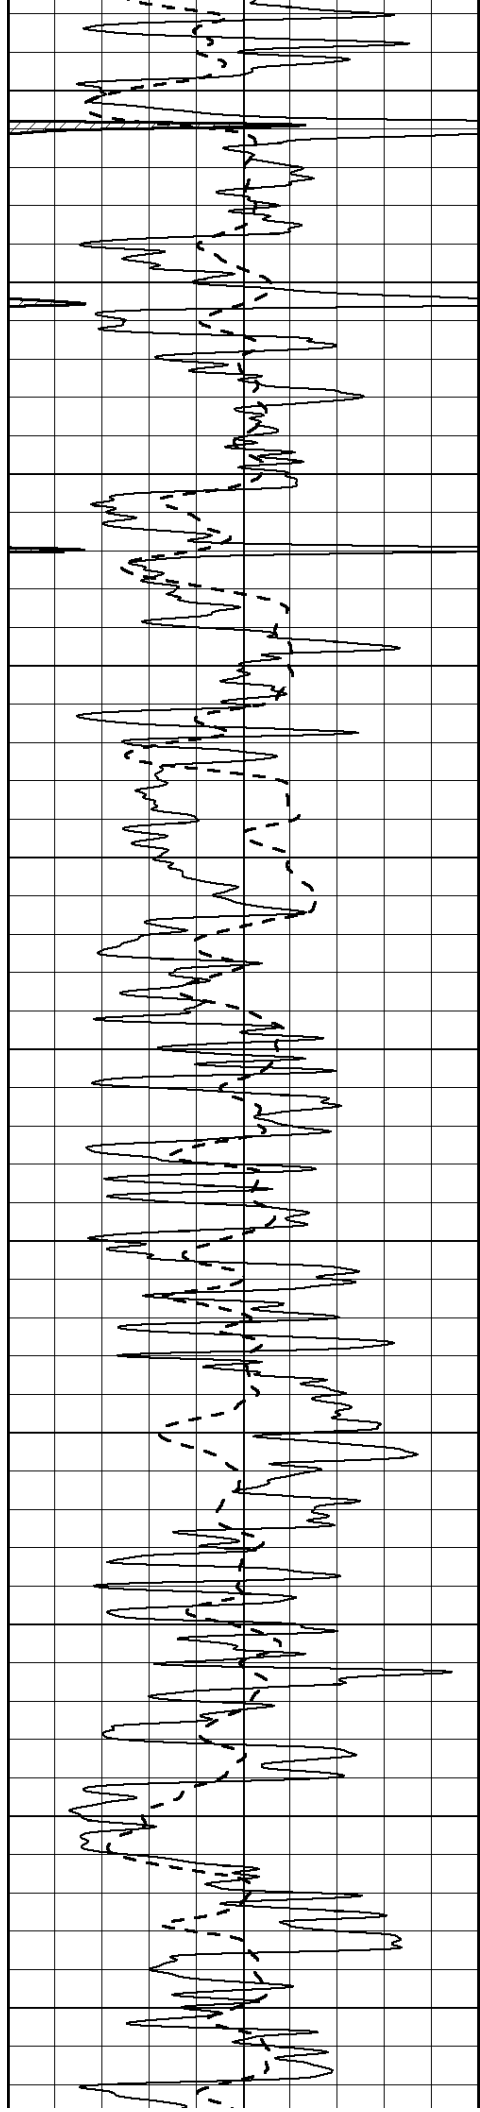

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

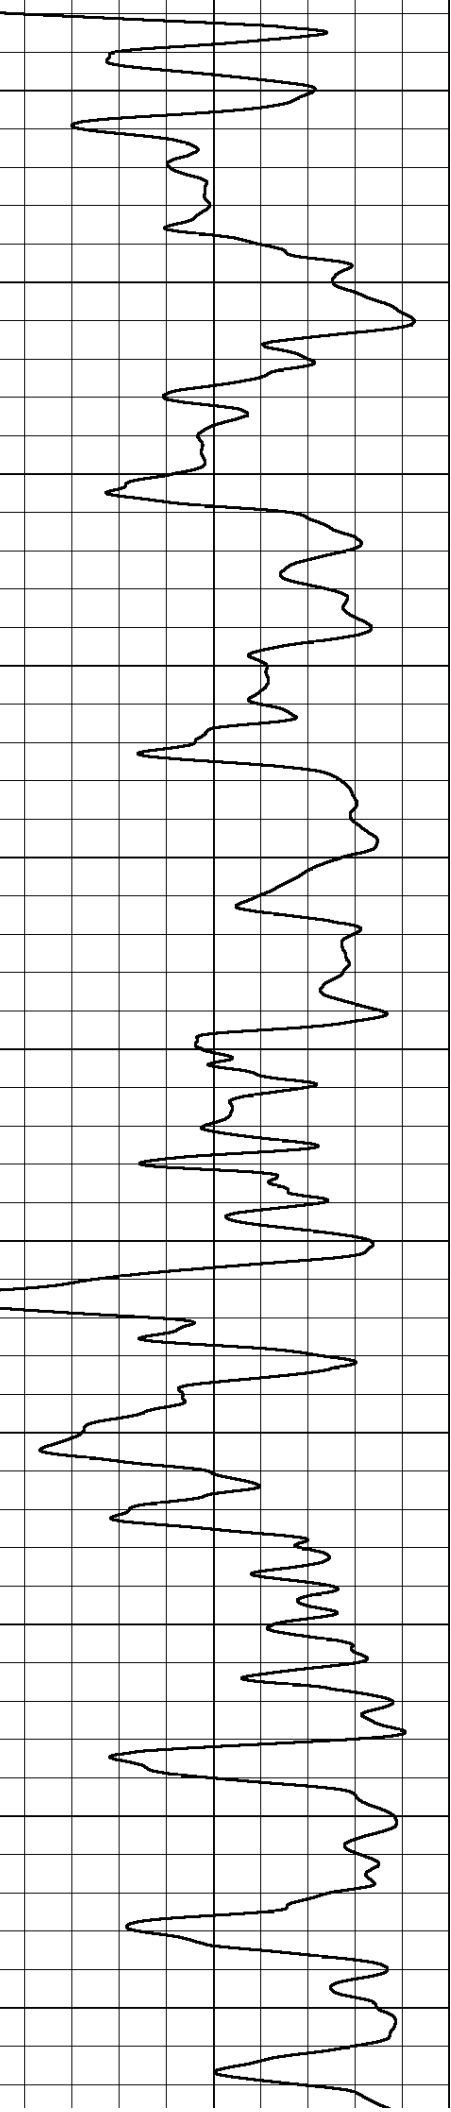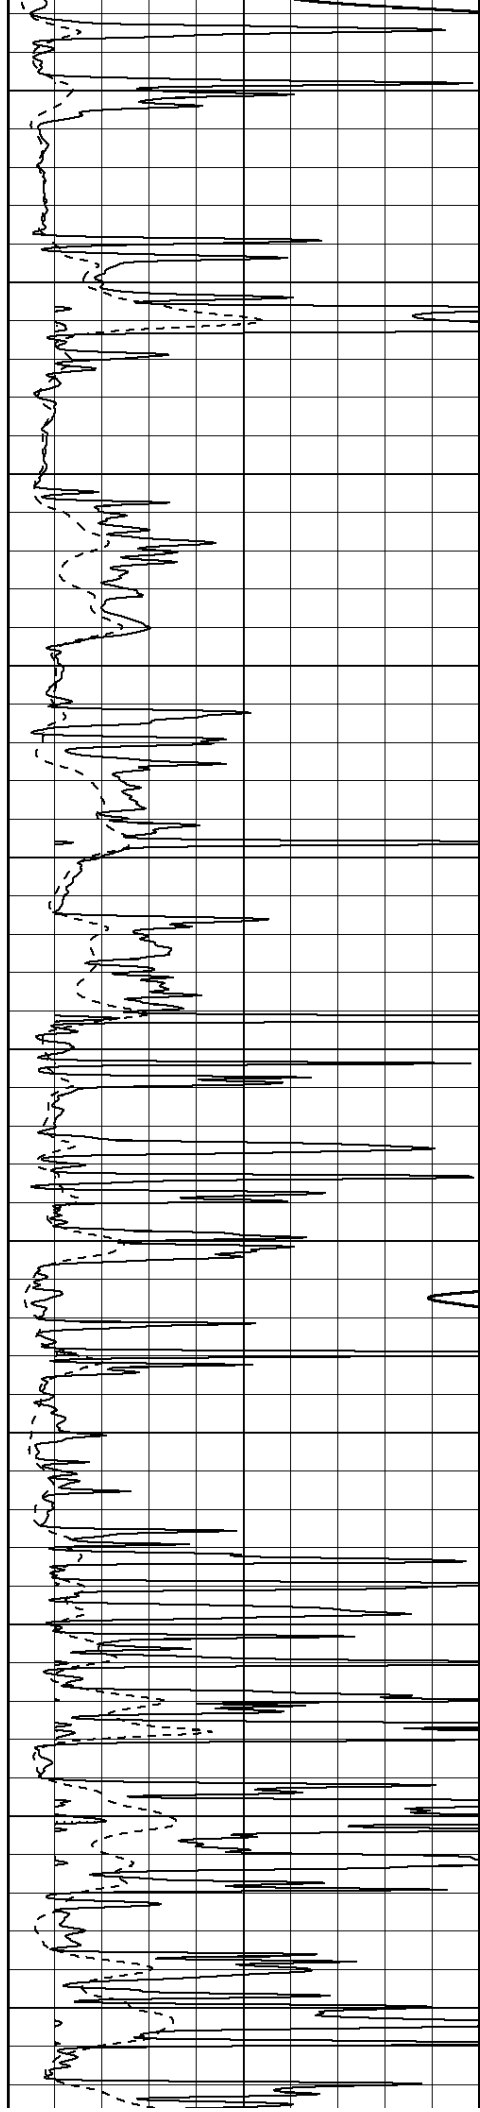

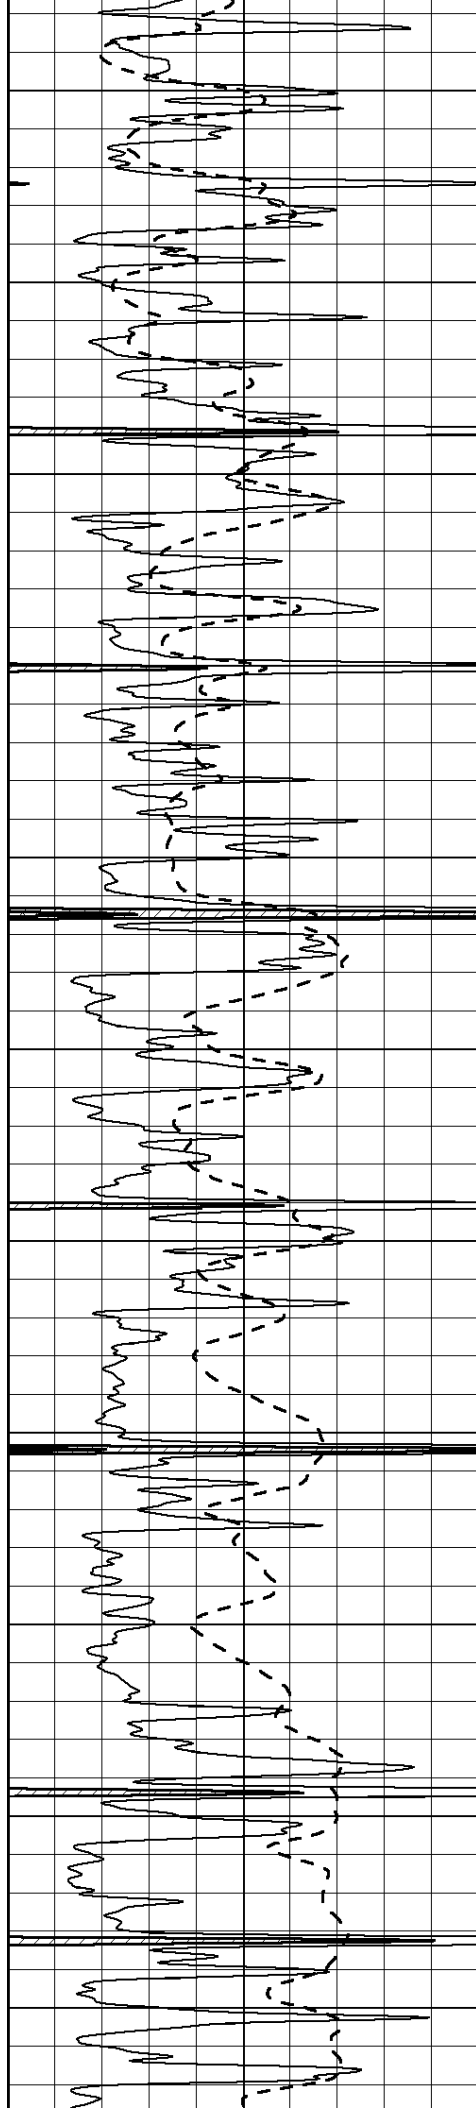

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

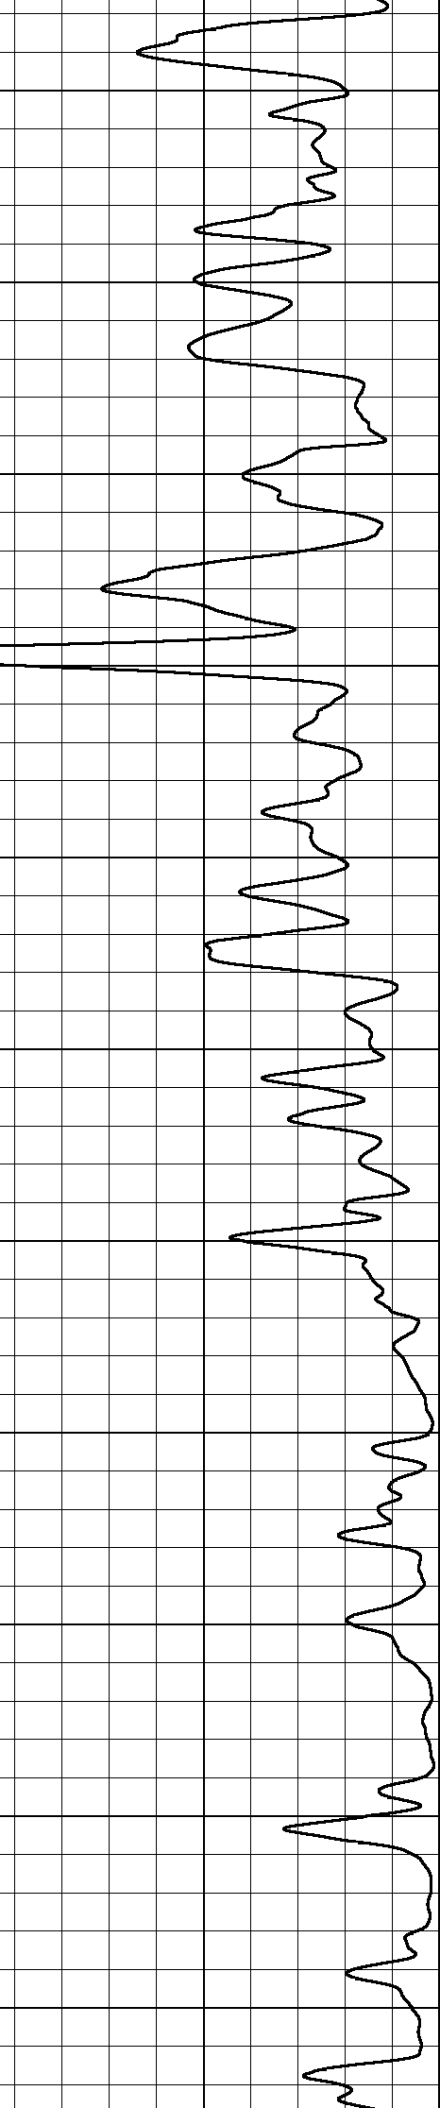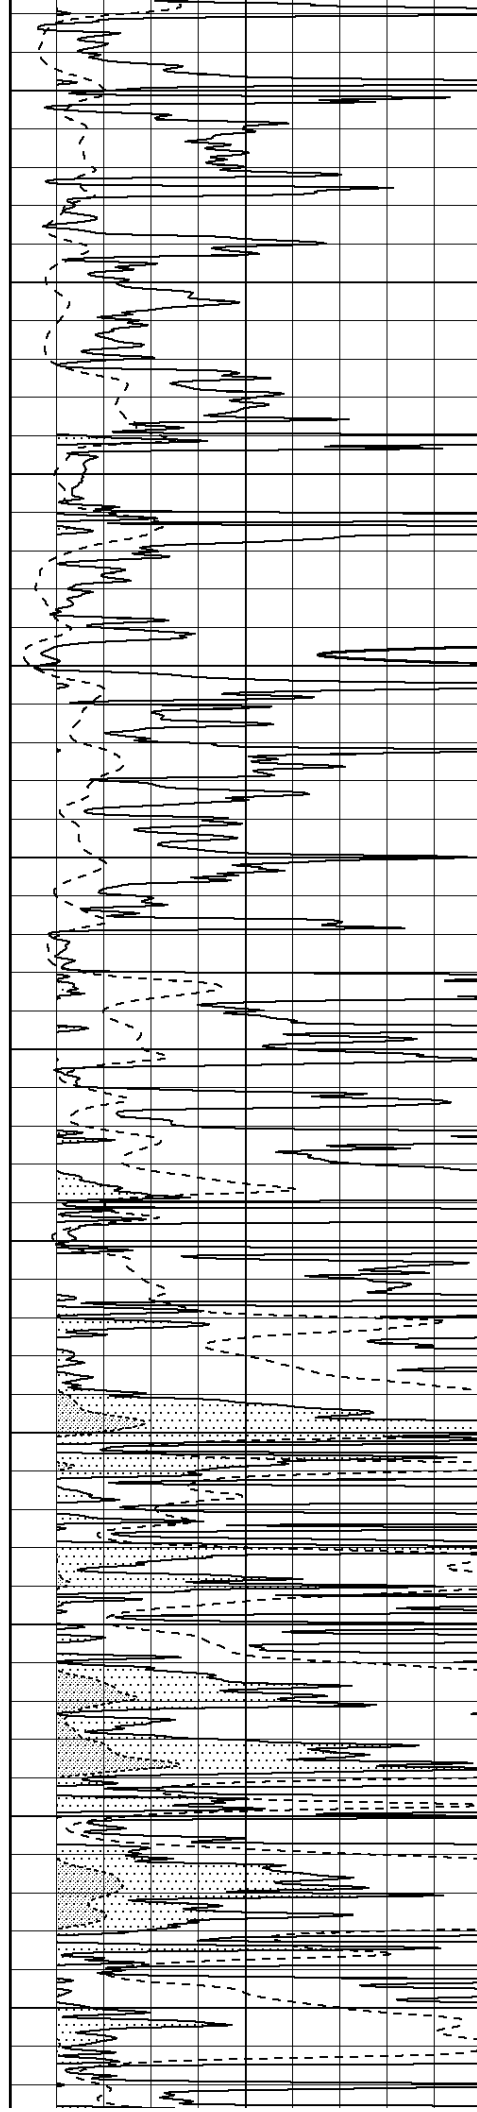

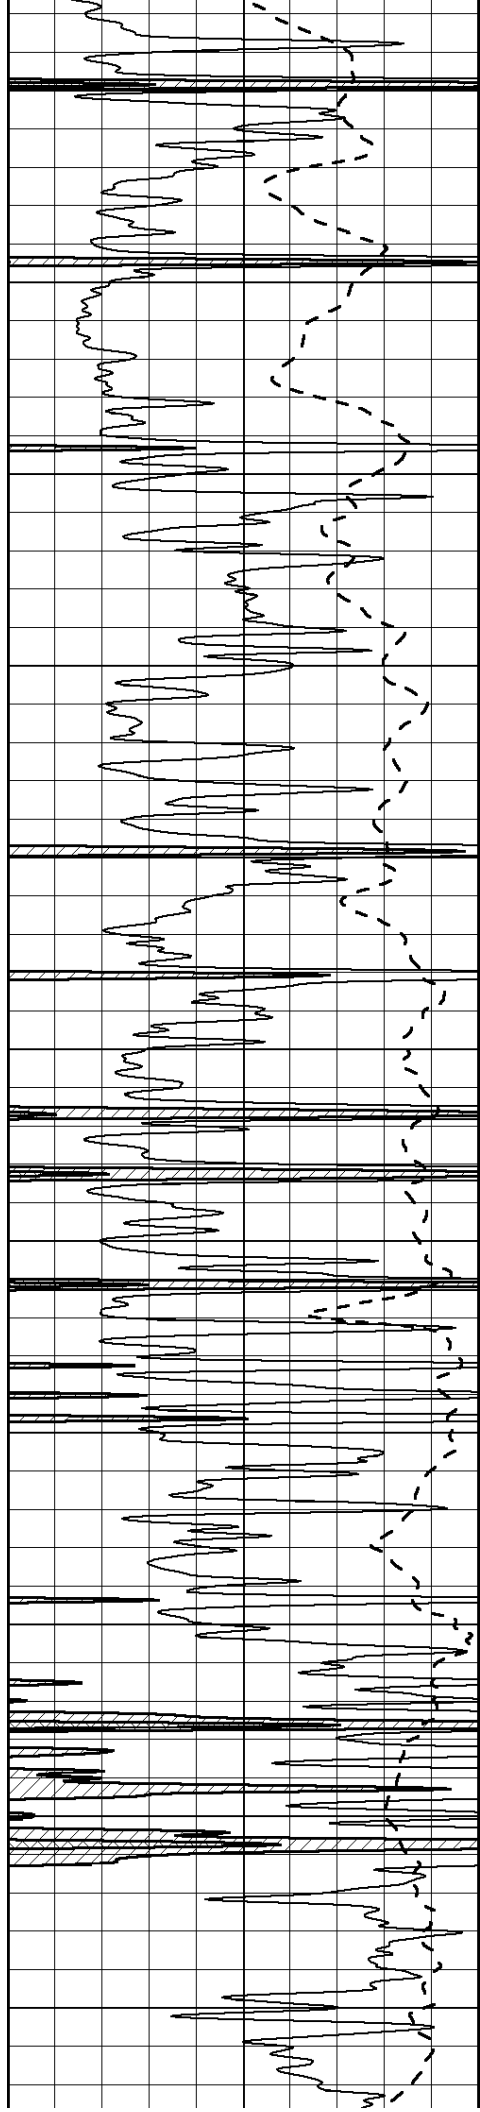

4300

4350

4400

4450

4500

4550



4600


4650

4700

4750

4800

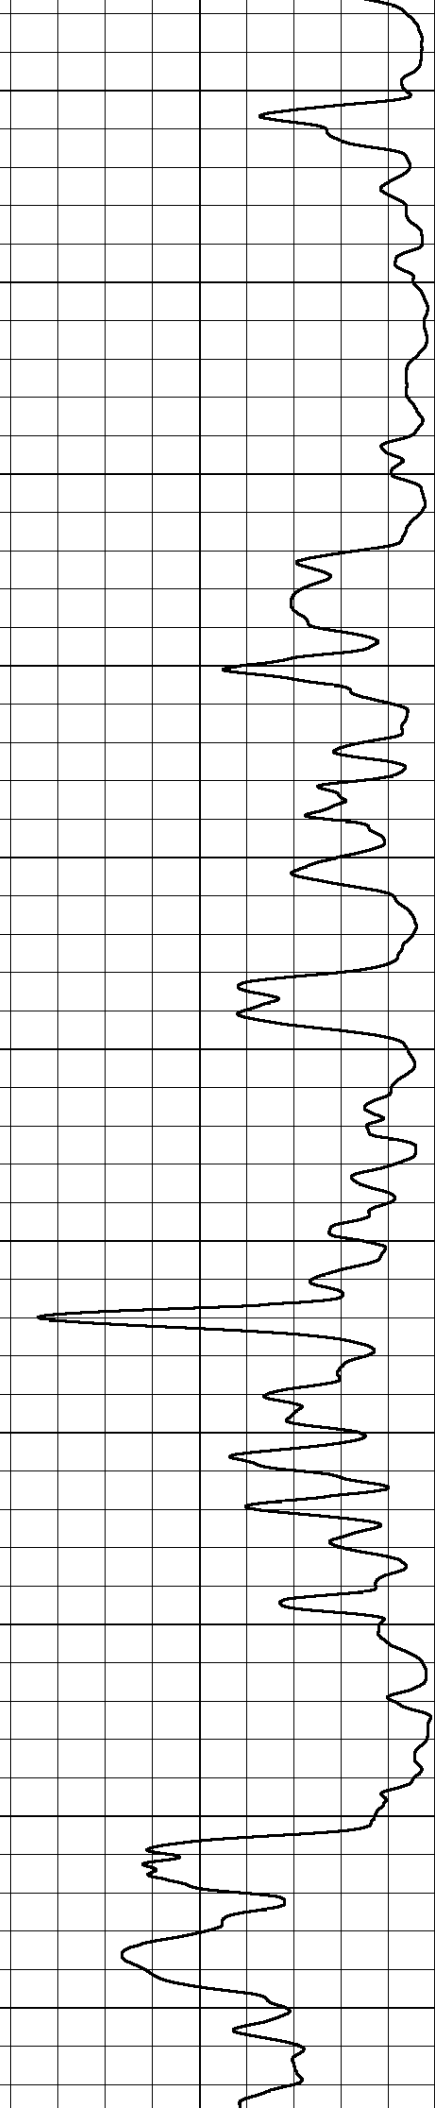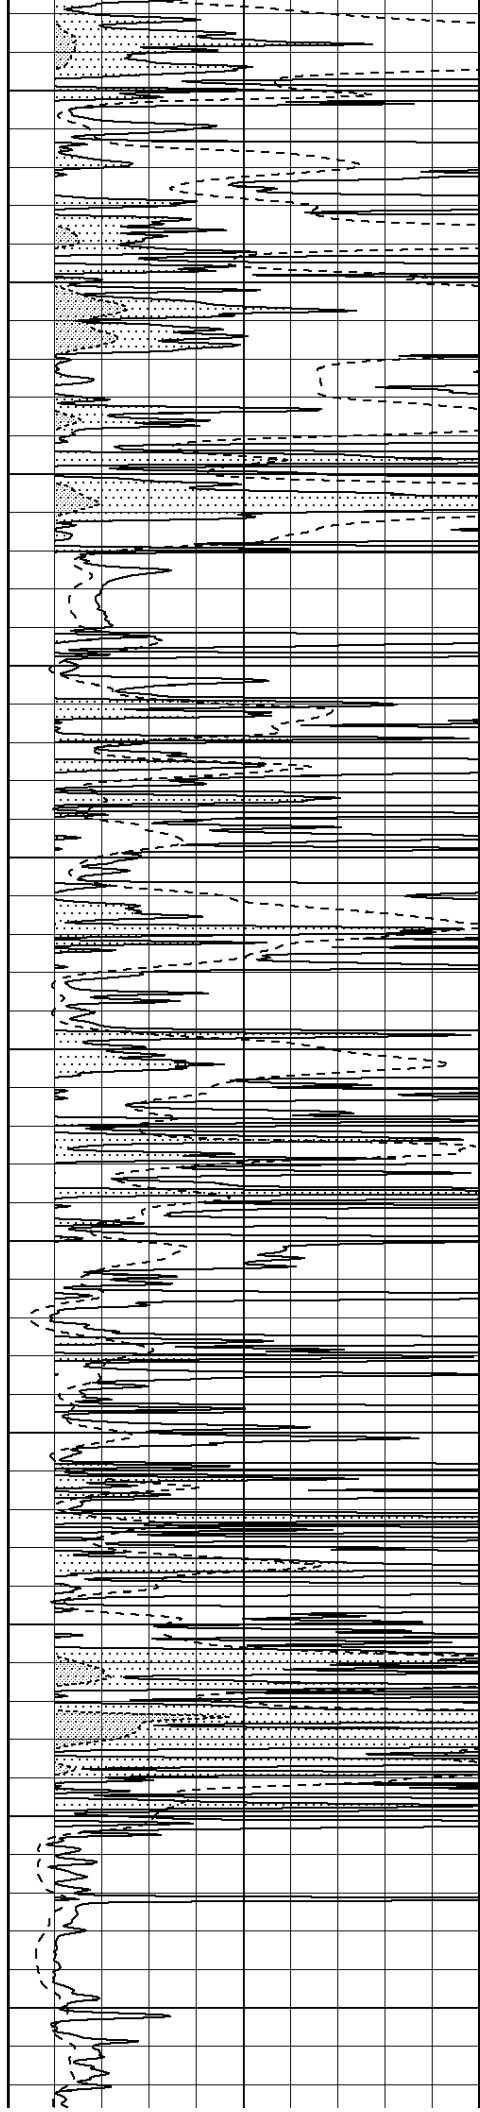

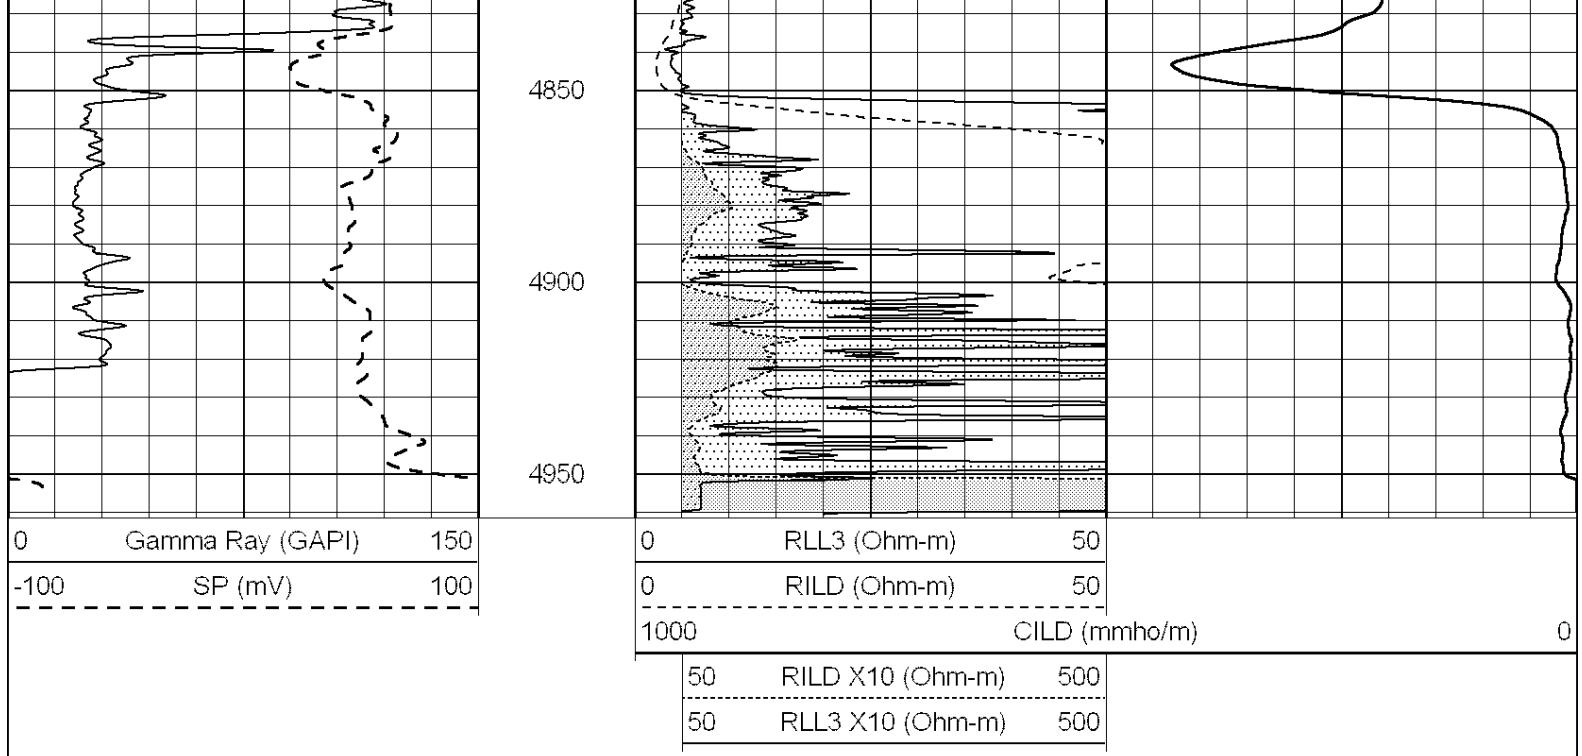


NABORS
COMPLETION
& PRODUCTION
SERVICES CO.

ANHYDRITE

Database File: 22242pe.db
Dataset Pathname: pass3.8
Presentation Format: _dil
Dataset Creation: Sun Jan 26 20:12:17 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

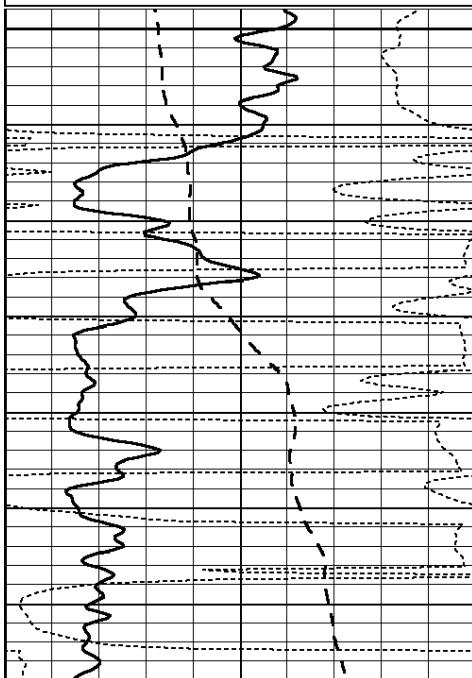

2300


2350

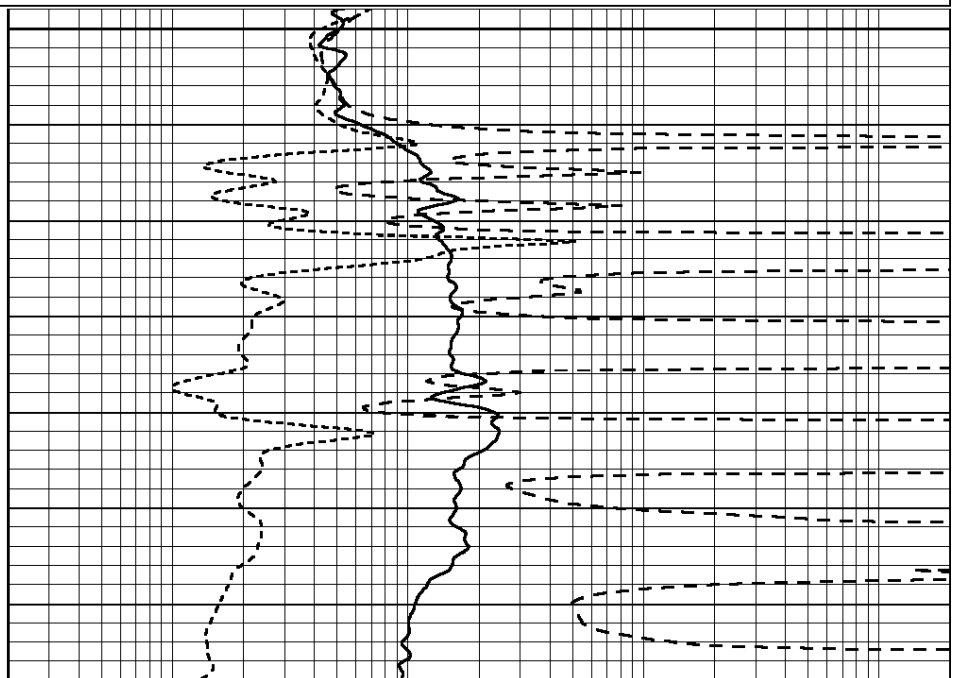

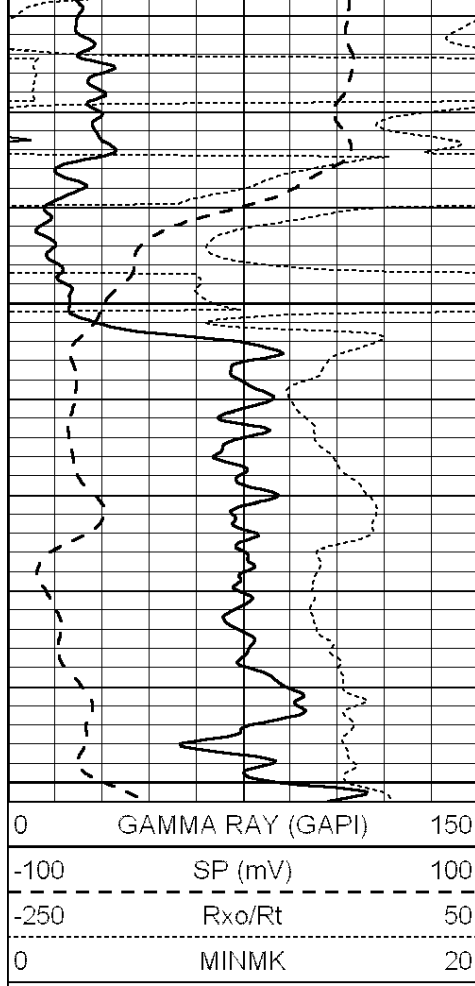

2400


2450

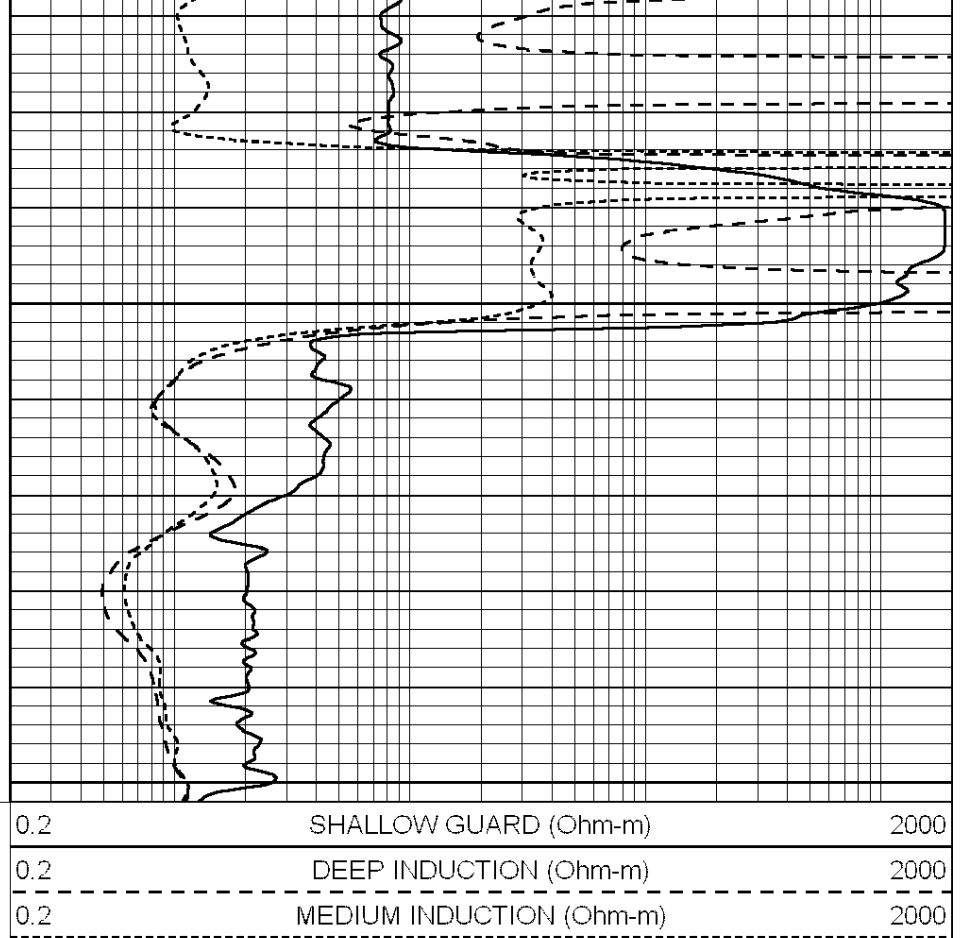




NABORS
COMPLETION
& PRODUCTION
SERVICES CO.


MAIN SECTION

Database File: 22242pe.db
Dataset Pathname: pass3.7
Presentation Format: _dil
Dataset Creation: Sun Jan 26 20:11:29 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

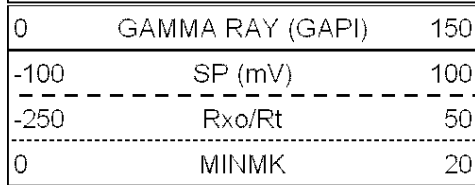

3400

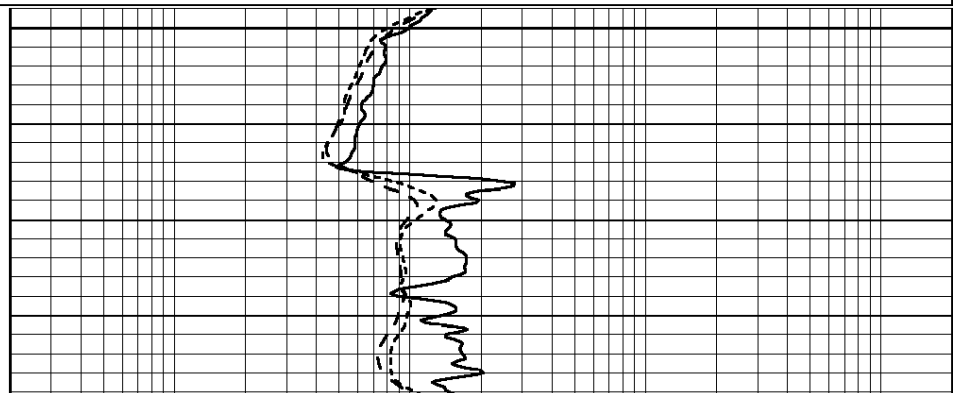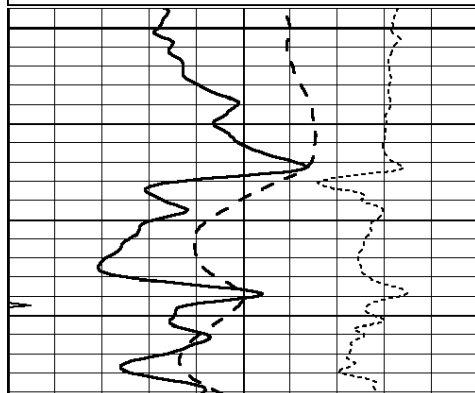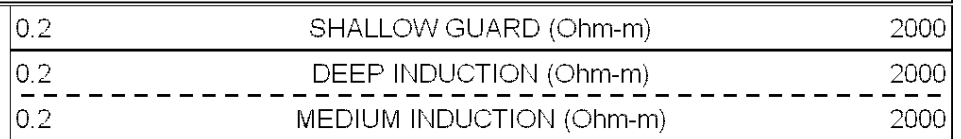

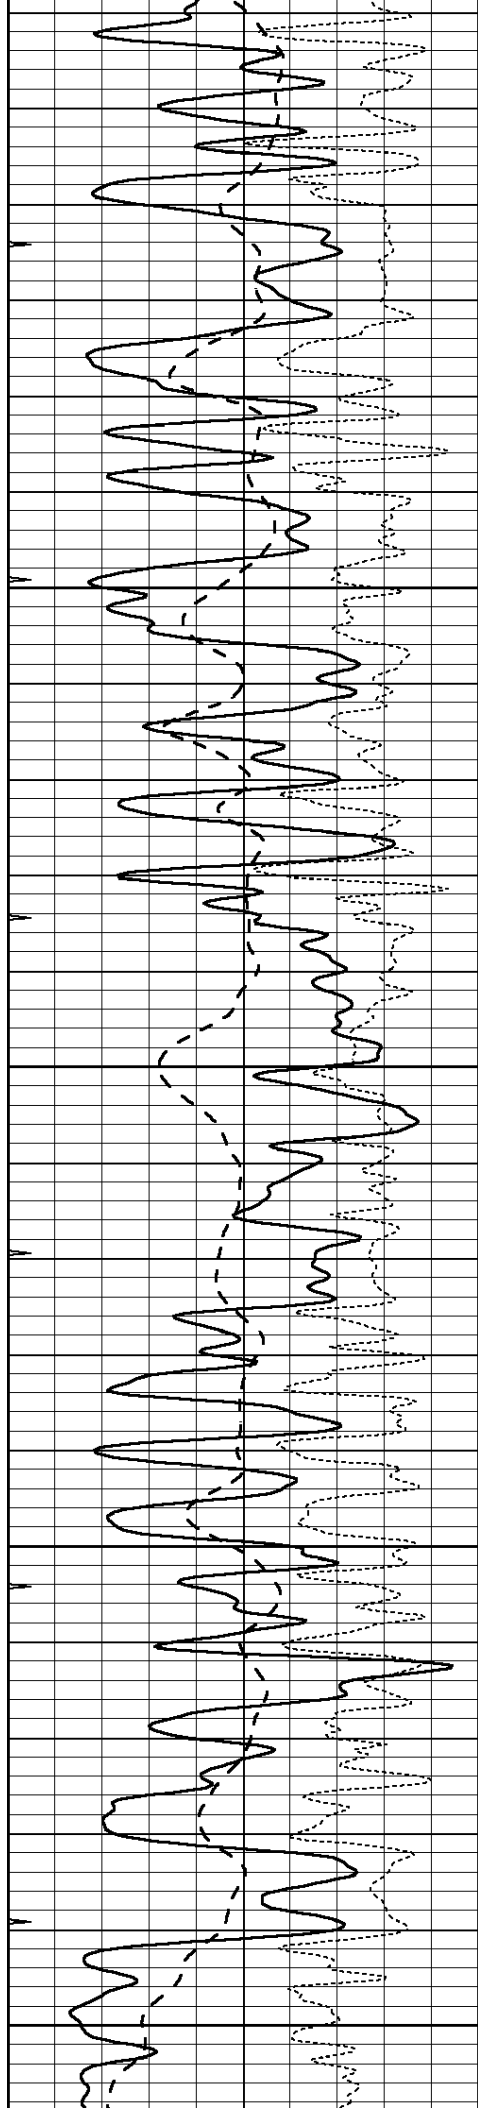


3450


3500

3550

3600

3650

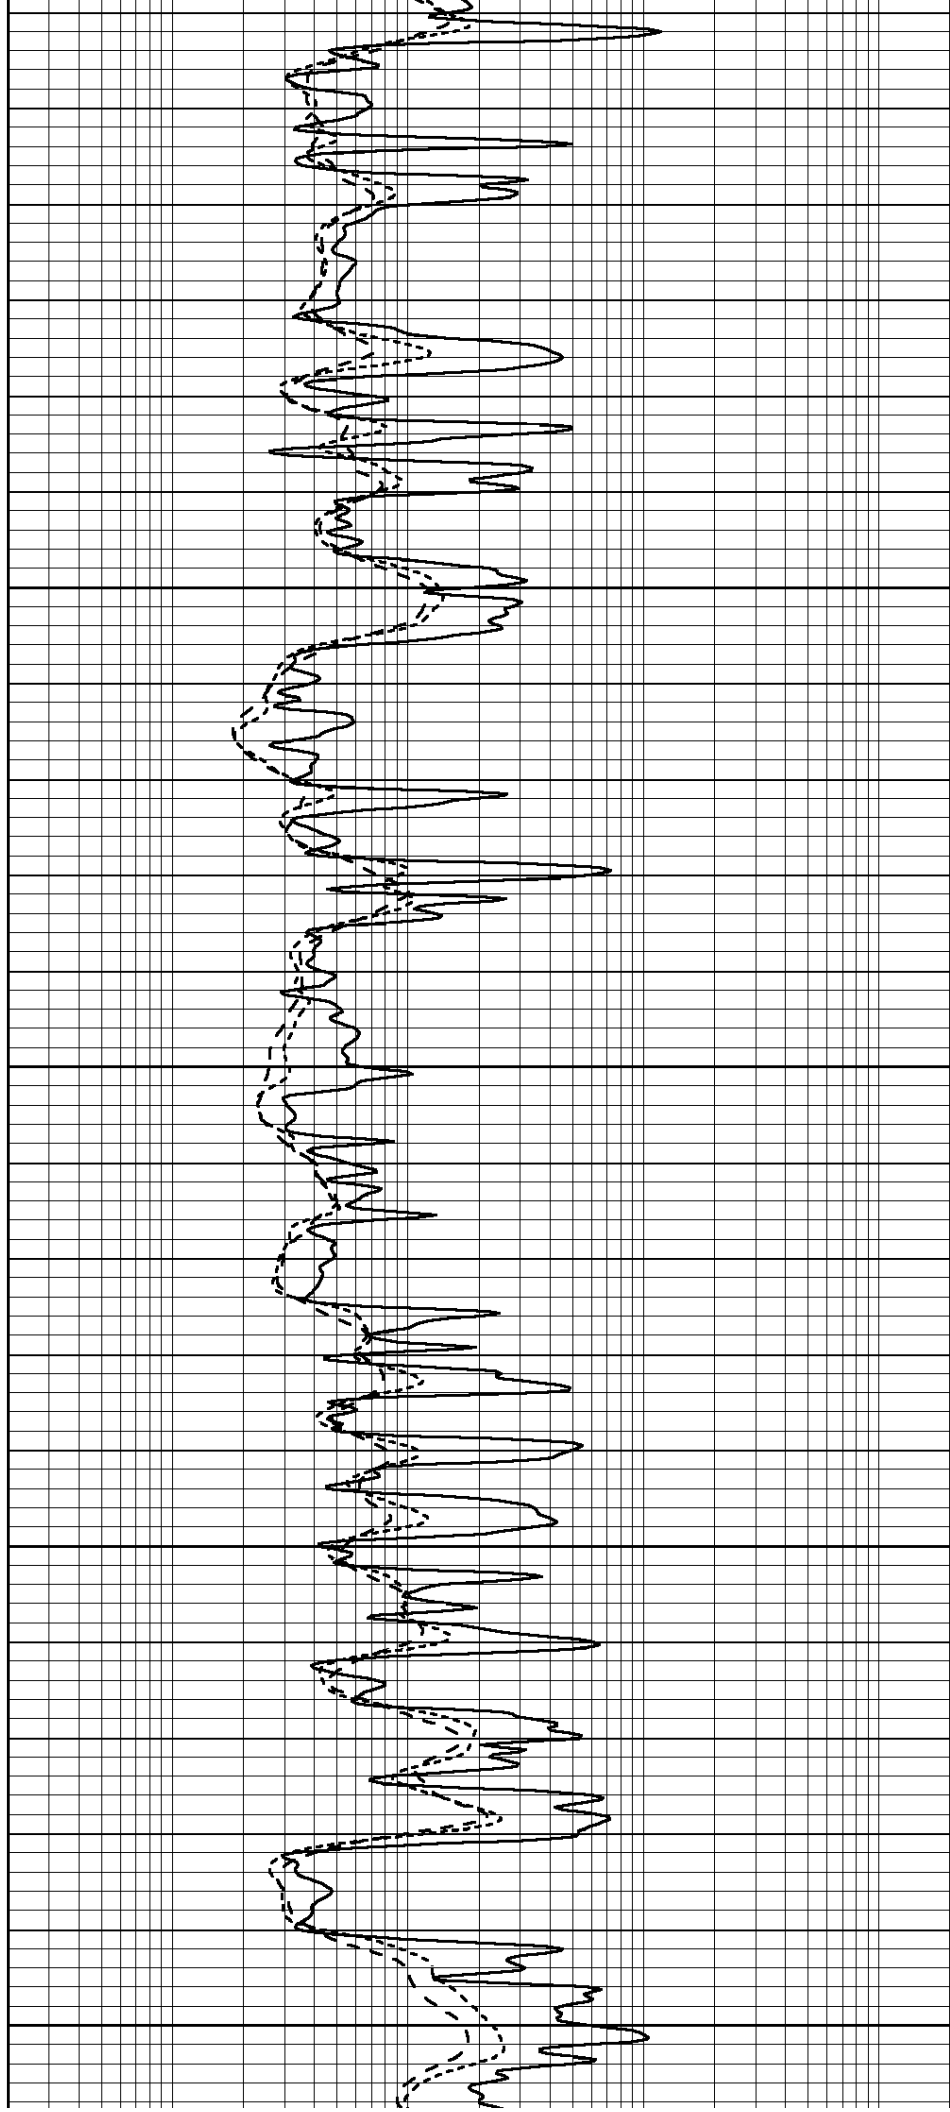

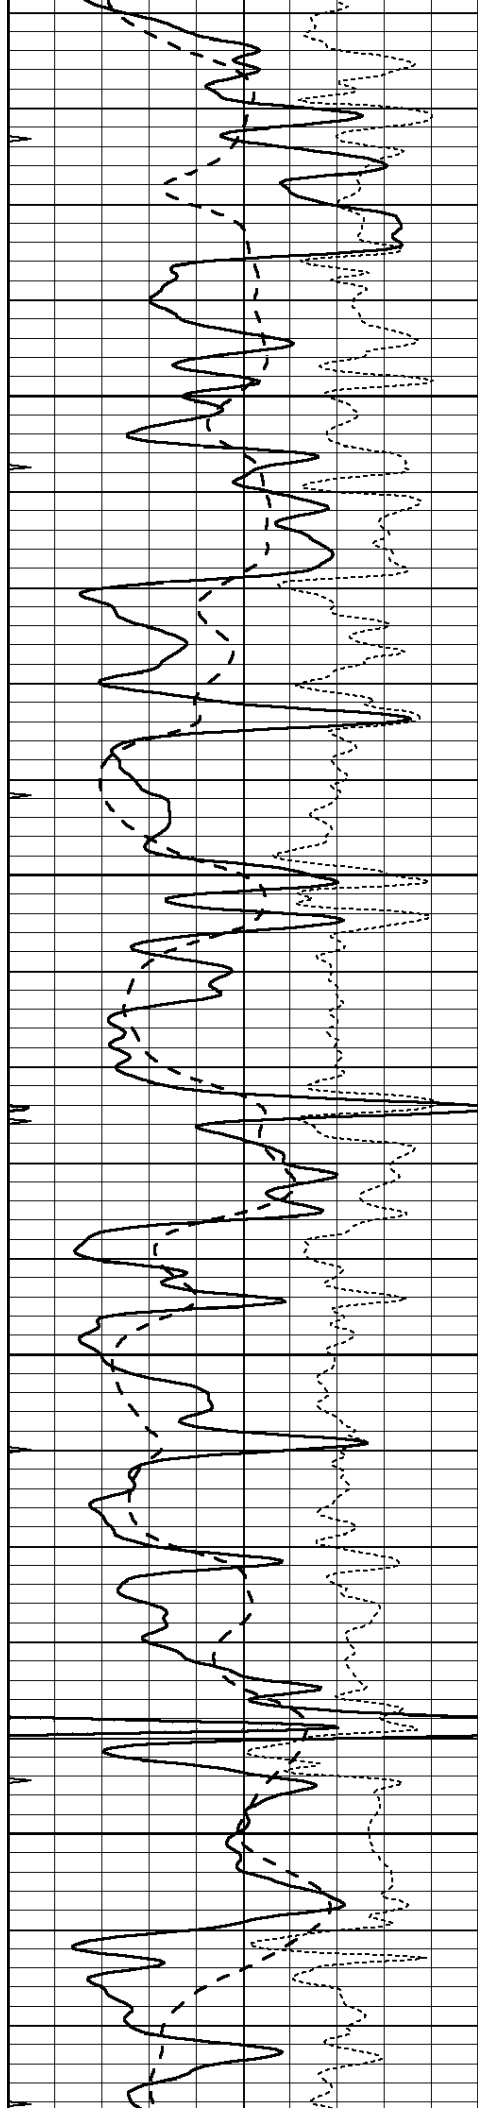



3700

3750

3800

3850

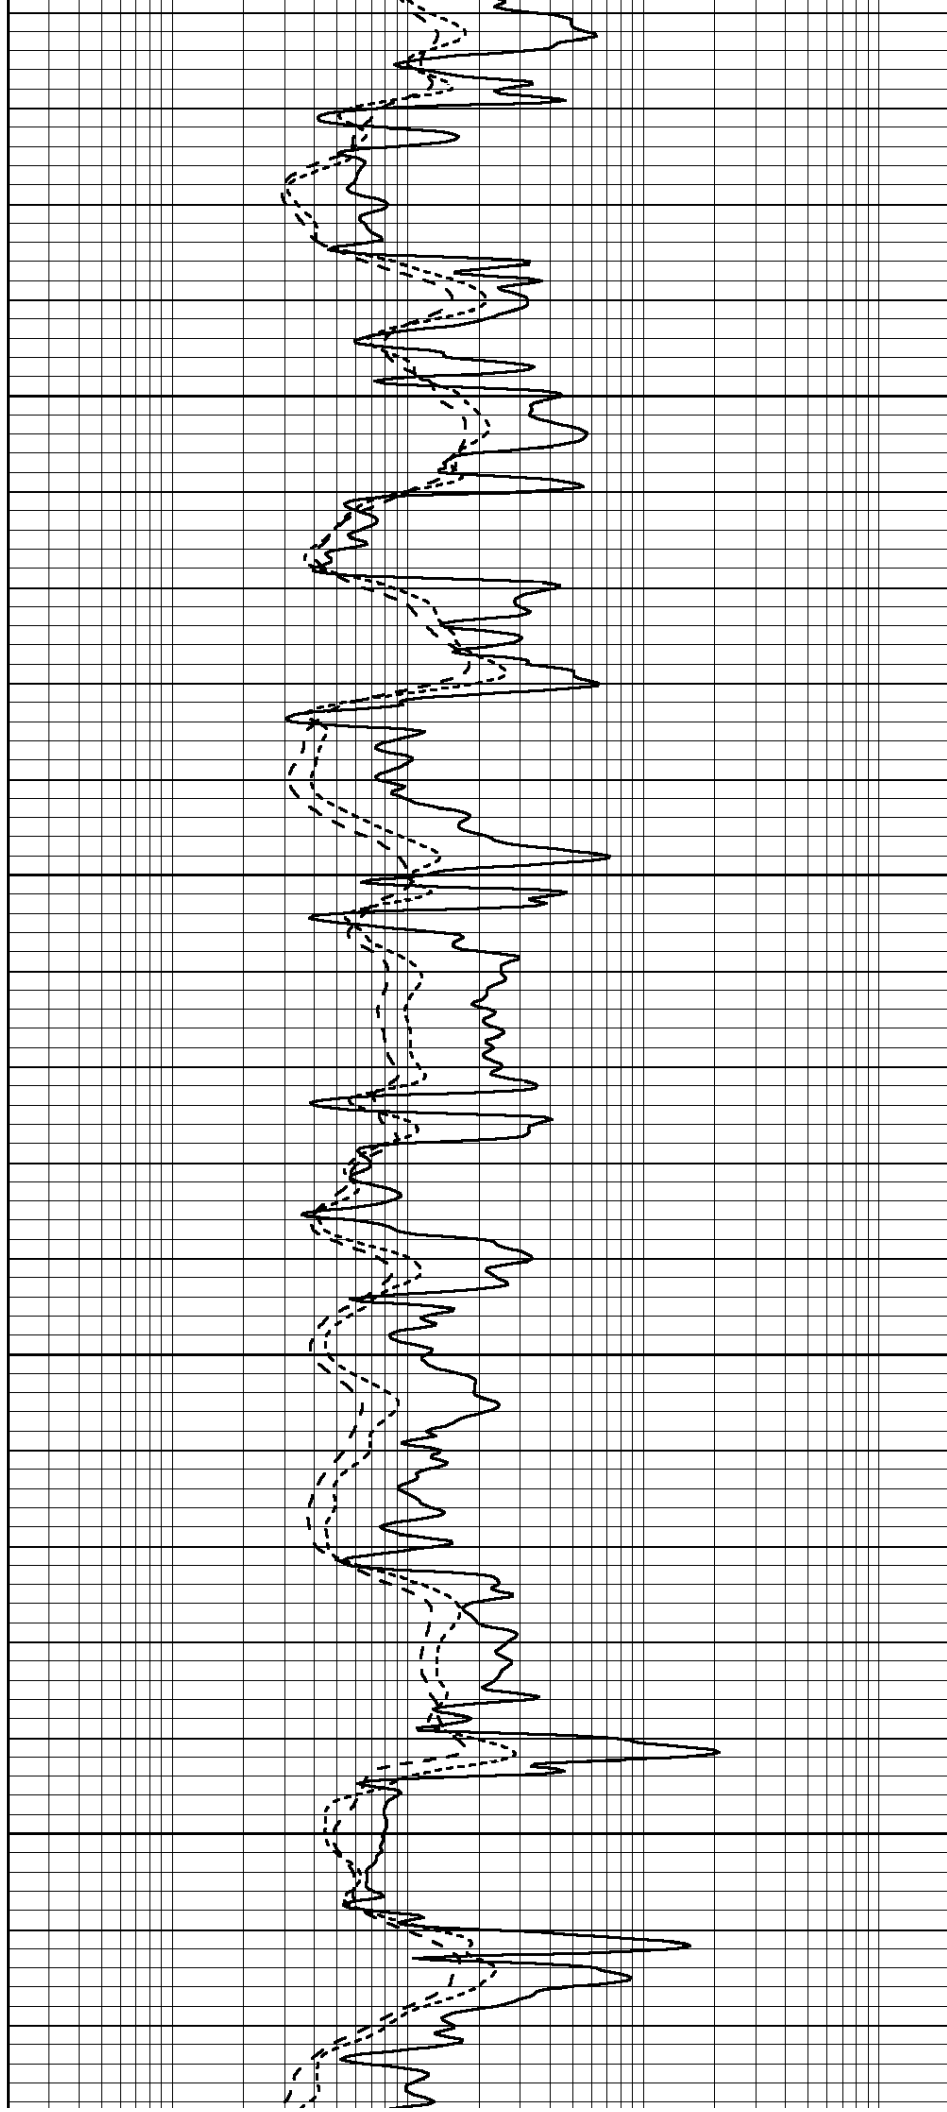

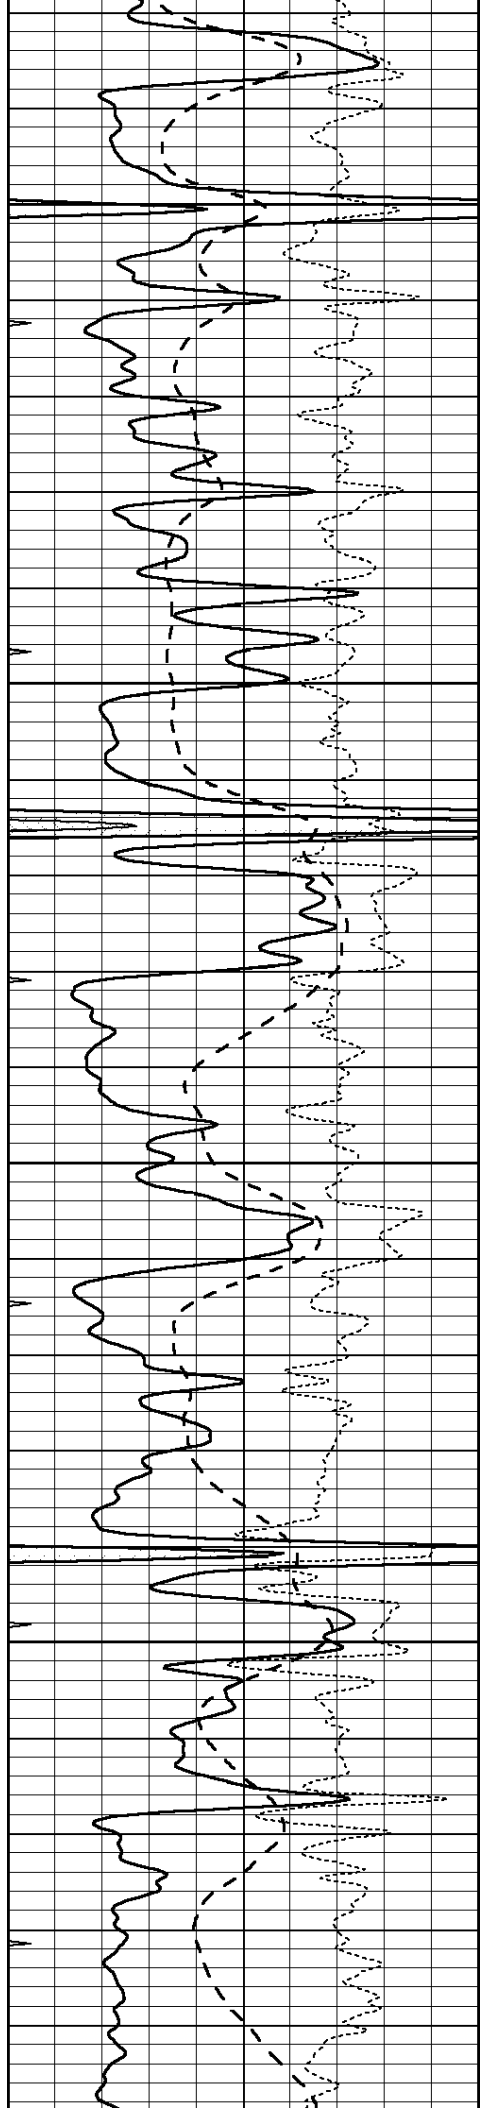



3900

3950

4000

4050

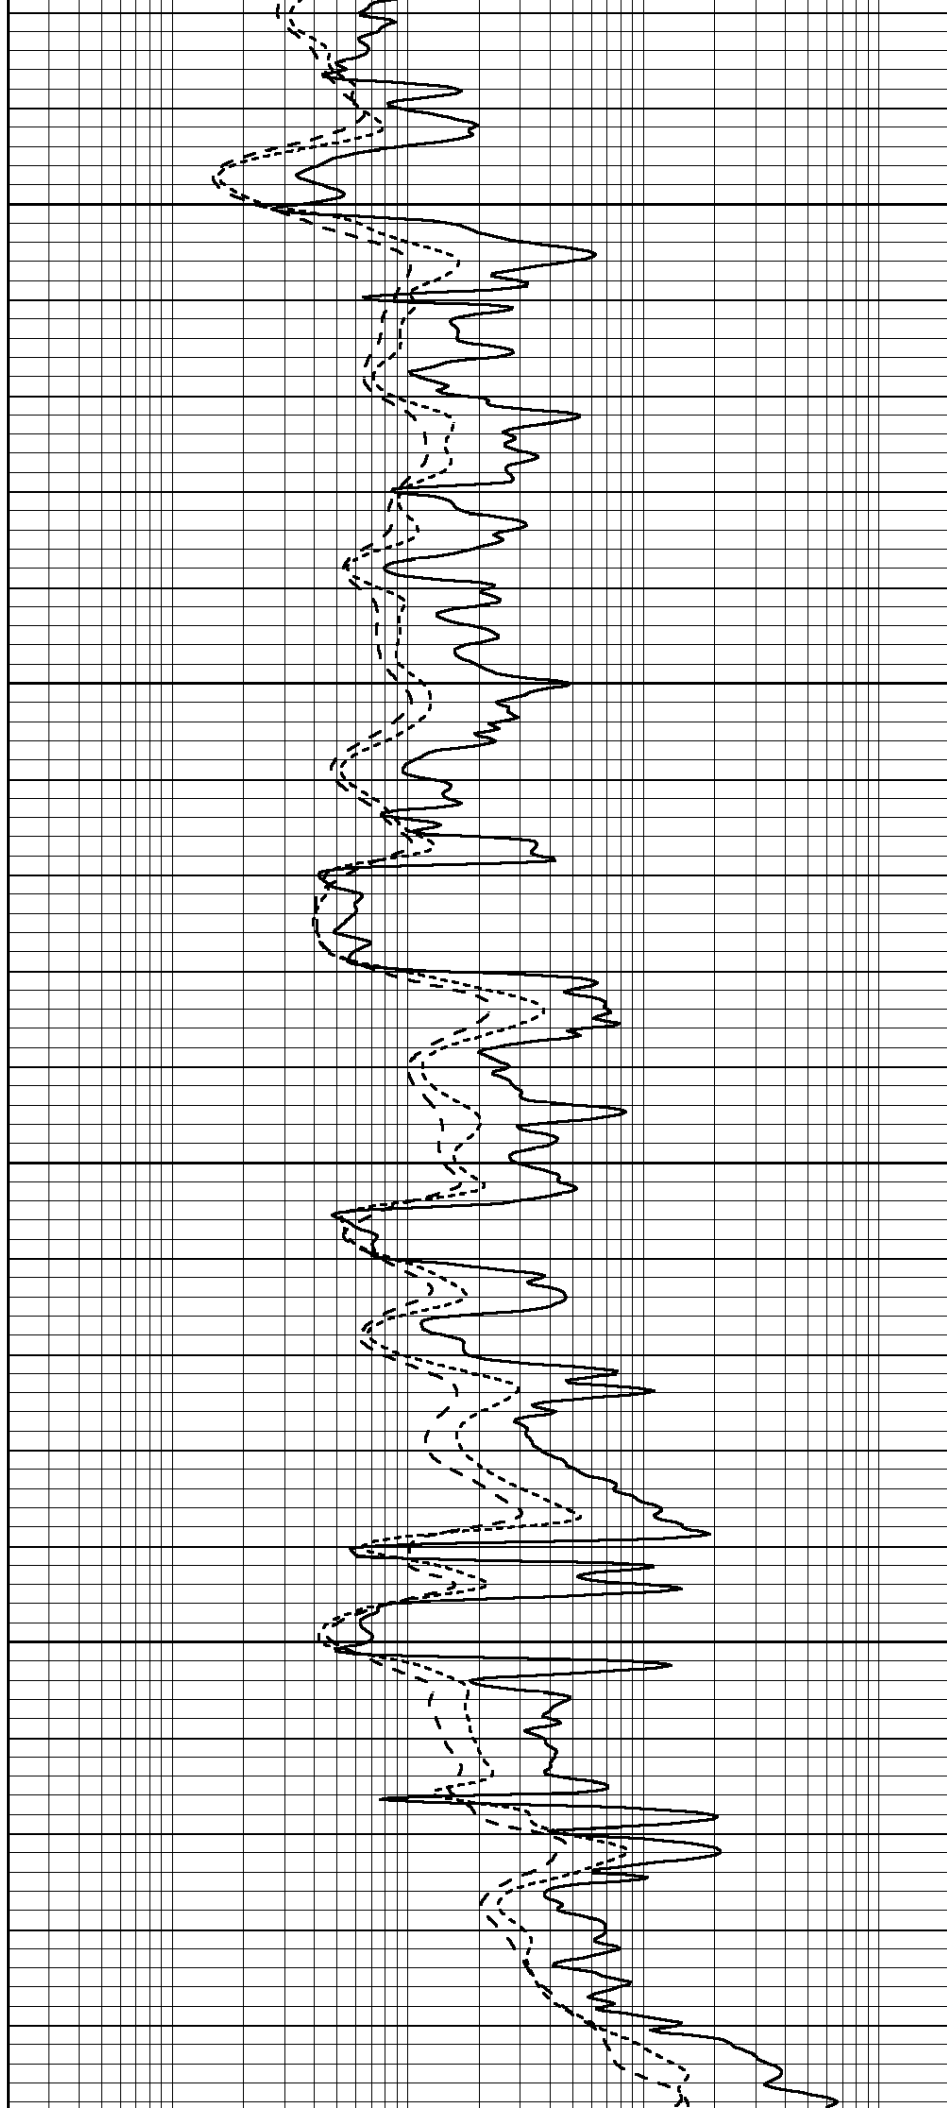

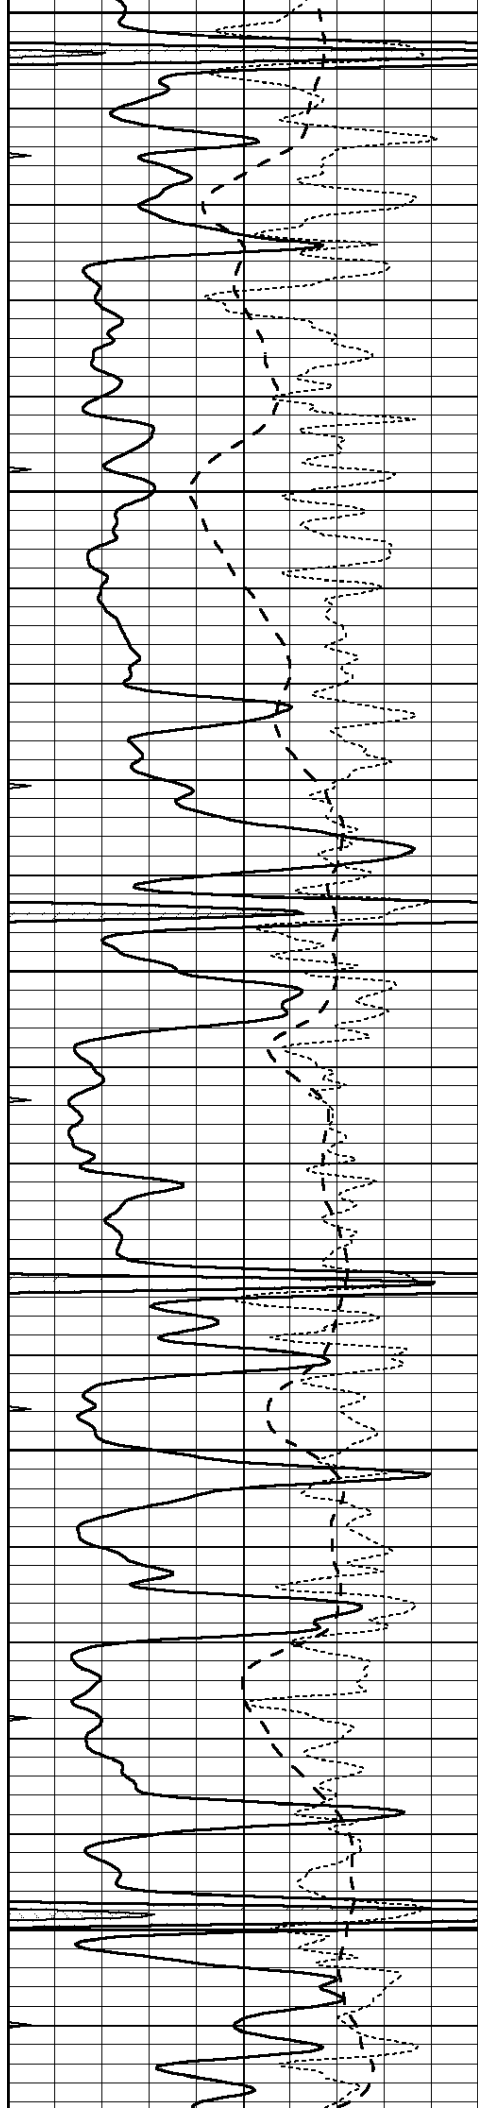


4100


4150

4200

4250

4300

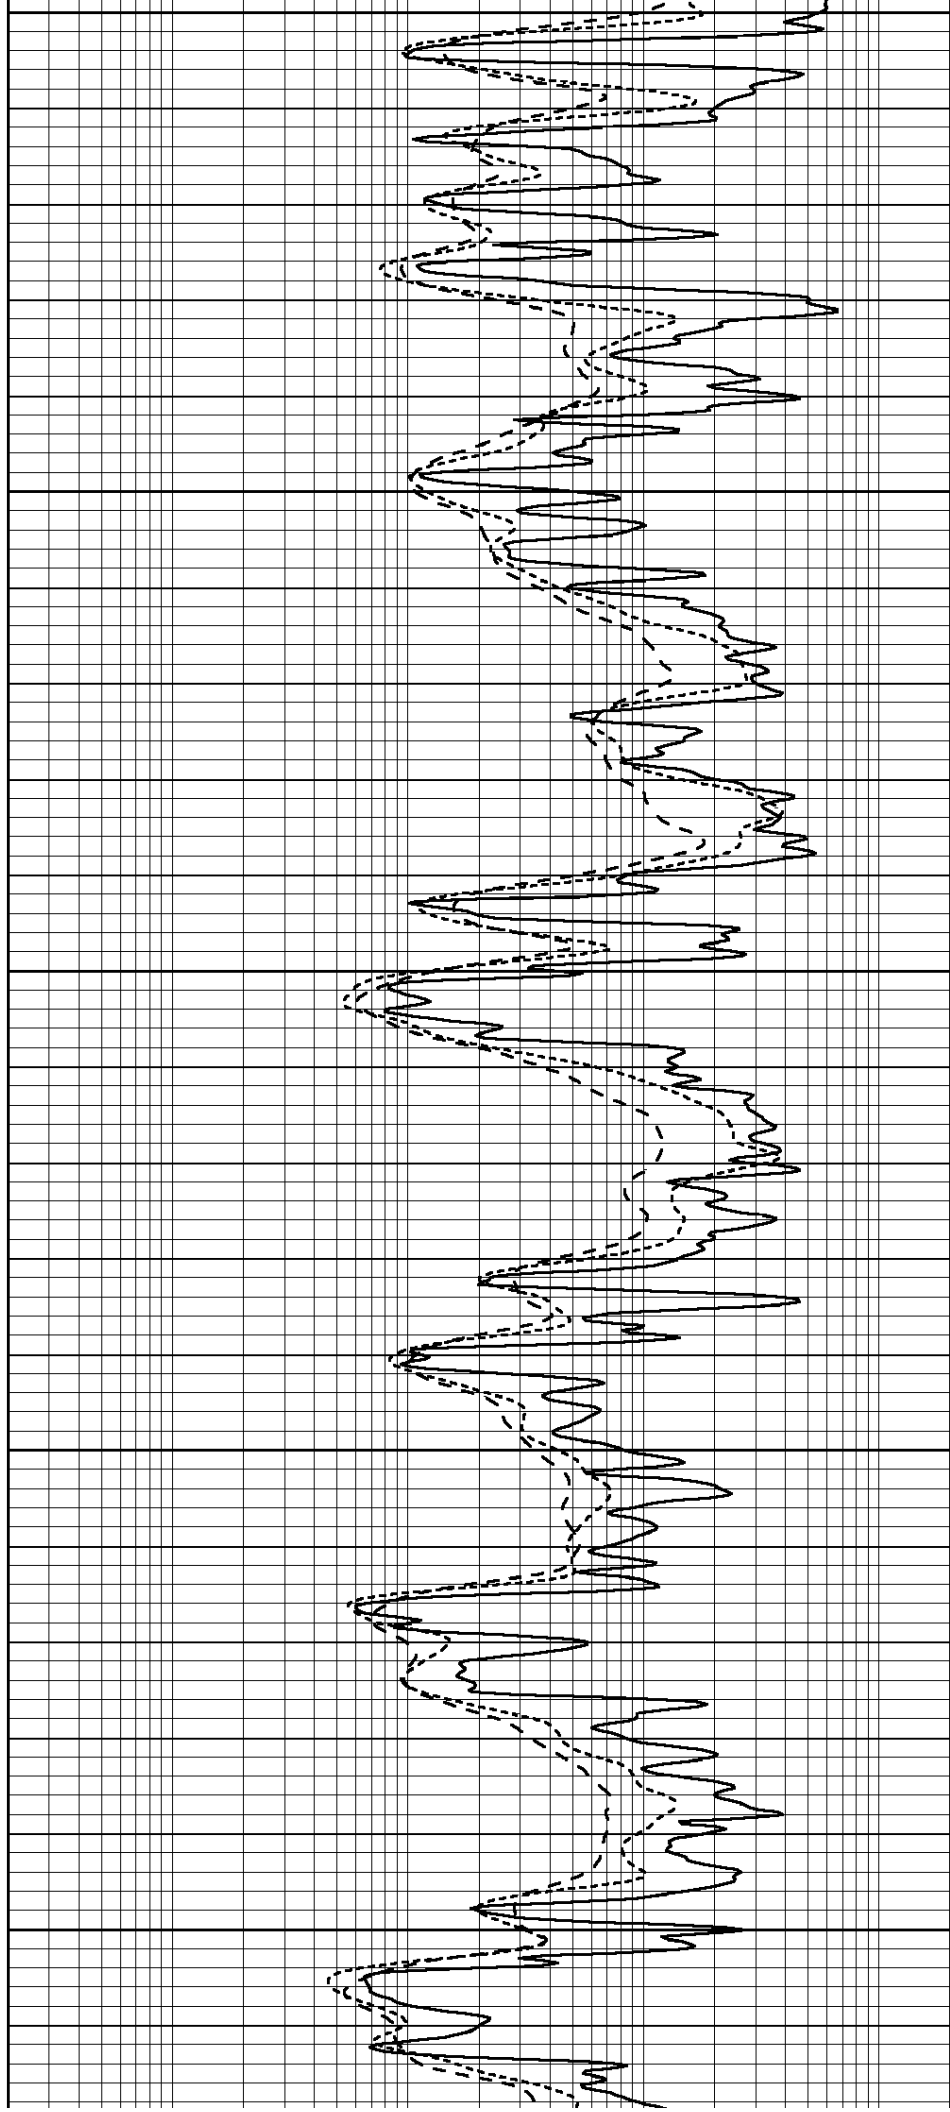

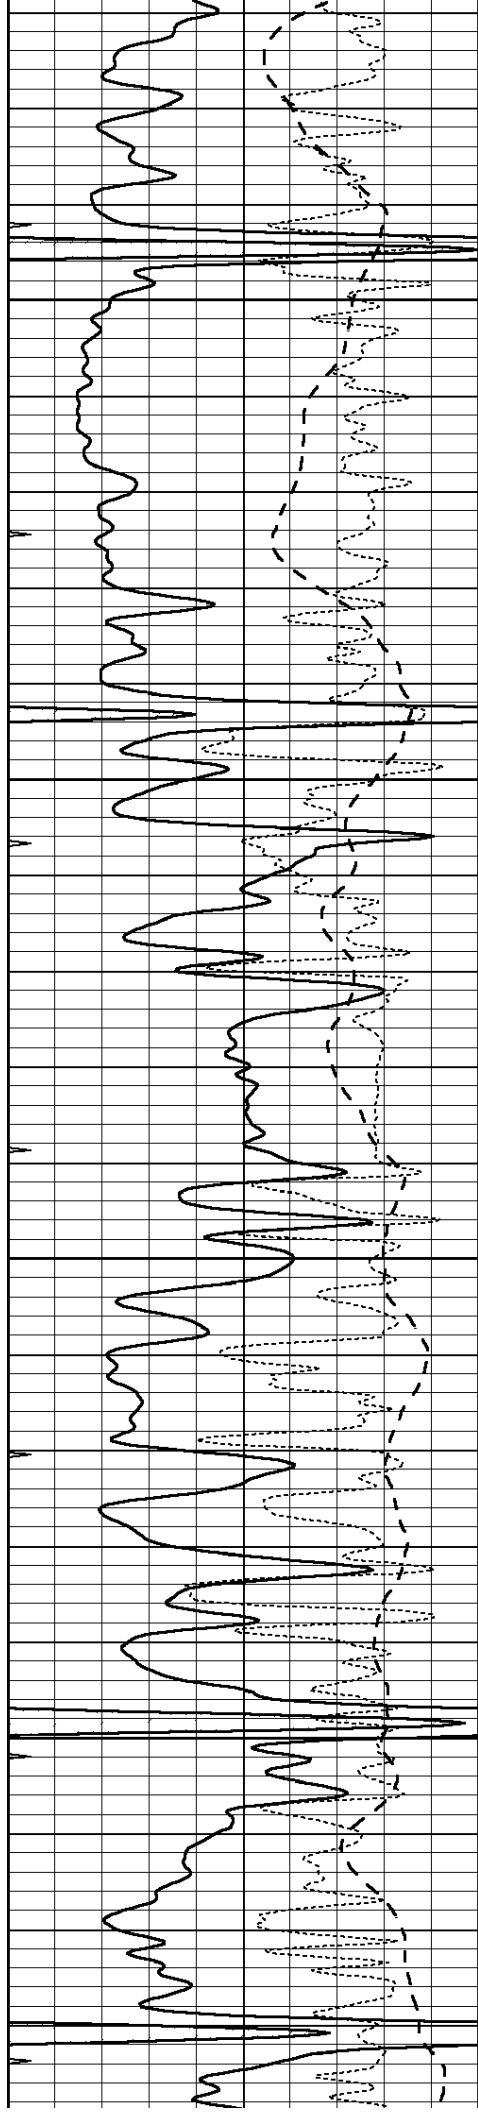



4350

4400

4450

4500

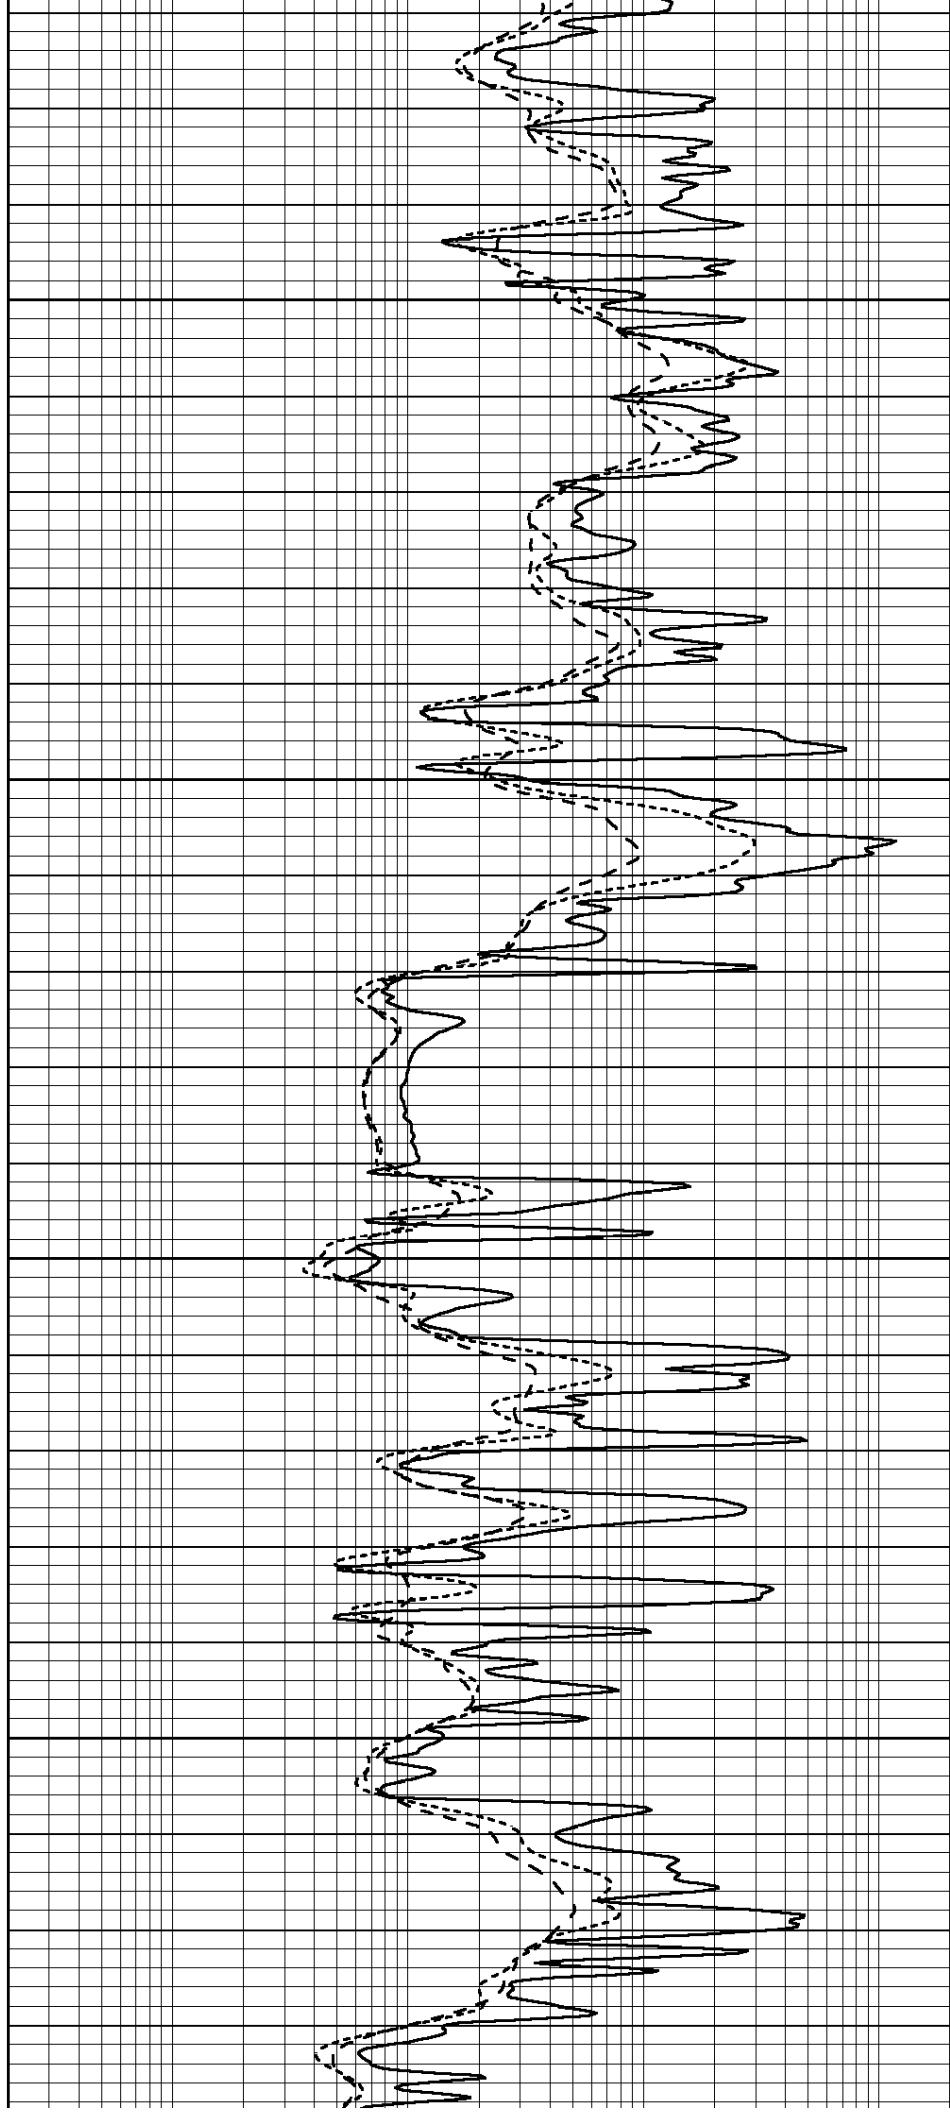

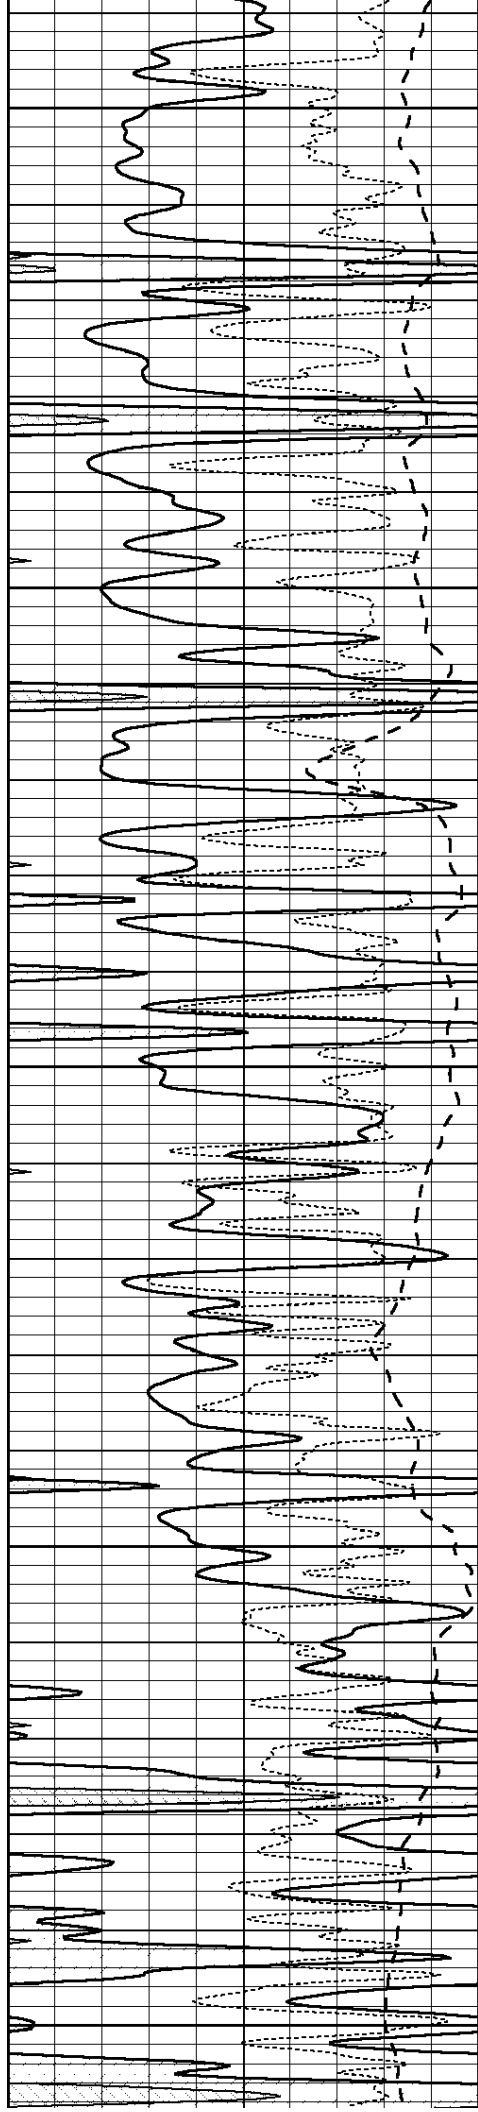


4550


4600

4650


4700

4750

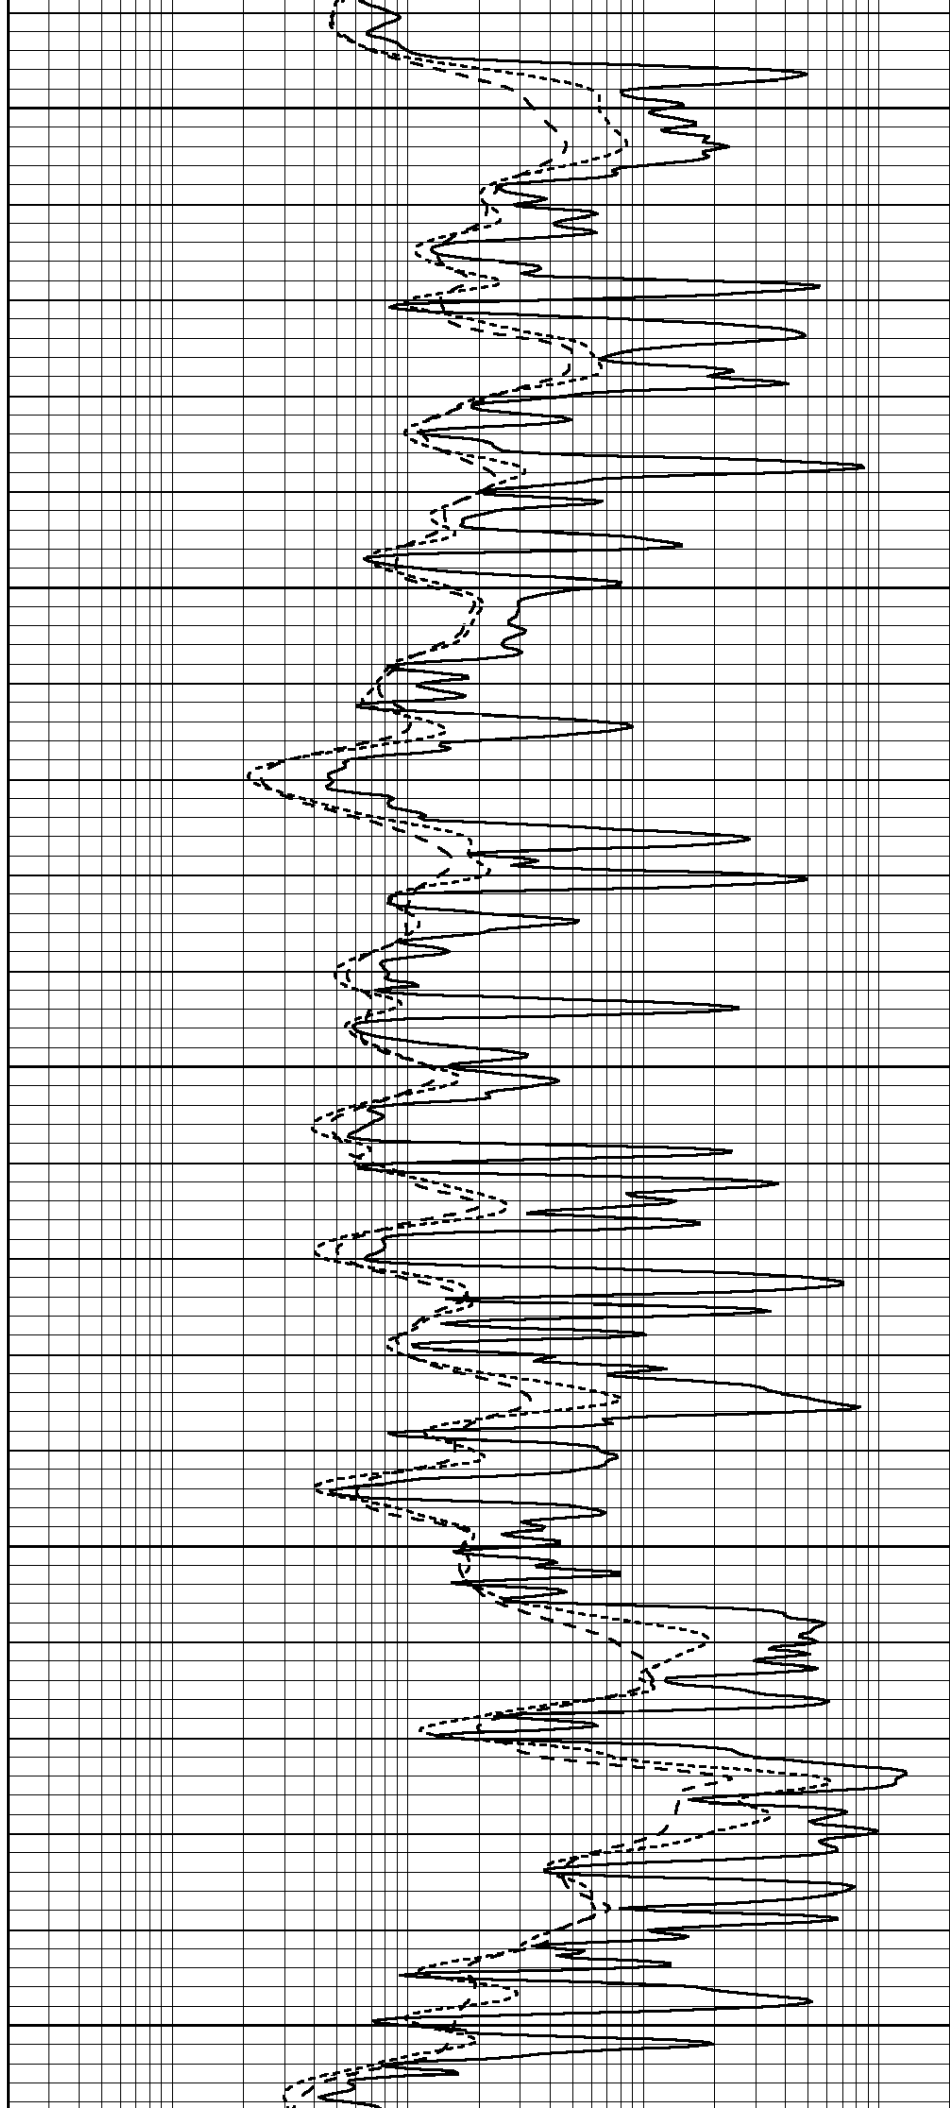

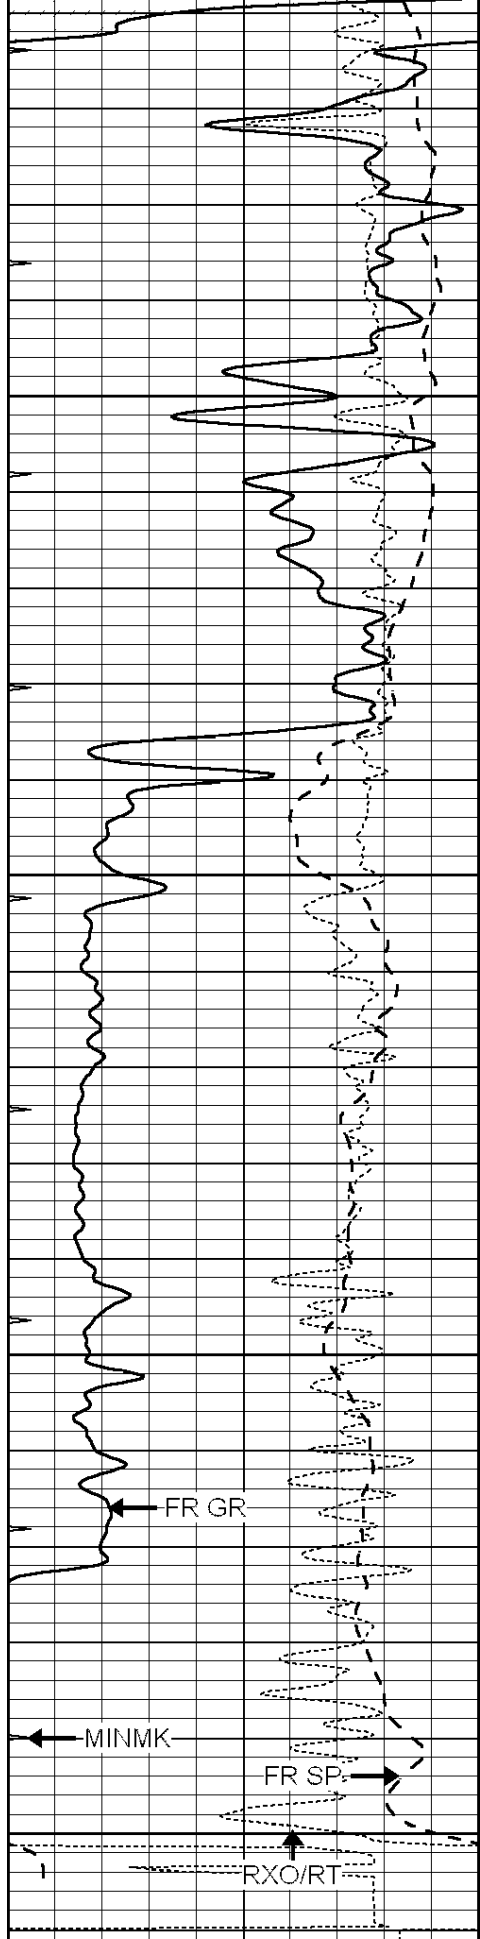

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

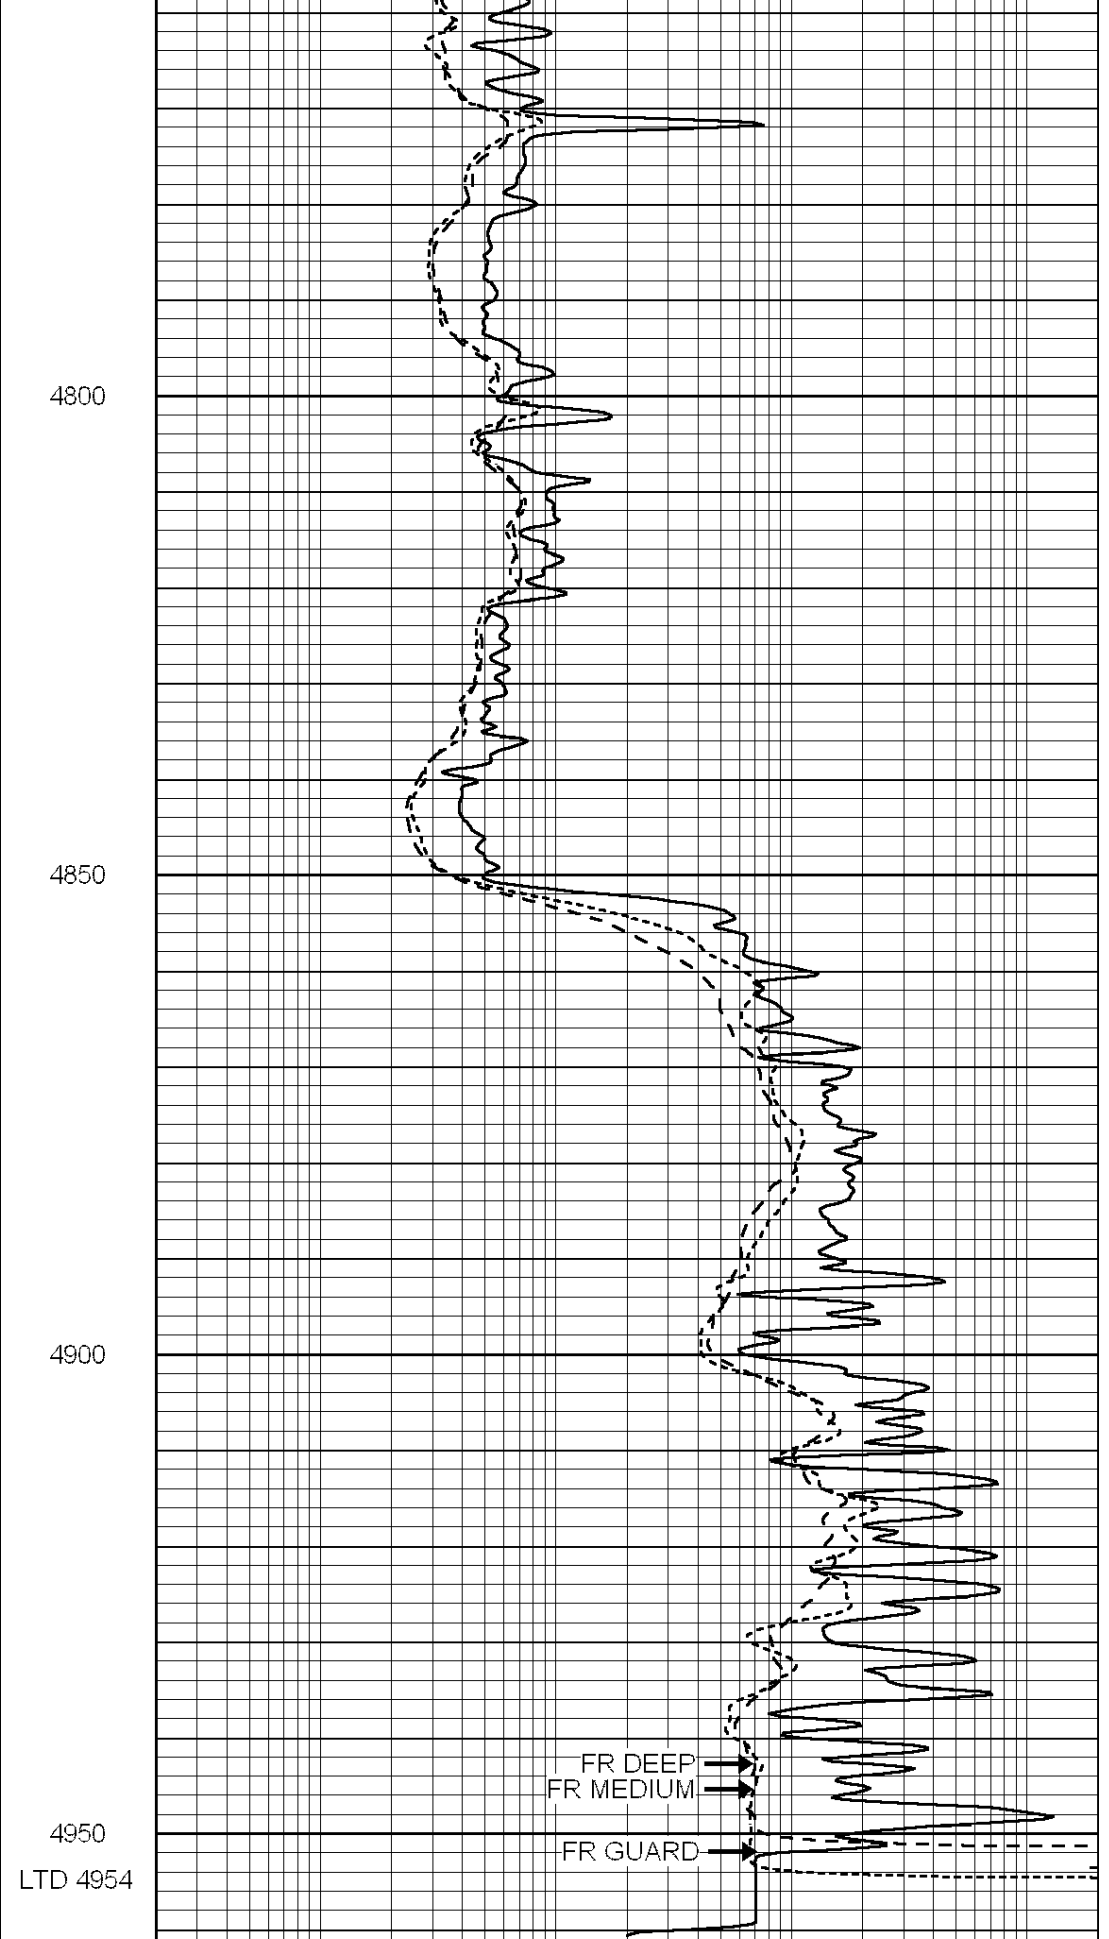


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

REPEAT SECTION

Database File: 22242pe.db
Dataset Pathname: pass2.6
Presentation Format: _dil
Dataset Creation: Sun Jan 26 20:14:40 2014 by Calc SOC 120430
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

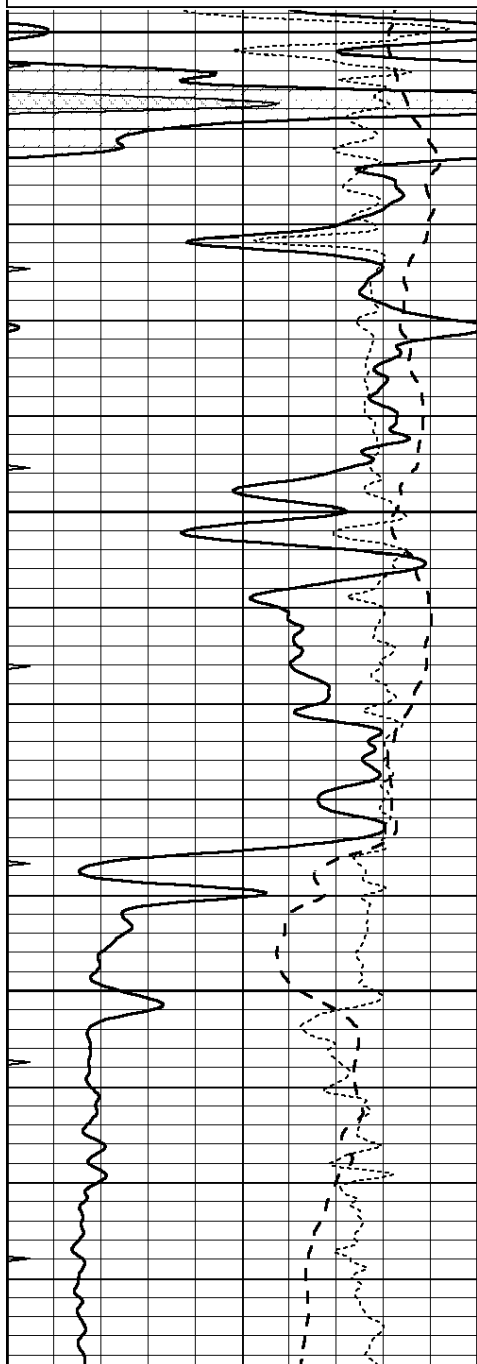


4750

4800

4850

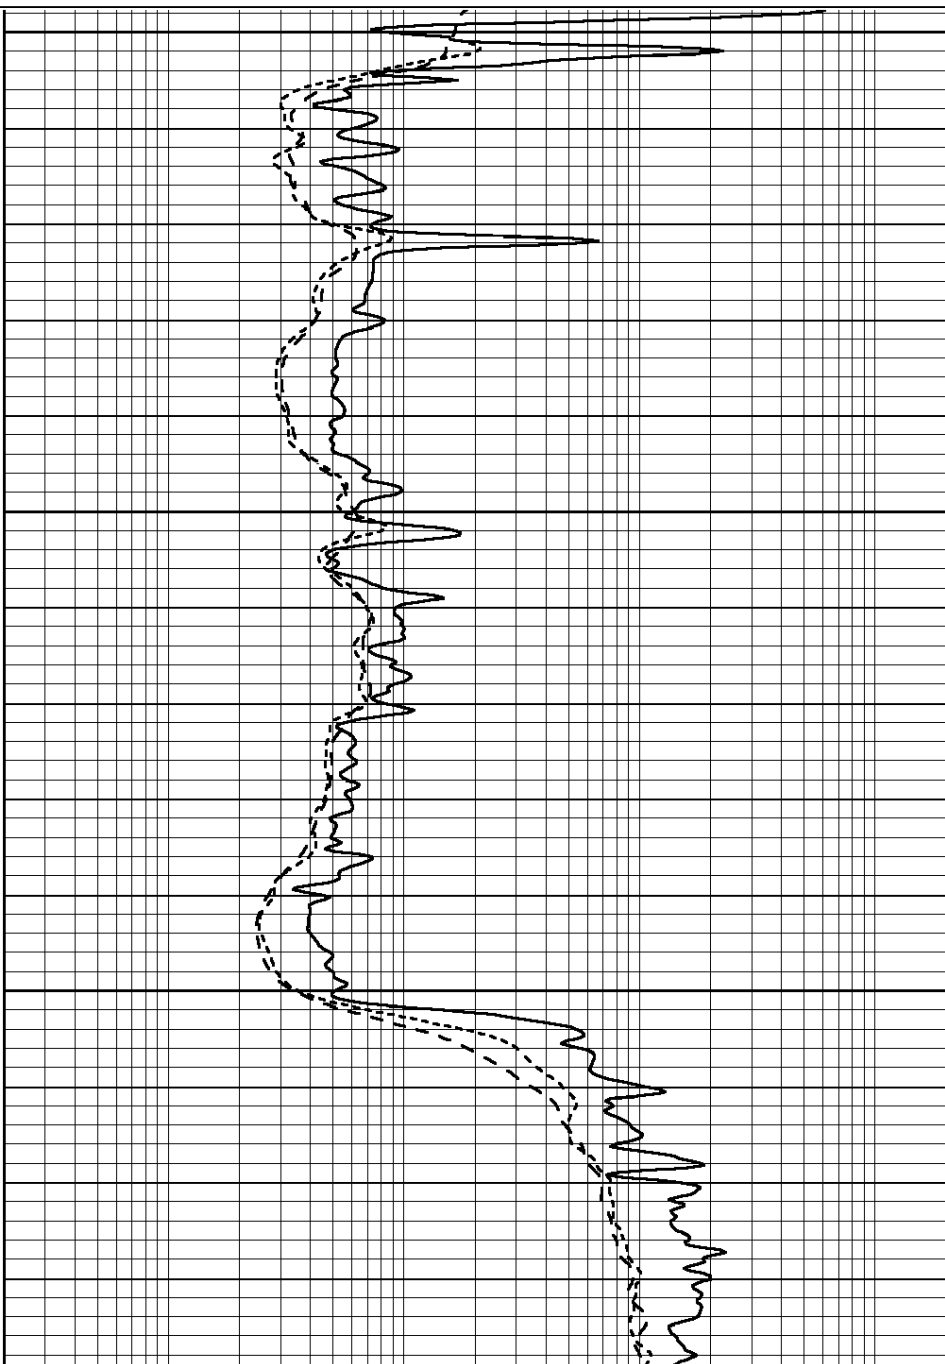

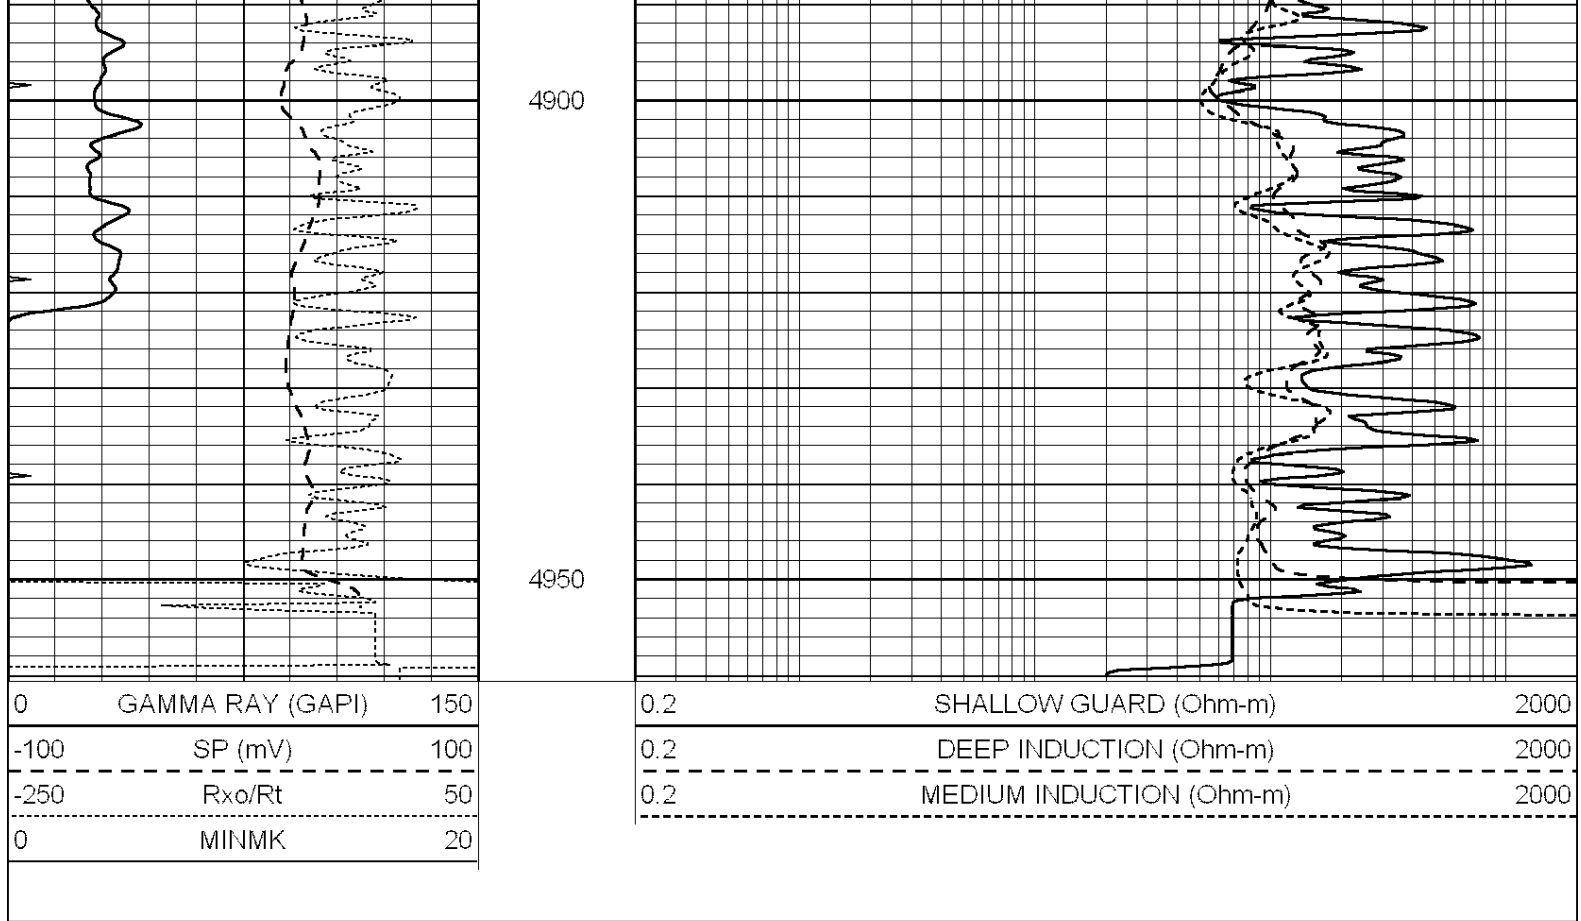

Calibration Report

Database File: 22242pe.db
 Dataset Pathname: pass3.7
 Dataset Creation: Sun Jan 26 20:11:29 2014 by Calc SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
 Surface Cal Performed: Sun Jan 19 14:29:10 2014
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	650.000	-4.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	660.000	-8.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 004N Model: PRB

Master Calibration			Performed Mon Jun 03 09:36:56 2013					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	1417.6	10391.4		3464.6		11537.5		cps
Window 2	1295.0	8959.7		3050.1		9816.4		cps
Window 3	1105.1	5464.2		2051.0		5838.8		cps
Window 4	315.0	317.7		312.9		319.8		cps
Long Space	0.0	7664.6		1755.0		8521.3		cps
Short Space	1.8	1582.4		1040.8		1699.4		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 44.1	Rib Slope	: 0.970	Density/Spine Ratio			: 0.574	
Spine Angle	: 74.1	Spine Slope	: 3.519	Spine Intercept			: -17.0	

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target

Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Thu Dec 19 09:01:02 2013		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	