

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-30190-00-00
Spot: SENE Sec/Twnshp/Rge: 11-28S-15W
3300 feet from S Section Line, 660 feet from E Section Line
Lease Name: STONESTREET Well #: 1
County: PRATT Total Vertical Depth: 4575 feet

Operator License No.: 31925
Op Name: QUALITY WELL SERVICE, INC.
Address: 401 WEST MAIN
LYONS, KS 67554

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4220		
PROD	5.5	4575	2635	WITH 150 SX CMT
SURF	8.625	316		WITH 300 SX CMT

#148⁶⁹

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/24/2005 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND BACK TO 4100' & 5 SX CMT. PLUG AT 950' WITH 12 SX GEL & 50 SX CMT. PLUG AT 330' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/24/2005 2:15 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4100' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 950' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 330' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4498	4504		
4178	4182		


INVOICED

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

DATE 11-4-05
INV. NO. 2006060710

Plugged through: CSG

District: 01

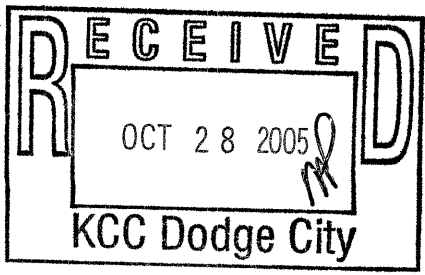

Signed Stephen J. Peifer
(TECHNICIAN)

RECEIVED
KCC WICHITA

Form CP-23